


### Four IGBTMOD™ U-Series Module 100 Amperes/600 Volts

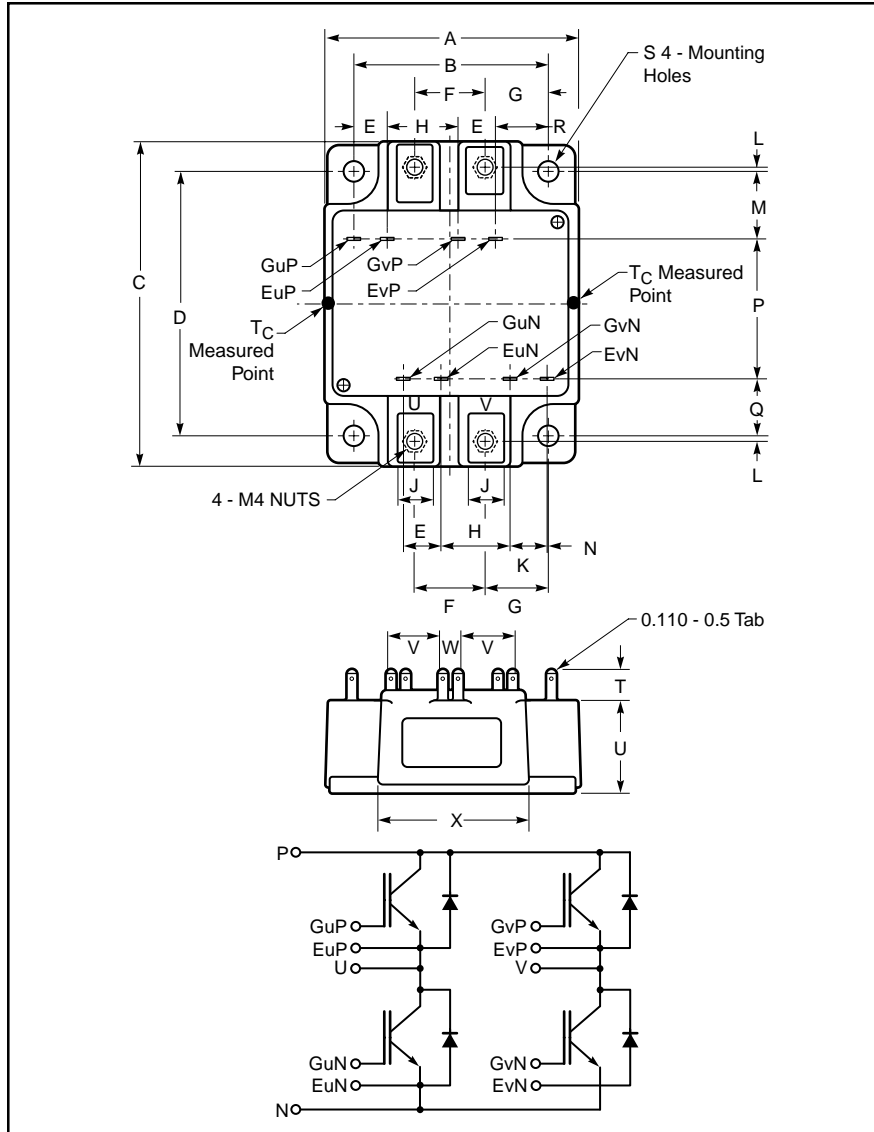

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	2.83	72.0
B	2.17±0.01	55±0.25
C	3.58	91.0
D	2.91±0.01	74.0±0.25
E	0.43	11.0
F	0.79	20.0
G	0.69	17.5
H	0.75	19.1
J	0.39	10.0
K	0.41	10.5
L	0.05	1.25

Dimensions	Inches	Millimeters
M	0.74	18.7
N	0.02	0.5
P	1.55	39.3
Q	0.63	16.0
R	0.57	14.4
S	0.22 Dia.	5.5 Dia.
T	0.32	8.1
U	1.02	26.0
V	0.59	15.0
W	0.20	5.0
X	1.61	41.0



#### Description:

Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of four IGBT Transistors in an H-Bridge configuration, with each transistor having a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

#### Features:

- ☐ Low Drive Power
- ☐ Low  $V_{CE(sat)}$
- ☐ Discrete Super-Fast Recovery Free-Wheel Diode
- ☐ Isolated Baseplate for Easy Heat Sinking

#### Applications:

- ☐ AC Motor Control
- ☐ Motion/Servo Control
- ☐ UPS
- ☐ Welding Power Supplies
- ☐ Laser Power Supplies

#### Ordering Information:

Example: Select the complete module number you desire from the table - i.e. CM100BU-12H is a 600V ( $V_{CES}$ ), 100 Ampere Four-IGBT IGBTMOD™ Power Module.

Type	Current Rating Amperes	$V_{CES}$ Volts (x 50)
CM	100	12

**CM100BU-12H**  
**Four IGBTMOD™ U-Series Module**  
 100 Amperes/600 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	CM100BU-12H	Units
Junction Temperature	$T_j$	-40 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Collector-Emitter Voltage (G-E SHORT)	$V_{\text{CES}}$	600	Volts
Gate-Emitter Voltage (C-E SHORT)	$V_{\text{GES}}$	$\pm 20$	Volts
Collector Current ( $T_c = 25^\circ\text{C}$ )	$I_C$	100	Amperes
Peak Collector Current ( $T_j \leq 150^\circ\text{C}$ )	$I_{\text{CM}}$	200*	Amperes
Emitter Current** ( $T_c = 25^\circ\text{C}$ )	$I_E$	100	Amperes
Peak Emitter Current**	$I_{\text{EM}}$	200*	Amperes
Maximum Collector Dissipation ( $T_c = 25^\circ\text{C}$ )	$P_c$	400	Watts
Mounting Torque, M4 Main Terminal	–	15	in-lb
Mounting Torque, M5 Mounting	–	31	in-lb
Weight	–	390	Grams
Isolation Voltage (Main Terminal to Baseplate, AC 1 min.)	$V_{\text{iso}}$	2500	Volts

\* Pulse width and repetition rate should be such that the device junction temperature ( $T_j$ ) does not exceed  $T_{j(\text{max})}$  rating.

\*\*Represents characteristics of the anti-parallel, emitter-to-collector free-wheel diode (FWDi).

**Static Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Cutoff Current	$I_{\text{CES}}$	$V_{\text{CE}} = V_{\text{CES}}, V_{\text{GE}} = 0\text{V}$	–	–	1	mA
Gate Leakage Voltage	$I_{\text{GES}}$	$V_{\text{GE}} = V_{\text{GES}}, V_{\text{CE}} = 0\text{V}$	–	–	0.5	$\mu\text{A}$
Gate-Emitter Threshold Voltage	$V_{\text{GE(th)}}$	$I_C = 10\text{mA}, V_{\text{CE}} = 10\text{V}$	4.5	6	7.5	Volts
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	$I_C = 100\text{A}, V_{\text{GE}} = 15\text{V}, T_j = 25^\circ\text{C}$	–	2.4	3.0	Volts
		$I_C = 100\text{A}, V_{\text{GE}} = 15\text{V}, T_j = 125^\circ\text{C}$	–	2.6	–	Volts
Total Gate Charge	$Q_G$	$V_{\text{CC}} = 300\text{V}, I_C = 100\text{A}, V_{\text{GE}} = 15\text{V}$	–	200	–	nC
Emitter-Collector Voltage*	$V_{\text{EC}}$	$I_E = 100\text{A}, V_{\text{GE}} = 0\text{V}$	–	–	2.6	Volts

\* Pulse width and repetition rate should be such that the device junction temperature ( $T_j$ ) does not exceed  $T_{j(\text{max})}$  rating.

**Dynamic Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics		Symbol	Test Conditions	Min.	Typ.	Max.	Units
Input Capacitance		C <sub>ies</sub>	V <sub>CE</sub> = 10V, V <sub>GE</sub> = 0V	–	–	8.8	nf
Output Capacitance		C <sub>oes</sub>		–	–	4.8	nf
Reverse Transfer Capacitance		C <sub>res</sub>		–	–	1.3	nf
Resistive	Turn-on Delay Time	t <sub>d(on)</sub>	V <sub>CC</sub> = 300V, I <sub>C</sub> = 100A,	–	–	100	ns
Load	Rise Time	t <sub>r</sub>	V <sub>GE1</sub> = V <sub>GE2</sub> = 15V,	–	–	250	ns
Switch	Turn-off Delay Time	t <sub>d(off)</sub>	R <sub>G</sub> = 6.3Ω, Resistive	–	–	200	ns
Times	Fall Time	t <sub>f</sub>	Load Switching Operation	–	–	300	ns
Diode Reverse Recovery Time		t <sub>rr</sub>	I <sub>E</sub> = 100A, di <sub>E</sub> /dt = -200A/μs	–	–	160	ns
Diode Reverse Recovery Charge		Q <sub>rr</sub>	I <sub>E</sub> = 100A, di <sub>E</sub> /dt = -200A/μs	–	0.24	–	μC










**Thermal and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{\text{th(j-c)Q}}$	Per IGBT 1/4 Module	–	–	0.31	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction to Case	$R_{\text{th(j-c)D}}$	Per FWDi 1/4 Module	–	–	0.7	$^\circ\text{C}/\text{W}$
Contact Thermal Resistance	$R_{\text{th(c-f)}}$	Per Module, Thermal Grease Applied	–	0.025	–	$^\circ\text{C}/\text{W}$

## CM100BU-12H

### Four IGBTMOD™ U-Series Module



100 Amperes/600 Volts

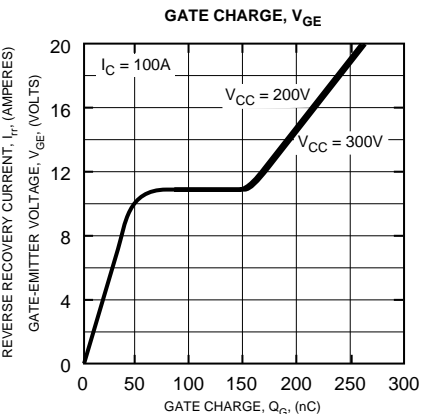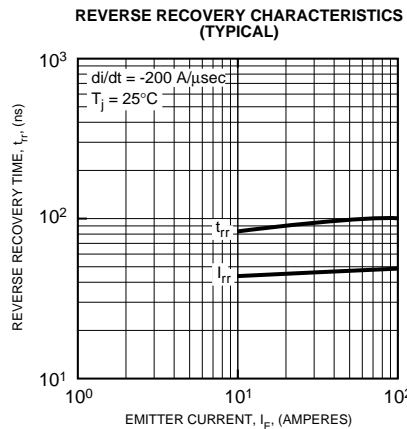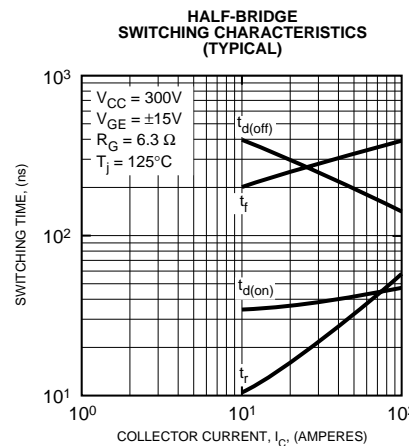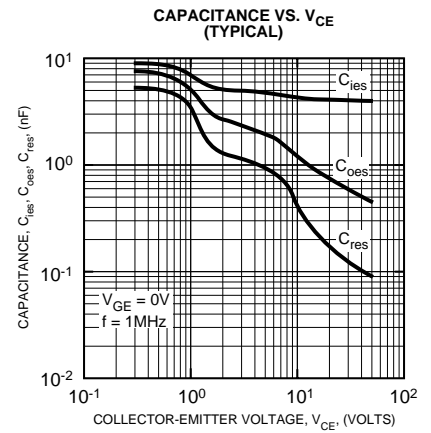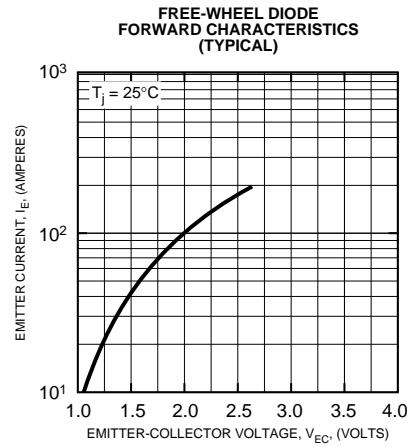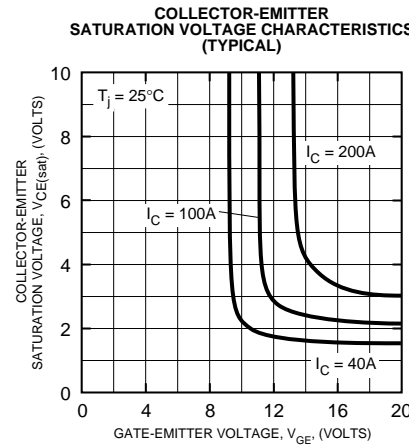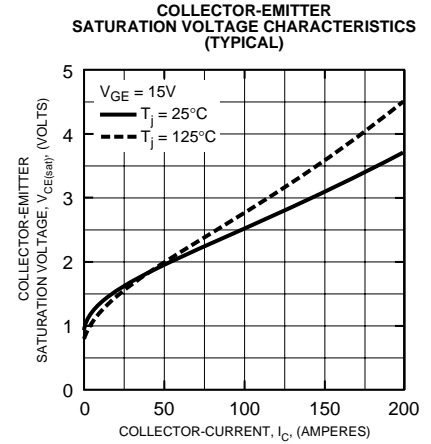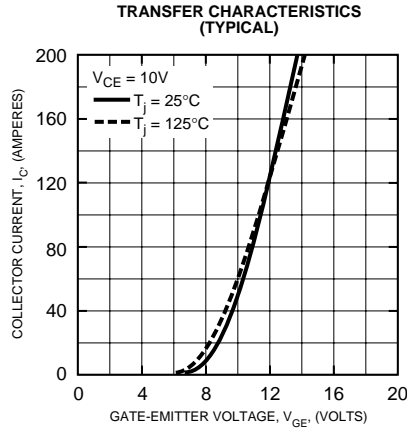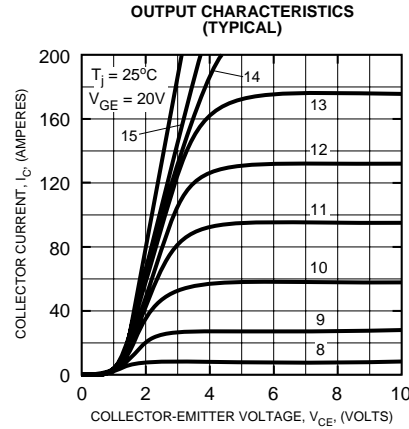

## CM100BU-12H

### Four IGBTMOD™ U-Series Module

100 Amperes/600 Volts

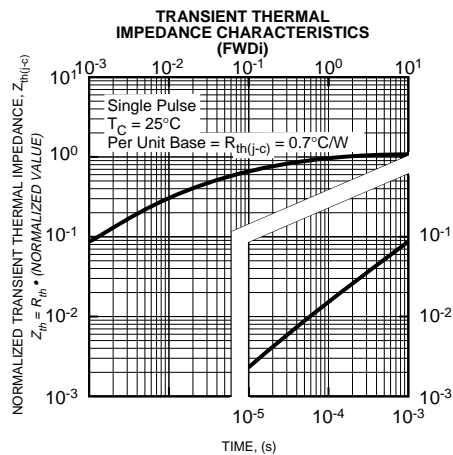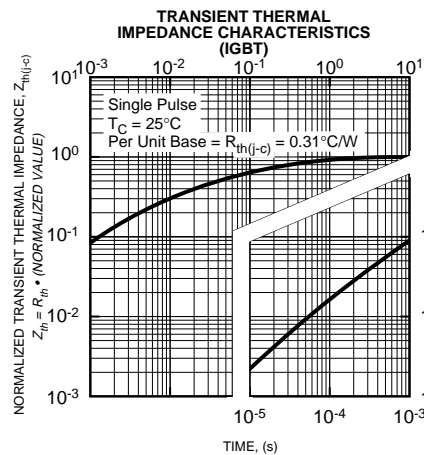

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.