


## Spark Gap Protectors (SPG)

### SCC Series

#### Features

- u Approximately zero leaking current before clamping voltage
- u Less decay at on/off state.
- u High capability to withstand repeated lightning strikes.
- u Low electrode capacitance ( $\leq 1.0\text{pF}$ ) and high isolation ( $\geq 100\text{M}\Omega$ ).
- u RoHS compliant.
- u Bilateral symmetrical.
- u Temperature, humidity and lightness insensitive.
- u Working temperature:  $-25^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- u Storage temperature:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- u Meets MSL level 1, per J-STD-020

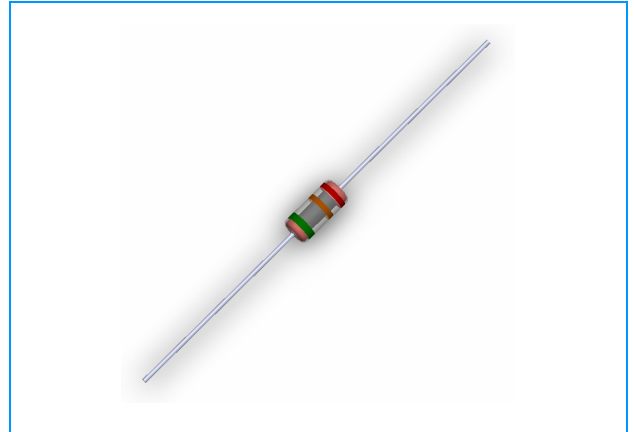

#### Applications


- u Power Supplies
- u Motor sparks eliminating
- u Relay switching spark absorbing
- u Data line pulse guarding
- u Electronic devices requiring UL497A and UL497B compliant
- u Telephone/Fax/Modem
- u High frequency signal transmitters/receivers
- u Satellite antenna
- u Radio amplifiers
- u Alarm systems
- u Cathode ray tubes in Monitors/TVs

#### Part Numbering

**SCC - 201 M**  
 (1) (2) (3)

- (1) Series  
 (2)  $V_s$  Voltage, e.g.  $201=20 \times 10^1=200\text{V}$   
 (3)  $V_s$  Voltage tolerance: L -  $\pm 15\%$ , M -  $\pm 20\%$ , N -  $\pm 30\%$

#### Dimensions

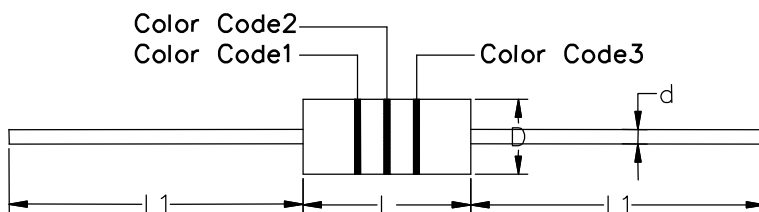

Symbol	Inches	Millimeters
L1	1.102 $\pm$ 0.079	28.0 $\pm$ 2.0
L	0.252 $\pm$ 0.039	6.7 $\pm$ 1.0
d	0.020 $\pm$ 0.002	0.5 $\pm$ 0.05
D	0.122 $\pm$ 0.020	3.1 $\pm$ 0.5

## Spark Gap Protectors (SPG)

### SCC Series

#### Electrical Characteristics

Part Number	DC Spark-over Voltage Vs(V)	Minimum Insulation Resistance IR(OHM)/DC	Maximum Capacitance 1KHZ-6Vmax C (pF)	Surge Current Capacity 8/20 μS	Surge Life Test
SCC-141N	140(98~182)	100M / 50V	1.0	3000A	10KV / 150A , >300T
SCC-181N	180(126~234)	100M / 50V	1.0	3000A	10KV / 150A , >300T
SCC-201M	200(160~240)	100M / 100V	1.0	3000A	10KV / 150A , >300T
SCC-251M	250(200~300)	100M / 100V	1.0	3000A	10KV / 150A , >300T
SCC-301M	300(240~360)	100M / 100V	1.0	3000A	10KV / 150A , >300T
SCC-401M	400(320~480)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-471M	470(400~560)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-501M	500(400~600)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-601M	600(480~720)	100M / 250V	1.0	3000A	10KV / 150A , >300T
SCC-102M	1000(800~1200)	100M / 500V	1.0	3000A	10KV / 150A , >300T
SCC-152M	1500(1200~1800)	100M / 500V	1.0	3000A	10KV / 150A , >300T

#### Color Code

Part Number	Color Code1	Color Code2	Color Code3
SCC-141N	Brown	Red	White
SCC-201M	Red	Brown	White
SCC-301M	Orange	Red	White
SCC-401M	Yellow	Brown	White
SCC-501M	Green	Orange	Red
SCC-601M	Blue	Red	Orange
SCC-102M	Black	Black	Red
SCC-152M	Black	Green	Red

## Spark Gap Protectors (SPG)

### SCC Series

#### Test Methods and Results


Items	Test Method	Standard
<b>DC Spark-over Voltage</b>	Measure starting discharge voltage (Vs) by gradually increasing applied DC voltage. Test current is 0.5mA max. And the DC voltage ascends up within 100V/s( $V_s < 1000V$ ) or 500V/s( $V_s \geq 1000V$ ).	Rate-of-change, within $\pm 30\%$ insulation resistance & capacitance, conformed to rated spec.
<b>Insulation Resistance</b>	Measure the insulation resistance across the terminal at regular voltage. But the test voltage doesn't over the DC spark-over voltage.	
<b>Capacitance</b>	Measure the electrostatic capacitance by applying a voltage of less than 6V (at 1KHz) between terminals.	
<b>Static Life</b>	10KV with 1500pf condenser is discharged through 2K $\Omega$ resistor. 200 times at an interval of 10sec.	$ \Delta V_s/V_s  \leq 30\%$ Characteristics of other items must meet the specified value
<b>Surge Current Capacity</b>	1.2/50 $\mu$ s & 8/20 $\mu$ s, 3000A, electrically connected with a resistor (1~2 $\Omega$ ), $\pm 5$ times, each time interval 60 seconds. Thereafter, outer appearance shall be visually examined.	No crack and no failures
<b>Cold Resistance</b>	Measurement after -40 $^{\circ}$ C /1000 HRS & normal temperature/2 HRS.	Features are conformed to rated spec
<b>Heat Resistance</b>	Measurement after 125 $^{\circ}$ C /1000 HRS & normal temperature/2 HRS.	
<b>Humidity Resistance</b>	Measurement after humidity 90~95 $^{\circ}$ C (45 $^{\circ}$ C ) /1000 HRS & normal temperature/2 HRS.	
<b>Temperature Cycle</b>	10 times repetition of cycle -40 $^{\circ}$ C /30min $\rightarrow$ normal, temp/2 min $\rightarrow$ 125 $^{\circ}$ C/30min, measurement after normal temp/2 HRS.	
<b>Solder Ability</b>	Apply flux and immerse in molten solder 230 $\pm$ 5 $^{\circ}$ C for 3sec up to the point of 1.5mm from body. Check for solder adhesion.	Lead wire is evenly covered by solder
<b>Solder Heat</b>	Measurement after lead wire is dipped up to the point of 1.5mm from body into 260 $\pm$ 5 $^{\circ}$ C solder for 10sec	Conformed to rated spec
<b>Pull Strength</b>	Apply 0.5kg load for 10sec	Lead shall not pull out to snap
<b>Flexural Strength</b>	Bend lead wire at the point of 2mm from body under 0.25 load and back to its original point. Repeat 1 time.	

## Spark Gap Protectors (SPG)


### SCC Series

#### Recommended Soldering Conditions

##### Flow Soldering Conditions

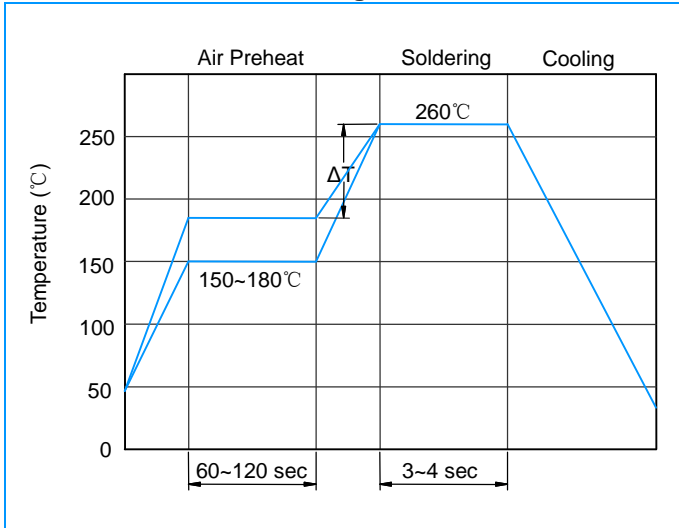

##### Reflow Soldering Conditions

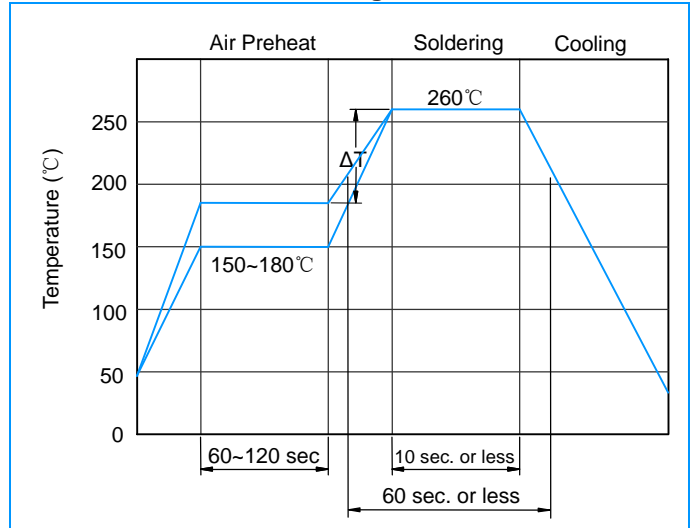

- 1) Time shown in the above figures is measured from the point when chip surface reaches temperature.
- 2) Temperature difference in high temperature part should be within 110°C .
- 3) After soldering, do not force cool, allow the parts to cool gradually.

#### Hand Soldering

Solder iron temperature: 350±5°C

Heating time: 3 seconds max.

#### General attention to soldering

- ⌘ High soldering temperatures and long soldering times can cause leaching of the termination, decrease in adherence strength, and the change of characteristic may occur.
- ⌘ For soldering, please refer to the soldering curves above. However, please keep exposures to temperatures exceeding 200°C to fewer than 50 seconds.
- ⌘ Please use a mild flux (containing less than 0.2wt% Cl). Also, if the flux is water soluble, be sure to wash thoroughly to remove any residue from the underside of components that could affect resistance.

#### Cleaning

When using ultrasonic cleaning, the board may resonate if the output power is too high. Since this vibration can cause cracking or a decrease in the adherence of the termination, we recommend that you use the conditions below:

Frequency: 40kHz max.

Output power: 20W/liter


Cleaning time: 5 minutes max.

# Spark Gap Protectors (SPG)

## SCC Series


### Packaging

#### Tape

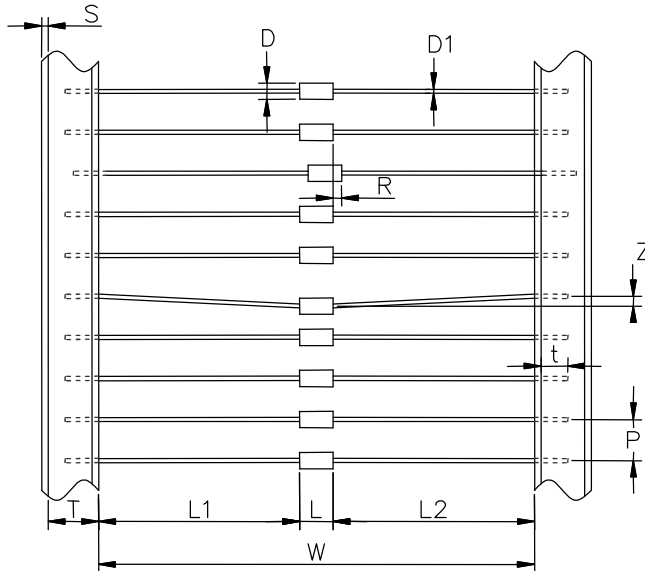

Symbol	Dimension (mm)
W	52±2.0/-1.0
P	5.0±0.5
T	6.0±1.0
Z	1.2 Max
L1-L2	1.0 Max
S	0.8 Max
t	3.2 Max
L	6.7±1.0
D1	Φ0.5±0.05
D	Φ3.1±0.5
R	1.0 Max

#### Inner Box

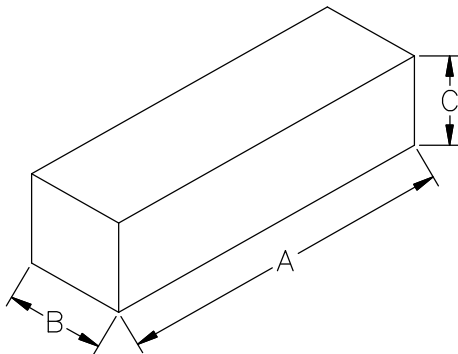

Item	Description
Length	A=255 mm
Width	B=75 mm
Height	C=68 mm
Quantity	1500 PCS
Package	There are upper and bottom board to protect the parts from damage.