

## ENGINEERING DATA SHEET

# M302

RELAY - LATCH  
2 PDT, 10 AMP



### APPLICATION NOTES:

[001](#)

[002](#)

[007](#)

[023](#)

### APPLICABLE SOCKETS:

[S302](#)

[SC30\\*](#)

Polarized, latching hermetically sealed relay

Contact arrangement

**2 PDT**

Meets the requirements of

**MIL-R-83536/12 and /13**

Coil supply

**Direct current**

## PRINCIPLE TECHNICAL CHARACTERISTICS

Contacts rated at

**10 Amps / 28 Vdc or 115 Vac -  
400 Hz**

Weight

**40 grams max**

Dimensions max.  
of case in mm

**26 x 28.6 x 13.3**

Balanced-Force design.

Hermetically sealed, corrosion protected metal can.

Intrinsically safe relay.

## CONTACT ELECTRICAL CHARACTERISTICS

Minimum operating cycles	Contact rating per pole and load type	Load Current in Amps		
		@28 Vdc	@115 Vac, 400 Hz	@115/200 Vac, 400 Hz, 3Ø
100,000 cycles	resistive load	10	10	10
20,000 cycles	inductive load (L/R=5ms)	8	8	8
100,000 cycles	motor load	4	4	4
100,000 cycles	lamp load	2	2	2
50 cycles	resistive overload	40	60	
400,000 cycles	at 25% rated resistive load			

**Esterline**  **Power Systems**

Featuring **LEACH**® power and control solutions  
[www.esterline.com](http://www.esterline.com)

**AMERICAS**  
6900 Orangethorpe Ave.  
P.O. Box 5032  
Buena Park, CA 90622

Tel: (01) 714-736-7599  
Fax: (01) 714-670-1145

**EUROPE**  
2 Rue Goethe  
57430 Sarralbe  
France

Tel: (33) 3 87 97 31 01  
Fax: (33) 3 87 97 96 86

**ASIA**  
Units 602-603 6/F Lakeside 1  
No.8 Science Park West Avenue  
Phase Two, Hong Kong Science Park  
Pak Shek Kok, Tai Po, N.T.  
Hong Kong  
Tel: (852) 2 191 3830  
Fax: (852) 2 389 5803


Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.

**COIL CHARACTERISTICS (Vdc)****M302**


CODE	A	B	C	N
Nominal operating voltage	28	12	6	28
Maximum operating voltage	29	14.5	7.3	29
Maximum latching voltage at +125° C	18	9	4.5	18
Maximum reset voltage at +125° C	18	9	4.5	18
Coil resistance in $\Omega \pm 10\%$ at +25° C	600	150	38	600
Back EMF suppressed to (Vdc)	N/A	N/A	N/A	-5


**GENERAL CHARACTERISTICS**

- Temperature range	-65° C to +125° C
Dielectric strength at sea level	
- Contacts to ground and between contacts	1250 Vrms / 50 Hz
- Coil to ground and between contacts	1000 Vrms / 50 Hz
Dielectric strength at altitude 25,000 m (all points)	350 Vrms / 50 Hz
Initial insulation resistance at 500 Vdc	100 M $\Omega$ min
Sinusoidal vibration (except G, O and R mounting)	30G / 75 to 3000 Hz
Sinusoidal vibration (G, O and R mounting only)	20G 75 to 3000 Hz
Shock (except G, O and R mounting)	200G / 6 ms
Shock (J mounting only)	100G / 6 ms
Maximum contact opening time under vibration and shock	10 $\mu$ s
Operate time at nominal voltage	10 ms max
Release time	10 ms max
Bounce time	1 ms max
Contact voltage drop at nominal current	
- initial value	150 mV max
- after life	175 mV max

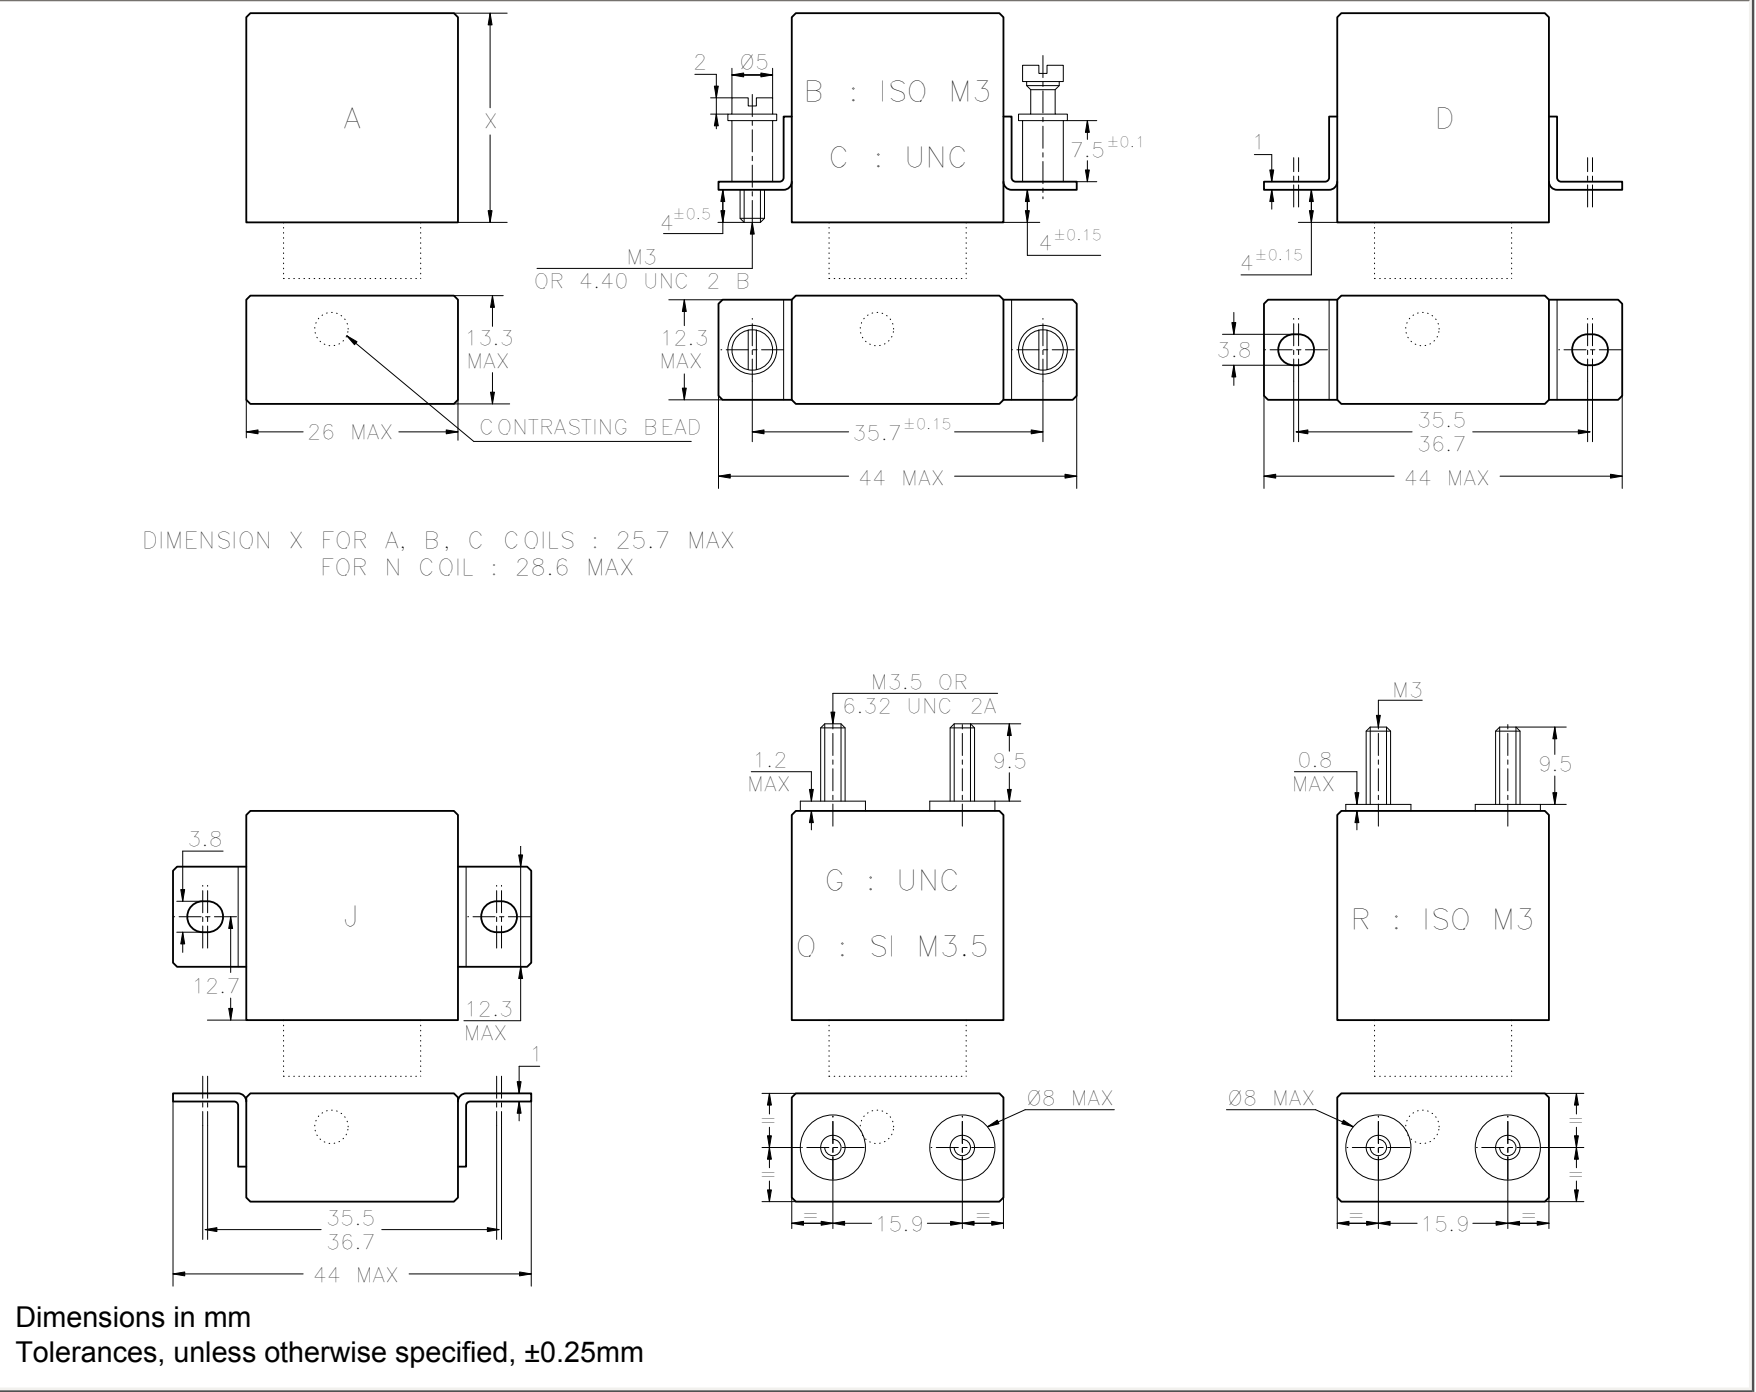

TERMINAL TYPES

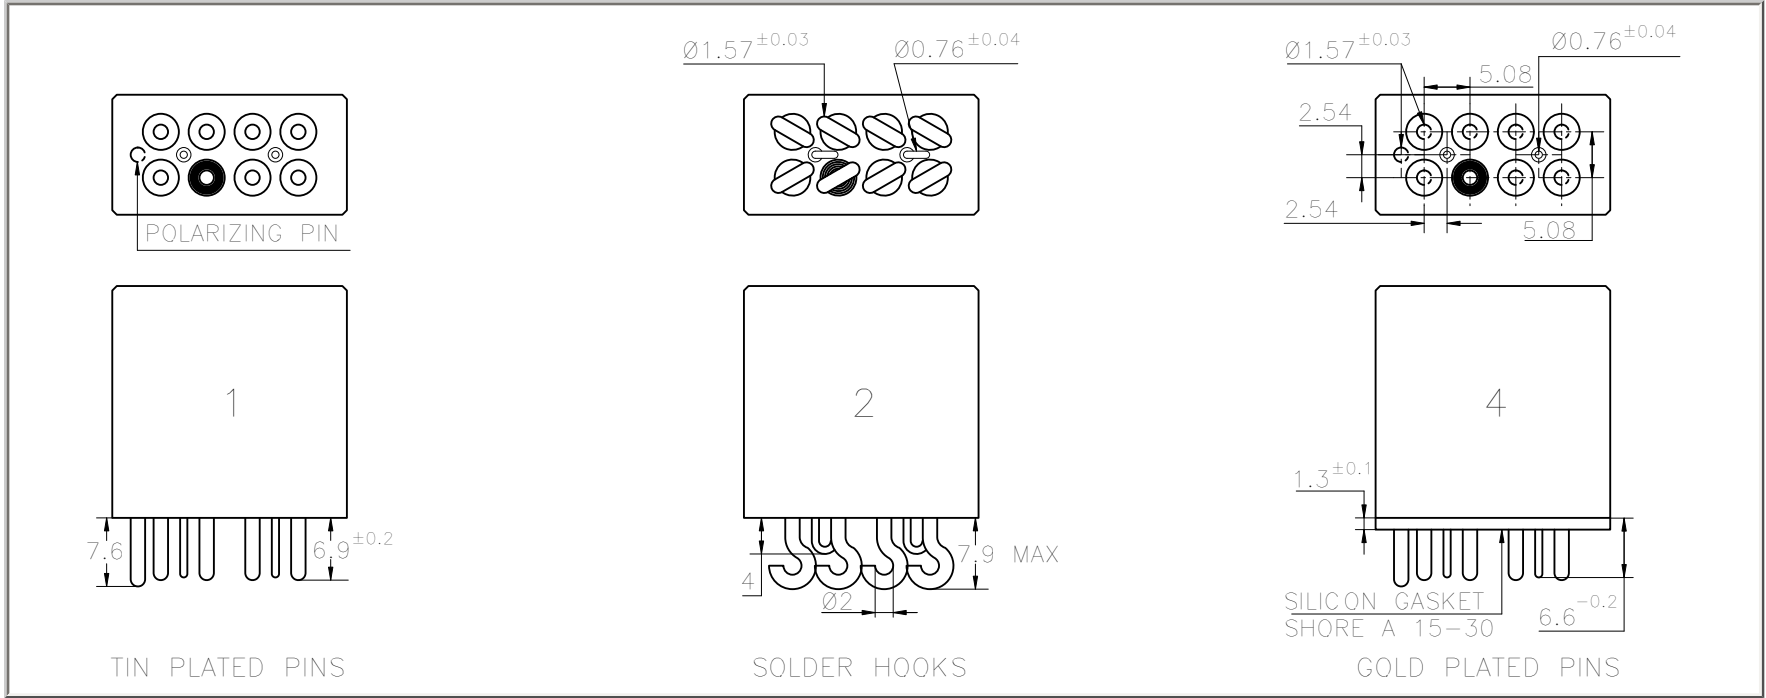

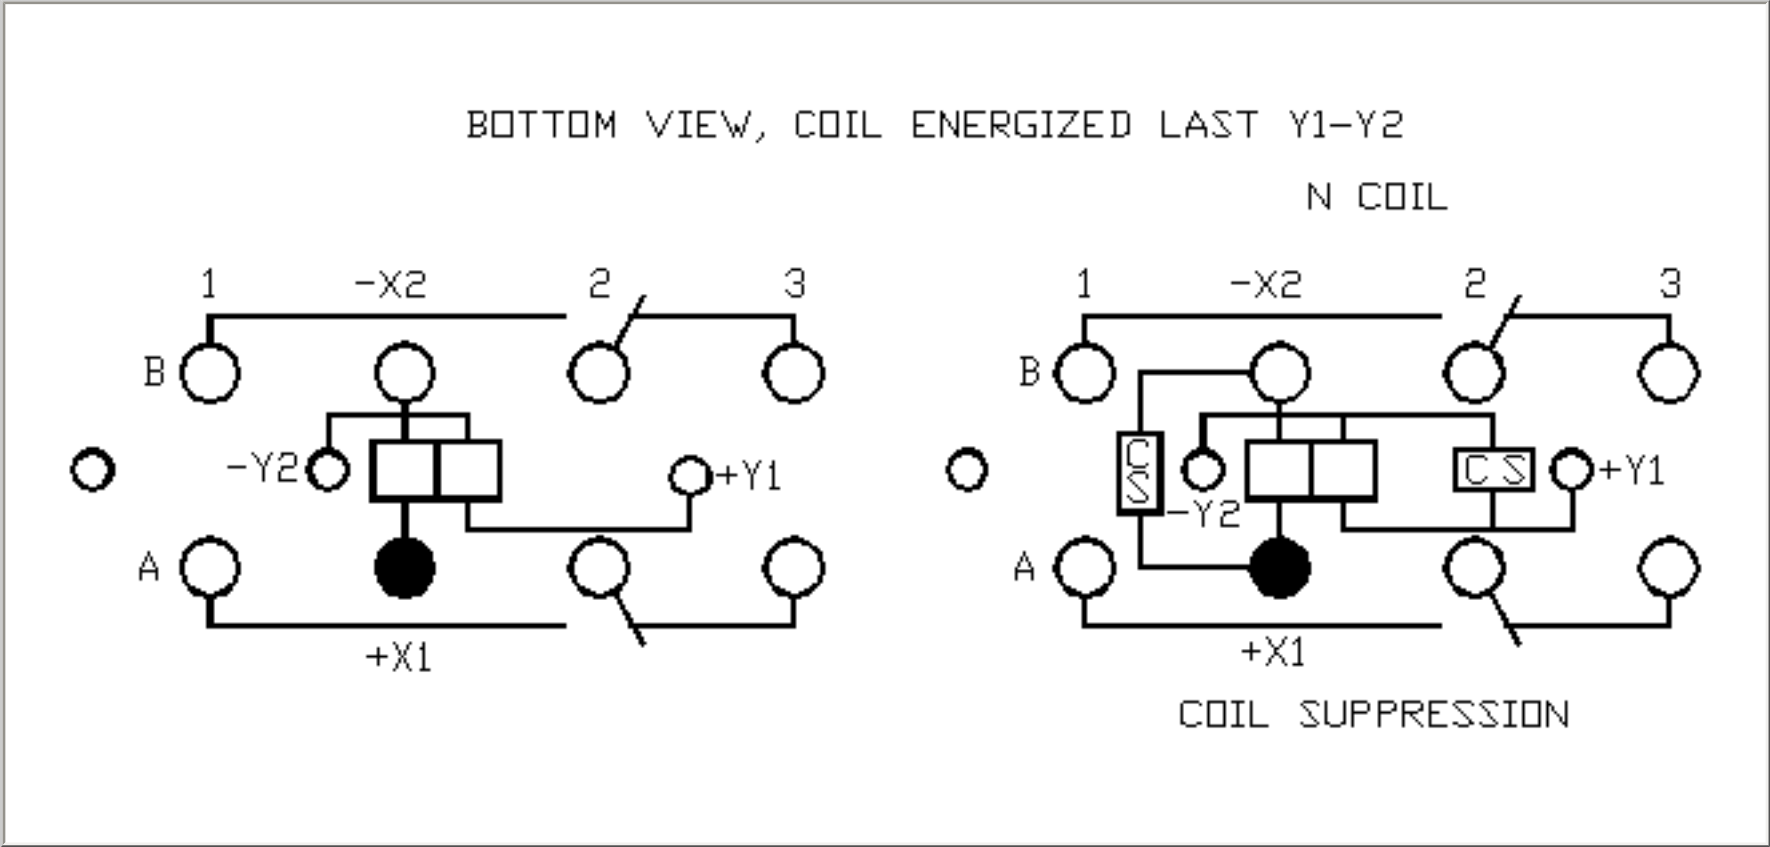

NUMBERING SYSTEM

	M302	B	4	A	C
Basic series designation					
1-Mounting Style (A,B,C,D,J,G,O,R)					
2-Terminal Types (1,2,4)					
3-Coil Voltage (A,B,C,N)					
4-See Note Below [4],[5]					


NOTES

1. Relays with mounting styles B,C,D and terminal type 4 are compatible with socket families S302, SF302...
2. Isolation spacer pads for PCB mounting available on request.
3. For other mounting styles or terminal types, please contact the factory.
- [4]. Options
  - C: Circuit breaker compatibility 15 A / 1 hour; 50 A / 5 sec; 100 A / 1.2 sec 250 A / 0.2 sec; 350 A / 0.1 sec
  - H: High current version, 15 Amps resistive contact rating
  - D: low level: 1 mAmp / 30 mV
- [5]. Quality level:
  - ER: Please contact factory.

TYPICAL CHARACTERISTICS

- Coil resistance/temperature change: See application note no. 001
- Life expectancy for loads other than 28Vdc: See application note no. 002

CORRECTION DUE TO COIL COPPER WIRE RESISTANCE  
CHANGE IN TEMPERATURE

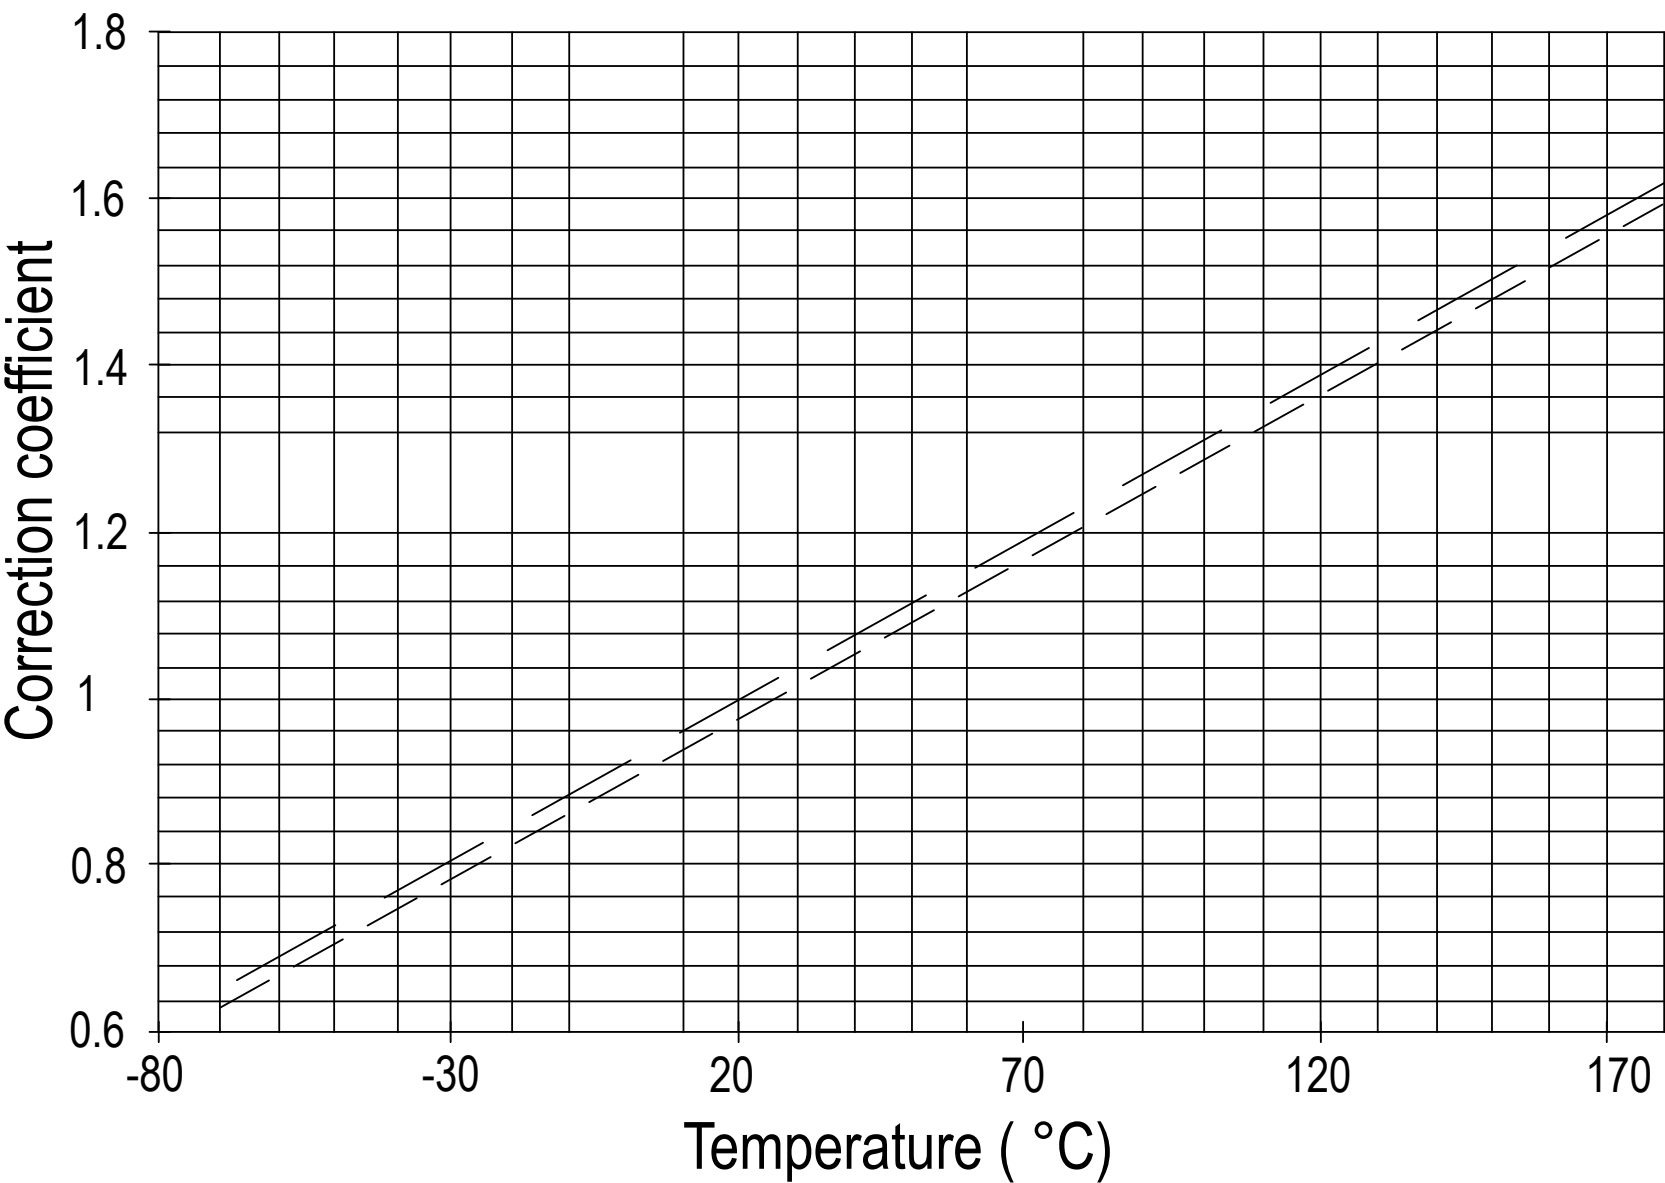


— — Nominal Resistance at 25°C      ——— Nominal Resistance at 20°C

Example: Coil resistance at 25°C: 935 ohms. What is it at 125°C?  
Correction coefficient on diagram is: 1.39 at 125°C. R becomes: 935x1.39=1299 Ohms

Correction also applies to operating voltages


LIFE CAPABILITY VERSUS VOLTAGE

Relay Series F/M30\*, 40\*, 60\*

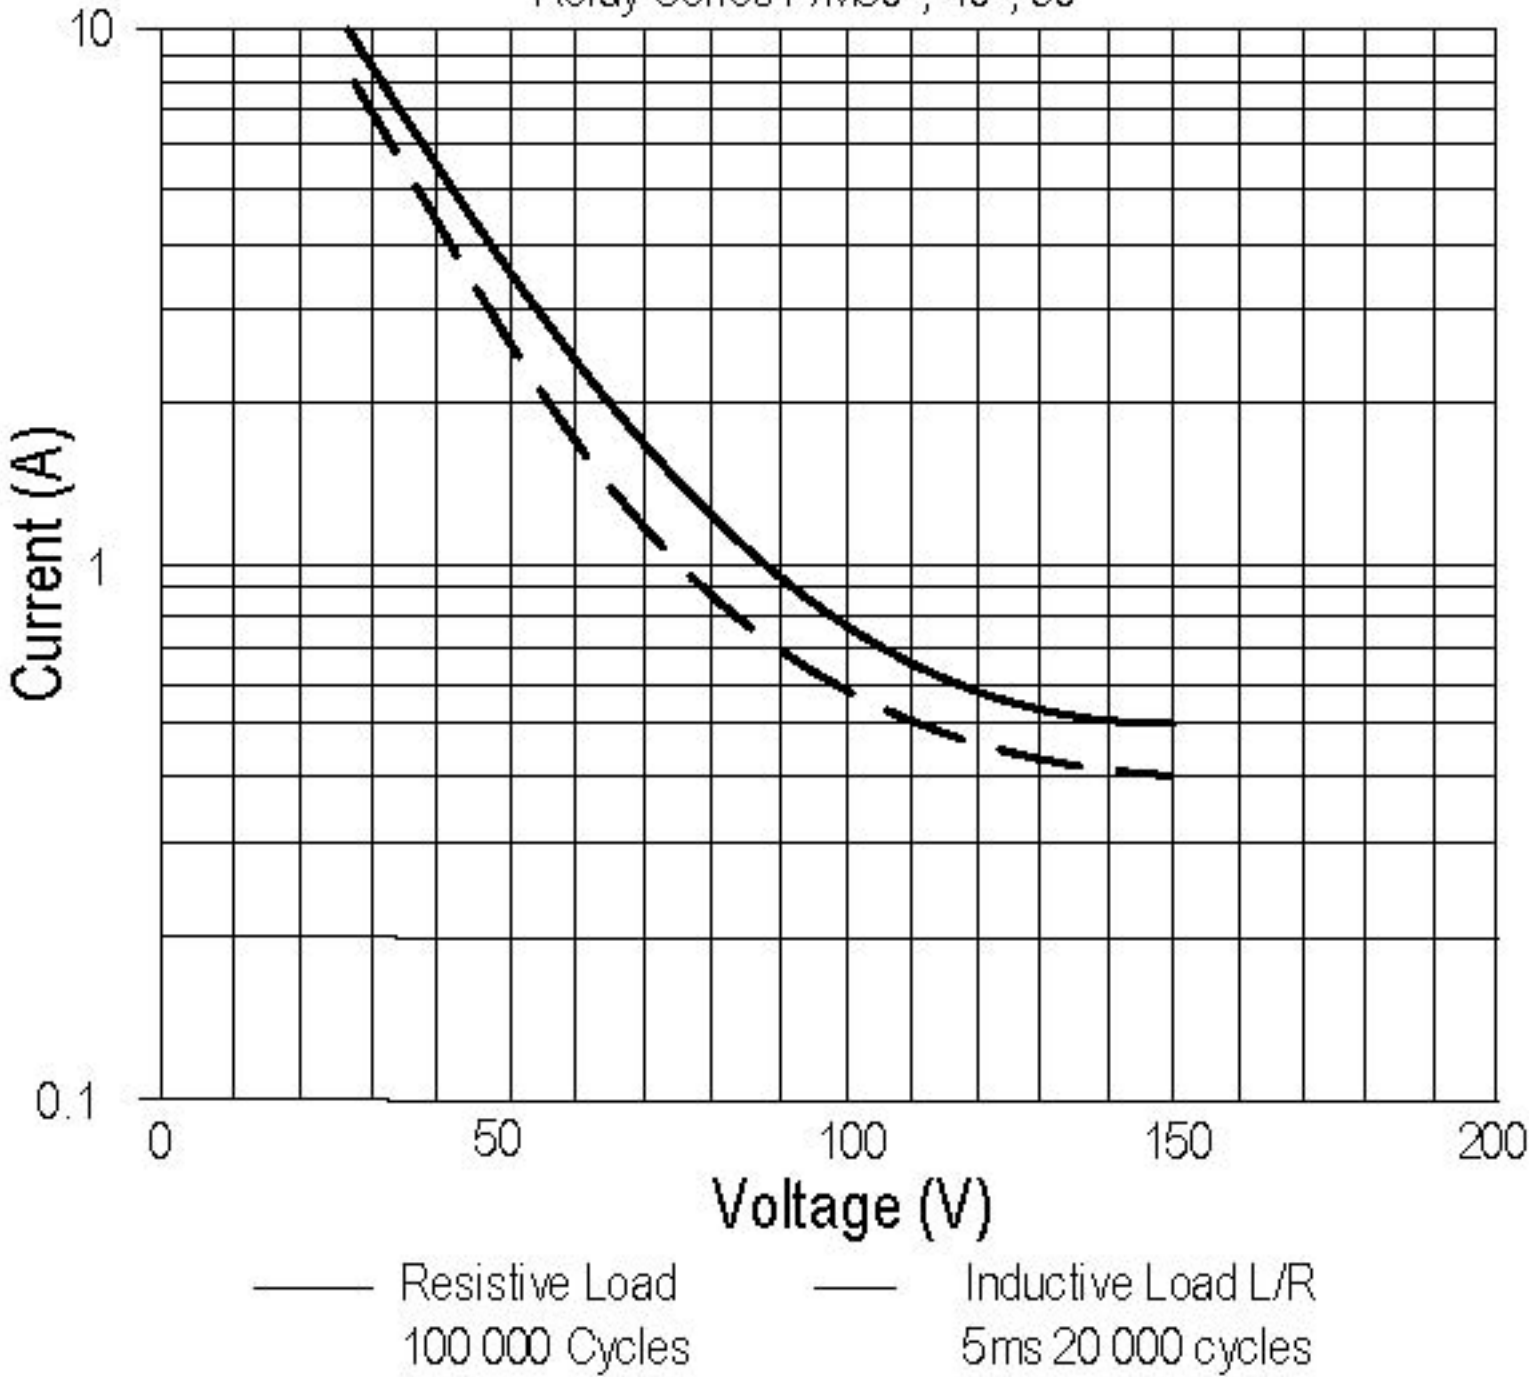

LIFE CAPABILITY VERSUS VOLTAGE

Relay Series FD 30,\* 40\*, 60\*

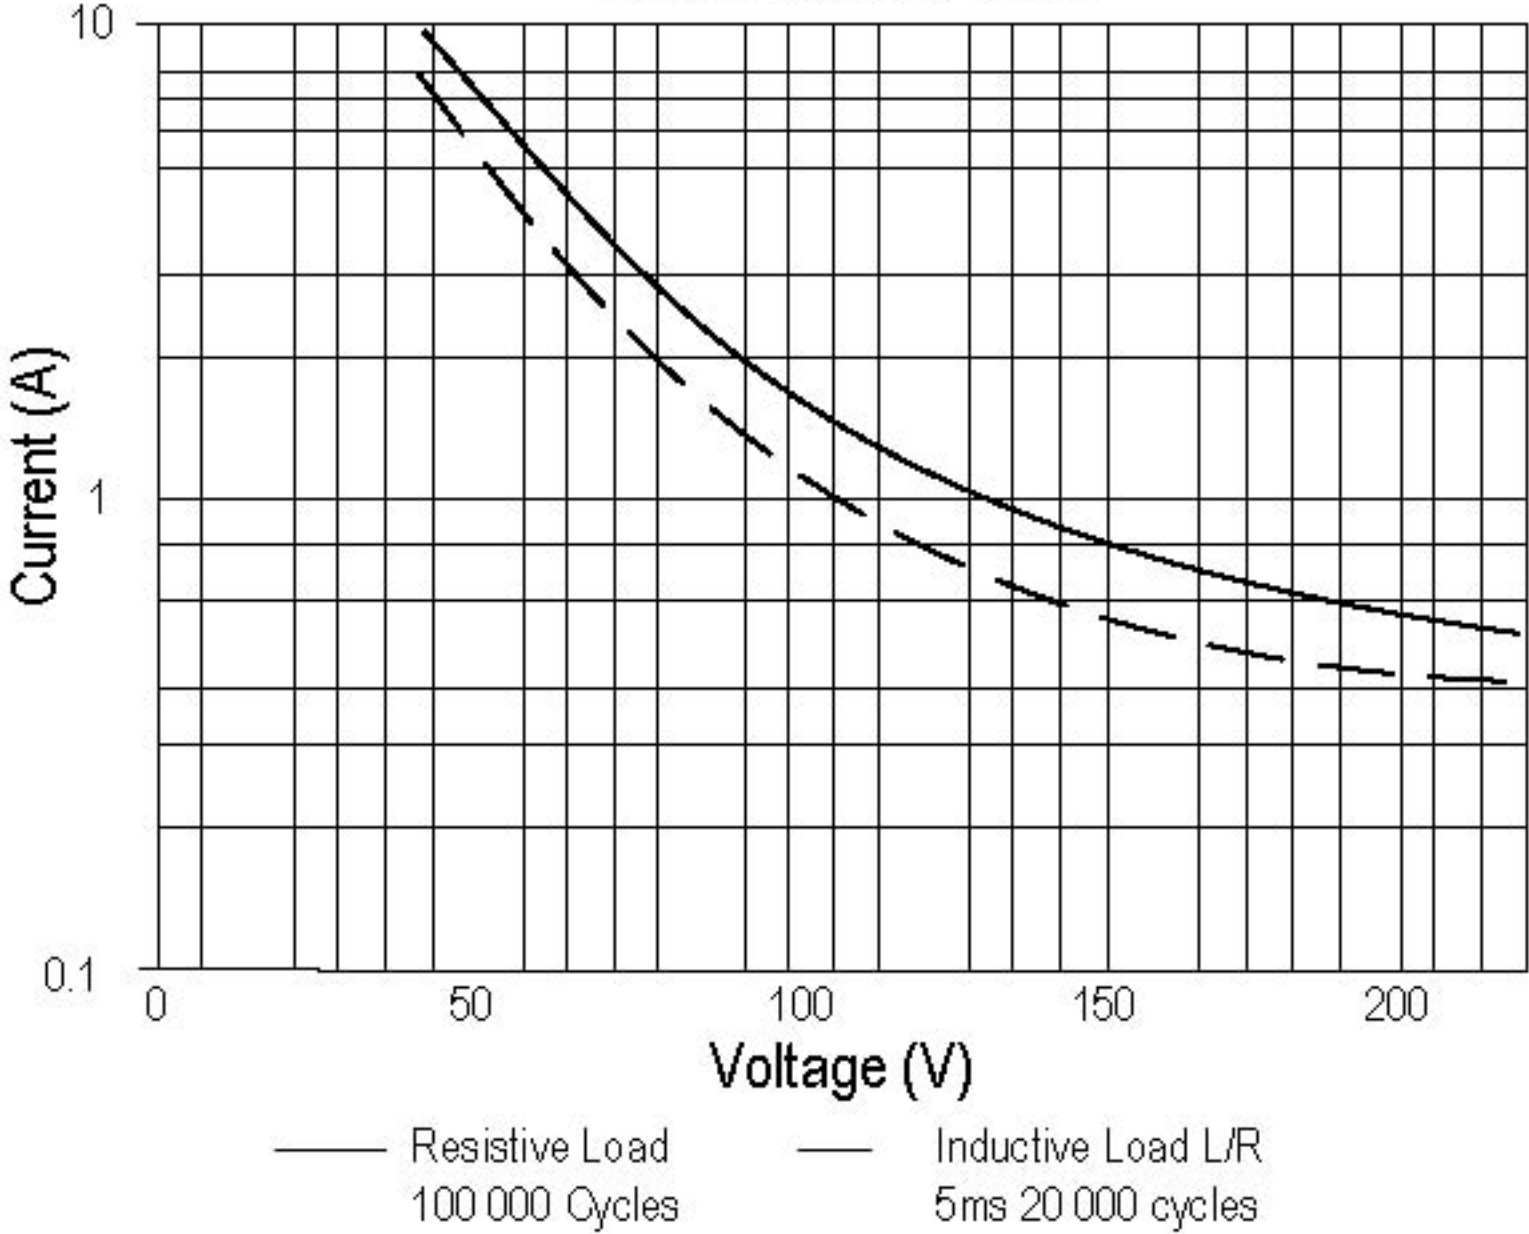

## SUPPRESSOR DEVICES FOR RELAY COILS

The inductive nature of relay coils allows them to create magnetic forces which are converted to mechanical movements to operate contact systems. When voltage is applied to a coil, the resulting current generates a magnetic flux, creating mechanical work. Upon deenergizing the coil, the collapsing magnetic field induces a reverse voltage (also known as back EMF) which tends to maintain current flow in the coil. The induced voltage level mainly depends on the duration of the deenergization. The faster the switch-off, the higher the induced voltage.

All coil suppression networks are based on a reduction of speed of current decay. This reduction may also slow down the opening of contacts, adversely affecting contact life and reliability. Therefore, it is very important to have a clear understanding of these phenomena when designing a coil suppression circuitry.

### Typical coil characteristics

On the graph below, the upper record shows the contacts state. (High level NO contacts closed, low level NC contacts closed, intermediate state contact transfer). The lower record shows the voltage across the coil when the current is switched off by another relay contact.

The surge voltage is limited to -300V by the arc generated across contact poles. Discharge duration is about 200 microseconds after which the current change does not generate sufficient voltage. The voltage decreases to the point where the contacts start to move, at this time, the voltage increases due to the energy contained in the NO contact springs. The voltage decreases again during transfer, and increases once more when the magnetic circuit is closed on permanent magnet.

Operating times are as follows:


Time to start the movement 1.5ms

Total motion time 2.3ms

Transfer time 1.4ms

Contact State

Tek **Stop** Single Seq 100kS/s

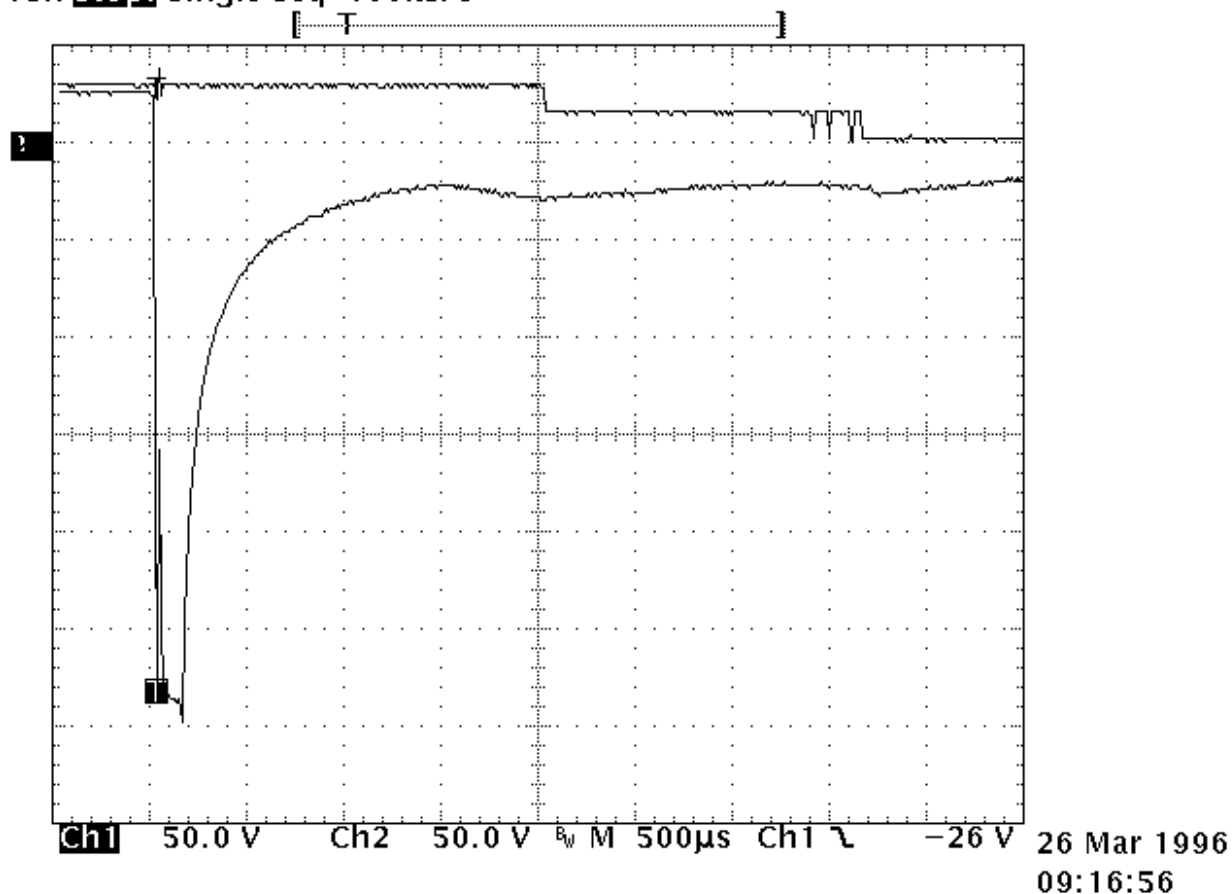



## Types of suppressors:

### Passive devices.

#### The resistor capacitor circuit

It eliminates the power dissipation problem, as well as fast voltage rises. With a proper match between coil and resistor, approximate capacitance value can be calculated from:

$$C = 0.02 \times T / R, \text{ where}$$

T = operating time in milliseconds

R = coil resistance in kiloOhms

C = capacitance in microFarads


The series resistor must be between 0.5 and 1 times the coil resistance. Special consideration must be taken for the capacitor inrush current in the case of a low resistance coil.

The record shown opposite is performed on the same relay as above. The operation time becomes:

- time to start the movement 2.3ms

- transfer time 1.2ms

The major difficulty comes from the capacitor volume. In our example of a relay with a  $290 \Omega$  coil and time delay of 8 ms, a capacitance value of  $C=0.5 \mu\text{F}$  is found. This non polarized capacitor, with a voltage of 63V minimum, has a volume of about  $1\text{cm}^3$ . For 150V, this volume becomes  $1.5 \text{ cm}^3$ .

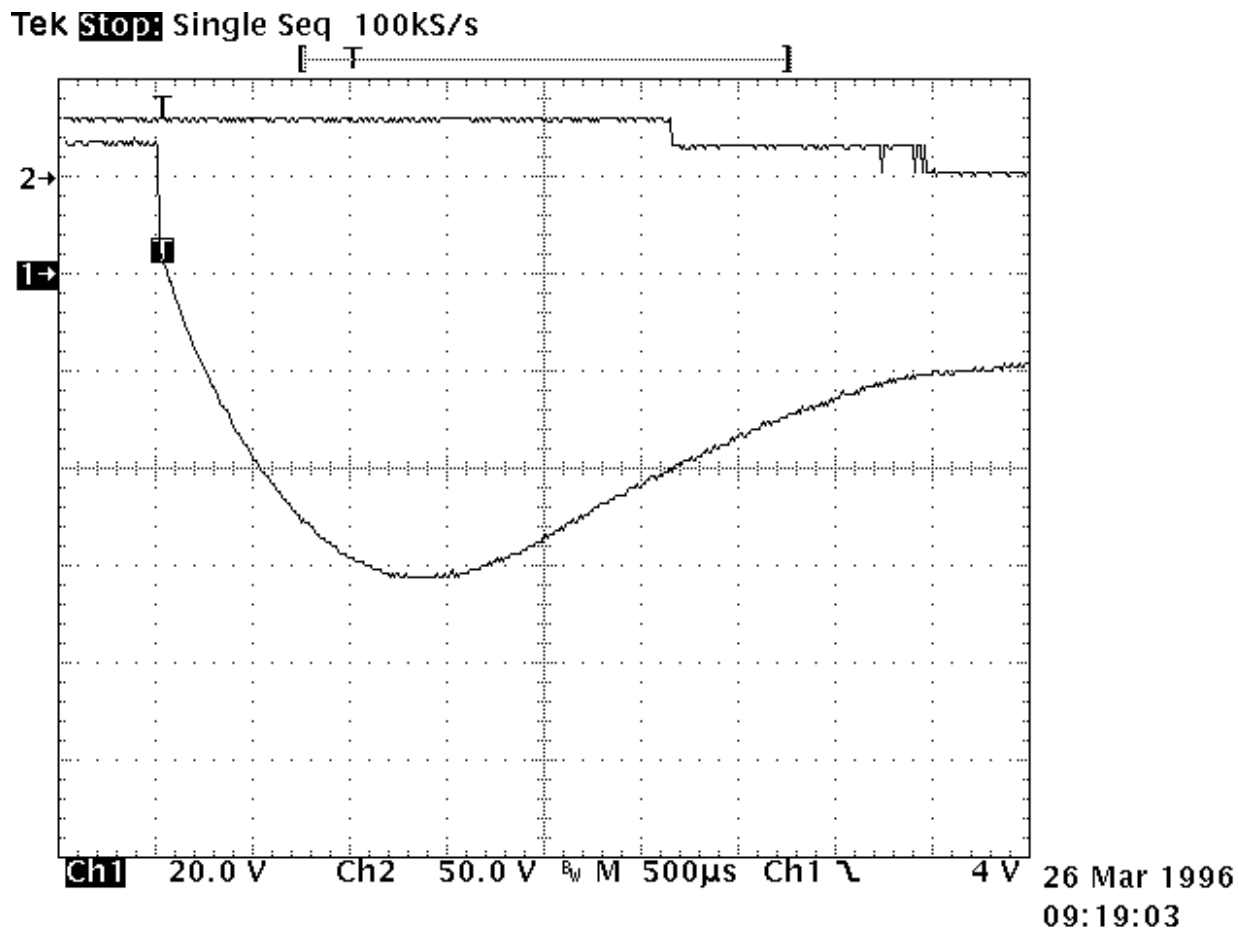

### The bifilar coil

The principle is to wind on the magnetic circuit of the main coil a second coil shorted on itself. By a proper adaptation of the internal resistance of this second coil it is possible to find an acceptable equilibrium between surge voltage and reduction of the opening speed. To be efficient at fast voltage changes, the coupling of two coils must be perfect. This implies embedded windings. The volume occupied by the second coil reduces the efficiency of the main coil and results in higher coil power consumption. This method cannot be applied efficiently to products not specifically designed for this purpose.

### The resistor (parallel with the coil)

For efficient action, the resistor must be of the same order of magnitude as the coil resistance. A resistor 1.5 times the coil resistance will limit the surge to 1.5 times the supply voltage. Release time and opening speed are moderately affected. The major problem is the extra power dissipated.

## **Semi-conductor devices**

### The diode


It is the most simple method to totally suppress the surge voltage. It has the major disadvantage of the higher reduction of contact opening speed. This is due to the total recycling, through the diode, of the energy contained in the coil itself. The following measurement is performed once again on the same relay. Operation times are given by the upper curve:

- time to start the movement 14ms
- transfer time 5ms

These times are multiplied by a coefficient from 4 to 8.

The lower curve shows the coil current. The increase prior to NO contact opening indicates that the contact spring dissipates its energy. At the opening time the current becomes constant as a result of practically zero opening speed.

Due to this kind of behavior, this type of suppression must be avoided for power relays. For small relays which have to switch low currents of less than 0.2 A, degradation of life is not that significant and the method may be acceptable.

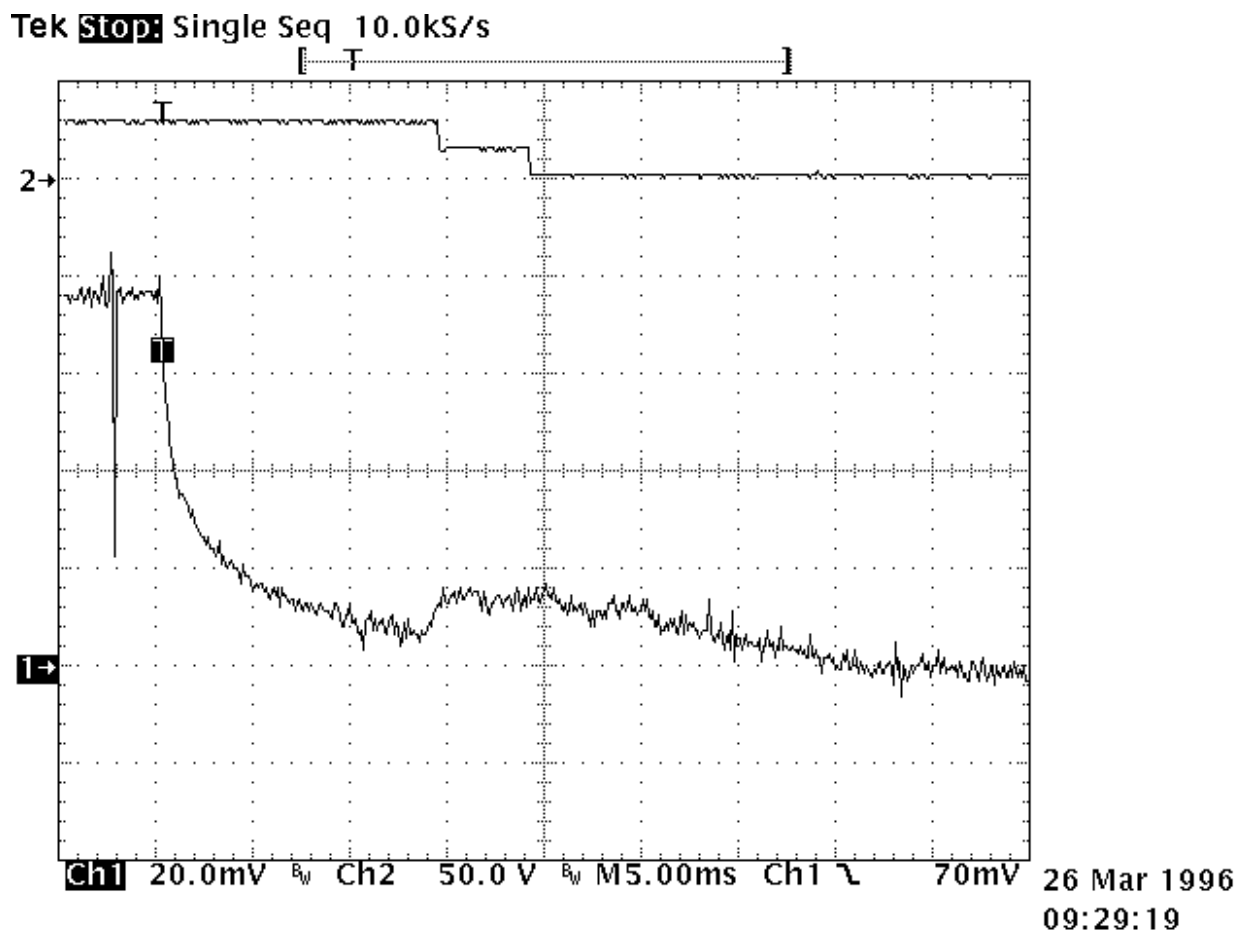

### The diode + resistor network

It eliminates the inconvenience of the resistor alone, explained above, and it limits the action of a single diode. It is now preferred to use the diode + zener network.

### The diode + zener network


Like the resistor, the zener allows a faster decurrent decay. In addition it introduces a threshold level for current conduction which avoids the recycling of energy released during contact movement.

The lower curve on the opposite record demonstrates those characteristics. Voltage limitation occurs at 42V. The two voltage spikes generated by internal movement are at lower levels than zener conduction. As a result, no current is recycled in the coil.

The opening time phases are as follows:

- time to start the movement 2.6ms
- total motion time 2.4ms
- transfer time 1.4ms

The release time is slightly increased. The contacts' opening speed remains unchanged.

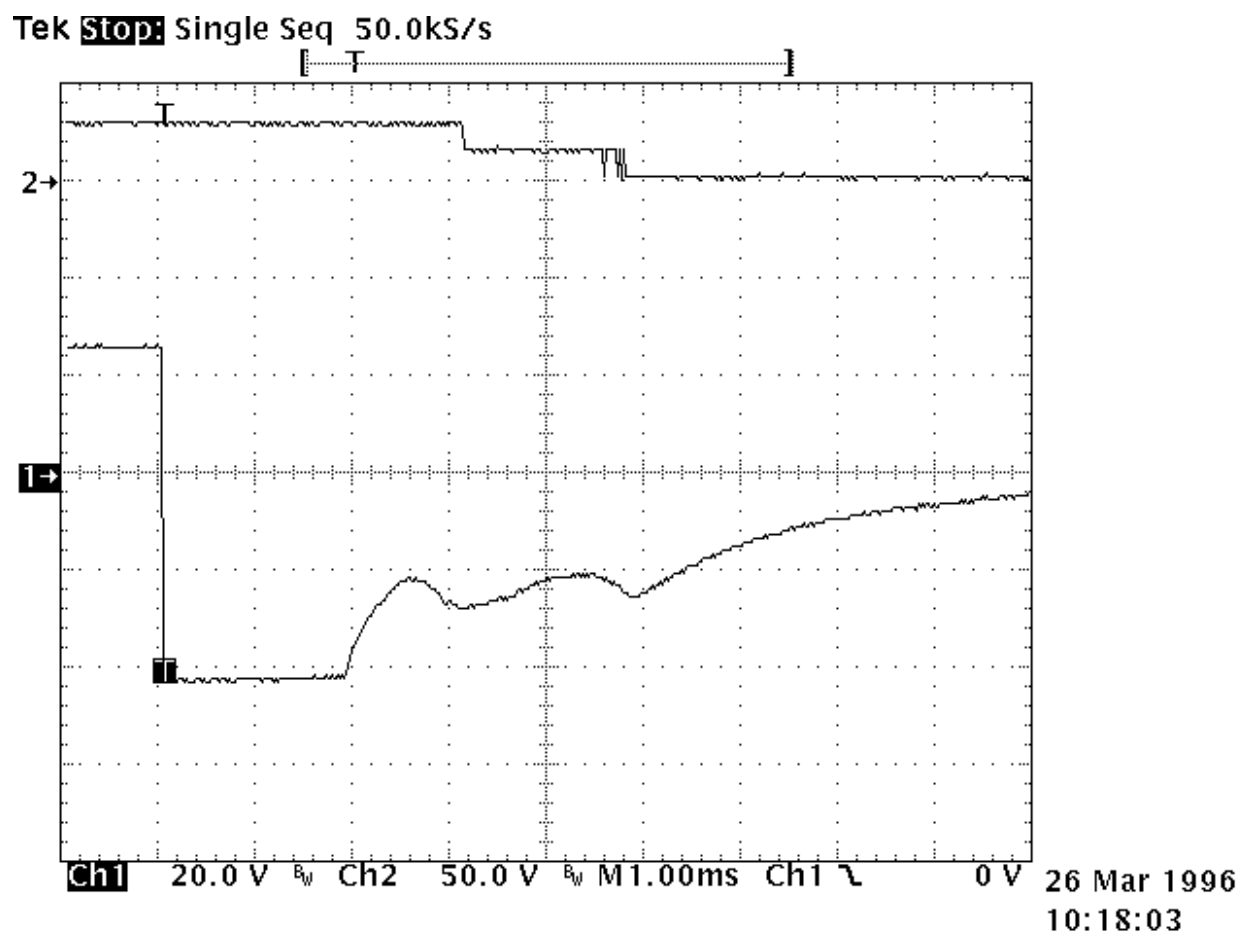

## MOUNTING DISTANCE BETWEEN RELAYS


### Applicable to M2XX / M3XX / M4XX / M5XX


#### Definition and applicability

This application note defines the minimum distance between relays to maintain the whole performances of the relays as given in our data sheets.


#### Phenomenon analysis

Each relay generates a magnetic field either when relay is de-energised because of the permanent magnet or in the energised position because of permanent magnet and coil. The magnetic field generated by one relay could affect the performance of another relay when the below minimum distance between relay is not respected. If the relays are mounted adjacent to each other, it is advisable to alternate direction of magnetic path on every other unit and to keep a 1.6 mm space between relays, figure "A". Or when mounted in the same direction, separate each relay from the other by 3.2 mm, figure "B". If two or more rows of relays are installed, allow clearance of 3.2 mm between rows, figures "C" and "D". Provide 4.8 mm space between relays if used in opposition, figure "E". Distance in millimetre.

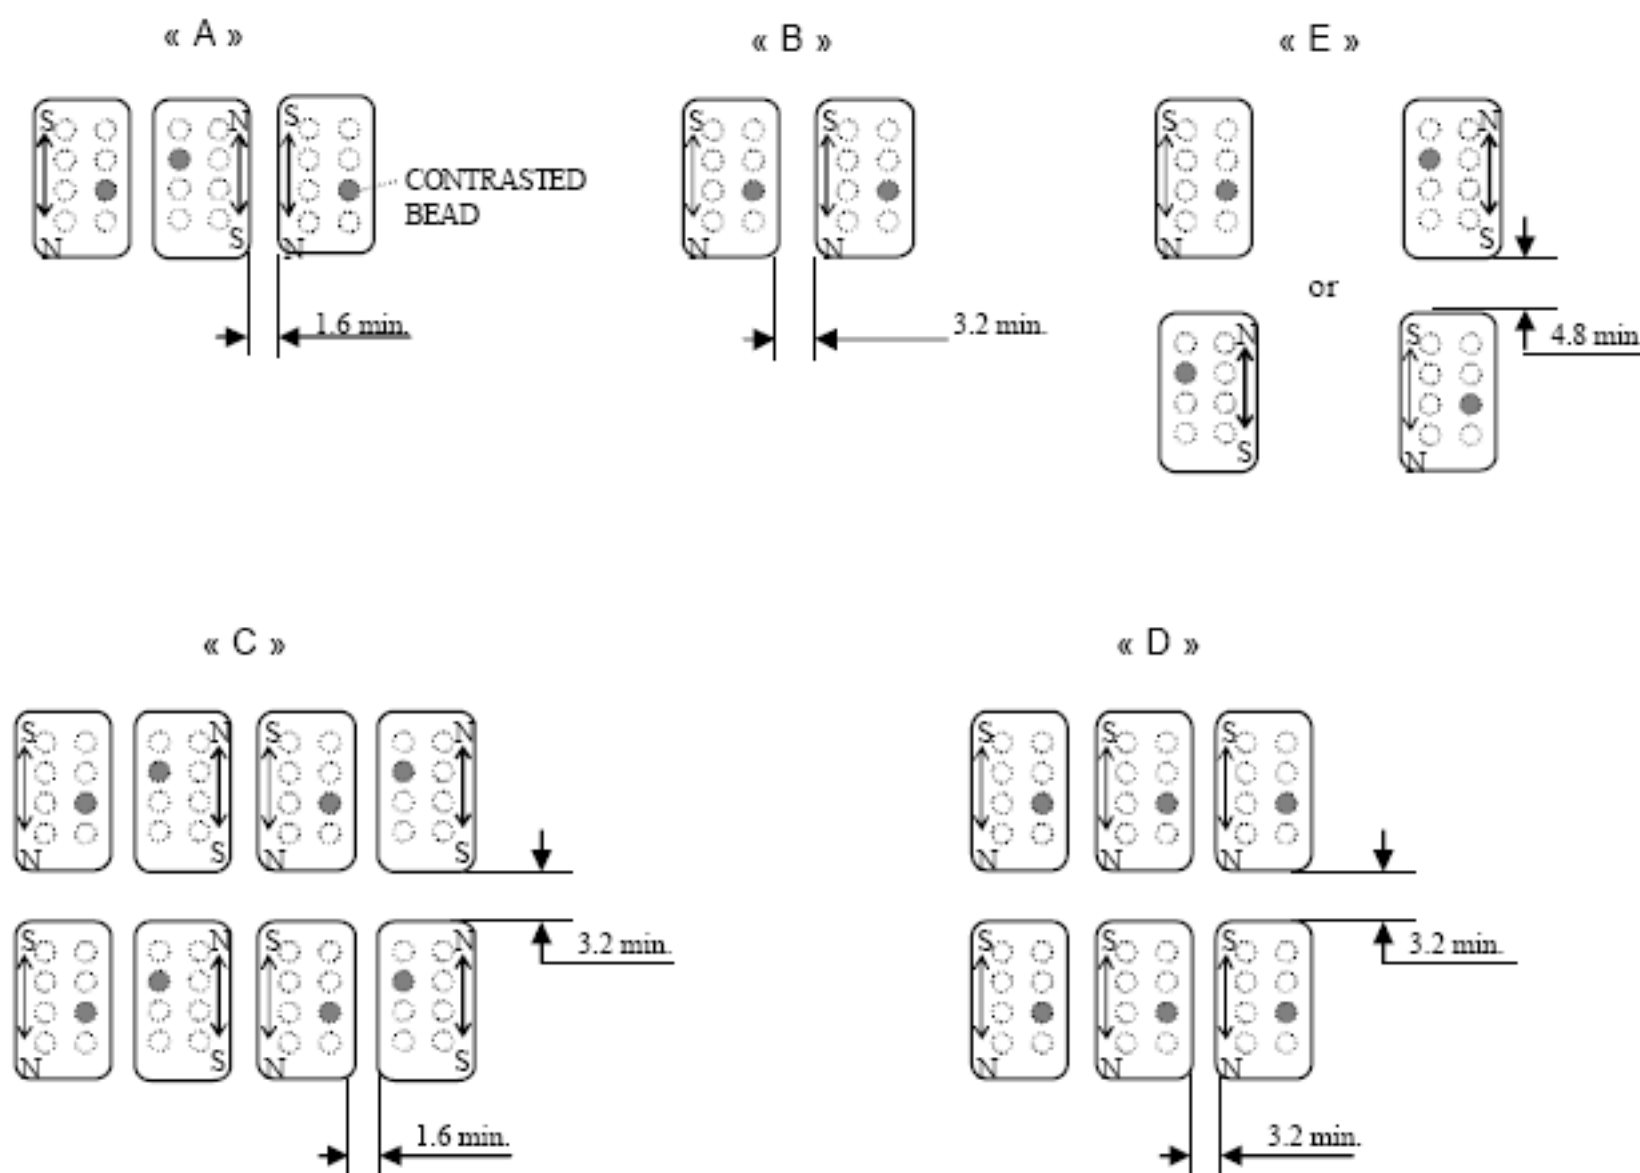

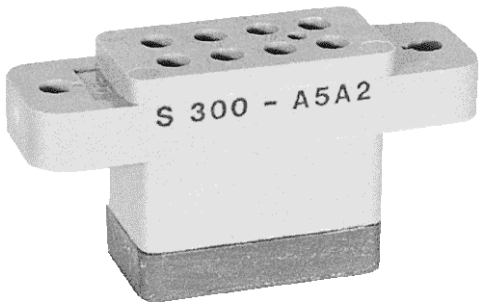

BASIC SOCKET SERIES DESIGNATION FOR:  
  
Series M300 (DC Coil), M301 (DC Coil),  
M302 (DC Coil), FD300, FLS300, FLR300

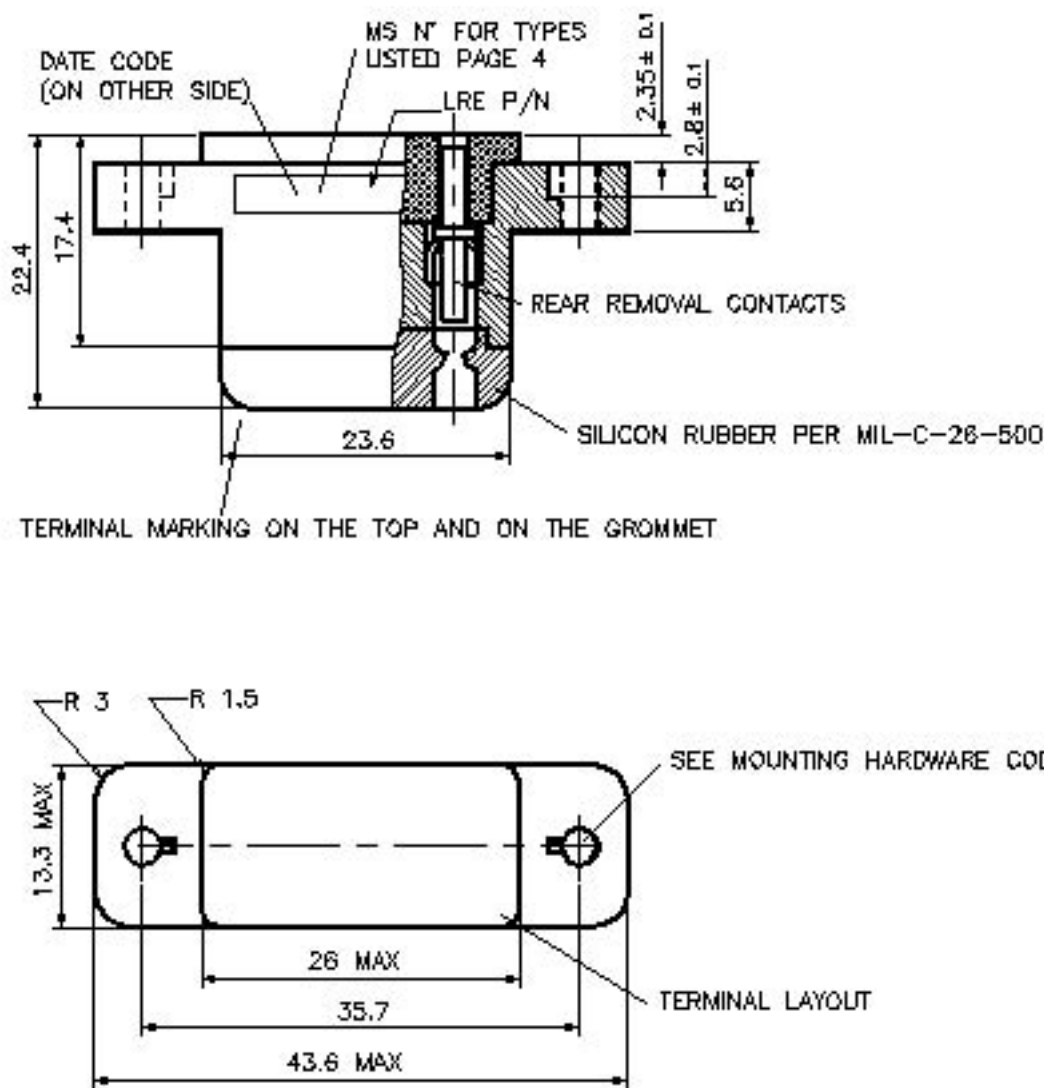

GENERAL CHARACTERISTICS

Crimp tool contact #22	M 22520/2-01 with turret M 22520/2-14.
Insertion and extraction tool #22	M 81969/14-01.
Crimp tool contact #16	M 22520/1-01 with turret M 22520/1-02 or MS 3191-1.
Insertion and extraction tool #16	M 81969/14-03 .
Weight	35g max.
Temperature range	70° C to +125° C.




Featuring **LEACH®** power and control solutions  
[www.esterline.com](http://www.esterline.com)

AMERICAS	EUROPE	ASIA
6900 Orangethorpe Ave. P.O. Box 5032 Buena Park, CA 90622	2 Rue Goethe 57430 Sarralbe France	Units 602-603 6/F Lakeside 1 No.8 Science Park West Avenue Phase Two, Hong Kong Science Park Pak Shek Kok, Tai Po, N.T. Hong Kong
Tel: (01) 714-736-7599 Fax: (01) 714-670-1145	Tel: (33) 3 87 97 31 01 Fax: (33) 3 87 97 96 86	Tel: (852) 2 191 3830 Fax: (852) 2 389 5803


Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.

## TERMINAL LAYOUT


**S300, S301, S302**

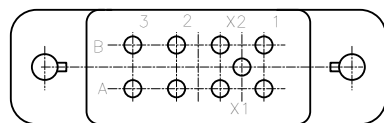


POSITION, TOLERANCE SEE CODE B  
FOR M300 RELAY

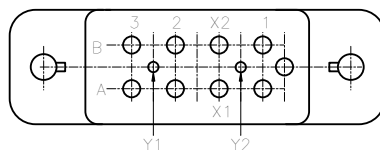


POSITION, TOLERANCE SEE CODE B  
FOR M302 RELAY

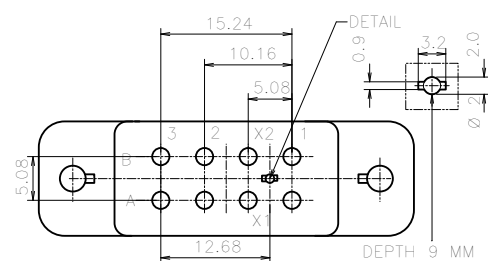

FOR M301 RELAY, FOR K COIL

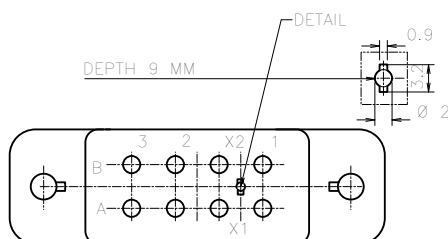


FOR M301 RELAY, FOR J COIL


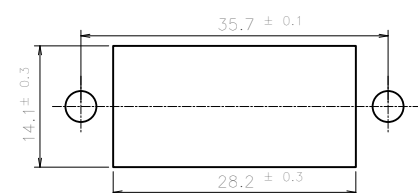


FOR HOLE CLEARANCE,  
SEE HARDWARE CODE


## MOUNTING HARDWARE




MOUNTING TORQUE  
NUT 4/40:0,45 ±0,1 Nm  
NUT 10-32:1,2 MAX  
:3,6 mm




MOUNTING TORQUE: 0,45 ± 0,1 Nm  
: 3,6 mm




MOUNTING TORQUE: 0,45 ± 0,1 Nm  
: 3.6 mm




MOUNTING TORQUE:0,45 ±0,1 Nm  
MOUNTING HOLE:3,6 mm MOUNTING




±0,1 Nm  
MOUNTING HOLE:3,6 mm




MOUNTING TORQUE:  $0,45 \pm 0,1$  Nm  
FOR RELAYS WITH CODE B TERMINALS  
MOUNTING HOLE: 3,6 mm




MOUNTING TORQUE: NUT 4/40:0,45 ±0,1 Nm – NUT 10-32: 1,2 MAX  
MOUNTING HOLE: 5,3 mm MOUNTING HOLE: 3,6 mm



MOUNTING HOLE: 3,6 mm



MOUNTING TORQUE: NUT 4/40:0,45 ±0,1 Nm – NUT 10-32: 1,2 MAX  
MOUNTING HOLE: 5,3 mm MOUNTING HOLE: 3,6 mm



MOUNTING HOLE: 3.6 mm

## WIRE INSULATION DIAMETER FOR SEAL TO GROMMET

**S300, S301, S302**

<b>Code A</b>  Recommended for contact code 2 contact code 8 <b>Dia: 1.2 .....2.4mm</b>	<b>Code B</b>  Recommended for contact code 3 contact code 9 <b>Dia: 0.8 .....1.6mm</b>
--	--

## CONTACT SIZE AND STYLE

Y1-Y2      Crimpend to accomodate AWG22 05 912 00    (for product code 2+3)  31 036 00 <u>Contact mating end dia 0.8mm</u> (for contact code 8+9) MIL-C-39029/92-531 Bin Code colour bands or Bin Code numbering on crimp side  <u>Contact mating end dia 0.8mm</u>	Code 2 05 911 00  Crimpend to accomodate AWG16-18-20   <u>Contact mating  end #16</u>	Code 3 05 911 10  Crimpend to accomodate AWG20-22-24   <u>Contact mating  end #16</u>
Code 0                      Without contacts	Code 8 30 315 00  Crimpend to accomodate AWG16-18-20  MIL-C-39029/92- 533 Bin Code colour bands or Bin Code numbering on crimp side  <u>Contact mating  end #16</u>	Code 9 30 315 10  Crimpend to accomodate AWG20-22-24  MIL-C-39029/92- 534 Bin Code colour bands or Bin Code numbering on crimp side  <u>Contact mating  end #16</u>

## SOCKET NUMBERING SYSTEM

	S300	A	1	A	2
1-Basic socket designation_____					
2-Terminal Layout_____					
3-Mounting Hardware_____					
4-Grommet to seal on wire insulation_____					
5-Contact size and style_____					


**MS/LEACH CROSS PART NO. AND MATING RELAYS**
**S300, S301, S302**

	<b>MS - Number</b>	<b>LEACH P/N</b>	<b>Contacts to accomodate wire #</b>		<b>Applicable for relays</b>
<b>MIL-S-12883/41</b>	-01	S300-A6A2	16-18-20	Loose terminals Above/below panel mounting	M300-D4A /-L/-N/-B/-C
	-04	S300-A6B3	20-22-24		M 301-D4F/-K
	-02	S301-B6A2	16-18-20		M 301-D4E/-J
	-03	S301-C6A2	16-18-20		
	<b>MS - Number</b>	<b>LEACH P/N</b>	<b>Contacts to accomodate wire #</b>		<b>Applicable for relays</b>
<b>MIL-S-12883/41B</b>	-11	S300-A1A2	16-18-20	Loose terminals below panel mounting	M300-D4A /-L/-N/-B/-C
	-14	S300-A1B3	20-22-24		M 301-D4F/-K
	-12	S301-B1A2	16-18-20		M 301-D4E/-J
	-13	S301-C1A2	16-18-20		
	<b>MS - Number</b>	<b>LEACH P/N</b>	<b>Contacts to accomodate wire #</b>		<b>Applicable for relays</b>
<b>MIL-S-12883/41C</b>	-11S	S300-A8A8	16-18-20	Loose terminals Above/below panel mounting	M300-D4A /-L/-N/-B/-C
	-14S	S300-A8B9	20-22-24		M301-D4F/-K
	-12S	S301-B8A8	16-18-20		M301-D4F/-J
	-13S	S301-C8A8	16-18-20		M302-D4A/ -L/-N/-B/-C
	-15S	S302-D8A8	16-18-20		
<b>MIL-S-12883/41C</b>	-16S	S300-A9A8	16-18-20	Fixed terminals Above/below panel mounting	M300-D4A /-L/-N/-B/-C
	-19S	S300-A9B9	20-22-24		M 301-D4F/-K
	-17S	S301-B9A8	16-18-20		M 301-D4E/-J
	-18S	S301-C9A8	16-18-20		M 302-D4A/ -L/-N/-B/-C
	-20S	S302-D9A8	16-18-20		



ENGINEERING DATA SHEET

SC30\*, SC40\*  
SOCKET FOR 2 OR 4 POLE  
10 AMP

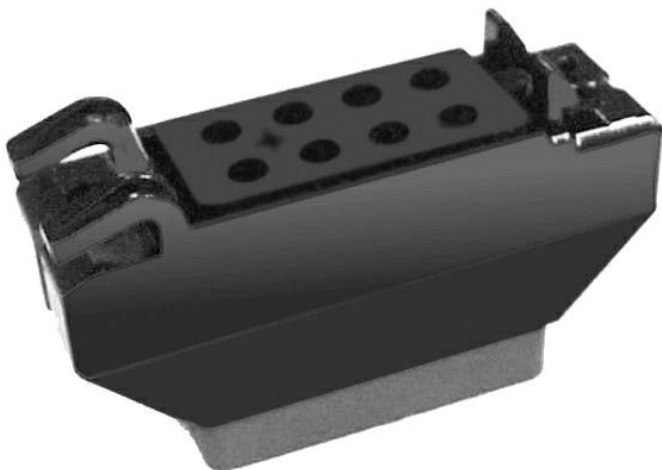

2 POLE



4 POLE

SNAP AND LOCK SOCKET SERIES DESIGNATION FOR:

**SERIES M300, M301, M302, M400, M401, M402, T402, T412**

DESIGNED TO THE STANDARDS AND REQUIREMENTS OF:

2-pole, 10A relays	<b>MIL-PRF-12883/41</b>
Mates with	<b>M83536, M83726 and MS27709</b>
4-pole, 10A relays	<b>MIL-PRF-12883/40</b>
Mates with	<b>M83536</b>

**FEATURES**

Low profile  
Bottom panel mount  
Snaps into panel  
Other models available

**MATERIALS**

Socket body	<b>Polyetherimide per MIL-P-46184</b>
Grommet	<b>Silicone rubber per ZZ-R-765</b>
Hardware	<b>Stainless Steel</b>
Contacts	<b>Copper alloy, hard gold plated per MIL-G-45204</b>
Contact retainers	<b>Beryllium copper</b>

**GENERAL CHARACTERISTICS**


Insulation resistance	1000 M $\Omega$ min.
Dielectric withstanding voltage	1500 VRMS sea level; 500 VRMS at 25,000 m
Weight	15.3g max.
Temperature range	-65°C to +125°C
Vibration	MIL-STD-202, Method 204, Test Condition G
Shock	MIL-STD-202, Method 213, Test Condition C

This socket is designed to snap and lock into a panel to reduce hardware requirement and mounting time. Contacts and hardware are provided disassembled in a plastic bag. Standard tolerances are  $\pm 0.025$ mm unless otherwise noted.


 <i>Featuring <b>LEACH</b>® power and control solutions</i> <a href="http://www.esterline.com">www.esterline.com</a>	<b>AMERICAS</b> 6900 Orangethorpe Ave. P.O. Box 5032 Buena Park, CA 90622  Tel: (01) 714-736-7599 Fax: (01) 714-670-1145	<b>EUROPE</b> 2 Rue Goethe 57430 Sarrelbe France  Tel: (33) 3 87 97 31 01 Fax: (33) 3 87 97 96 86	<b>ASIA</b> Units 602-603 6/F Lakeside 1 No.8 Science Park West Avenue Phase Two, Hong Kong Science Park Pak Shek Kok, Tai Po, N.T. Hong Kong Tel: (852) 2 191 3830 Fax: (852) 2 389 5803
	Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.		

**SOCKET DIMENSIONS**

**SC30\* (2 POLE)**

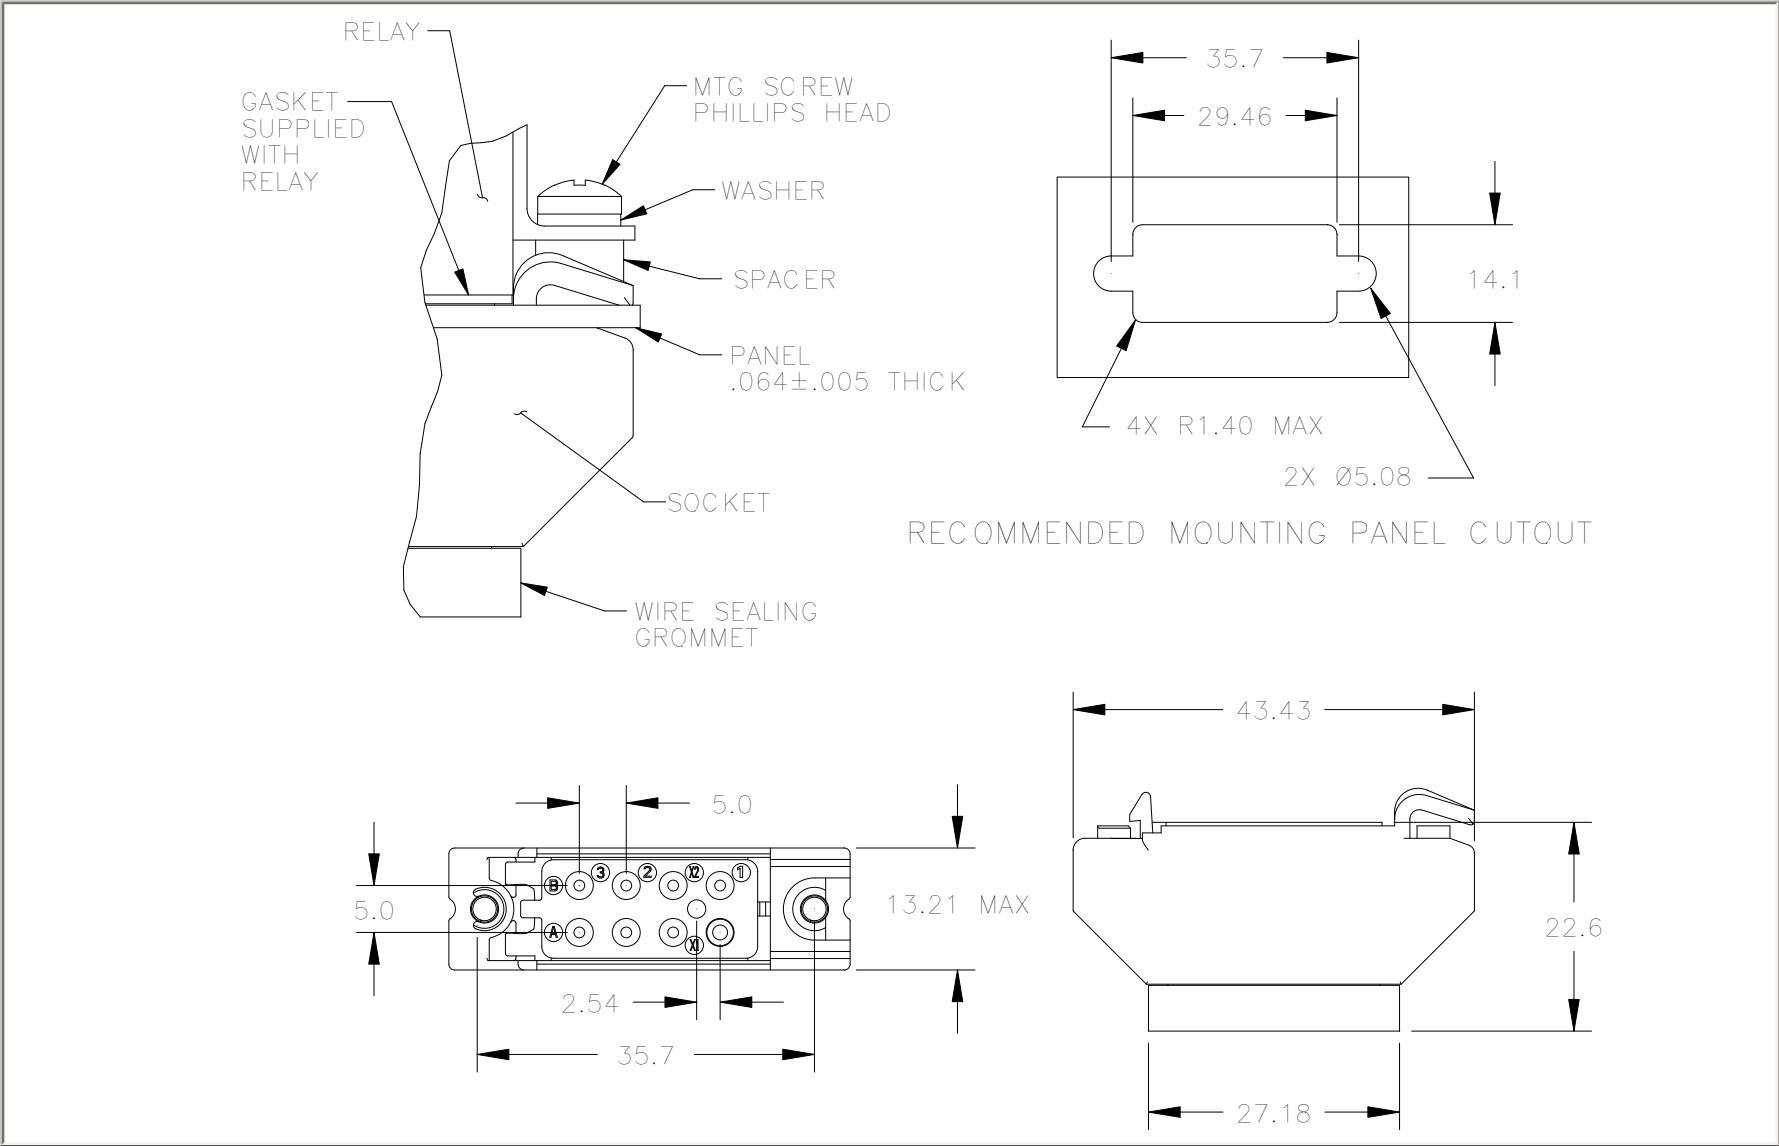


**TERMINAL LAYOUT**

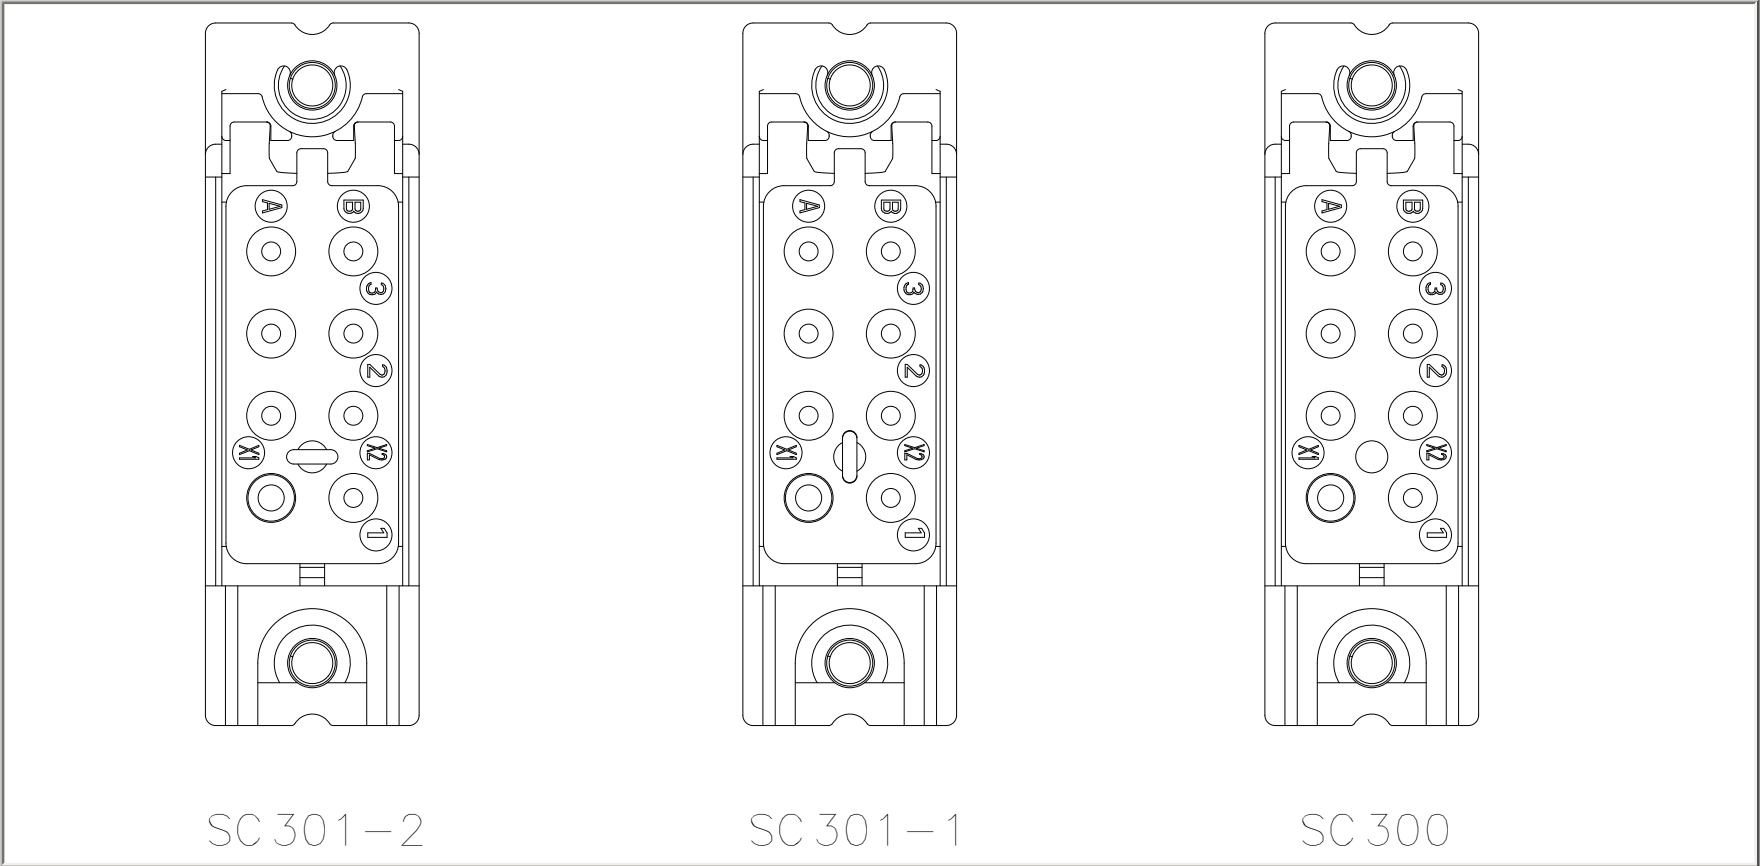


**SOCKET DIMENSIONS**

**SC40\* (4 POLE)**

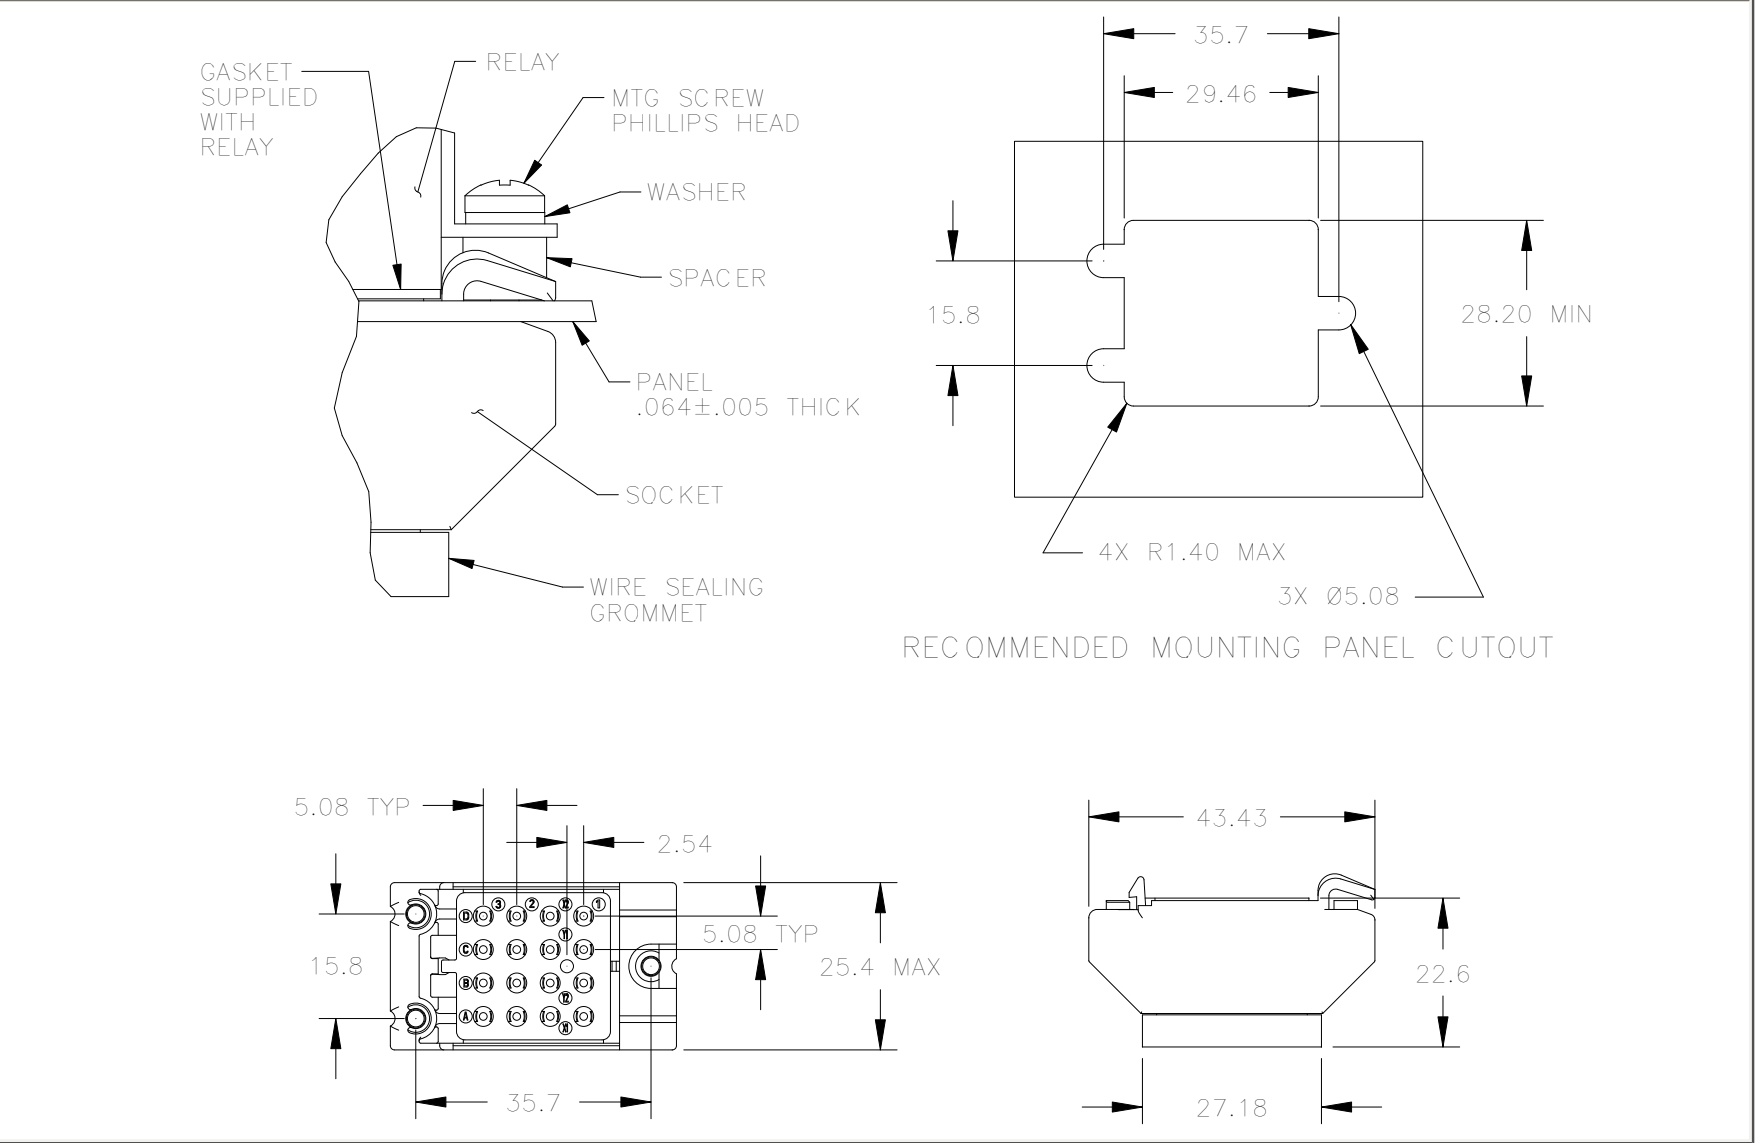

**TERMINAL LAYOUT**

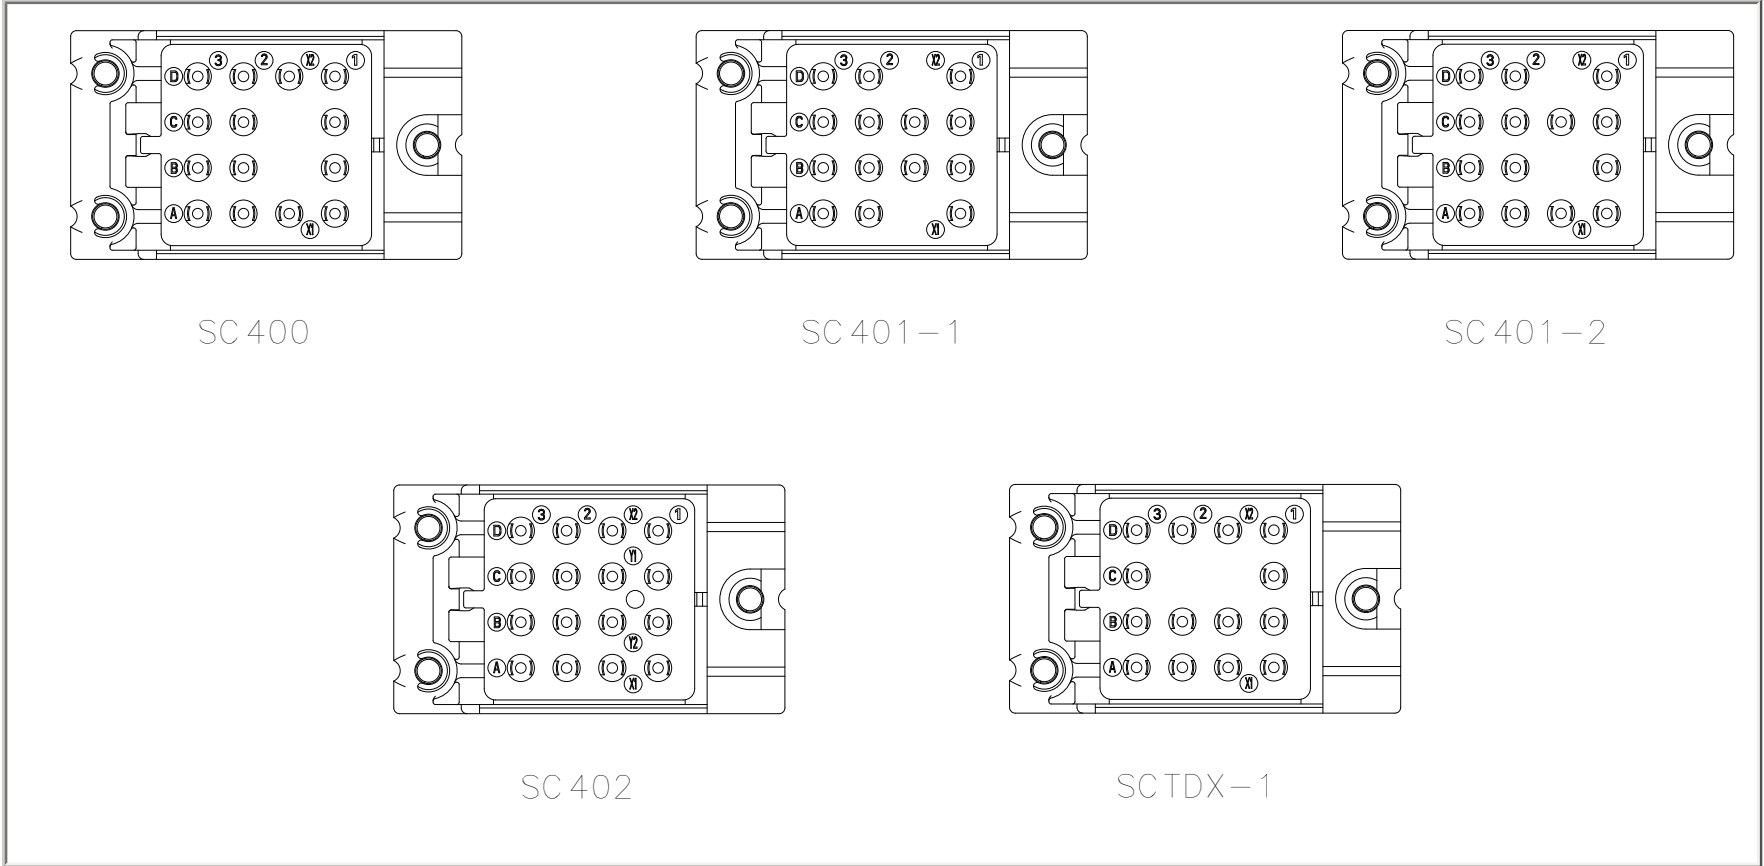

	SC	300	01
1-Basic socket snap lock designation_____			
2-Mating relay (M300, M301, M302, M400, M401_____			
2-Hardware (0=less hardware, 1=with hardware)_____			
3-Contacts (0=less contacts, 1=with contacts)_____			