

**Service
Service
Service****7638**

ServiceManual

Contents	Page
Safety Notes	2
General Information.....	10
Disassembly.....	17
Service Modes, Error Codes, and Faultfinding	26
Adjustment Procedures	55
Circuit Description	79
Waveforms.....	127
Electrical Diagrams	130
Exploded View	208
Parts List.....	209
Service Bulletin	640



IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** Equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done, or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.


** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a  or "S" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol  on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

* Broken Line _____

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.
2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.
3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.
4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.
5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.
6. Critical components having special safety characteristics are identified with an 'S' by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol  on the schematic diagrams and /or exploded views.
7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.
8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.
9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

* **Broken line** ____ - ____ - ____ - ____

LEAKAGE CURRENT COLD CHECK

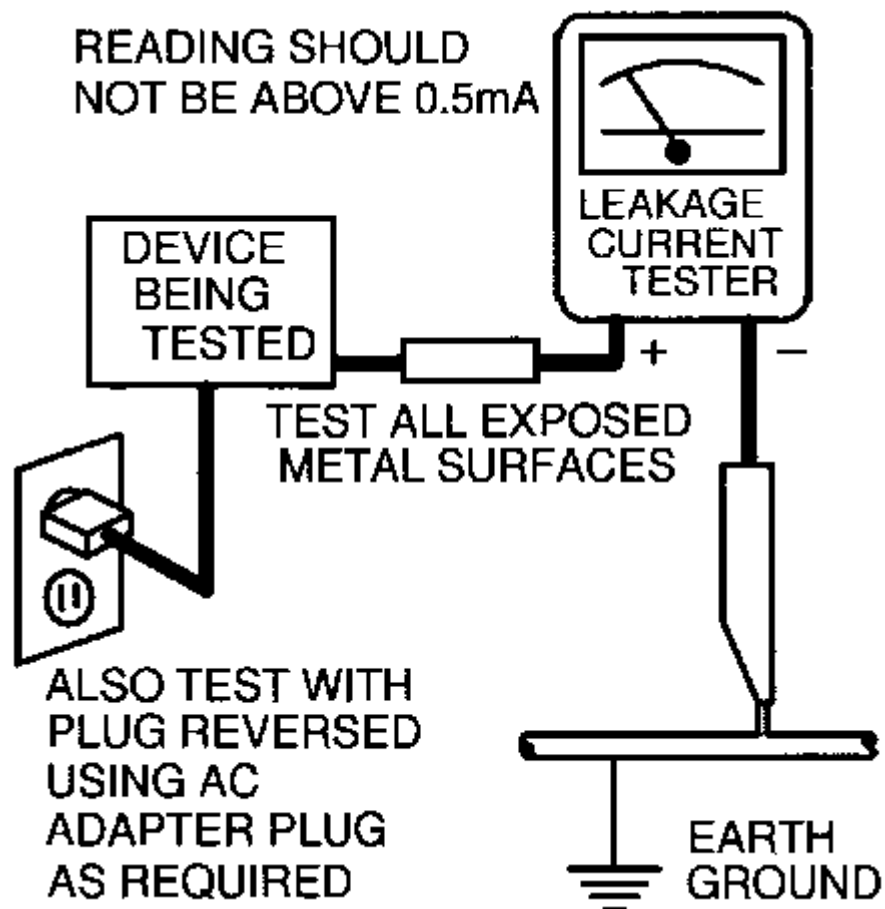
1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.
2. Turn on the power switch.
3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.
2. Connect a 1.5k, 10W resistor paralleled by a 0.15uF. capacitor between each exposed metallic cabinet part and a good earth ground such as a water pipe, as shown below.
3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.
4. The potential at any point should not exceed 0.75 volts. A leakage current tester may be used to make this test; leakage current must not exceed 0.5mA. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.
5. Repeat the above procedure with the ac plug reversed. (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the ac line cord directly into a 120Vac outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument ac switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See the graphic below.



TV SAFETY NOTES

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to your customer. Be sure to check all of the following:

- Fire and Shock Hazard
- Implosion
- X-Radiation
- Leakage Current Cold Check
- Leakage Current Hot Check
- Picture Tube Replacement
- Parts Replacement

WARNING: Before removing the CRT anode cap, turn the unit OFF and short the HIGH VOLTAGE to the CRT DAG ground.

SERVICE NOTE: The CRT DAG is not at chassis ground.

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.
2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.
2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.
3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.
4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.

5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.
6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.
7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.
8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.
5. Do not use Freon propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:

This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

PRACTICAL SERVICE PRECAUTIONS

IT MAKES SENSE TO AVOID EXPOSURE TO ELECTRICAL SHOCK. While some sources are expected to have a possible dangerous impact, others of quite high potential are of limited current and are sometimes held in less regard.

ALWAYS RESPECT VOLTAGES. While some may not be dangerous in themselves, they can cause unexpected reactions – reactions that are best avoided. Before reaching into the powered color TV set, it is best to test the high voltage insulation. It is easy to do, and is just a good service precaution.

BEFORE POWERING UP THE TV WITH THE BACK OFF (or on a test fixture), attach a clip lead to the CRT DAG ground and to a screwdriver blade that has a well insulated handle. After the TV is powered on and high voltage has developed, probe the anode lead with the blade, starting at the bottom of the High Voltage Transformer (flyback – IFT). Move the blade to within two inches of the connector of the CRT. **IF THERE IS AN ARC, YOU FOUND IT THE EASY WAY, WITHOUT GETTING A SHOCK!** If there is an arc to the screwdriver blade, replace the High Voltage Transformer or the lead, (if removable) whichever is causing the problem.

PICTURE TUBE REPLACEMENT PROCEDURE

Note: a. Two (2) people are required to handle this picture tube.
b. Safety Glasses must be worn during this procedure or whenever directly handling a picture tube.
c. Take care in each step not to damage the CRT or the cabinet.

1. Remove the Chassis and the CRT Socket Board Module from the cabinet.
2. A furniture pad or blanket should be positioned on the floor to support only the CRT Face. This pad or blanket should be high enough to keep the CRT Face approximately 12 to 14 inches off the floor.
3. Using two people, place the cabinet in a front down position with the CRT Face on the pad or blanket.
4. Place padded blocks under each corner of the cabinet to keep it from rocking.
5. Remove the four screws, at the corners of the CRT.
6. With two people lowering the cabinet to the floor, leave the CRT elevated by the pad or blanket.

Note: Take care not to grasp the neck of the CRT during this procedure, as it is extremely fragile.

7. Two (2) people may then lift the CRT from the cabinet.
 8. Remove the degaussing coil from the defective CRT and mount on the replacement. Take care to maintain the exact shape and fit.
- To install the new CRT, reverse steps 1 to 7.

Technical Specifications and Connections

Note: Described specifications are valid for the *whole* product range.

Technical Specifications

Reception

Feature	Data
Tuning system	: PLL
Color systems	: NTSC M/N
Sound systems	: BTSC non-DBX : BTSC DBX
Channel selections	: 181, full cable
IF picture carrier	: 45.75 MHz
Aerial input	: 75 Ohm, F-type
A/V Connections	: NTSC M/N

Miscellaneous

Audio output:

Feature	Data
Stereo versions	: 2 x 1 W
	: 2 x 3 W
	: 2 x 5 W
	: 2 x 10 W
Mono versions	: 1 x 1 W
	: 1 x 3 W
	: 1 x 4 W
	: 2 x 2 W

Power supply:

Feature	Data
Mains voltage range	: 90 - 140 VAC
Mains frequency	: 60 Hz

Ambient conditions:

Feature	Data
Temperature range	: +5 to +45 deg. C
Maximum humidity	: 90 % R.H.


Power consumption:

Feature	Data
Normal operation	: from 81 W (20") : to 145 W (32")
Standby	: < 3 W


Connections

Front or Top Control / Front or Side Connections

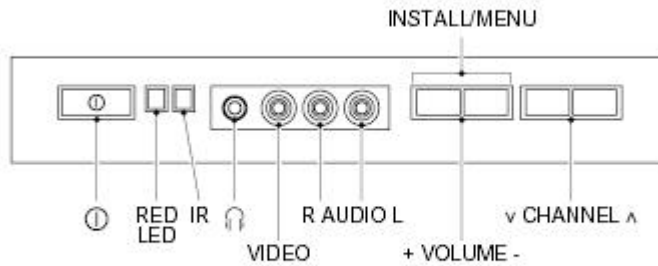FRONT CONTROL + FRONT I/O



TOP CONTROL

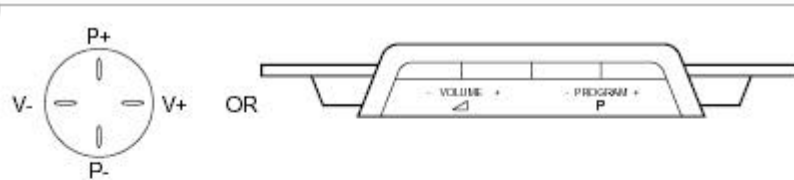

SIDE I/O








Figure: Front/Top control and Side I/O

Audio / Video In

Connector	Kind	Value	Symbol
1	Video	1 Vpp / 75 Ohm	
2	Audio - L	0.2 Vrms / 10 kOhm	
3	Audio - R	0.2 Vrms / 10 kOhm	
4	Headphone (3.5 mm)	8 - 600 Ohm / 4 mW	

Rear Connections










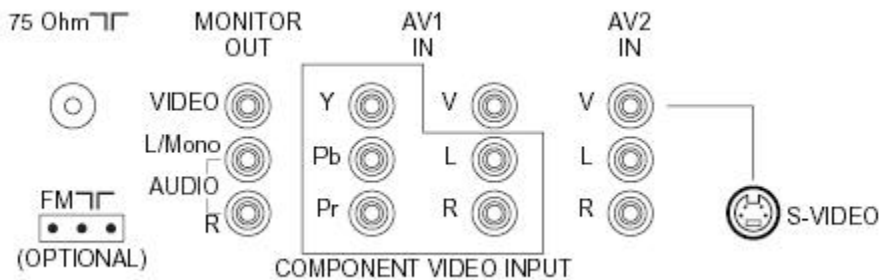Figure: Rear connections




Monitor Out

Connector	Kind	Value	Symbol
1	Video (CVBS)	1 Vpp / 75 Ohm	
2	Audio - L	0.5 Vrms / 1 kOhm	
3	Audio - R	0.5 Vrms / 1 kOhm	




YUV In

Connector	Kind	Value	Symbol
1	Y	0.7 Vpp / 75 Ohm	
2	U	0.7 Vpp / 75 Ohm	
3	V	0.7 Vpp / 75 Ohm	





AV1 In

Connector	Kind	Value	Symbol
1	Video (CVBS)	1 Vpp / 75 Ohm	
2	Audio - L	0.5 Vrms / 10 kOhm	
3	Audio - R	0.5 Vrms / 10 kOhm	

AV2 In

Connector	Kind	Value	Symbol
1	Video (CVBS)	1 Vpp / 75 Ohm	
2	Audio - L	0.5 Vrms / 10 kOhm	
3	Audio - R	0.5 Vrms / 10 kOhm	

AV2 In (SVHS)

Connector	Kind	Value	Symbol
1	Ground	GND	
2	Ground	GND	
3	Y	1 Vpp / 75 Ohm	
4	C	0.3 Vpp / 75 Ohm	

Mechanical Instructions

Index of this chapter:

1. Set Disassembly
2. Service Positions
3. Assembly/Board Removal
4. Set Re-assembly

Note: Figures below may deviate slightly from the actual product, due to different set designs.

Set Disassembly

1. Remove all screws from the back cover (do not forget the screws that hold the rear connection panel).
2. Pull the back cover backward to remove it.

Service Positions

There are 2 service positions possible.

Family Board without bracket (with integrated 'control').

1. Disconnect the strain relief of the AC power cord.
2. Remove the mono carrier, by pushing the two center clips outward [1]. At the same time pull the panel away from the CRT [2].
3. Disconnect the degaussing coil by removing the cable from (red) connector 0212.
4. Turn the panel 90 degrees counter clockwise [3].
5. Flip the panel 90 degrees [4], with the components toward the CRT.
6. Turn the panel with its rear connections toward the CRT [5].
7. Slide the metal heatsink (near the mains transformer 5520) underneath the right chassis bracket. This secures the panel [6].

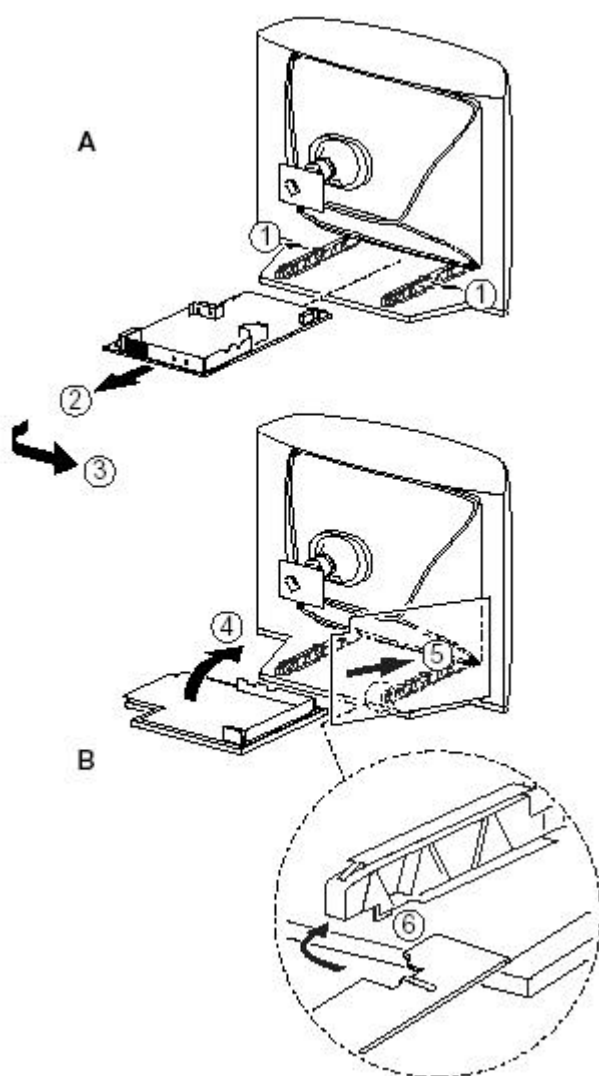


Figure: Service position (1)

Family Board with bracket (with separate 'control').

1. Disconnect the strain relief of the AC power cord.
2. Disconnect the degaussing coil by removing the cable from (red) connector 0212 [1].
3. Remove the panel bracket from the bottom tray, by pulling it backward [2].
4. Turn the chassis tray 90 degrees counter clockwise.
5. Move the panel to the left and flip it 90 degrees [3], with the components toward the CRT.
6. Turn the panel with the rear jack panel toward the CRT.
7. Place the hook of the tray in the hole in the cabinet bottom [4] and slide the panel backward to lock it in the service position.

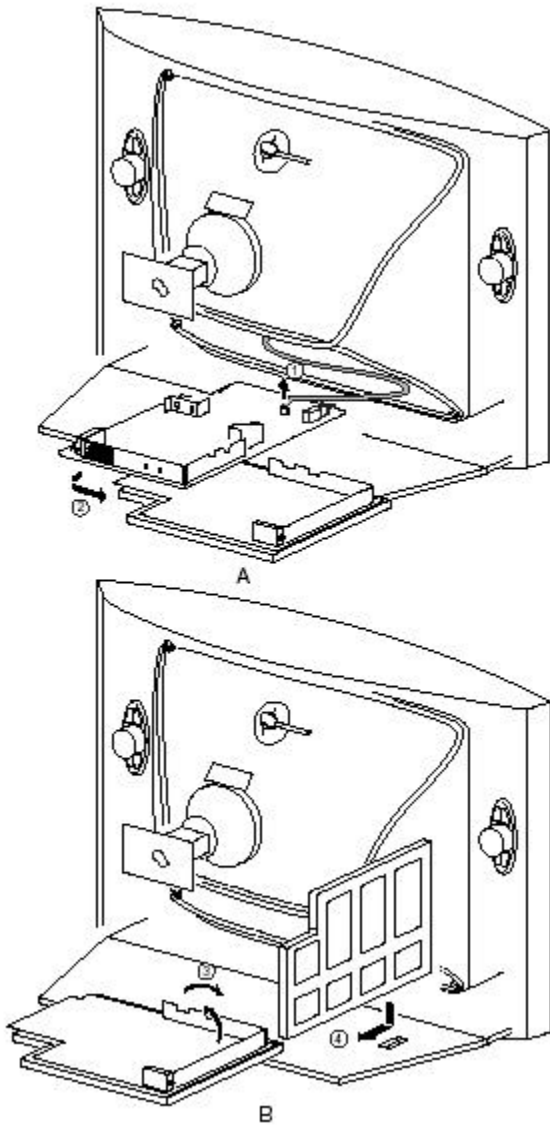


Figure: Service position (2)

Assembly/Board Removal

Comb Filter Assembly/Board (if present)

You can remove the Comb Filter panel from the family board by disconnecting it from connector 1810 (located at the top of the AC power transformer 5520).

Top Control Assembly/Board (if present)

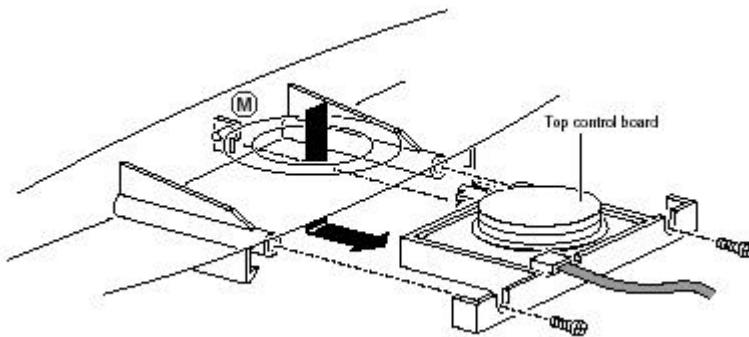


Figure: Top control removal

1. Remove the two screws (if present).
2. Pull the module down and backward (release it from the front hinge [M]).
3. Lift the board from its bracket while releasing the two fixation clamps. The board hinges on the other side.

Front Interface Assembly/Board (if present)

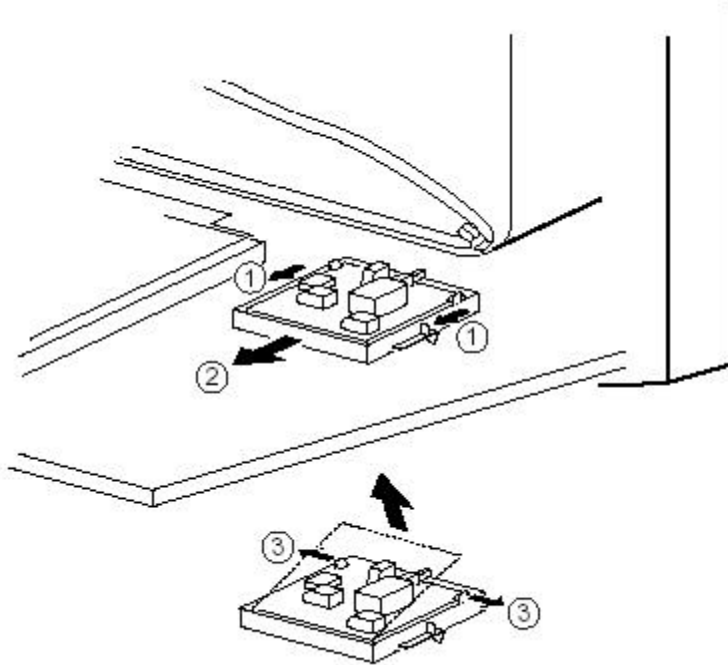


Figure: Front interface removal

1. You can remove the complete module from the bottom plate, by pulling the two clamps upward [1] while sliding the module away from the CRT [2].
2. Release the 2 clamps [3] at the side of the bracket, and lift the board out of the bracket (it hinges at one side).

DAF Assembly/Board (if present)

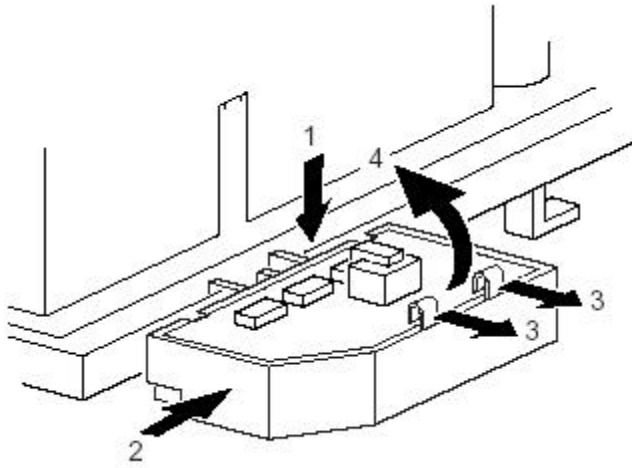


Figure: DAF panel removal

1. You can remove the complete module from the family board bracket, by pressing the clamp downward [1] while sliding the module toward the CRT [2].
2. Release the 2 clamps [3] to lift the board out of the bracket [4].

Side Jack Panel Assembly/Board (if present)

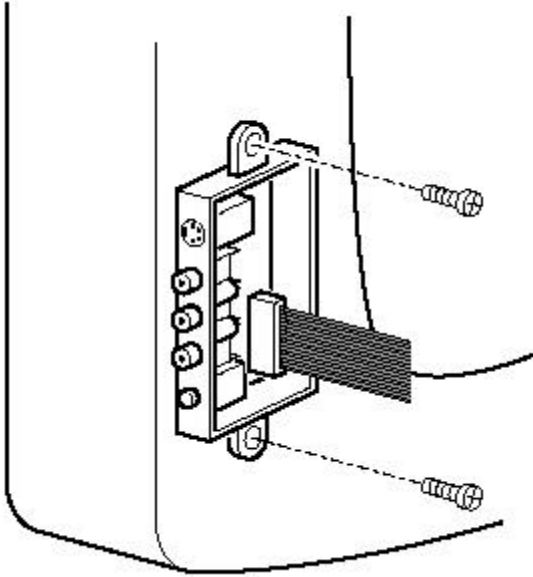


Figure: Side jack panel removal

1. You can remove the complete side jack panel assembly by removing the 2 screws.
2. Release the 2 clamps to lift the board out of the bracket.

Set Re-assembly

Before replacing the back cover, check the following:

1. Be sure the AC power cord is mounted correctly in its guiding brackets.
2. Re-place the strain relief for the AC power cord into the cabinet.
3. Be sure all cables are returned to their original positions.

Service Modes, Error Codes and Fault Finding

Index:

1. Supporting Overviews
2. Test Points.
3. Service Modes.
4. Problems and Solving Tips (related to CSM).
5. ComPair.
6. Error Codes.
7. The Blinking LED Procedure.
8. Protections.
9. Repair Tips.

Supporting Overviews

- [Block Diagram](#)
- [I2C and Supply Voltage Diagram](#)
- [Test point Overview Mono Carrier](#)
- [Test point Overview CRT panel](#)

Test Points

The chassis is equipped with test points printed on the circuit board assemblies. These test points refer to the functional blocks:

Table: Test point overview

Test point	Circuit	Diagram
A1-A2-A3-....	Audio processing	A8, A9 / A11
C1-C2-C3-....	Control	A7
F1-F2-F3-....	Frame drive and output	A3
I1-I2-I3-....	Tuner & IF	A4
L1-L2-L3-...	Line drive and output	A2
P1-P2-P3-....	Power supply	A1
S1-S2-S3-....	Synchronization	A6
V1-V2-V3-....	Video processing	A5, B1

The numbering is in a logical sequence for diagnostics. Always start diagnosing within a functional block in the sequence of the relevant test points for that block.

Perform measurements under the following conditions:

- Television set in Service Default Alignment Mode.
- Video input: Color bar signal.
- Audio input: 3 kHz left channel, 1 kHz right channel.

Service Modes

Service Default Alignment Mode (SDAM) offers several features for the service technician, while the Customer Service Mode (CSM) is used for communication between the servicer and the customer.

The L01.1U AC chassis also offers the option of using ComPair, a hardware interface between a computer and the TV chassis. It offers the abilities of structured troubleshooting, error code reading, and software version readout for all L01.1U AC chassis.

Minimum requirements for ComPair: a Pentium processor, a Windows OS, and a CD-ROM drive (see also "ComPair" section).

Table: Software cluster overview

SW Cluster	SW name	UOC type	UOC Diversity	Special Features
L3LUS1	L01US2x.y	TDA9587	64K ROM Size	Stereo dBx, Comb Filter
L3LUN1	L01UN4x.y	TDA9588	64K ROM Size	Stereo non-dBx
L3LUN2	L01UN5x.y	TDA9577	55K ROM Size	Stereo non-dBx
Abbreviations in Software name: U = USA (NAFTA), M = Mono, N = Stereo non-dBx and S = Stereo dBx.				

Service Default Alignment Mode (SDAM)

Purpose

- To create a predefined setting for measurements to be made.
- To override software protections.
- To start the blinking LED procedure.
- To change option settings.
- To display / clear the error code buffer.
- To perform alignments.

Specifications

- Tuning frequency: 61.25 MHz (channel 3).
- Color system: NTSC M.
- All picture settings at 50% (brightness, color contrast, hue).
- Bass, treble and balance at 50 %; volume at 25 %.
- All service-unfriendly modes (if present) are disabled. The service unfriendly modes are:
 - Timer / Sleep timer.
 - Child / parental lock.
 - Blue mute.
 - Hotel / hospital mode.
 - Auto shut off (when no 'IDENT' video signal is received for 15 minutes).
 - Skipping of non-favorite presets / channels.
 - Auto-storage of personal presets.
 - Auto user menu time-out.
 - Auto Volume Leveling (AVL).
- Run timer (maximum four digits displayed)

- Software version
- Option settings
- Error buffer reading and erasing
- Software alignments

How to enter

To enter SDAM, use one of the following methods:

- Press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).
- Short jumper wires 9631 and 9641 on the family board (see Fig. 8-1) and apply AC power. Then press the power button (remove the short after start-up).

Caution : Entering SDAM by shorting wires 9631 and 9641 will override the +8V-protection. Do this only for a short period. When doing this, the service-technician must know exactly what he is doing, as it could damage the television set.

- Or via ComPair (with the ComPair 'Tools' RC7150 Service Remote, it should be possible to enter SDAM via the ComPair interface).

After entering SDAM, the following screen is visible, with S in the upper right corner of the screen to indicate that the television is in Service Default Alignment Mode.

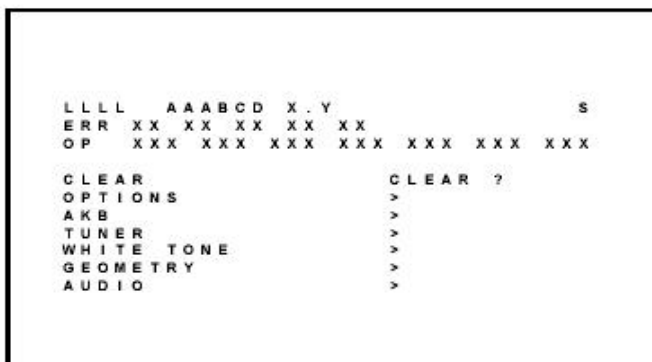


Figure: SDAM menu

Menu explanation

1. **LLLL**. This represents the run timer. The run timer counts normal operation hours, but does not count standby hours (maximum four digits displayed).
2. **AAABCD-X.Y**. This is the software identification of the main microprocessor:
 - **A** = the project name (L01).
 - **B** = the region: E= Europe, A= Asia Pacific, U= NAFTA, L= LATAM.
 - **C** = the software diversity:
 - **Europe**: T = 1 page TXT, F = Full TXT, V = Voice control
 - **LATAM and NAFTA**: N = Stereo non-dBx, S = Stereo dBx
 - **Asian Pacific**: T = TXT, N = non TXT, C = NTSC
 - **ALL regions**: M = mono, D = DVD, Q = Mk2
 - **D** = the language cluster number:
 - **X** = the main software version number (updated with a major change that is incompatible with previous versions)
 - **Y** = the sub software version number (updated with a minor change that is compatible with previous versions)
3. **S**. Indication of the service mode (S = SDAM = Service Default Alignment Mode).
4. **Error Buffer**. Shows all errors detected since the last time the buffer was erased. Five errors possible.
5. **Option Bytes**. Used to set the option bytes. See 'Options' in the Alignments section for a detailed description. Seven codes possible.
6. **Clear**. Erases the contents of the error buffer. Select the CLEAR menu item and press the MENU RIGHT key. The content of the error buffer is cleared.
7. **Options**. Used to set the option bits. See 'Options' in the Alignments section for a detailed description.
8. **AKB**. Used to disable (0) or enable (1) the 'black current loop' (AKB = Auto Kine Bias).
9. **Tuner**. Used to align the tuner. See 'Tuner' in the Alignments section for a detailed description.

10. **White Tone.** Used to align the white tone. See 'White Tone' in the Alignments section for a detailed description.
11. **Geometry.** Used to align the geometry settings of the television. See 'Geometry' in the Alignments section for a detailed description.
12. **Audio.** No audio alignment is necessary for this television set.

How to navigate

- In SDAM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
 - Activate the selected menu item.
 - Change the value of the selected menu item.
 - Activate the selected submenu.
- In SDAM, when you press the MENU button, the set will switch to the normal user menus (with the SDAM mode still active in the background). To return to the SDAM menu press the STATUS/EXIT button.
- When you press the MENU key in while in an SDAM submenu, you will return to the previous menu.
- In SDAM, press the STATUS/EXIT button to toggle the OSD (except the S which indicates SDAM) on and off, to prevent the OSD from interfering with measurements.

How to store SDAM settings

To store settings changed in SDAM leave the top level SDAM menu by using the POWER button on the remote control transmitter or the television set.

How to exit

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.

If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SDAM when AC power is re-applied, and the error buffer is not cleared.

Customer Service Mode (CSM)

Purpose

The Customer Service Mode shows error codes and information on the TV operation settings. The servicer can instruct the customer to enter CSM by telephone and read off the information displayed. This helps the servicer to diagnose problems and failures in the TV set before making a service call.

The CSM is a read-only mode; therefore, modifications are not possible in this mode.

How to enter

To enter CSM, press the following key sequence on the remote control transmitter: '**1 2 3 6 5 4**' (do not allow the display to time out between entries while keying the sequence).

Upon entering the Customer Service Mode, the following screen will appear:

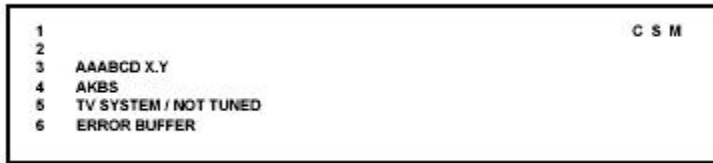


Figure: CSM menu

Menu explanation

1. Indication of the service mode (CSM = Customer Service Mode).
2. Reserved item.
3. Software identification of the main microprocessor (see 'Service Default Alignment Mode' for an explanation)
4. Reserved item for P3C call centers (**AKBS** stands for **A**dvanced **K**nowledge **B**ase **S**ystems).
5. Indicates the type of TV system or whether or not the television is receiving an 'IDENT' signal on the selected source. If no 'IDENT' signal is detected, the display will read 'NOT TUNED'
6. Displays the last five errors detected in the error code buffer.

How to exit

To exit CSM, use one of the following methods:

- Press the MENU, STATUS/EXIT, or POWER button on the remote control transmitter.
- Press the POWER button on the television set.

iTV/Commercial Model Service Modes

Unlike mainstream L01.1U AC models, commercial L01.1U AC models do not use the Service Default Alignment Mode. Commercial Models use the Service Default Mode (SDM) and Service Alignment Mode (SAM).

Service Alignment Mode (SAM) and Service Default Mode (SDM) offer several features for the service technician.

To enter the SAM and SDM modes in iTV/commercial models, you must use a Philips ITV commercial setup transmitter, such as the RC2573GR or the RG4172BK). Part numbers for two common Philips ITV setup remotes are:

RC2573GR : part number 4835 310 57554

RG4172BK : part number 3121 247 91041

Service Alignment Mode (SAM)

Purpose

- To perform (software) alignments.

Specifications

- Software alignments

How to enter

To enter SAM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SAM:

- First, place the setup remote in setup mode. To place the RG4172BK in setup mode, press TV SETUP; to place the RC2573GR in setup mode, set the switch

to the TV SETUP position. Then press the following key sequence on the remote control transmitter: '0 6 2 5 9 6' directly followed by the '**RECALL**' button (do not allow the display to time out between entries while keying the sequence).

After entering SAM, a special menu screen is visible, with SAM in the upper right corner of the screen to indicate that the television is in Service Alignment Mode.

SAM mode allows the servicer to perform all of the software alignments performed in the SDAM mode in mainstream models.

How to navigate in SAM

- In SAM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
 - Activate the selected menu item.
 - Change the value of the selected menu item.
 - Activate the selected submenu.
- In SAM, when you press the MENU button, the set will switch to the normal user menus (with the SAM mode still active in the background). To return to the SAM menu press the RECALL button.
- When you press the MENU key in while in an SAM submenu, you will return to the previous menu.

How to store SAM settings

To store settings changed in SAM leave the top level SAM menu by using the POWER button on the remote control transmitter or the television set.

How to exit SAM

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.

If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SAM when AC power is reapplied.

Service Default Mode (SDM)

Purpose

- To create a predefined setting for measurements to be made.
- To override software protections.
- To start the blinking LED procedure.
- To change option settings.
- To display the error code buffer.

Specifications

- Tuning frequency: 61.25 MHz (channel 3).
- Color system: NTSC M.
- All picture settings at 50% (brightness, color contrast, hue).
- Bass, treble and balance at 50 %; volume at 25 %.

- All service-unfriendly modes (if present) are disabled. The service unfriendly modes are:
 - Timer / Sleep timer.
 - Child / parental lock.
 - Blue mute.
 - Auto shut off (when no 'IDENT' video signal is received for 15 minutes).
 - Skipping of non-favorite presets / channels.
 - Auto-storage of personal presets.
 - Auto user menu time-out.
 - Auto Volume Leveling (AVL).
- Run timer (maximum four digits displayed)
- Software version
- Option settings
- Error buffer reading

How to enter

To enter SDM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SDM:

- First, place the setup remote in setup mode. To place the the RG4172BK in setup mode, press TV SETUP; to place the the RC2573GR in setup mode, set the switch to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).

After entering SDM, a special menu screen is visible, with SDM in the upper right corner of the screen to indicate that the television is in Service Default Mode.

SDM mode allows the servicer to perform all of the alignments, except software alignments, which are performed in the SDAM mode in mainstream models. In commercial models, software alignments are performed in SAM mode.

How to navigate

- In SDM, select menu items with the MENU UP/DOWN keys on the remote control transmitter. The selected item will be highlighted. When not all menu items fit on the screen, use the MENU UP/DOWN keys to display the next / previous menu items.
- With the MENU LEFT/RIGHT keys, it is possible to:
 - Activate the selected menu item or option.
 - Change the value of the selected menu item or option byte.
- In SDM, when you press the MENU button, the set will switch to the normal user menus (with the SDM mode still active in the background). To return to the SDM menu press the RECALL button.
- In SDM, press the RECALL button to toggle the OSD (except the SDM which indicates the set is in SDM mode) on and off, to prevent the OSD from interfering with measurements.

How to store SDM settings

To store settings changed in SDM leave the top level SDM menu by using the POWER button on the remote control transmitter or the television set.

How to exit

Switch the set to STANDBY by pressing the POWER button on the remote control transmitter or the television set.

If you turn the television set off by removing the AC power (i.e., unplugging the television) without using the POWER button, the television set will remain in SDM when AC power is reapplied, and the error buffer is not cleared.

Problems and Solving Tips Related to CSM

Picture Problems

Note : The problems described below are all related to the TV settings. The procedures used to change the value (or status) of the different settings are described.

Picture too dark or too bright

If:

- The picture improves when you have press the AUTO PICTURE button on the remote control transmitter, or
- The picture improves when you enter the Customer Service Mode

Then:

3. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.

4. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
5. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
6. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
7. Use the MENU UP/DOWN keys (if necessary) to select BRIGHTNESS.
8. Press the MENU LEFT/RIGHT keys to increase or decrease the BRIGHTNESS value.
9. Use the MENU UP/DOWN keys to select PICTURE.
10. Press the MENU LEFT/RIGHT keys to increase or decrease the PICTURE value.
11. Press the MENU button on the remote control transmitter twice to exit the user menu.
12. The new PERSONAL preference values are automatically stored.

White line around picture elements and text

If:

The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter

Then:

13. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
14. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
15. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
16. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.

17. Use the MENU UP/DOWN keys to select SHARPNESS.
18. Press the MENU LEFT key to decrease the SHARPNESS value.
19. Press the MENU button on the remote control transmitter twice to exit the user menu.
20. The new PERSONAL preference value is automatically stored.

Snowy picture

To enter CSM, press the following key sequence on the remote control transmitter: '**123654**' (do not allow the display to time out between entries while keying the sequence).

Check CSM line 5. If this line reads 'Not Tuned,' check the following:

- Antenna not connected. Connect the antenna.
- No antenna signal or bad antenna signal. Connect a proper antenna signal.
- The tuner is faulty (in this case line 6, the Error Buffer line, will contain error number 10). Check the tuner and replace/repair the tuner if necessary.

Black and white picture

If:

- The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter

Then:

25. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
26. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
27. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
28. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
29. Use the MENU UP/DOWN keys to select COLOR.
30. Press the MENU RIGHT key to increase the COLOR value.
31. Press the MENU button on the remote control transmitter twice to exit the user menu.
32. The new PERSONAL preference value is automatically stored.

Menu text not sharp enough

If:

- The picture improves after you have pressed the AUTO PICTURE button on the remote control transmitter.

Then:

34. Press the AUTO PICTURE button on the remote control transmitter repeatedly (if necessary) to choose PERSONAL picture mode.
35. Press the MENU button on the remote control transmitter. This brings up the normal user menu.
36. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).

37. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
38. Use the MENU UP/DOWN keys to select PICTURE.
39. Press the MENU LEFT key to decrease the PICTURE value.
40. Press the MENU button on the remote control transmitter twice to exit the user menu.
41. The new PERSONAL preference value is automatically stored.

ComPair

Introduction

ComPair (Computer Aided Repair) is a service tool for Philips Consumer Electronics products. ComPair is a further development of the European DST (special remote control transmitter for Service), which allows faster and more accurate diagnostics. ComPair has three big advantages:

- ComPair helps you to get an understanding on how to repair the chassis in a short time, by guiding you systematically through the repair procedures.
- ComPair allows very detailed diagnostics (on I² C level) and is therefore capable of accurately indicating problem areas. You do not have to know anything about I² C commands yourself because ComPair takes care of this.
- ComPair speeds up the repair time since it can automatically communicate with the chassis (when the microprocessor is working) and all repair information is directly available. When ComPair is installed together with the Force electronic manual of the L01.1U AC chassis, schematics and CBAs are only a mouse-click away.

Specifications

ComPair consists of a Windows based faultfinding program and an interface box between PC and the product. The ComPair interface box is connected to the PC via a serial or RS232 cable.

In case of the L01 chassis, the ComPair interface box and the TV communicate via a bi-directional service cable via the service connector (connector 0267).

The ComPair faultfinding program is able to determine the problem of the television set. ComPair can gather diagnostic information in two ways:

- **Automatic** (by communication with the television): ComPair can automatically read the contents of the entire error buffer. Diagnosis is done on I² C level. ComPair can access the I² C bus of the television. ComPair can send and receive I² C commands to the microprocessor of the television. In this way, it is possible for ComPair to communicate (read and write) to devices on the I² C busses of the television set.
- **Manually** (by asking questions to the servicer): Automatic diagnosis is only possible if the microprocessor of the television is working correctly, and only to a certain extent. When this is not the case, ComPair will guide you through the faultfinding tree by asking you questions (for example; Does the screen give a picture? Click on the correct answer: YES / NO) and showing you examples (for example; Measure test-point I7 and click on the correct oscillogram you see on the oscilloscope). You can answer by clicking on a link (for example, text or a waveform picture) that will bring you to the next step in the faultfinding process.

By a combination of automatic diagnostics and an interactive question and answer procedure, ComPair will enable you to find most problems in a fast and effective way.

Beside fault finding, ComPair provides some **additional features** like:

- Uploading or downloading of presets.
- Management of preset lists.
- If both ComPair and the Force electronic service manual are installed, all the schematics and CBAs of the television set are available by clicking on the appropriate hyperlink.
- **Example:** *Measure the DC-voltage on capacitor C2568 (Schematic/Panel) at the family board.*
 - Click on the 'Panel' hyperlink to automatically show the CBA with a highlighted capacitor C2568.
 - Click on the 'Schematic' hyperlink to automatically show the electronic position of the highlighted capacitor.

How To Connect ComPair

51. First, install the ComPair Browser software on your PC (see the Quick Reference Card for installation instructions).
52. Connect the RS232 interface cable between a free serial (COM) port of your PC and the PC connector (marked with 'PC') of the ComPair interface.
53. Connect the AC power adapter to the supply connector (marked 'POWER 9V DC') on the ComPair interface.
54. Switch the ComPair interface 'off'.
55. Switch the television set 'off' (and remove the AC power).
56. Connect the ComPair interface cable between the connector on the rear side of the ComPair interface (marked 'I² C') and the ComPair connector on the family board (connector 0267).

57. Plug the AC power adapter in the AC power outlet and switch the ComPair interface 'on'. The green and red LEDs light up together. The red LED turns off after approximately 1 second, while the green LED remains lit.
58. Start the ComPair program and read the 'introduction' chapter.

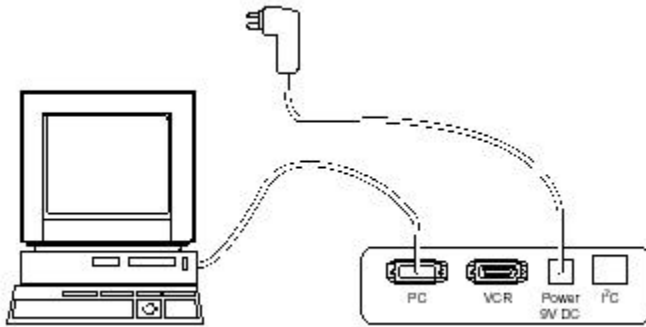


Figure: ComPair connection

How To Order

ComPair order codes **for NAFTA** :

- ComPair Software: ST4191.
- ComPair Interface Box: 4822 727 21631.
- AC Adapter: T405-ND.
- ComPair Quick Start Guide: ST4190.
- ComPair interface cable: 3122 785 90004.

Error Codes

The error code buffer contains all errors detected since the last time the buffer was erased. The buffer is written from left to right. When an error occurs that is not yet in the error code buffer, it is displayed at the left side and all other errors shift one position to the right.

How To Read The Error Buffer

You can read the error buffer in 3 ways:

- On screen via the SDAM (if you have a picture). **Examples:**
 - ERROR: 0 0 0 0 0 : No errors detected
 - ERROR: 6 0 0 0 0 : Error code 6 is the last and only detected error
 - ERROR: 9 6 0 0 0 : Error code 6 was detected first and error code 9 is the last detected (newest) error
- Via the blinking LED procedure (when you have no picture). See 'The Blinking LED Procedure'.
- Via ComPair.

How To Clear The Error Buffer

The error code buffer is cleared in the following cases:

- By using the CLEAR command in the SDAM menu:
 - To enter SDAM, press the following key sequence on the remote control transmitter: '062596' directly followed by the 'MENU' button (do not allow the display to time out between entries while keying the sequence).

- Make sure the menu item CLEAR is highlighted. Use the MENU UP/DOWN buttons, if necessary.
- Press the MENU RIGHT button to clear the error buffer. The text on the right side of the 'CLEAR' line will change from 'CLEAR?' to 'CLEARED'
- If the contents of the error buffer have not changed for 50 hours, the error buffer resets automatically.

Note: If you exit SDAM by disconnecting the AC power from the television set, the error buffer is not reset.

Error Codes

In case of non-intermittent faults, write down the errors present in the error buffer and clear the error buffer before you begin the repair. This ensures that old error codes are no longer present.

If possible, check the entire contents of the error buffer. In some situations, an error code is only the result of another error and not the actual cause of the problem (for example, a fault in the protection detection circuitry can also lead to a protection).

Table: Error code overview

Error	Device	Error description	Check item	Diagram
0	-	No Error		
1	-	X-Ray Protection (USA)	2465, 7460	A2
2	-	Horizontal Protection	7460, 7461, 7462, 7463, 6467	A2
3	TDA8359TDA9302	Vertical Protection	7861, VlotAux +13v	A2, A3
4	MSP34X5TDA9853	MAP I 2 C identification error	7831, 7861	A9 or A11
5	TDA95XX	POR 3.3V / 8V Protection	7200, 7560, 7480	A1, A2. A5, A6, A7
6	I 2 C bus	General I 2 C bus error	7200, 3624, 3625	A7
7	-	Power Down (over current) prot.	-	-
8	-	E/W Protection (Large Screen)	7400, 3405, 3406, 3400	A2

Error	Device	Error description	Check item	Diagram
9	M24C08	NVM I 2 C identification error	7602, 3611, 3603, 3604	A7
10	Tuner	Tuner I 2 C identification error	1000, 7482	A2, A4
11	TDA6107/8	Black current loop protection	7330, RGB amps, CRT	B1, B2
12	M65669	MAP I 2 C identification error (USA)	7803	P
14	DVD Loader	DVD I 2 C identification error	DVD Interface module	DVD Loader

Note: Error 7 is not applicable.

The Blinking LED Procedure

Using this procedure, you can make the contents of the error buffer visible via the front LED. This is especially useful when there is no picture.

When the SDAM is entered, the LED will blink the contents of the error-buffer:

- 1-14 short blinks (indicates error number 1-14),
- When all the error-codes are displayed, the sequence finishes with an 'on' LED blink of 1.5 seconds,
- The sequence starts again.

Example of error buffer: **12 9 6 0 0**

After entering SDAM, the following occurs:

- 1 long 'on' blink of 5 seconds to start the sequence,
- 12 short blinks followed by a pause of 1.5 seconds,
- 9 short blinks followed by a pause of 1.5 seconds,
- 6 short blinks followed by a pause of 1.5 seconds,
- 1 long 'on' blink of 1.5 seconds to finish the sequence,
- The sequence starts again at 12 short blinks.

Protections

If a fault situation is detected, an error code will be generated; and, if necessary, the television set will go into protection mode. Blinking of the red LED at a frequency of 3 Hz indicates the protection mode. In some error cases, the microprocessor does not put the set in protection mode. The error codes of the error buffer and the blinking LED procedure can be read via the Service Default Alignment Menu (SDAM), or via ComPair.

To get a quick diagnosis the chassis has two service modes implemented:

- The Customer Service Mode (CSM).
- The Service Default Alignment Mode (SDAM).

For a detailed description, see the "Customer Service Mode" and "Service Default Alignment Mode" sections.

Repair Tips

Below some failure symptoms are given, followed by a repair tip.

- **Set is dead and makes hiccupping sound.** 'Main Power Supply' is available. Hiccupping stops when L5561 is de-soldered, meaning that problem is in the 'Main Power Supply' line. No output voltages at LOT, no horizontal deflection. Reason: line transistor 7460 is defective.
- **Set is dead, and makes no sound.** Check power supply IC 7520. Result: voltage at pins 1, 3, 4, 5 and 6 are about 180 V and pin 8 is 0 V. The reason why the voltage on these pins is so high is that the output driver (pin 6) has an open load. That is why MOSFET 7521 is not able to switch. Reason: feedback resistor 3523 is defective. **Caution** : Be careful measuring the gate of 7521: circuitry is very high ohmic and can easily be damaged!
- **Set is in hiccup mode and shuts down after 8 seconds.** The blinking LED (set is in SDAM mode) indicates error 5. As it is unlikely that the microprocessor 'POR' and '+8V protection' happen at the same time, measure the '+8V' supply. If this voltage is missing, check transistor 7480.
- **Set is in non-stop hiccup mode.** Set is in over-current mode; check the secondary sensing (opto coupler 7515) and the 'Main Power Supply' voltage. Signal 'Stdbby_con' must be logic low under normal operation conditions and goes to high (3.3 V) under standby and fault conditions.
- **Set turns on, but without picture and sound.** The screen shows snow, but OSD and other menus are okay. Blinking LED procedure indicates error 11, so problem is expected in the tuner (part reference number 1000). Check presence of supply voltages. 'Vlotaux+5V' voltages at pin 5 and 7 are okay; 'VT_supply' at pin 9 is missing. Conclusion: resistor 3460 is defective.

- **Set turns on, but with a half screen at the bottom. Sound is okay.** Blinking LED (set is in SDAM mode) indicates error 3. Check 'Vlotaux+11V' and '+50V'. If they are okay, problem is expected in the vertical amplifier IC 7471. Use an oscilloscope to measure the waveform on pin 17 of the UOC. Also, measure the waveform at pin 1 of IC 7471. If the signal there is missing, a defective resistor R3244 caused the problem.

Alignments

Index of this chapter:

1. General Alignment Conditions
2. Hardware Alignments
3. Software Alignments and Settings

Note: The Service Default Alignment Mode (SDAM) is described in the "Service Modes, Error Codes and Fault Finding" section. SDAM menu navigation is performed by using the MENU UP, MENU DOWN, MENU LEFT, and MENU RIGHT keys of the remote control transmitter.

General Alignment Conditions

Perform all electrical adjustments under the following conditions:

- AC voltage and frequency: 110 V ($\pm 10\%$), 60 Hz ($\pm 5\%$).
- Connect the television set to the AC power via an isolation transformer.
- Allow the television set to warm up for approximately 20 minutes.
- Measure the voltages and waveforms in relation to chassis ground (with the exception of the voltages on the primary side of the power supply). Never use heatsinks as ground.
- Test probe: $R_i > 10\text{ M}\Omega$; $C_i < 2.5\text{ pF}$.
- Use an isolated trimmer/screwdriver to perform the alignments.

Hardware Alignments

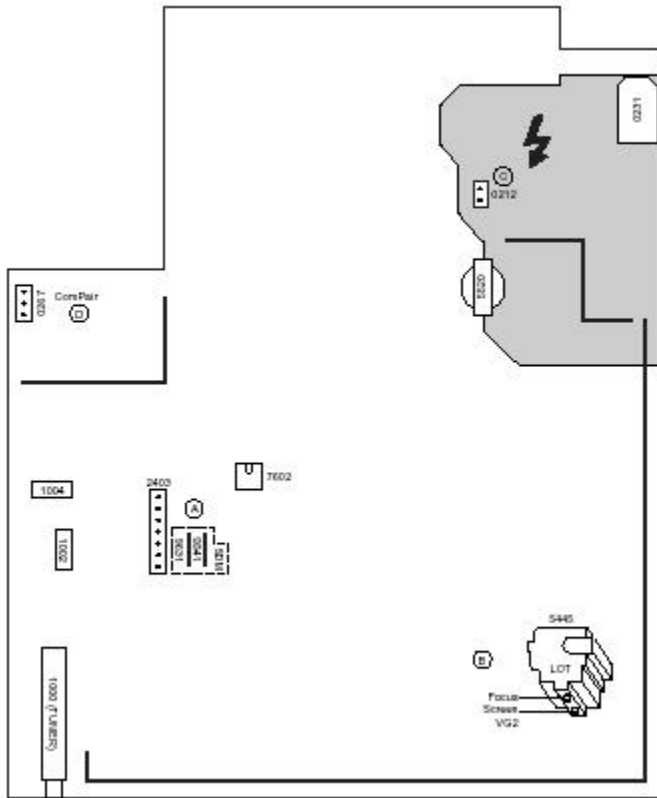


Figure: Family board (top view)

Vg2 Adjustment

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the WHITE TONE sub menu.
3. Press the MENU LEFT or MENU RIGHT key to enter the WHITE TONE sub menu.
4. In the WHITE TONE sub menu, press the MENU UP/DOWN keys to select NORMAL RED, NORMAL GREEN, or NORMAL BLUE.

5. Use the MENU LEFT/RIGHT keys to set the values of NORMAL RED, NORMAL GREEN and NORMAL BLUE to '40'.
6. Press the MENU button twice to enter the normal user menu.
7. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
8. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
9. Use the MENU UP/DOWN keys to select PICTURE. Be sure to record the current value of PICTURE.
10. Use the MENU LEFT/RIGHT keys to set the value of PICTURE to '0'.
11. Use the MENU UP/DOWN keys to select BRIGHTNESS. Be sure to record the current value of BRIGHTNESS.
12. Use the MENU LEFT/RIGHT keys to set the value of BRIGHTNESS to minimum (OSD just visible in a dark room).
13. Press the MENU button twice to return to the top level SDAM menu.
14. Press the STATUS/EXIT button to hide the SDAM onscreen display.
15. Connect the RF output of a video pattern generator to the antenna input.
16. Input a 'black picture' test pattern to the television set.
17. Set the oscilloscope to 50 V/div and the time base to 0.2 milliseconds (external triggering on the vertical pulse).
18. Ground the scope at the CRT panel and connect a 10:1 probe to one of the cathodes of the picture tube socket (see schematic diagram B).
19. Measure the 'cut off pulse' during the first full line after the frame blanking (see Fig. 8-2). You will see two pulses, one being the 'cut off pulse' and the other being the 'white drive pulse'. Choose the one with the lowest value; this is the 'cut off pulse'.
20. Select the cathode with the highest VDC value for the alignment. Adjust the Vcutoff of this gun with the SCREEN potentiometer (see Fig. 8-1) on the LOT to the correct value (see table 8-1).
21. Press the STATUS/EXIT button to display the SDAM onscreen display.
22. Press the MENU button to enter the normal user menu.

23. In the normal user menu, use the MENU UP/DOWN keys to highlight the PICTURE sub menu (if necessary).
24. Press the MENU LEFT/RIGHT keys to enter the PICTURE sub menu.
25. Use the MENU UP/DOWN keys to select PICTURE.
26. Use the MENU LEFT/RIGHT keys to reset the value of PICTURE to the original value.
27. Use the MENU UP/DOWN keys to select BRIGHTNESS.
28. Use the MENU LEFT/RIGHT keys to reset the value of BRIGHTNESS to the original value.
29. Press the MENU button twice to return to the top level SDAM menu.
30. Use the POWER button on the remote control transmitter or the POWER button on the television set to turn off the television set. This will save the changes made in SDAM.

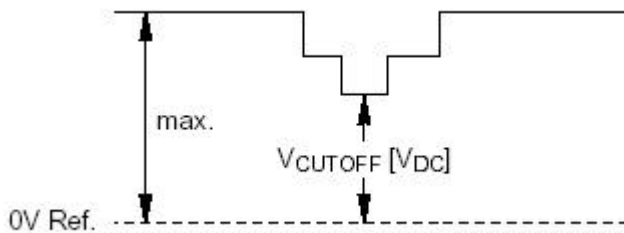


Figure: Vcutoff

Table: Vg2 cut-off point (Large Screen)

Screen Size (RF= Real Flat)	Cut-off point (V)
20RF Matsushita 20RF Samsung 20RF LG Philips 25V Curved Face 27V Curved Face	+145 V +/- 4 V
27RF 29RF LG Philips	+155 V +/- 4 V
20RF Philips 27RF Samsung 32RF 26 Wide Screen RF 30 Wide Screen RF	+160 V +/- 4 V

RF = Real Flat

V = (Visible) Diagonal Screen Measurement of Phosphor

Focusing

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a circle or crosshatch test pattern to the television set.
3. Press the AUTO PICTURE button on the remote control transmitter repeatedly to choose PERSONAL or MOVIES picture mode.
4. Adjust the FOCUS potentiometer (see Fig. 8-1) until the vertical lines near the left and right sides of the screen, and near the horizontal center of the screen, are at minimum width without visible haze.

Software Alignments and Settings

The following options are performed in the Service Default Alignment Mode (SDAM).

SDAM is described in the 'Service Modes, Error Codes and Fault Finding' section.

The following alignments are explained:

1. OPTIONS
2. TUNER
3. WHITE TONE
4. GEOMETRY
5. AUDIO

Options

Options are used to control the presence or absence of certain features and hardware.

How to change an Option Byte

An Option Byte represents a number of different options. Changing these bytes directly makes it possible to set all options very quickly. All options are controlled via seven option bytes.

Note: Each option byte controls several features of the television set; therefore, before changing option byte information, it is important to record the current option byte values. This ensures that the television features can be restored to the original settings, if necessary.

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the MENU button (do not allow the display to time out between entries while keying the sequence).

2. Use the MENU UP/DOWN keys to highlight the OPTIONS sub menu.
3. Press the MENU LEFT or MENU RIGHT key to enter the OPTIONS sub menu.
4. In the OPTIONS sub menu, press the MENU UP/DOWN keys to select 'OP 1' through 'OP 7'.
5. Use the number keys on the remote control transmitter to enter a new value for the selected option byte. The value must be entered as a three-digit value (for example, '4' would be entered as '0 0 4').
6. The selected value must be between '0' and '255'.
7. When all desired changes to the option bytes are made, press the MENU button to return to the top level SDAM menu. This will save changes to the option byte settings.
8. To ensure the option byte changes take effect: Turn the television set OFF by using the POWER button on the remote control transmitter or the local keyboard. Disconnect the television set from AC power for at least ten seconds. Reconnect the television set to AC power. Turn the television set ON by using the POWER button on the remote control transmitter or the local keyboard.

	S
OP 1	X X X
OP 2	X X X
OP 3	X X X
OP 4	X X X
OP 5	X X X
OP 6	X X X
OP 7	X X X

Figure: Options menu

How to change iTV Option Bytes

An Option Byte represents a number of different options. Changing these bytes directly makes it possible to set all options very quickly. All options are controlled via five option bytes.

Note: Each option byte controls several features of the television set; therefore, before changing option byte information, it is important to record the current option byte values. This ensures that the television features can be restored to the original settings, if necessary.

1. To enter SDM, you must use a Philips ITV commercial setup transmitter (such as the RC2573GR or the RG4172BK). Use the following method to enter SDM:

First, place the setup remote in setup mode. To place the RG4172BK in setup mode, press TV SETUP; to place the RC2573GR in setup mode, set the switch to the TV SETUP position. Then press the following key sequence on the remote control transmitter: **'0 6 2 5 9 6'** directly followed by the **'MENU'** button (do not allow the display to time out between entries while keying the sequence).

2. Use the MENU UP/DOWN keys to scroll through the OPTIONS until you reach OB1 through OB5.
3. Use the number keys on the remote control transmitter to enter a new value for the selected option byte. The value must be entered as a three-digit value (for example, '4' would be entered as '0 0 4').
4. The selected value must be between '0' and '255'.
5. When all desired changes to the option bytes are made, press the MENU button to return to the top level SDM menu. This will save changes to the option byte settings.
6. To ensure the option byte changes take effect: Turn the television set OFF by using the POWER button on the remote control transmitter or the local keyboard. Disconnect the television set from AC power for at least ten seconds. Reconnect the television set to AC power. Turn the television set ON by using the POWER button on the remote control transmitter or the local keyboard.

Option Code Tables

Table: Option code settings

Model Number	OP1	OP2	OP3	OP4	OP5	OP6	OP7
20DV693R01	0	23	65	162	252	153	64
20DV693R02	0	23	65	162	252	153	80
20MS334R37	0	23	65	1	144	88	0
20PT633R/37	0	23	1	1	144	152	0
20PT643F/35R	64	23	65	1	236	152	0
20PT643R01	0	23	1	1	236	152	0
20PT653R/37	0	23	1	1	252	152	0
21PT6331/44R	16	23	65	1	144	152	0
21PT633R/85C	0	23	1	1	144	152	0
21PT6431/44R	16	23	65	1	236	152	0
21PT643R/85C	0	23	1	1	236	152	0
24PT633F/35R	64	23	193	1	252	152	0
24PT633R/37	0	23	129	1	252	152	0
25PT533S/37C	0	23	1	1	252	152	0
25PT633R/85C	0	23	129	1	252	152	0
27DV693R37A	0	23	209	162	252	153	64
27MS3404/17	0	23	65	1	252	152	0
27MS4504/17	0	23	193	1	252	152	0
27PT541S37A	0	23	65	1	252	152	0
27PT543F35A	64	23	65	1	252	152	0
27PT543S/37A	0	23	1	1	252	152	0

Model Number	OP1	OP2	OP3	OP4	OP5	OP6	OP7
27PT563S37A	0	23	65	162	252	153	80
27PT633R/37C	0	23	145	162	252	153	80
27PT643F35A	64	23	193	1	252	152	0
27PT643R/37C	0	23	193	1	252	152	0
27PT643R/37A	0	23	193	1	252	152	0
27PT643R/97A	0	23	193	1	252	152	0
27PT663R/37A	0	23	145	162	252	153	80
27PT663R/37C	0	23	145	162	252	153	80
29DV6931/85R	16	23	209	162	252	153	64
29PT543S/44A	0	23	1	1	252	152	0
29PT543S/85A	0	23	1	1	252	152	0
29PT563S/85A	0	23	1	162	252	153	80
29PT633R/85A	0	23	129	1	252	152	0
29PT633R/85C	0	23	129	1	252	152	0
29PT643R85A	16	23	193	1	252	152	0
29PT6631/44R	16	23	209	162	252	153	80
29PT663R/85A	0	23	145	162	252	153	80
29PT663R/85C	0	23	145	162	252	153	80
29PT663S85A	16	23	209	162	252	153	80
30DV693R37A	0	31	149	162	252	153	64
30DV693R37C	0	31	149	162	252	153	64
30PW633F35A	0	31	149	162	252	153	80
30PW633R37A	0	31	149	162	252	153	80
30PW633R37C	0	31	149	162	252	153	80

Model Number	OP1	OP2	OP3	OP4	OP5	OP6	OP7
32PT541S37G	0	23	193	1	252	152	0
32PT543S/37A	0	23	129	1	252	152	0
32PT543S/37G	0	23	129	1	252	152	0
32PT553S/37A	0	23	129	1	252	152	64
32PT553S/37G	0	23	129	1	252	152	64
32PT563S37A	0	23	193	162	252	153	80
32PT563S37G	0	23	193	162	252	153	80
32PT633R/37D	0	31	145	162	252	153	80
32PT663R/37A	0	31	145	162	252	153	80
MS3252S431	0	23	129	1	189	88	0
MS3652S427	0	23	129	1	189	88	0

Table: Option code settings for iTV/Commercial models

Model Number	OP1	OP2	OP3	OP4	OP5
25LT220L/17	212	16	2	65	168
25LT421L/17	196	252	3	33	172
25ST220L/17	212	16	2	67	8
27LT220L/17	212	16	2	65	168
27LT621L/17	198	252	3	33	172
27ST110P/35	212	16	2	67	8
27ST220L/17	212	16	2	67	8
27ST230P/35	212	16	2	67	8
27ST240P/35	212	16	2	67	8
27ST420L/17	196	220	3	35	12

Model Number	OP1	OP2	OP3	OP4	OP5
27ST421L/17	196	220	3	35	12
32LT621L/17	198	252	11	41	252
32ST220P/17	198	220	11	43	12
32ST230P/35	198	220	11	43	12
36ST220P/35	198	220	11	43	12
36ST230P/35	198	220	11	43	12

Tuner

Note: Described alignments are only necessary when the NVM (part reference number 7602) is replaced.

IF-PLL

This adjustment is auto-aligned. Therefore, no action is required.

AGC (AGC take over point)

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a color bar test pattern to the television set.
3. Set the amplitude of the video pattern generator to 10 mV and set the frequency to 61.25 MHz (channel 3).
4. Connect a DC multimeter to pin 1 of the tuner (item 1000 on the main chassis).
5. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).

6. Use the MENU UP/DOWN keys to highlight the TUNER sub menu.
7. Press the MENU LEFT/RIGHT keys to enter the TUNER sub menu.
8. Use the MENU UP/DOWN keys to select AGC.
9. Use the MENU LEFT/RIGHT keys to adjust the AGC value (default value is 27) until the DC-voltage at pin 1 of the tuner lies between 3.8 V and 2.3 V.
10. Press the MENU button to return to the top level SDAM menu.
11. To ensure the AGC change takes effect:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

SL (Slicing Level)

This adjustment sets the sync slicing level for non-standard signals. You must turn it 'on' to help correct picture instability in premium decoded cable channels.

- OFF: slicing level dependent on noise detector.
- ON: fixed slicing level of 70 %.

To adjust SL:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the TUNER sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the TUNER sub menu.

4. Use the MENU UP/DOWN keys to select SL.
5. Use the MENU LEFT/RIGHT keys to toggle SL 'Off' and 'On'.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the SL setting is saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

White Tone

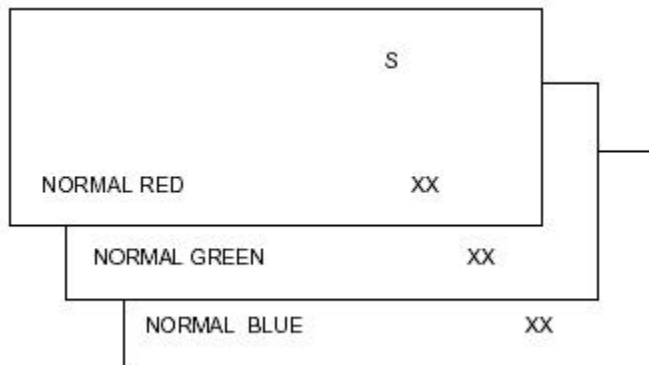


Figure: White tone alignment menu

The values of the 'black cut off level' can be adjusted in the 'WHITE TONE' sub menu. Normally, no alignment is needed for 'WHITE TONE', and the given default values are used.

Default settings:

NORMAL (color temperature = 9600 K):

- NORMAL RED = 40
- NORMAL GREEN = 40
- NORMAL BLUE = 40

To adjust NORMAL RED, NORMAL GREEN, and NORMAL BLUE:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the WHITE TONE sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the WHITE TONE sub menu.
4. Use the MENU UP/DOWN keys to select NORMAL RED, NORMAL GREEN, or NORMAL BLUE.
5. Use the MENU LEFT/RIGHT keys to adjust the value of NORMAL RED, NORMAL GREEN, or NORMAL BLUE.
6. When all desired changes to the WHITE TONE sub menu values are made, press the MENU button to return to the top level SDAM menu.
7. To ensure the WHITE TONE settings are saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

Geometry

The geometry alignments menu contains several items for correct picture geometry alignment.

1. Connect the RF output of a video pattern generator to the antenna input.
2. Input a crosshatch test pattern to the television set.
3. Set the amplitude of the video pattern generator to at least 1 mV and set the frequency to 61.25 MHz (channel 3).
4. Press the AUTO PICTURE button on the remote control transmitter repeatedly to choose PERSONAL or MOVIES picture mode.
5. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the MENU button (do not allow the display to time out between entries while keying the sequence).
6. Use the MENU UP/DOWN keys to highlight the GEOMETRY sub menu.
7. Press the MENU LEFT/RIGHT keys to enter the GEOMETRY sub menu.
8. Use the MENU UP/DOWN keys to highlight either the HORIZONTAL sub menu or the VERTICAL sub menu.
9. Press the MENU LEFT/RIGHT keys to enter either the HORIZONTAL sub menu or the VERTICAL sub menu.
10. Use the MENU UP/DOWN keys to select items in the HORIZONTAL sub menu or the VERTICAL sub menu.
11. Use the MENU LEFT/RIGHT keys to adjust the values of items in the HORIZONTAL and VERTICAL sub menus.
12. When all desired changes to the HORIZONTAL and VERTICAL sub menu values are made, press the MENU button twice to return to the top level SDAM menu.
13. To ensure the GEOMETRY settings are saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.

- Disconnect the television set from AC power for at least ten seconds.
- Reconnect the television set to AC power.
- Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

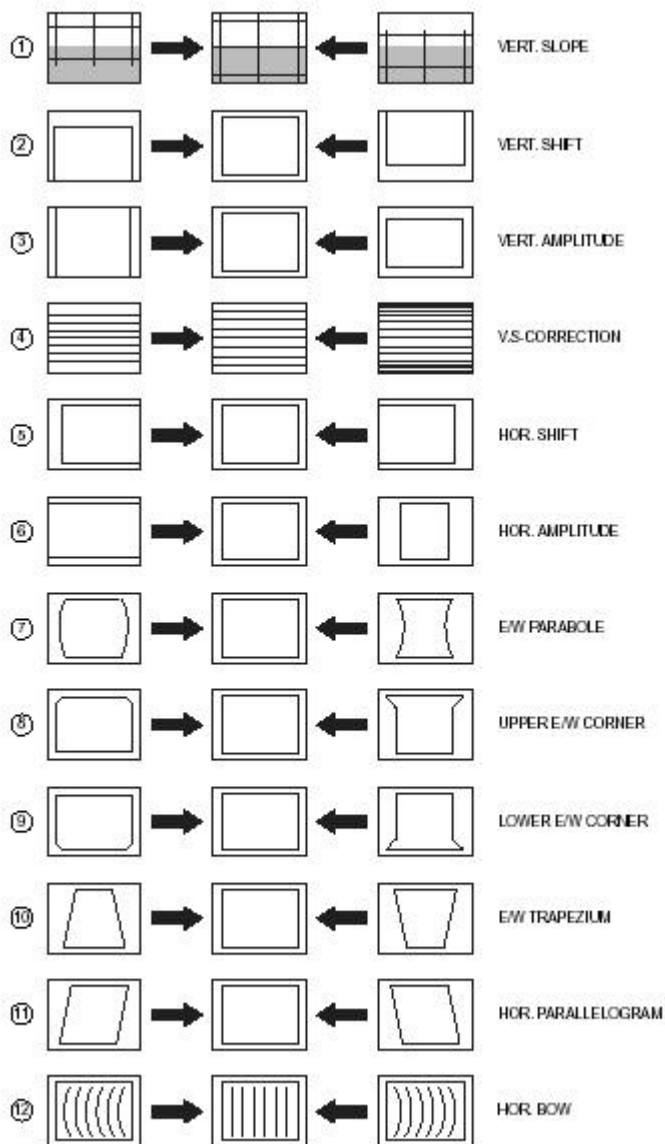


Figure: Geometry alignments

The following alignments can be performed in the GEOMETRY sub menu:

Horizontal Amplitude and Phase:

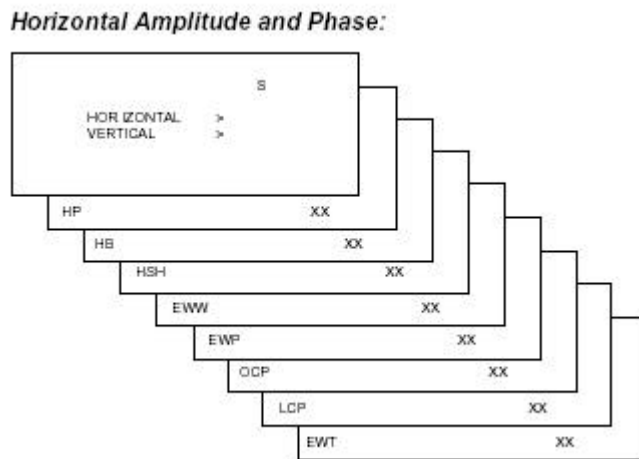


Figure: Horizontal alignment menu

- **Horizontal Shift (HSH).** Select Horizontal Shift to center the picture on the screen.
- **Horizontal Parallelogram (HP).** Set Horizontal Parallelogram to prevent the picture from slanting to one side.
- **Horizontal Bow (HB).** Set Horizontal Bow to prevent the top and bottom of picture from bending to the sides.
- **East West Width (EWW).** Select East-West Width and align the picture width until the complete test pattern is visible.
- **East West Parabola (EWP).** Select East-West Parabola and align the vertical sides until the sides are straightened.
- **Upper Corner Parabola (UCP).** Select Upper Corner Parabola to straighten the top of the vertical lines at the sides.
- **Lower Corner Parabola (LCP).** Select Lower Corner Parabola to straighten the bottom of the vertical lines at the sides.
- **East West Trapezium (EWT).** Align straight vertical lines in the middle of the screen.

Vertical Amplitude and Position:

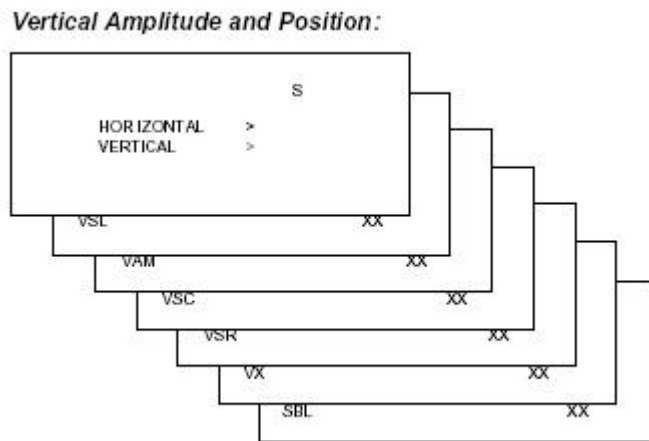


Figure: Vertical alignment menu

- **Vertical Amplitude (VAM).** Aligns the height of the picture (other vertical alignments are NOT compensated).
- **Vertical slope (VSL).** Aligns the picture so the proportions are the same at the top and bottom of the screen. This alignment must be performed first, before all other vertical alignments. Turning SBL 'on' will assist in performing this alignment.
- **Service blanking (SBL).** Turns the blanking of the lower half of the screen 'on' or 'off' (to be used in combination with the vertical slope alignment).
- **Vertical S-Correction (VSC).** Aligns the vertical linearity, so that the vertical intervals of the grid-patterns are the same over the entire height of the screen.
- **Vertical Shift (VSH).** Aligns the vertical center of the picture to the vertical center of the CRT. After performing this alignment, it may be necessary to perform the VAM alignment again.
- **Vertical Zoom (VX).** Adjusts the picture height.
- **Delta Horizontal Shift 60 Hz (H60).**
- **Delta Vertical Amplitude 60 Hz (V60).**

Methods of adjustment

1. Select Service Blanking (SBL) and set it to 1. The lower half of the picture will be blanked.
2. Press the MENU UP/DOWN buttons to select Vertical Slope (VSL).
3. Align VSL to start the blanking exactly at the horizontal white line at the center of the test circle (align the bottom of the screen so that castellations just disappear).
4. Press the MENU UP/DOWN buttons to select SBL and set it back to 0. The full picture reappears.
5. Select Vertical Amplitude (VAM) and align the picture height to approximately 13.0 - 13.1 blocks (align the top of the screen so that castellations just disappear).
6. Select Vertical Shift (VSH) and align for vertical centering of the picture on the screen.

Repeat the last two steps if necessary.

The table below lists the default GEOMETRY values for the different television sets.

Table: Default geometry values (Large Screen)

Parameter	20RF, 21RF, 25RF, 27RF, 29RF, 25", 28", 29"SF, 32V, 33"	25V	27V/29"	35V	28WS	32WS	28WSRF	32WSRF
HP Horizontal- Parallelogram	31	31	31	45	47	32	36	45
HB Horizontal- Bow	31	31	31	25	32	32	40	30
HSH Horizontal Shift	35	35	35	23	27	24	31	29
EWV East- West Width	34	-	-	45	36	39	40	33
EWP East- West Parabola	33	-	-	23	21	21	37	16
UCP Upper Corner Parabola	35	-	-	25	26	23	14	16

Parameter	20RF, 21RF, 25RF, 27RF, 29RF, 25", 28", 29"Sf, 32V, 33"	25V	27V/29"	35V	28WS	32WS	28WSRF	32WSRF
LCP Lower Corner Parabola	35	-	-	31	30	30	25	23
EWT East- West Trapezium	35	-	-	24	28	26	18	27
VSL Vertical Slope	33	25	25	19	42	35	31	25
VAM Vertical Amplitude	26	32	32	31	30	23	23	30
VSC Vertical S-Correction	23	23	23	27	24	24	12	20
VSH Vertical Shift	31	28	28	26	18	23	36	34
VX Vertical Zoom	25	-	-	25	25	25	25	25

Audio



Figure: Audio alignment menu

No alignments are necessary for the AUDIO sub menu. Use the default values.

AF-M (NICAM threshold)

Default value is 300.

To adjust AF-M:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the AUDIO sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the AUDIO sub menu.
4. Use the MENU UP/DOWN keys to select AF-M.
5. Use the MENU LEFT/RIGHT keys to adjust the value of AF-M to 300.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the AF-M setting is saved:

- Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
- Disconnect the television set from AC power for at least ten seconds.
- Reconnect the television set to AC power.
- Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

A2T (TV A2 Threshold)

Default value is 250.

To adjust A2T:

1. To enter SDAM, press the following key sequence on the remote control transmitter: **0 6 2 5 9 6** directly followed by the **MENU** button (do not allow the display to time out between entries while keying the sequence).
2. Use the MENU UP/DOWN keys to highlight the AUDIO sub menu.
3. Press the MENU LEFT/RIGHT keys to enter the AUDIO sub menu.
4. Use the MENU UP/DOWN keys to select A2T.
5. Use the MENU LEFT/RIGHT keys to adjust the value of A2T to 250.
6. Press the MENU button to return to the top level SDAM menu.
7. To ensure the A2T setting is saved:
 - Turn the television set 'off' by using the 'POWER' button on the remote control transmitter or the local keyboard.
 - Disconnect the television set from AC power for at least ten seconds.
 - Reconnect the television set to AC power.
 - Turn the television set 'on' by using the 'POWER' button on the remote control transmitter or the local keyboard.

Circuit Description

Index of this chapter:

1. Introduction
2. Audio Signal Processing
3. Video Signal Processing
4. Synchronization
5. Deflection
6. Power Supply
7. Control
8. Abbreviations
9. IC Data Sheets

Notes:

- For a good understanding of the following circuit descriptions, please use the [Block diagram](#) . Where necessary, you will find a separate drawing for clarification.
- Figures below can deviate slightly from the actual situation, due to different set executions.

Introduction

The 'L01.1U AC' chassis is a global TV chassis for the model year 2003 and is used for TV sets with screen sizes from 20" - 32" (large screen), in Super Flat, Real Flat, and Wide Screen executions. In comparison to its predecessor (the 'L01.1U AB'), the chassis has enhanced features like a 2D 3-line Comb-filter and 'Active Control'.

The standard architecture consists of a Mono Carrier, a Picture Tube panel, a Side I/O panel, and a Top Control panel.

The Mono Carrier consists primarily of conventional components with hardly any surface mounted devices.



Figure: Mono Carrier component side

The functions for video processing, microprocessor (P), and teletext (TXT) decoder are combined in one IC (TDA958xH), the so-called Ultimate One Chip (UOC). This chip is (surface) mounted on the copper side of the LSP.

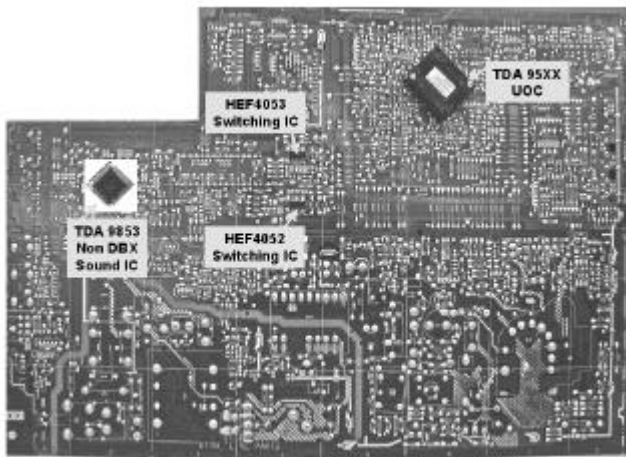


Figure: Mono Carrier solder side

The 'L01.1U AC' is divided into 2 basic systems, i.e. mono and stereo sound. While the audio processing for the mono sound is done in the audio block of the UOC, an external audio processing IC is used for stereo sets.

The tuning system features 181 channels with on-screen display. The main tuning system uses a tuner, a microcomputer, and a memory IC mounted on the Mono Carrier. The microcomputer communicates with the memory IC, the customer keyboard, remote receiver, tuner, signal processor IC and the audio output IC via the I²C bus. The memory IC retains the settings for favorite stations, customer-preferred settings, and service / factory data.

The on-screen graphics and closed caption decoding are done within the microprocessor, and then sent to the signal processor IC to be added to the main signal.

The chassis utilizes a Switching Mode Power Supply (SMPS) for the main voltage source. The chassis has a 'hot' ground reference on the primary side and a cold ground reference on the secondary side of the power supply and the rest of the chassis.

Audio Signal Processing

Stereo


In stereo sets, the signal goes via the SAW filter (position 1002/1003), to the audio demodulator part of the UOC IC 7200. The audio output on pin 33 goes to the stereo decoder 7831/ 7861. The switch inside this IC selects either the internal decoder or an external source.

There are two stereo decoders versions used:

1. A BTSC DBX stereo/SAP decoder (MSP34X5 at position 7831) for the highest specified sets, and
2. A BTSC non-DBX stereo decoder (TDA9853 at position 7861) for BTSC Economic.

The output is fed to the to the audio amplifier (AN7522 at position 7901). The volume level is controlled at this IC (pin 9) by a control line (Volume|Mute) from the microprocessor. The audio signal from 7901 is then send to the speaker and headphone output panel.

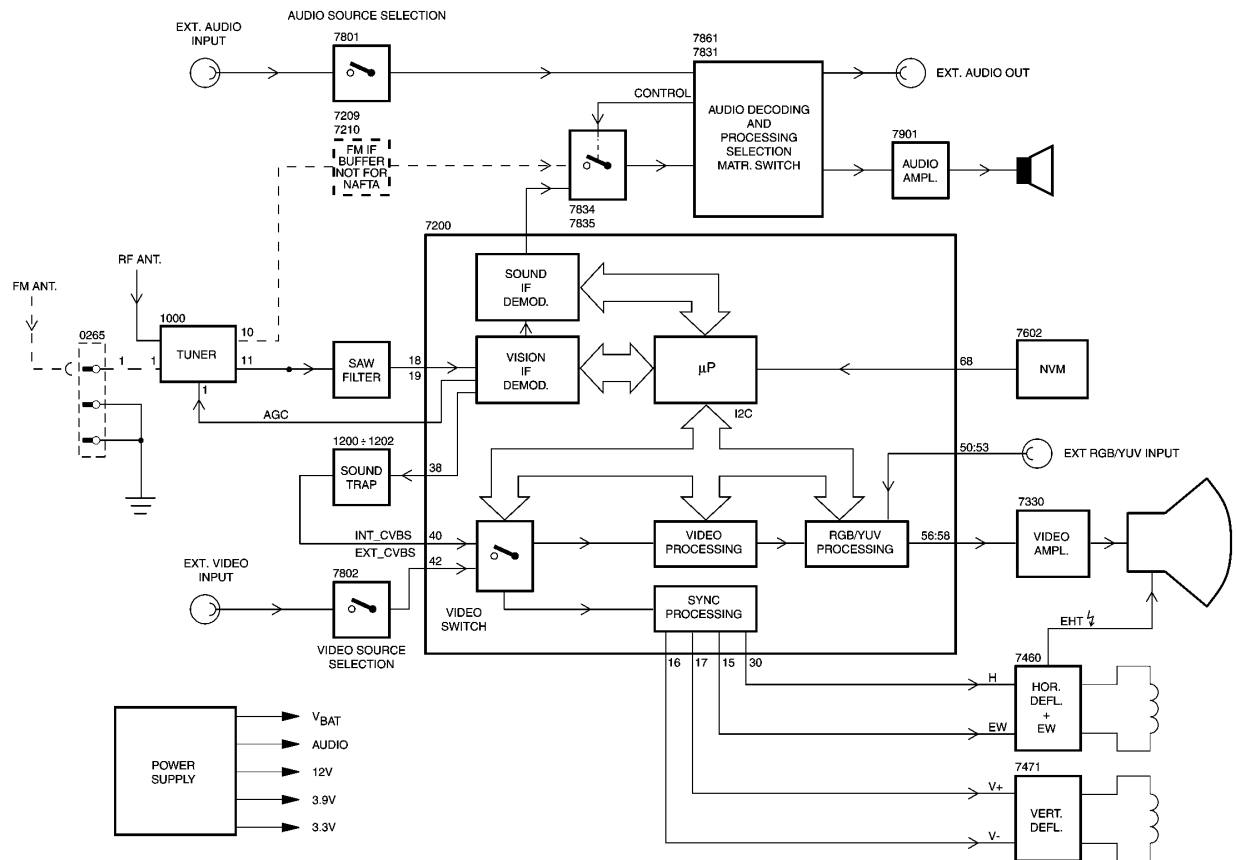Stereo audio signal processing




Mono

In mono sets, the signal goes via the SAW filter (position 1002/1003), to the audio demodulator part of the UOC IC 7200. The audio output on pin 48 goes to the audio amplifier (AN7523 at position 7902).

The volume level is controlled at this IC (pin 9) by a 'VolumeMute' control line from the microprocessor.

The audio signal from IC 7902 is then send to the speaker and headphone output panel.

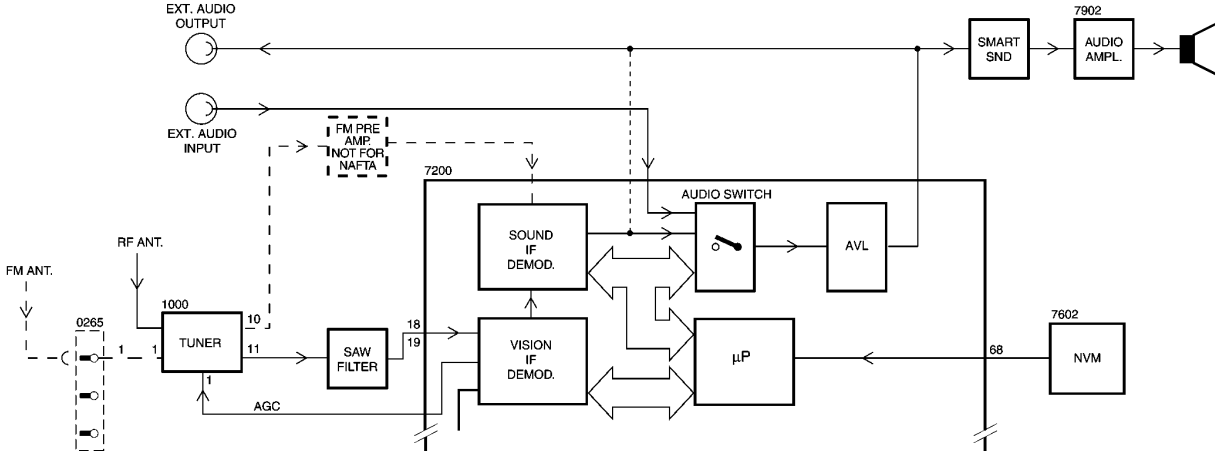Mono audio signal processing



Video Signal Processing

Introduction

The video signal-processing path consists of the following parts:

- RF signal processing.
- Video source selection.
- Video demodulation.
- Luminance / Chrominance signal processing.
- RGB control.
- RGB amplifier

The processing circuits listed above are all integrated in the UOC TV processor. The surrounding components are for the adaptation of the selected application. The I²C bus is for defining and controlling the signals.

RF Signal Processing

The incoming RF signal goes to the tuner (pos. 1000), where the 45.75 MHz IF signal is developed and amplified. The IF signals then exits the tuner from pin 11 to pass through the SAW filter (pos. 1002/1003). The shaped signal is then applied to the IF processor part of the UOC (pos. 7200).

Tuner AGC (Automatic Gain Control) will reduce the tuner gain and thus the tuner output voltage when receiving strong RF signals. Adjust the AGC takeover point via the Service Alignment Mode (SAM). The tuner AGC starts working when the video-IF input reaches a certain input level and will adjust this level via the I²C bus. The tuner AGC signal goes to the tuner (pin 1) via the open collector output (pin 22) of the UOC.

The IC also generates an Automatic Frequency Control (AFC) signal that goes to the tuning system via the I²C bus, to provide frequency correction when needed.

The demodulated composite video signal is available at pin 38 and then buffered by transistor 7201.

Video Source Selection

The Composite Video Blanking Signal (CVBS) from buffer 7201 goes to the audio carrier trap filters 1200, 1201, or 1202 (depending on the system used), to remove the audio signal. The signal then goes to pin 40 of IC 7200. The internal input switch selects the following input signals:

- Pin 40: terrestrial CVBS input
- Pin 42: external AV1 CVBS input
- Pin 44: external Side I/O CVBS or AV2 (or comb filter) luminance (Y) input
- Pin 45: external AV2 (or comb filter) chrominance (C) input

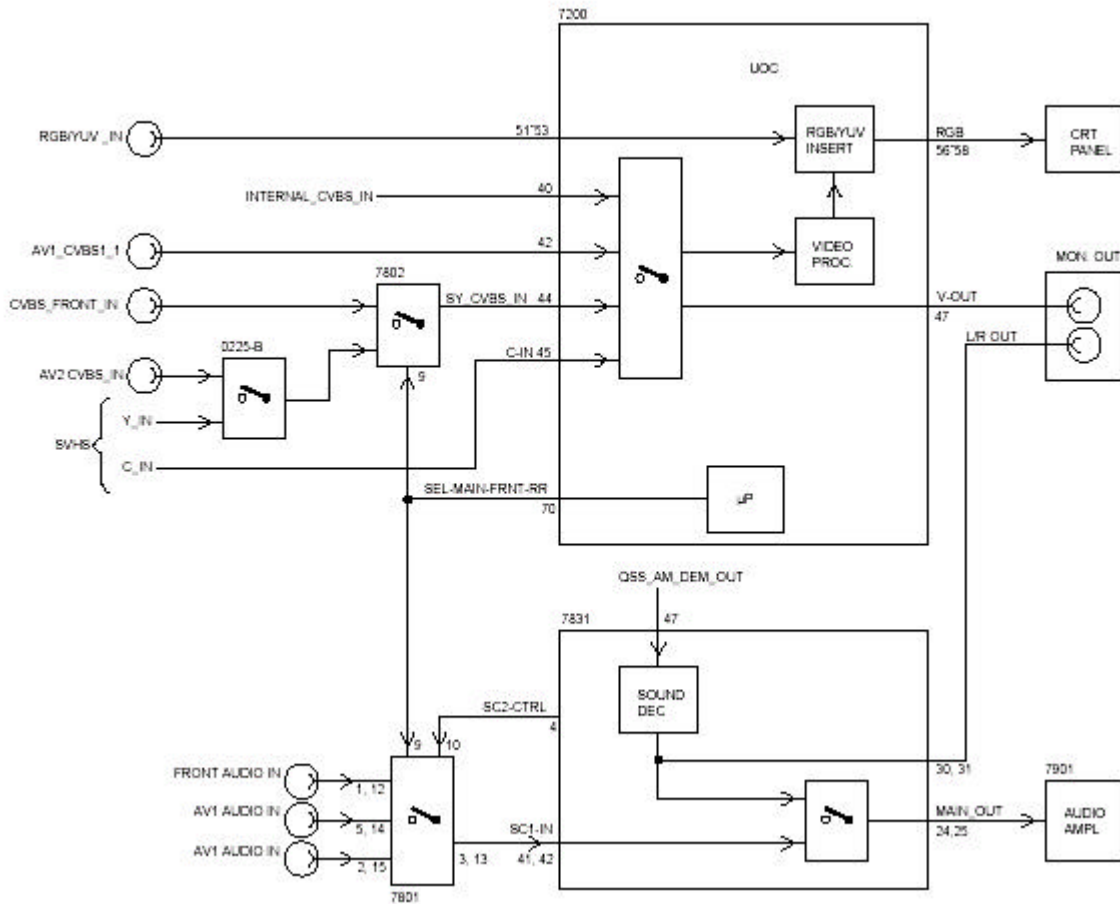


Figure: Video source selection

Once the signal source is selected, a chroma filter calibration is performed. The received color burst sub-carrier frequency is used for this. Correspondingly, the chroma band pass filter for PAL/NTSC processing or the cloche filter for SECAM processing is switched on. The selected luminance (Y) signal is supplied to the horizontal and vertical synchronization circuit and to the luminance processing circuit. In the luminance-processing block, the luminance signal goes to the chroma trap filter. This trap is switched 'on' or 'off' depending on the color burst detection of the chroma calibration circuit.

The group delay correction part can be switched between the BG and a flat group delay characteristic. This has the advantage that in multi-standard receivers no compromise has to be made for the choice of the SAW filter.

Comb Filter

Introduction

The video signal prepared for broadcast contains two major parts commingled, the luminance (makes a black and white picture in full detail) and chrominance (coloration with not quite all the detail). This method is used instead of red, green, and blue sub-signals in order to get the best looking picture that can be transmitted in the limited bandwidth of the broadcast channel.

Every TV receiver and VCR must contain a filter to separate the luminance and color (Y and C) again. Less than perfect Y/C separators lose resolution -- horizontal, vertical, or both. Also there are artifacts such as *rainbow swirls* where thin stripes should be, and *crawling dots* where patches of different colors meet. The perfect Y/C separator does not exist yet, although some 3D comb filters come close.

There are several methods for filtering:

- **No comb filter.** The cheapest solution is to use simple filters (notch, low pass, bandpass filters) that pass only the coarse and medium horizontal detail (lower 3 MHz or so) to the luminance circuits and pass the bulk of the color information still commingled with the fine luminance detail (3 to 4.2 MHz) to the color circuits.
- **Two line ordinary filter.** The improvements over 'no' comb filter are: revealing of finer horizontal detail overall, and some reduction of rainbow swirls. Improvement of fine detail is most prominent where details consist of upright dark and light lines.
- **Three line ordinary filter.** Improvement over the two-line filter consists of sharper transition from one color to another at sharp horizontal color boundaries, and less dot crawl.
- **Three line adaptive (a.k.a. 2D; dynamic) filter.** This method adapts the mixing according the line content of two fields. The big improvement that the 2D comb filter brings, is the elimination (or near elimination) of dot crawl. This type of filter

is used in the 'L01.1U AC' chassis. When present, the filter CBA is plugged-in on connector 1810B of the Mono Carrier.

- **Motion adaptive (3D) filter.** The difference with the 2D method is that this method uses three fields, so it also uses 'time' dimension. The 3D comb filter can achieve essentially perfect Y/C separation, eliminating all dot crawl and rainbow swirls for 'stationary' subject material, and perform at least as well as the 2D filter for the rest of the picture.

Implementation

The input (CVBS) signal comes from pin 47 of the UOC. On the comb filter panel, it first enters a low-pass filter (items 2409, 5408, 2408, 5407, and 2407) and an amplifier circuit (items 7401 and 7402). The LPF is used to eliminate the noise and the amplifier circuit to get a video input of $1 V_{PP}$.

The 'REF0' subcarrier reference (f_{SC}) is fed to pin 11 and internally multiplied by four ($4 \times 3.58 \text{ MHz} = 14.32 \text{ MHz}$) for the system clock.

After processing, the Y/C outputs (pins 25 and 23) are both filtered by a low-pass filter, in order to eliminate the high frequency harmonics of this system clock.

After filtering, the Y and C signals are fed to the source inputs of the UOC (pins 44 and 45).

Specification

If the comb filter is 'on', and the signal level drops below a specified value, then the filter is set to 'off'. Once the filter is set to 'off' it will remain 'off' until a channel change is performed.

When an S-Video (Y/C) or component video signal is offered to the TV, the filter is bypassed via the 'COMB_BYPASS' signal from the microprocessor.

Video Demodulation

The color decoder circuit detects whether the signal is a PAL, NTSC, or SECAM signal. The result is made known to the auto system manager. The PAL/NTSC decoder has an internal clock generator, which is stabilized to the required frequency by using the 12 MHz clock signal from the reference oscillator of the microcontroller / teletext decoder. The base-band delay line is used to obtain a good suppression of cross color effects. The Y signal and the delay line outputs U and V are applied to the luminance / chroma signal processing part of the TV processor.

Luminance / Chrominance signal Processing

The output of the YUV separator is fed to the internal YUV switch, which switches between the output of the YUV separator or the external YUV (for DVD or PIP) on pins 51-53. Pin 50 is the input for the insertion control signal called 'FBL-1'. When this signal level becomes higher than 0.9 V (but less than 3 V), the RGB signals at pins 51, 52, and 53 are inserted into the picture by using the internal switches.

Also, some picture improvement features are implemented in this part:

- **Black stretch.** This function corrects the black level of incoming signals, which have a difference between the black level and the blanking level. The amount of extension depends upon the difference between actual black level and the darkest part of the incoming video signal level. It is detected by means of an internal capacitor.
- **White stretch.** This function adapts the transfer characteristic of the luminance amplifier in a non-linear way depending on the average picture content of the luminance signal. It operates in such a way that maximum stretching is obtained when signals with a low video level are received. For bright pictures, stretching is not active.
- **Dynamic skin tone correction.** This circuit corrects (instantaneously and locally) the hue of those colors, which are located in the area in the UV plane that

matches the skin tone. The correction is dependent on the luminance, saturation, and distance to the preferred axis.

The YUV signal is then fed to the color matrix circuit, which converts it to R, G, and B signals.

The OSD/TXT signal from the microprocessor is mixed with the main signal at this point, before being output to the CRT board (pins 56, 57, and 58).

RGB Control

The RGB control circuit enables the picture parameters contrast, brightness, and saturation to be adjusted, by using a combination of the user menus and the remote control. Additionally automatic gain control for the RGB signals via cut-off stabilization is achieved in this functional block to obtain an accurate biasing of the picture tube.

Therefore, this block inserts the cut-off point measuring pulses into the RGB signals during the vertical retrace period.

The following additional controls are used:

- **Black current calibration loop.** Because of the 2-point black current stabilization circuit, both the black level and the amplitude of the RGB output signals depend on the drive characteristics of the picture tube. The system checks whether the returning measuring currents meet the requirements, and adapt the output level and gain of the circuit when necessary. After stabilization of the loop, the RGB drive signals are switched on. The 2-point black level system adapts the drive voltage for each cathode in such a way that the two measuring currents have the right value. This is done with the measurement pulses during the frame flyback. During the first frame, three pulses with a current of 8 μA are generated to adjust the cut off voltage. During the second frame, three pulses with a current of 20 μA are generated to adjust the 'white drive'. This has as a consequence, that a

change in the gain of the output stage will be compensated by a gain change of the RGB control circuit. Pin 55 (BLKIN) of the UOC is used as the feedback input from the CRT base panel.

- **Blue stretch.** This function increases the color temperature of the bright scenes (amplitudes which exceed a value of 80% of the nominal amplitude). This effect is obtained by decreasing the small signal gain of the red and green channel signals, which exceed this 80% level.
- **Beam current limiting.** A beam current limiting circuit inside the UOC handles the contrast and brightness control for the RGB signals. This prevents the CRT from being overdriven, which could otherwise cause serious damage in the line output stage. The reference used for this purpose is the DC voltage on pin 54 (BLCIN) of the TV processor. Contrast and brightness reduction of the RGB output signals is therefore proportional to the voltage present on this pin. Contrast reduction starts when the voltage on pin 54 is lower than 2.8 V. Brightness reduction starts when the voltage on pin 54 is less than 1.7 V. The voltage on pin 54 is normally 3.3 V (limiter not active). During set switch-off, the black current control circuit generates a fixed beam current of 1 mA. This current ensures that the picture tube capacitance is discharged. During the switch-off period, the vertical deflection is placed in an over-scan position, so that the discharge is not visible on the screen.

RGB Amplifier

From outputs 56, 57, and 58 of IC 7200 the RGB signals are applied to the integrated output amplifier (7330) on the CRT panel. Via the outputs 7, 8, and 9, the picture tube cathodes are driven.

The supply voltage for the amplifier is +200 V and is derived from the line output stage.

SCAVEM (if present)

The SCAn VElocity Modulation (SCAVEM) circuitry is implemented in the layout of the picture tube panel. It is thus not an extra module. This circuit influences the horizontal deflection as a function of the picture content. In an ideal square wave, the sides are limited in slope due to a limited bandwidth (5 MHz). SCAVEM will improve the slope as follows:

- **At a positive slope** , a SCAVEM current is generated which supports the deflection current. At the first half of the slope, the spot is accelerated and the picture is darker. At the second half of the slope, the spot is delayed and the slope becomes steeper.
- **At the end of the slope** , the SCAVEM-current decays to zero and the spot is at the original position. An overshoot occurs which improves the impression of sharpness.
- **At the negative slope** , the SCAVEM-current counteracts the deflection. During the first half of the slope, the spot is delayed and the slope becomes steeper. During the second half the spot accelerates, the SCAVEM-current is zero at the end of the slope.

The R/G/B signals are fed into the SCAVEM circuit and differentiated by C2364/2365/2366 and the input impedance of 7360 stage. Diode 6364 (Schottky diode) is the coring component, which blocks all the signals below 0.3 V so that the noise is not amplified and all the signals larger than 0.3V are differentiated and amplified. After differentiation, the signal is amplified by Q7360 with 3369 as the collector resistor. The biasing of the 7360 stage is done by 3369, 3361, 3360, 3362, and 3363.

Items 6367, 2367, 3367, 3361, and 2360 work as the clipping components that limit the SCAVEM current at a certain level, to prevent SCAVEM over correction.

After being buffered by 7369, the differentiated signals are coupled through 2375 and 2380 to the output stage. The output stage is configured into cascode stage and push-pull operation. The biasing is done by 3373, 3375, 3376, 3380, 3381, 3383, 3374, and 3384. The working voltage of the transistors is settled at half the supply voltage.

At the rising portion of the R/G/B signals, cascode 7380 and 7382 will be operating and will pull the current through the SCAVEM coil. Contrarily, at the falling portion of the R/G/B signals, cascode 7373 and 7366 will be operating and will push the current through the SCAVEM coil.

The capacitors 2362, 2373, and 2381 ground the high frequencies, to prevent high frequency amplification. The ferrite bead 5376 is for EMC purpose. Resistors 3374 and 3384 determine the output SCAVEM current.

Items 2378 and 3378 are for the fine-tuning for different SCAVEM coil impedances.

They also help to suppress high frequency oscillation. Capacitor 2369 helps to suppress the high frequency components and also controls the SCAVEM delay.

Synchronization

Inside IC 7200 part D, the vertical and horizontal sync pulses are separated. These 'H' and 'V' signals are synchronized with the incoming CVBS signal. They are then fed to the H- and V-drive circuits and to the OSD/TXT circuit for synchronization of the On Screen Display and Teletext (CC) information.

Deflection

Horizontal Drive

The horizontal drive signal is obtained from an internal VCO, which is running at twice the line frequency. This frequency is divided by two, to lock the first control loop to the incoming signal.

When the IC is switched 'on', the 'Hdrive' signal is suppressed until the frequency is correct.

The 'Hdrive' signal is available at pin 30. The 'Hflybk' signal is fed to pin 31 to phase lock the horizontal oscillator, so that Q7462 cannot switch 'on' during the flyback time.

The 'EWdrive' signal for the E/W circuit (if present) is available on pin 15, where it drives transistor 7400 to make linearity corrections in the horizontal drive.

When the set is switched on, the '+8V' voltage goes to pin 9 of IC 7200. The horizontal drive starts up in a soft start mode. It starts with a very short TON time of the horizontal output transistor. The TOFF of the transistor is identical to the time in normal operation. The starting frequency during switch on is therefore about 2 times higher than the normal value. The 'on' time is slowly increased to the nominal value in 1175 ms. When the nominal value is reached, the PLL is closed in such a way that only very small phase corrections are necessary.

The 'EHTinformation' line on pin 11 is intended to be used as a 'X-ray' protection. When this protection is activated (when the voltage exceeds 6 V), the horizontal drive (pin 30) is switched 'off' immediately. If the 'H-drive' is stopped, pin 11 will become low again.

Now the horizontal drive is again switched on via the slow start procedure.

The 'EHTinformation' line (Aquadag) is also fed back to the UOC IC 7200 pin 54, to adjust the picture level in order to compensate for changes in the beam current.

The filament voltage is monitored for 'no' or 'excessive' voltage. This voltage is rectified by diode 6447 and fed to the emitter of transistor 7443. If this voltage goes above 6.8 V, transistor 7443 will conduct, making the 'EHT0' line 'high'. This will immediately switch off the horizontal drive (pin 30) via the slow stop procedure.

The horizontal drive signal exits IC 7200 at pin 30 and goes to 7462, the horizontal driver transistor. The signal is amplified and coupled to the base circuit of 7460, the horizontal output transistor. This will drive the line output transformer (LOT) and associated circuit. The LOT provides the extra high voltage (EHT), the VG2 voltage and the focus and filament voltages for the CRT, while the line output circuit drives the horizontal deflection coil.

Vertical Drive

A divider circuit performs the vertical synchronization. The vertical ramp generator needs an external resistor (R3245, pin 20) and capacitor (C2244, pin 21). A differential output is available at pins 16 and 17, which are DC-coupled with the vertical output stage.

During the insertion of RGB signals, the maximum vertical frequency is increased to 72 Hz so that the circuit can also synchronize on signals with a higher vertical frequency like VGA.

To avoid damage of the picture tube when the vertical deflection fails, the guard output is fed to the beam current limiting input. When a failure is detected, the RGB-outputs are blanked. When no vertical deflection output stage is connected, this guard circuit will also blank the output signals.

These 'V_DRIVE+' and 'V_DRIVE-' signals are applied to the input pins 1 and 2 of IC 7471 (full bridge vertical deflection amplifier). These are voltage driven differential inputs. As the driver device (IC 7200) delivers output currents, R3474 and R3475 convert them to voltage. The differential input voltage is compared with the voltage

across measuring resistor R3471 that provides internal feedback information. The voltage across this measuring resistor is proportional to the output current, which is available at pins 4 and 7 where they drive the vertical deflection coil (connector 0222) in phase opposition.

IC 7471 is supplied by +13 V. The vertical flyback voltage is determined by an external supply voltage at pin 6 (VlotAux+50V). This voltage is almost totally available as flyback voltage across the coil, this being possible due to the absence of a coupling capacitor (which is not necessary, due to the 'bridge' configuration).

Deflection Corrections

The Linearity Correction

A constant voltage on the horizontal deflection coil should result in a sawtooth current. This however is not the case as the resistance of the coil is not negligible. In order to compensate for this resistance, a pre-magnetized coil L5457 is used. R3485 and C2459 ensure that L5457 does not excite, because of its own parasite capacitance. This L5457 is called the 'linearity coil'.

The Mannheim Effect

When clear white lines are displayed, the high-voltage circuit is heavily loaded. During the first half of the flyback, the high voltage capacitors are considerable charged. At that point in time, the deflection coil excites through C2465. This current peak, through the high-voltage capacitor, distorts the flyback pulse. This causes synchronization errors, causing an oscillation under the white line.

During $t_3 - t_5$, C2490//2458 is charged via R3459. At the moment of the flyback, C2490//2458 is subjected to the negative voltage pulses of the parabola as a result of which D6465 and D6466 are conducting and C2490//2458 is switched in parallel with C2456//2457. The high-voltage diodes are conducting this moment. Now extra energy is

available for excitation through C2465 and the line deflection. Consequently, the flyback pulse is less distorted.

The S-Correction

Since the sides of the picture are further away from the point of deflection than from the center, a linear sawtooth current would result in a non-linear image being scanned (the center would be scanned slower than the sides). For the center-horizontal line, the difference in relation of the distances is larger than those for the top and bottom lines. An S-shaped current will have to be superimposed onto the sawtooth current. This correction is called finger-length correction or S-correction.

C2456//2457 is relatively small, as a result of which the sawtooth current will generate a parabolic voltage with negative voltage peaks. Left and right, the voltage across the deflection coil decreases, and the deflection will slow down; in the center, the voltage increases and deflection is faster. The larger the picture width, the higher the deflection current through C2456//2457. The current also results in a parabolic voltage across C2484//2469, resulting in the finger length correction proportionally increasing with the picture width. The east/west drive signal will ensure the largest picture width in the center of the frame. Here the largest correction is applied.

East/West Correction

In this chassis, there are three types of CRTs, namely the 100°, 110° and wide screen CRTs. The 100° CRT is raster-correction-free and does not need East/West correction. The 110° 4:3 CRT comes with East/West correction and East/West protection. The wide screen TV sets have all the correction of the 110 4:3 CRT and also have additional picture format like the 4:3 format, 16:9, 14:9, 16:9 zoom, subtitle zoom and the Super-Wide picture format

A line, written at the upper- or lower side of the screen, will be larger at the screen center when a fixed deflection current is used. Therefore, the amplitude of the deflection current must be increased when the spot approaches the center of the screen. This is called the East/West or pincushion correction.

The 'Ewdrive' signal from pin 15 of IC 7200 takes care for the correct correction. It drives FET 7400. It also corrects breathing of the picture, due to beam current variations (the EHT varies dependent of the beam current). This correction is derived from the 'EHTinformation' line.

Two protections are built-in for the E/W circuit: over-current and over-voltage protection. See paragraph 9.7.6.

Panorama

The panorama function is only used in 16:9 sets. This is a function to enable the 4:3 and Super-Wide feature. It drives the 'Bass_panorama' line, to activate relay 1400. When this relay is switched on, the capacitors 2453//2454 are added in parallel to the default S-correction capacitors 2456//2457. This results in an increased capacitance, a lower resonance frequency of the line deflection coil and the S-correction capacitors and therefore a less steep S-corrected line deflection current.

Power Supply

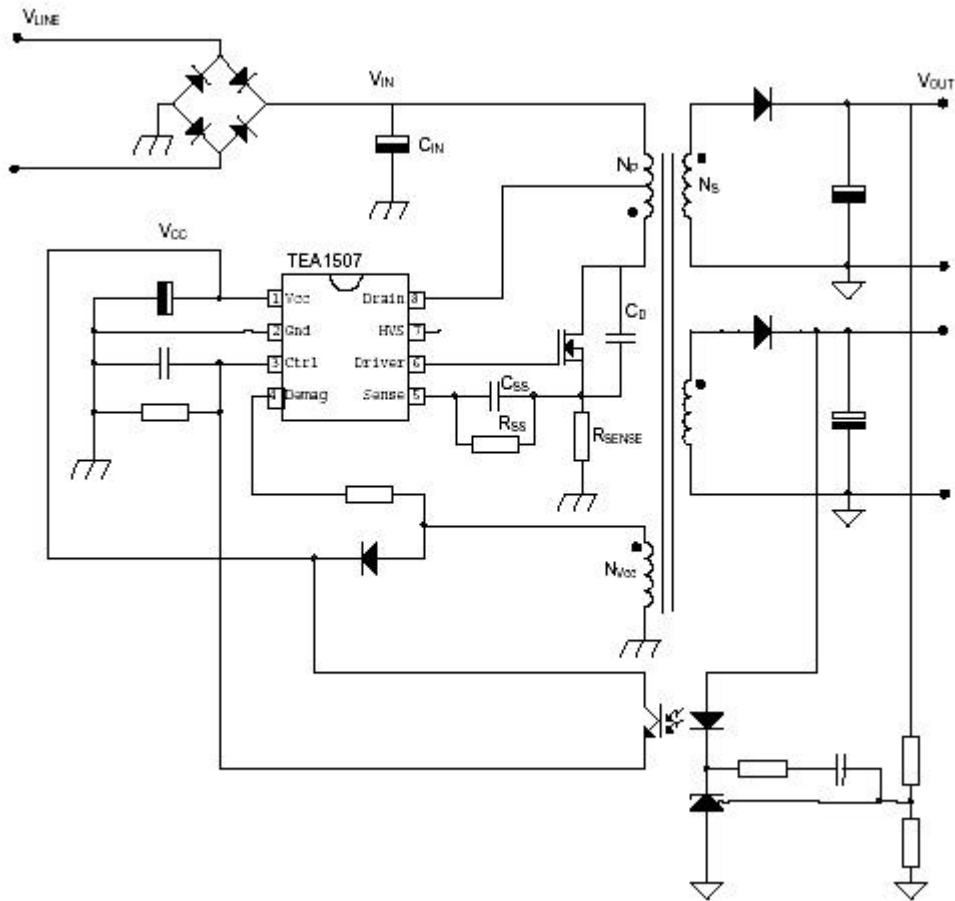


Figure: Switched Mode Power Supply standard circuit

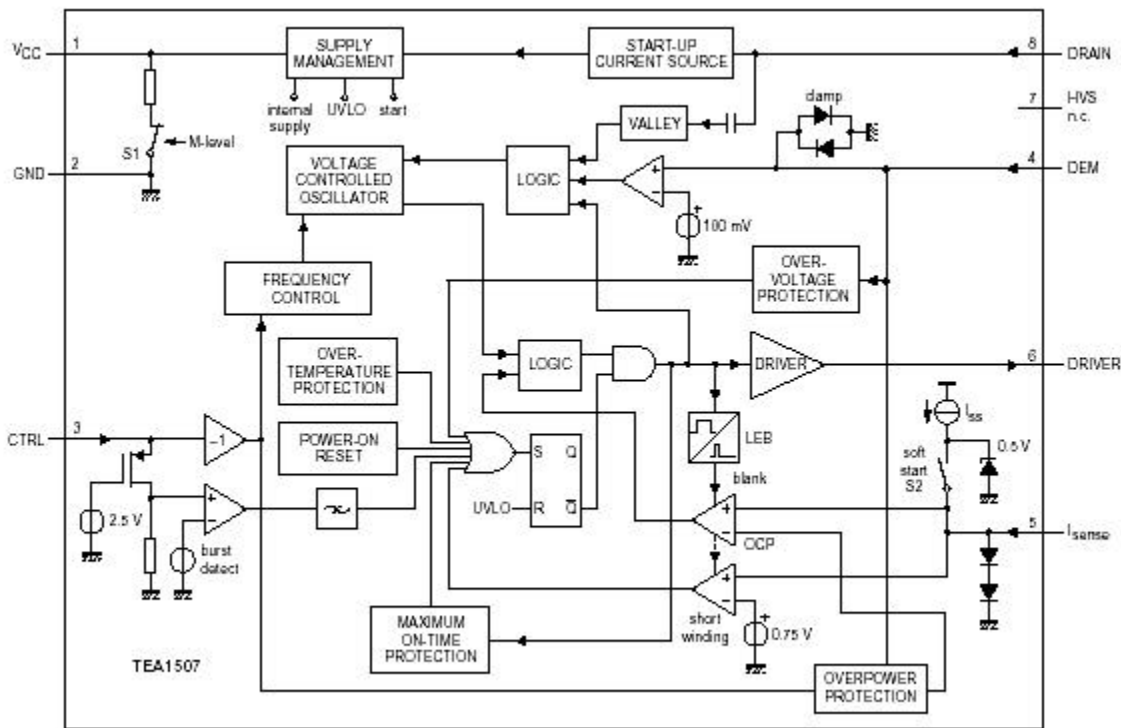


Figure: Internal block diagram of the driver IC (TEA1507)

Introduction

The supply is a Switching Mode Power Supply (SMPS). The frequency of operation varies with the circuit load. This 'Quasi-Resonant Flyback' behavior has some important benefits compared to a 'hard switching' fixed frequency Flyback converter. The efficiency can be improved up to 90%, which results in lower power consumption. Moreover, the supply runs cooler and safety is enhanced.

The power supply starts operating when a DC voltage goes from the rectifier bridge via T5520, R3532 to pin 8. The operating voltage for the driver circuit is also taken from the 'hot' side of this transformer.

The switching regulator IC 7520 starts switching the FET 'on' and 'off', to control the current flow through the primary winding of transformer 5520. The energy stored in the primary winding during the 'on' time is delivered to the secondary windings during the 'off' time.

The 'MainSupply' line is the reference voltage for the power supply. It is sampled by resistors 3543 and 3544 and fed to the input of the regulator 7540 / 6540. This regulator drives the feedback optocoupler 7515 to set the feedback control voltage on pin 3 of 7520.

The power supply in the set is 'on' any time AC power goes to the set.

Derived Voltages

The voltages supplied by the secondary windings of T5520 are:

- 'MainAux' for the audio circuit (voltage depends on set execution, see table below),
- 3.3 V and 3.9 V for the microprocessor and
- 'MainSupply' for the horizontal output (voltage depends on set execution, see table below).

Other supply voltages are provided by the LOT. It supplies +50 V (only for large screen sets), +13 V, +8 V, +5 V, and a +200 V source for the video drive. The secondary voltages of the LOT are monitored by the 'EHTinformation' lines. These lines are fed to the video processor part of the UOC IC 7200 on pins 11 and 34.

This circuit will shut 'off' the horizontal drive in case of over-voltage or excessive beam current.

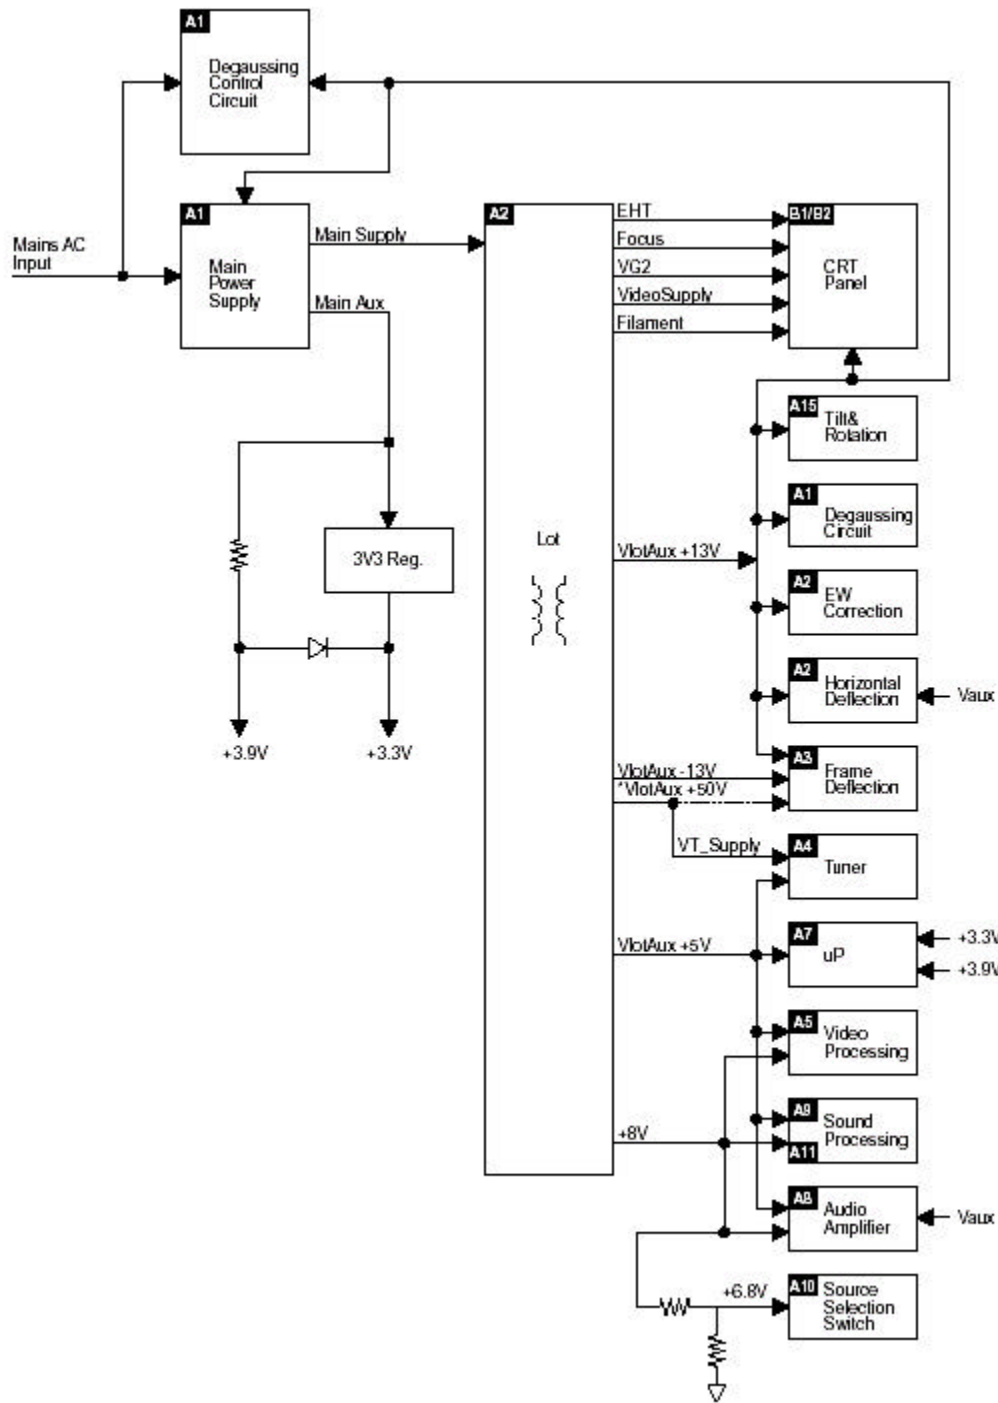


Figure: Derived voltages

Degaussing

When the set is switched on, the degaussing relay 1515 is immediately activated as transistor 7580 is conducting. Due to the RC-time of R3580 and C2580, it will last about 3 to 4 seconds before transistor 7580 is switched off.

Basic IC Functionality

For a clear understanding of the Quasi-Resonant behavior, it is possible to explain it by a simplified circuit diagram (see Figure below). In this circuit diagram, the secondary side is transferred to the primary side and the transformer is replaced by an inductance LP. CD is the total drain capacitance including the resonance capacitor CR, parasitic output capacitor COSS of the MOSFET and the winding capacitance CW of the transformer. The turn ratio of the transformer is represented by n (N_P/N_S).

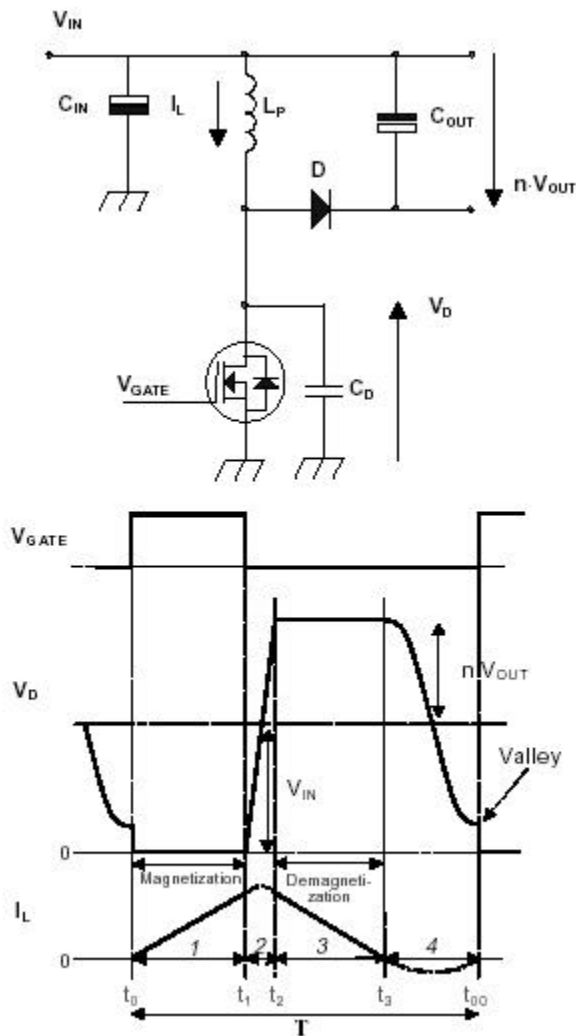


Figure: QR-mode time intervals

In the Quasi-Resonant mode each period can be divided into four different time intervals, in chronological order:

- **Interval 1: $t_0 < t < t_1$ primary stroke.** At the beginning of the first interval, the MOSFET is switched 'on' and energy is stored in the primary inductance (magnetization). At the end, the MOSFET is switched 'off' and the second interval starts.
- **Interval 2: $t_1 < t < t_2$ commutation time.** In the second interval, the drain voltage will rise from almost zero to $V_{IN} + n \cdot (V_{OUT} + V_F)$. V_F is the forward voltage drop of

the diode that will be omitted from the equations from now on. The current will change its positive derivative, corresponding to V_{IN}/L_P , to a negative derivative, corresponding to $-n \cdot V_{OUT}/L_P$.

- **Interval 3: $t_2 < t < t_3$ secondary stroke.** In the third interval, the stored energy is transferred to the output, so the diode starts to conduct and the inductive current I_L will decrease. In other words, the transformer will be demagnetized. When the inductive current has become zero the next interval begins.
- **Interval 4: $t_3 < t < t_{00}$ resonance time.** In the fourth interval, the energy stored in the drain capacitor C_D will start to resonate with the inductance L_P . The voltage and current waveforms are sinusoidal waveforms. The drain voltage will drop from $V_{IN} + n \cdot V_{OUT}$ to $V_{IN} - n \cdot V_{OUT}$.

Frequency Behavior

The frequency in the QR-mode is determined by the power stage and is not influenced by the controller (important parameters are L_P and C_D). The frequency varies with the input voltage V_{IN} and the output power P_{OUT} . If the required output power increases, more energy has to be stored in the transformer. This leads to longer magnetizing t_{PRIM} and demagnetizing t_{SEC} times, which will decrease the frequency. See the frequency versus output power characteristics below. The frequency characteristic is not only output power-, but also input voltage dependent. The higher the input voltage, the smaller t_{PRIM} , so the higher the frequency will be.

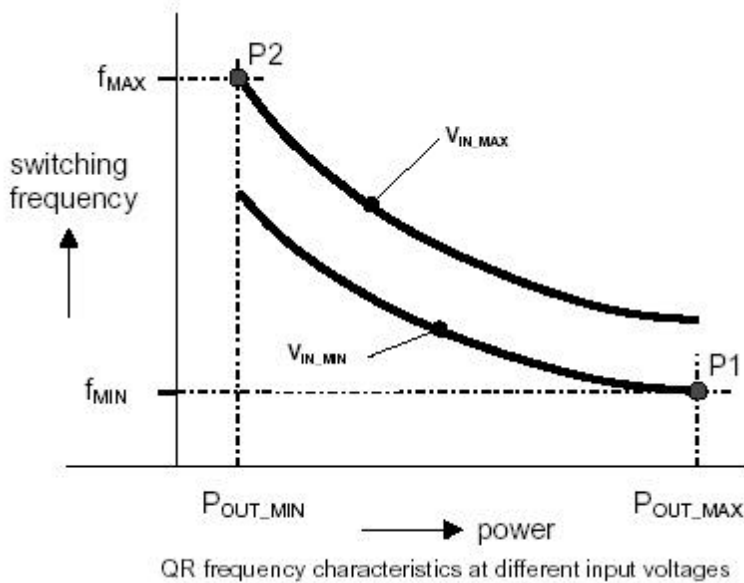


Figure: QR frequency behavior

Point P1 is the minimum frequency f_{MIN} that occurs at the specified minimum input voltage and maximum output power required by the application. Of course the minimum frequency has to be chosen above the audible limit (>20 kHz).

Start-Up Sequence

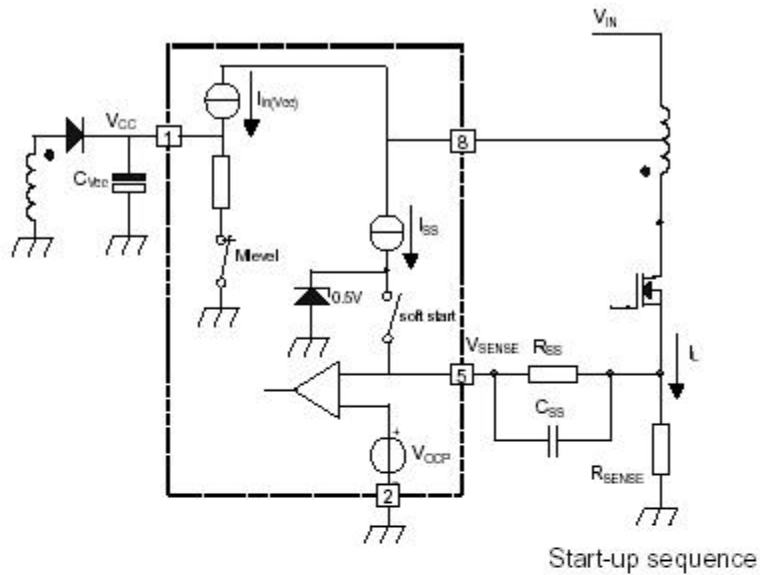
When the rectified AC voltage V_{IN} (via the center tap connected to pin 8) reaches the Mains dependent operation level (Mlevel: between 60 and 100 V), the internal 'Mlevel switch' will be opened and the start-up current source is enabled to charge capacitor C2521 at the V_{CC} pin as shown below.

The 'soft start' switch is closed when the V_{CC} reaches a level of 7 V and the 'soft start' capacitor C_{SS} (C2522, between pin 5 and the sense resistor R3526), is charged to 0.5 V.

Once the V_{CC} capacitor is charged to the start-up voltage $V_{\text{CC}} - \text{start}$ (11 V), the IC starts driving the MOSFET. Both internal current sources are switched 'off' after reaching this

start-up voltage. Resistor R_{SS} (3524) will discharge the 'soft start' capacitor, such that the peak current will slowly increase. This to prevent 'transformer rattle'.

During start-up, the V_{CC} capacitor will be discharged until the moment that the primary auxiliary winding takes over this voltage.



Start-up sequence

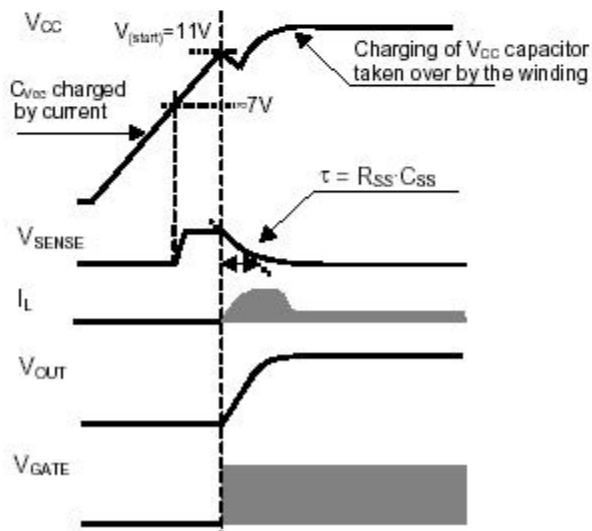


Figure: Start-up behavior

The moment that the voltage on pin 1 drops below the 'under voltage lock out' level ($UVLO = \pm 9\text{ V}$), the IC will stop switching and will enter a safe restart from the rectified mains voltage.

Operation

The supply can run in three different modes depending on the output power:

- **Quasi-Resonant mode (QR).** The 'QR' mode, described above, is used during normal operation. This will give a high efficiency.
- **Frequency Reduction mode (FR).** The 'FR' mode (also called 'VCO' mode) is implemented to decrease the switching losses at low output loads. In this way, the efficiency at low output powers is increased, which enables power consumption smaller than 3 W during stand-by. The voltage at the pin 3 (Ctrl) determines where the frequency reduction starts. An external Ctrl voltage of 1.425 V corresponds with an internal VCO level of 75 mV. This fixed VCO level is called $V_{VCO,start}$. The frequency will be reduced in relation to the VCO voltage between 75 mV and 50 mV (at levels larger than 75 mV, Ctrl voltage < 1.425V, the oscillator will run on maximum frequency $f_{oscH} = 175\text{ kHz}$ typically). At 50 mV ($V_{VCO,max}$), the frequency is reduced to the minimum level of 6 kHz. Valley switching is still active in this mode.
- **Minimum Frequency mode (MinF).** At VCO levels below 50 mV, the minimum frequency will remain on 6 kHz, which is called the 'MinF' mode. Because of this low frequency, it is possible to run at very low loads without having any output regulation problems.

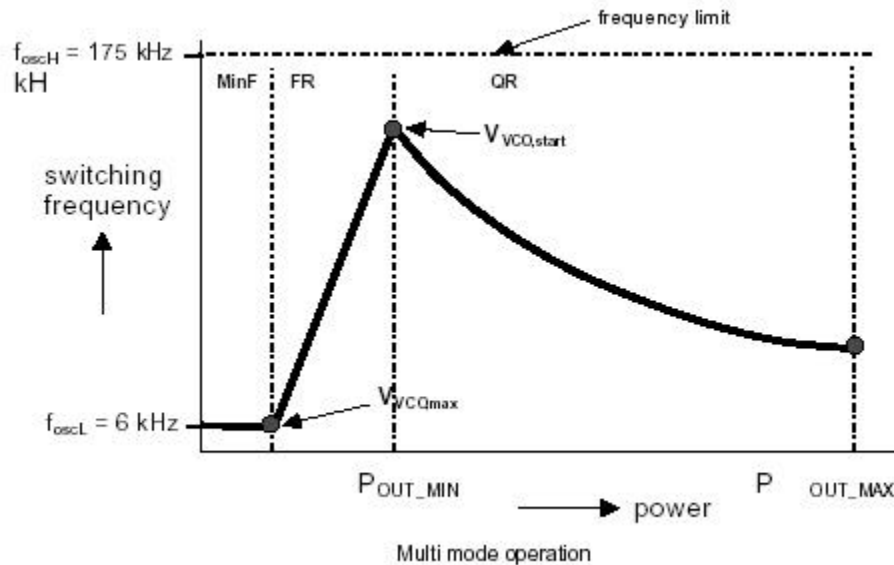


Figure: Different supply modes

Safe-Restart Mode

This mode is introduced to prevent the components from being destroyed during eventual system fault conditions. It is also used for the Burst mode. The Safe-Restart mode will be entered if it is triggered by one of the following functions:

- Over voltage protection,
- Short winding protection,
- Maximum 'on time' protection,
- V_{CC} reaching UVLO level (fold back during overload),
- Detecting a pulse for Burst mode,
- Over temperature protection.

When entering the Safe-Restart mode, the output driver is immediately disabled and latched. The V_{CC} winding will not charge the VCC capacitor anymore and the V_{CC} voltage will drop until UVLO is reached. To recharge the V_{CC} capacitor, the internal current source ($I_{(restart)(VCC)}$) will be switched 'on' to initiate a new start-up sequence as described before. This Safe-Restart mode will persist until the controller detects no faults or burst triggers.

Standby

The set goes to Standby in the following cases:

- After pressing the 'standby' key on the remote control.
- When the set is in protection mode.

In Standby, the power supply works in 'burst mode'. Burst mode can be used to reduce the power consumption below 1 W at stand-by. During this mode, the controller is active (generating gate pulses) for only a short time and for a longer time inactive waiting for the next burst cycle.

In the active period, the energy is transferred to the secondary and stored in the buffer capacitor C_{STAB} in front of the linear stabilizer (see Figure below). During the inactive period, the load (e.g. microprocessor) discharges this capacitor. In this mode, the controller makes use of the Safe-Restart mode.

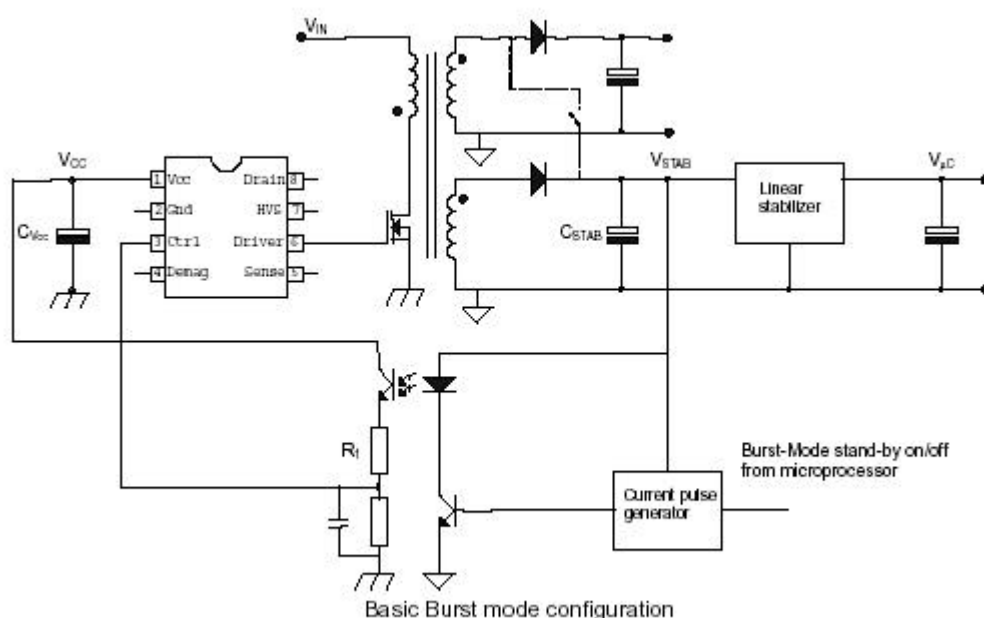


Figure: Supply standby mode (burst mode)

The system enters burst mode standby when the microprocessor activates the 'Stdby_con' line. When this line is pulled high, the base of Q7541 is allowed to go high. This is triggered by the current from collector Q7542. When Q7541 turns 'on', the opto-coupler (7515) is activated, sending a large current signal to pin 3 (Ctrl). In response to this signal, the IC stops switching and enters a 'hiccup' mode. This burst activation signal should be present for longer than the 'burst blank' period (typically 30 s): the blanking time prevents false burst triggering due to spikes.

Burst mode standby operation continues until the microcontroller pulls the 'Stdby_con' signal low again. The base of Q7541 is unable to go high, thus cannot turn 'on'. This will disable the burst mode. The system then enters the start-up sequence and begins normal switching behavior.

For a more detailed description of one burst cycle, three time intervals are defined:

t1: Discharge of V_{CC} when gate drive is active. During the first interval, energy is transferred, which result in a ramp-up of the output voltage (V_{STAB}) in front of the stabilizer. When enough energy is stored in the capacitor, the IC will be switched 'off' by a current pulse generated at the secondary side. This pulse is transferred to the primary side via the opto coupler. The controller will disable the output driver (safe restart mode) when the current pulse reaches a threshold level of 16 mA into the Ctrl pin. A resistor R1 (R3519) is placed in series with the opto coupler, to limit the current going into the Ctrl pin. Meanwhile the V_{CC} capacitor is discharged but has to stay above V_{UVLO} .

t2: Discharge of V_{CC} when gate drive is inactive. During the second interval, the V_{CC} is discharged to V_{UVLO} . The output voltage will decrease depending on the load.

t3: Charge of V_{CC} when gate drive is inactive. The third interval starts when the UVLO is reached. The internal current source charges the V_{CC} capacitor (also the soft start capacitor is recharged). Once the V_{CC} capacitor is charged to the start-up voltage, the driver is activated and a new burst cycle is started.

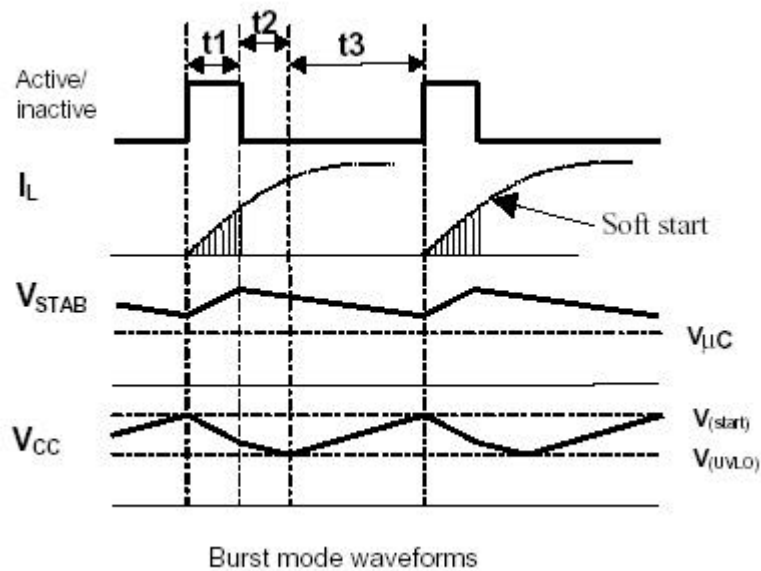


Figure: Burst mode waveforms

Protection Events

The SMPS IC 7520 has the following protection features:

Demagnetization sense

This feature guarantees discontinuous conduction mode operation in every situation. The oscillator will not start a new primary stroke until the secondary stroke has ended. This is to ensure that FET 7521 will not turn on until the demagnetization of transformer 5520 is complete. The function is an additional protection feature against:

- saturation of the transformer,
- damage of the components during initial start-up,
- an overload of the output.

The demagnetization sense is realized by an internal circuit that guards the voltage (V_{demag}) at pin 4 that is connected to V_{CC} winding by resistor R1 (R3522).

The Figure below shows the circuit and the idealized waveforms across this winding.

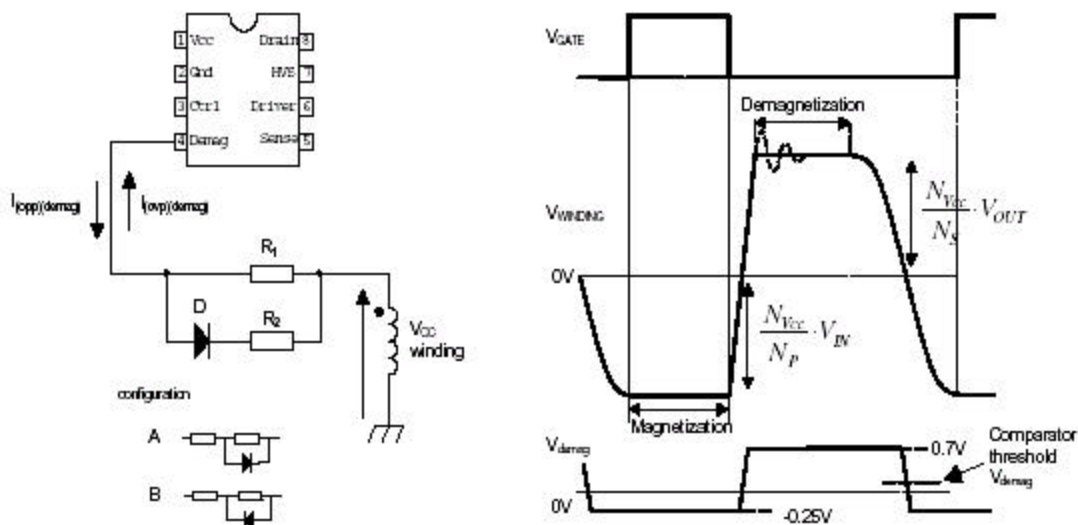


Figure: Demagnetization protection

Over Voltage Protection

The Over Voltage Protection ensures that the output voltage will remain below an adjustable level. This works by sensing the auxiliary voltage via the current flowing into pin 4 (DEM) during the secondary stroke. This voltage is a well-defined replica of the output voltage. Any voltage spikes are averaged by an internal filter.

If the output voltage exceeds the OVP trip level, the OVP circuit switches the power MOSFET 'off'.

Next, the controller waits until the 'under voltage lock out' level ($UVLO = \pm 9 \text{ V}$) is reached on pin 1 (V_{CC}). This is followed by a safe restart cycle, after which switching starts again. This process is repeated as long as the OVP condition exists. The output voltage at which the OVP function trips, is set by the demagnetization resistor R3522.

Over Current Protection

The internal OCP protection circuit limits the 'sense' voltage on pin 5 to an internal level.

Over Power Protection

During the primary stroke, the rectified AC input voltage is measured by sensing the current drawn from pin 4 (DEM). This current is dependent on the voltage on pin 9 of transformer 5520 and the value of R3522. The current information is used to adjust the peak drain current, which is measured via pin I_{SENSE} .

Short Winding Protection

If the 'sense' voltage on pin 5 exceeds the short winding protection voltage (0.75 V), the converter will stop switching. Once V_{CC} drops below the UVLO level, capacitor C2521 will be recharged and the supply will start again. This cycle will be repeated until the short circuit is removed (safe restart mode).

The short winding protection will also protect in case of a secondary diode short circuit. This protection circuit is activated after the leading edge blanking time (LEB).

LEB time

The LEB (Leading Edge Blanking) time is an internally fixed delay, preventing false triggering of the comparator due to current spikes. This delay determines the minimum 'on' time of the controller.

Over Temperature protection

When the junction temperature exceeds the thermal shutdown temperature (typ. 140° C), the IC will disable the driver. When the V_{CC} voltage drops to UVLO, the V_{CC} capacitor will be recharged to the V(start) level. If the temperature is still too high, the V_{CC} voltage will drop again to the UVLO level (Safe-Restart mode). This mode will persist until the junction temperature drops 8 degrees typically below the shutdown temperature.

Mains dependent operation enabling level

To prevent the supply from starting at a low input voltage, which could cause audible noise, a mains detection is implemented (Mlevel). This detection is provided via pin 8, which detects the minimum start-up voltage between 60 and 100 V. As previous mentioned, the controller is enabled between 60 and 100 V.

An additional advantage of this function is the protection against a disconnected buffer capacitor (C_{IN}). In this case, the supply will not be able to start-up because the V_{CC} capacitor will not be charged to the start-up voltage.

Control

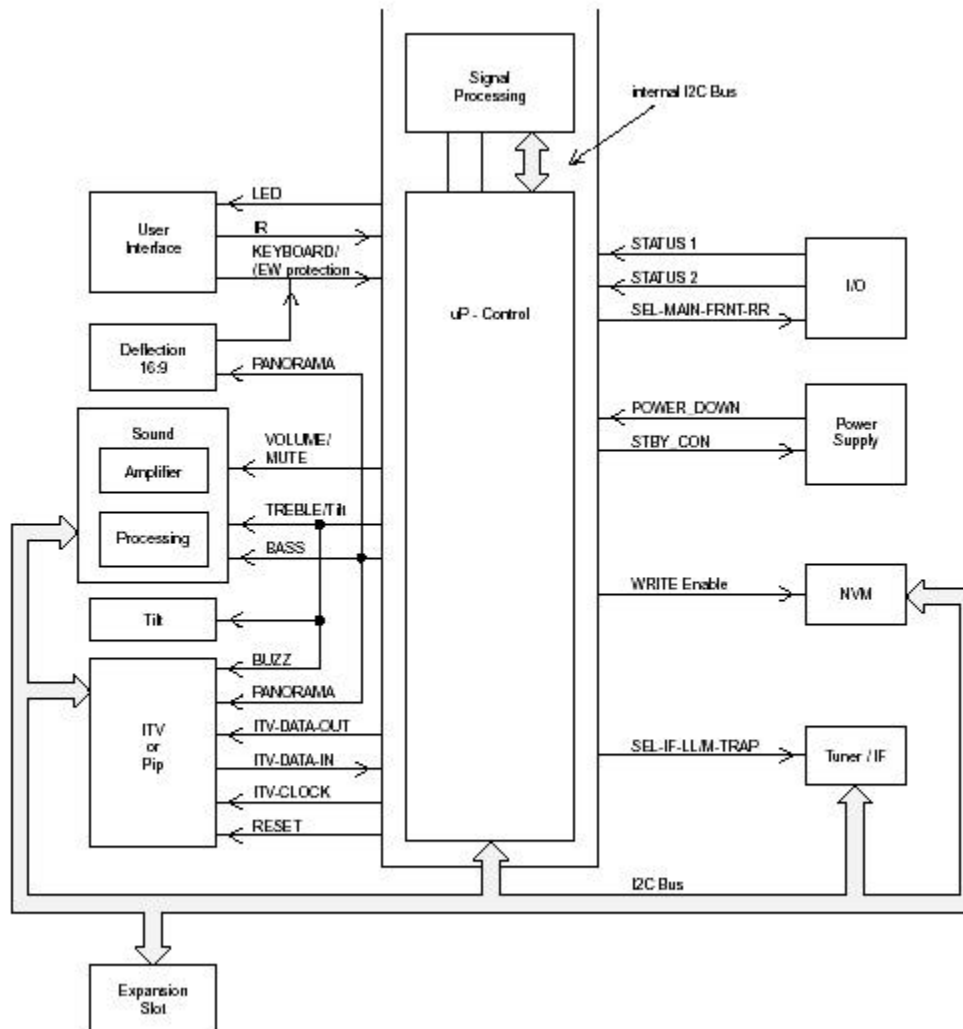


Figure: Block diagram set control

Introduction

The microprocessor part of the UOC, has the complete control and teletext on board. User menu, Service Default Mode, Service Alignment Mode and Customer Service Mode are generated by the uP. Communication to other ICs is done via the I² C-bus.

I² C-Bus

The main control system, which consists of the microprocessor part of the UOC (7200), is linked to the external devices (tuner, NVM, MSP, etc) by means of the I² C-bus. An internal I² C-bus is used to control other signal processing functions, like video processing, sound IF, vision IF, synchronization, etc.

User Interface

The 'L01.1U AC' uses a remote control with RC5 protocol. The incoming signal is connected to pin 67 of the UOC.

The 'Top Control' keyboard, connected to UOC pin 80, can also control the set. Button recognition is done via a voltage divider.

The front LED (6691) is connected to an output control line of the microprocessor (pin 5). It is activated to provide the user information about whether or not the set is working correctly (e.g., responding to the remote control, normal operation (USA only) or fault condition)

In- and Output Selection

For the control of the input and output selections, there are three lines:

- **STATUS1.** This signal provides information to the microprocessor on whether a video signal is available on the SCART1 AV input and output port (only for Europe). This signal is not connected in NAFTA sets.
- **STATUS2.** This signal provides information to the microprocessor on whether a video signal is available on the SCART2 AV input and output port (only for Europe). For sets with an SVHS input it provides the additional information if a

Y/C or CVBS source is present. The presence of an external Y/C source makes this line 'high' while a CVBS source makes the line 'low'.

- **SEL-MAIN-FRNT-RR.** This is the source select control signal from the microprocessor. This control line is under user control or can be activated by the other two control lines.

Power Supply Control

The microprocessor part is supplied with 3.3 V and 3.9 V both derived from the 'MainAux' voltage via a 3V3 stabilizer (7560) and a diode.

Two signals are used to control the power supply:

- **Stdbby_con.** This signal is generated by the microprocessor when over-current takes place at the 'MainAux' line. This is done to enable the power supply into standby burst mode, and to enable this mode during a protection. This signal is 'low' under normal operation conditions and goes to 'high' (3.3 V) under 'standby' and 'fault' conditions.
- **POWER_DOWN.** This signal is generated by the power supply. Under normal operating conditions, this signal is 'high' (3.3 V). During 'standby' mode, this signal is a pulse train of approx. 10 Hz and a 'high' duration of 5 ms. It is used to give information to the UOC about the fault condition in the Audio amplifier supply circuit. This information is generated by sensing the current on the 'MainAux' line (using voltage drop across R3564 to trigger Q7562). This signal goes 'low' when the DC-current on the 'MainAux' line exceeds 1.6 - 2.0 A. It is also used to give an early warning to the UOC about a power failure. Then the information is used to mute the sound amplifier to prevent a switch off noise and to solve the switch-off spot.

Protection Events

Several protection events are controlled by the UOC:

- **BC protection** , to protect the picture tube from a too high beam current. The UOC has the capability of measuring the normal back level current during the vertical flyback. So if for some reason the CRT circuit is malfunctioning (i.e. high beam current), the normal black current will be out of the 75 A range, and the UOC will trigger the power supply to shut down. However, this is a high beam-current situation, the TV screen will be bright white before the set is shut down.
- **E/W protection** , two protection mechanisms are built in, over-current and over-voltage.
 - In case of over-current due to defective parts in the line deflection output stage, a high current will flow through resistors 3405//3406. If this current is large enough to create a voltage drop of 0.7 V across 3405//3406, transistor Q7606 (in A7 diagram) will conduct and pin 80 of the UOC will be pulled down. Thereafter, the UOC will shut down the power supply. In case of further current increase, the fused resistor 3411 is built-in for double protection.
 - In case of a high voltage appearing across capacitor 2401 (dependent of the tube size), which is high enough to trigger zener diode 6401 into conduction, transistor Q7606 (in A7 diagram) will conduct and UOC is triggered to shut down the power supply.
- **I²C protection** , to check whether all I²C ICs are functioning.

In case one of these protections is activated, the set will go into 'standby'.

The 'on' and 'standby' LEDs are controlled via the UOC.

Abbreviation list

Abbreviation	Description
2CS	2 Carrier (or Channel) Stereo
ACI	Automatic Channel Installation: algorithm that installs TV sets directly from cable network by means of a predefined TXT page
ADC	Analogue to Digital Converter
AFC	Automatic Frequency Control: control signal used to tune to the correct frequency
AFT	Automatic Fine Tuning
AGC	Automatic Gain Control: algorithm that controls the video input of the feature box
AM	Amplitude Modulation
AP	Asia Pacific
AR	Aspect Ratio: 4 by 3 or 16 by 9
ATS	Automatic Tuning System
AV	External Audio Video
AVL	Automatic Volume Level
BC-PROT	Beam Current Protection
BCL	Beam Current Limitation
B/G	Monochrome TV system. Sound carrier distance is 5.5 MHz

BLC-INFORMATION	Black current information
BTSC	Broadcast Television Standard Committee. Multiplex FM stereo sound system, originating from the USA and used e.g. in LATAM and AP-NTSC countries
B-TXT	Blue teletext
CBA	Circuit Board Assembly
CC	Closed Caption
ComPair	Computer aided rePair
CRT	Cathode Ray Tube or picture tube
CSM	Customer Service Mode
CTI	Color Transient Improvement: manipulates steepness of chroma transients
CVBS	Composite Video Blanking and Synchronization
DAC	Digital to Analogue Converter
DBE	Dynamic Bass Enhancement: extra low frequency amplification
DBX	Dynamic Bass Expander
D/K	Monochrome TV system. Sound carrier distance is 6.5 MHz
DFU	Direction For Use: description for the end user
DNR	Dynamic Noise Reduction
DSP	Digital Signal Processing

DST	Dealer Service Tool: special remote control designed for dealers to enter e.g. service mode
DVD	Digital Versatile Disc
EEPROM	Electrically Erasable and Programmable Read Only Memory
EHT	Extra High Tension
EHT-INFORMATION	Extra High Tension information
EU	Europe
EW	East West, related to horizontal deflection of the set
EXT	External (source), entering the set via SCART or Cinch
FBL	Fast Blanking: DC signal accompanying RGB signals
FILAMENT	Filament of CRT
FLASH	Flash memory
FM	Field Memory
FM	Frequency Modulation
HA	Horizontal Acquisition: horizontal sync pulse coming out of the HIP
HFB	Horizontal Flyback Pulse: horizontal sync pulse from large signal deflection
HP	Headphone
Hue	Color phase control for NTSC (not the same as 'Tint')

I	Monochrome TV system. Sound carrier distance is 6.0 MHz
I2C	Integrated IC bus
IF	Intermediate Frequency
IIC	Integrated IC bus
Interlaced	Scan mode where two fields are used to form one frame. Each field contains half the number of the total amount of lines. The fields are written in 'pairs', causing line flicker.
ITV	Institutional TV
LATAM	Latin America
LED	Light Emitting Diode
L/L'	Monochrome TV system. Sound carrier distance is 6.5 MHz. L' is Band I, L is all bands except for Band I
LNA	Low Noise Amplifier
LS	Large Screen
LS	Loudspeaker
LSP	Large signal panel
M/N	Monochrome TV system. Sound carrier distance is 4.5 MHz
MSP	Multistandard Sound Processor: ITT sound decoder
MUTE	Mute-Line

NC	Not Connected
NICAM	Near Instantaneous Compounded Audio Multiplexing. This is a digital sound system, mainly used in Europe.
NTSC	National Television Standard Committee. Color system mainly used in North America and Japan. Color carrier NTSC M/N = 3.579545 MHz, NTSC 4.43 = 4.433619 MHz (this is a VCR norm, it is not transmitted off-air)
NVM	Non Volatile Memory: IC containing TV related data e.g. alignments
OB	Option Byte
OC	Open Circuit
OSD	On Screen Display
PAL	Phase Alternating Line. Color system mainly used in West Europe (color carrier = 4.433619 MHz) and South America (color carrier PAL M = 3.575612 MHz and PAL N = 3.582056 MHz)
PCB	Printed Circuit board
PIP	Picture In Picture
PLL	Phase Locked Loop. Used for e.g. FST tuning systems. The customer can give directly the desired frequency
POR	Power-On Reset
Progressive Scan	Scan mode where all scan lines are displayed in one frame at the same time, creating a double vertical resolution.

PTP	Picture Tube Panel (or CRT-panel)
RAM	Random Access Memory
RC	Remote Control handset
RC5	Remote Control system 5, signal from the remote control receiver
RGB	Red Green Blue
ROM	Read Only Memory
SAM	Service Alignment Mode
SAP	Second Audio Program
SC	Sandcastle: pulse derived from sync signals
S/C	Short Circuit
SCAVEM	Scan Velocity Modulation
SCL	Serial Clock
SDA	Serial Data
SDM	Service Default Mode
SECAM	SEquence Couleur Avec Memoire. Color system mainly used in France and East Europe. Color carriers = 4.406250 MHz and 4.250000 MHz
SIF	Sound Intermediate Frequency
SS	Small Screen
STBY	Standby


SVHS	Super Video Home System
SW	Software
THD	Total Harmonic Distortion
TXT	Teletext
uP	Microprocessor
UOC	Ultimate One Chip
VA	Vertical Acquisition
VBAT	Main supply voltage for the deflection stage (mostly 141 V)
V-chip	Violence Chip
VCR	Video Cassette Recorder
WYSIWYR	What You See Is What You Record: record selection that follows main picture and sound
XTAL	Quartz crystal
YC	Luminance (Y) and Chrominance (C) signal

IC Data Sheets


In this paragraph, the internal block diagrams and pinning are given of ICs that are drawn as a 'black box' in the electrical diagrams (with the exception of 'memory' and 'logic' ICs).

This is not applicable for this manual (all ICs are drawn with internal block diagrams)


P2




L1




L2




L3




L4




F1




F2




F3




F4




I1




I2




I4




V4




V5




V6




V7




V8




V9




V10



S1




S2




10V / div DC
20μs / div

S3




500mV / div DC
5ms / div

S4




500mV / div DC
5ms / div

S5




500mV / div DC
5ms / div

C1




500mV / div DC
1ms / div

C2




500mV / div DC
1ms / div

C3




200mV / div DC
1ms / div

C4




10V / div DC
100μs / div

C5




10V / div DC
100μs / div

A1




200mV / div AC
1ms / div

A2




200mV / div AC
1ms / div

A3




200mV / div AC
1ms / div

A4




200mV / div AC
1ms / div

A5




200mV / div AC
1ms / div

A6




200mV / div AC
1ms / div

A7




200mV / div AC
1ms / div

A8




200mV / div AC
1ms / div

A8a




200mV / div AC
1ms / div

A9




200mV / div AC
1ms / div

A10




200mV / div AC
1ms / div

A11




200mV / div AC
1ms / div

A11a




200mV / div AC
1ms / div

A12




200mV / div AC
1ms / div

A13




10V / div DC
20μs / div

A14




10V / div DC
20μs / div

A15




10V / div DC
1ms / div

A16




10V / div DC
1ms / div

C6



10V / div DC
2ms / div

V11




10V / div DC
20μs / div

V12




10V / div DC
20μs / div

V13




10V / div DC
20μs / div

V14




50V / div DC
20μs / div

V15




50V / div DC
20μs / div

V16



50V / div DC
20μs / div

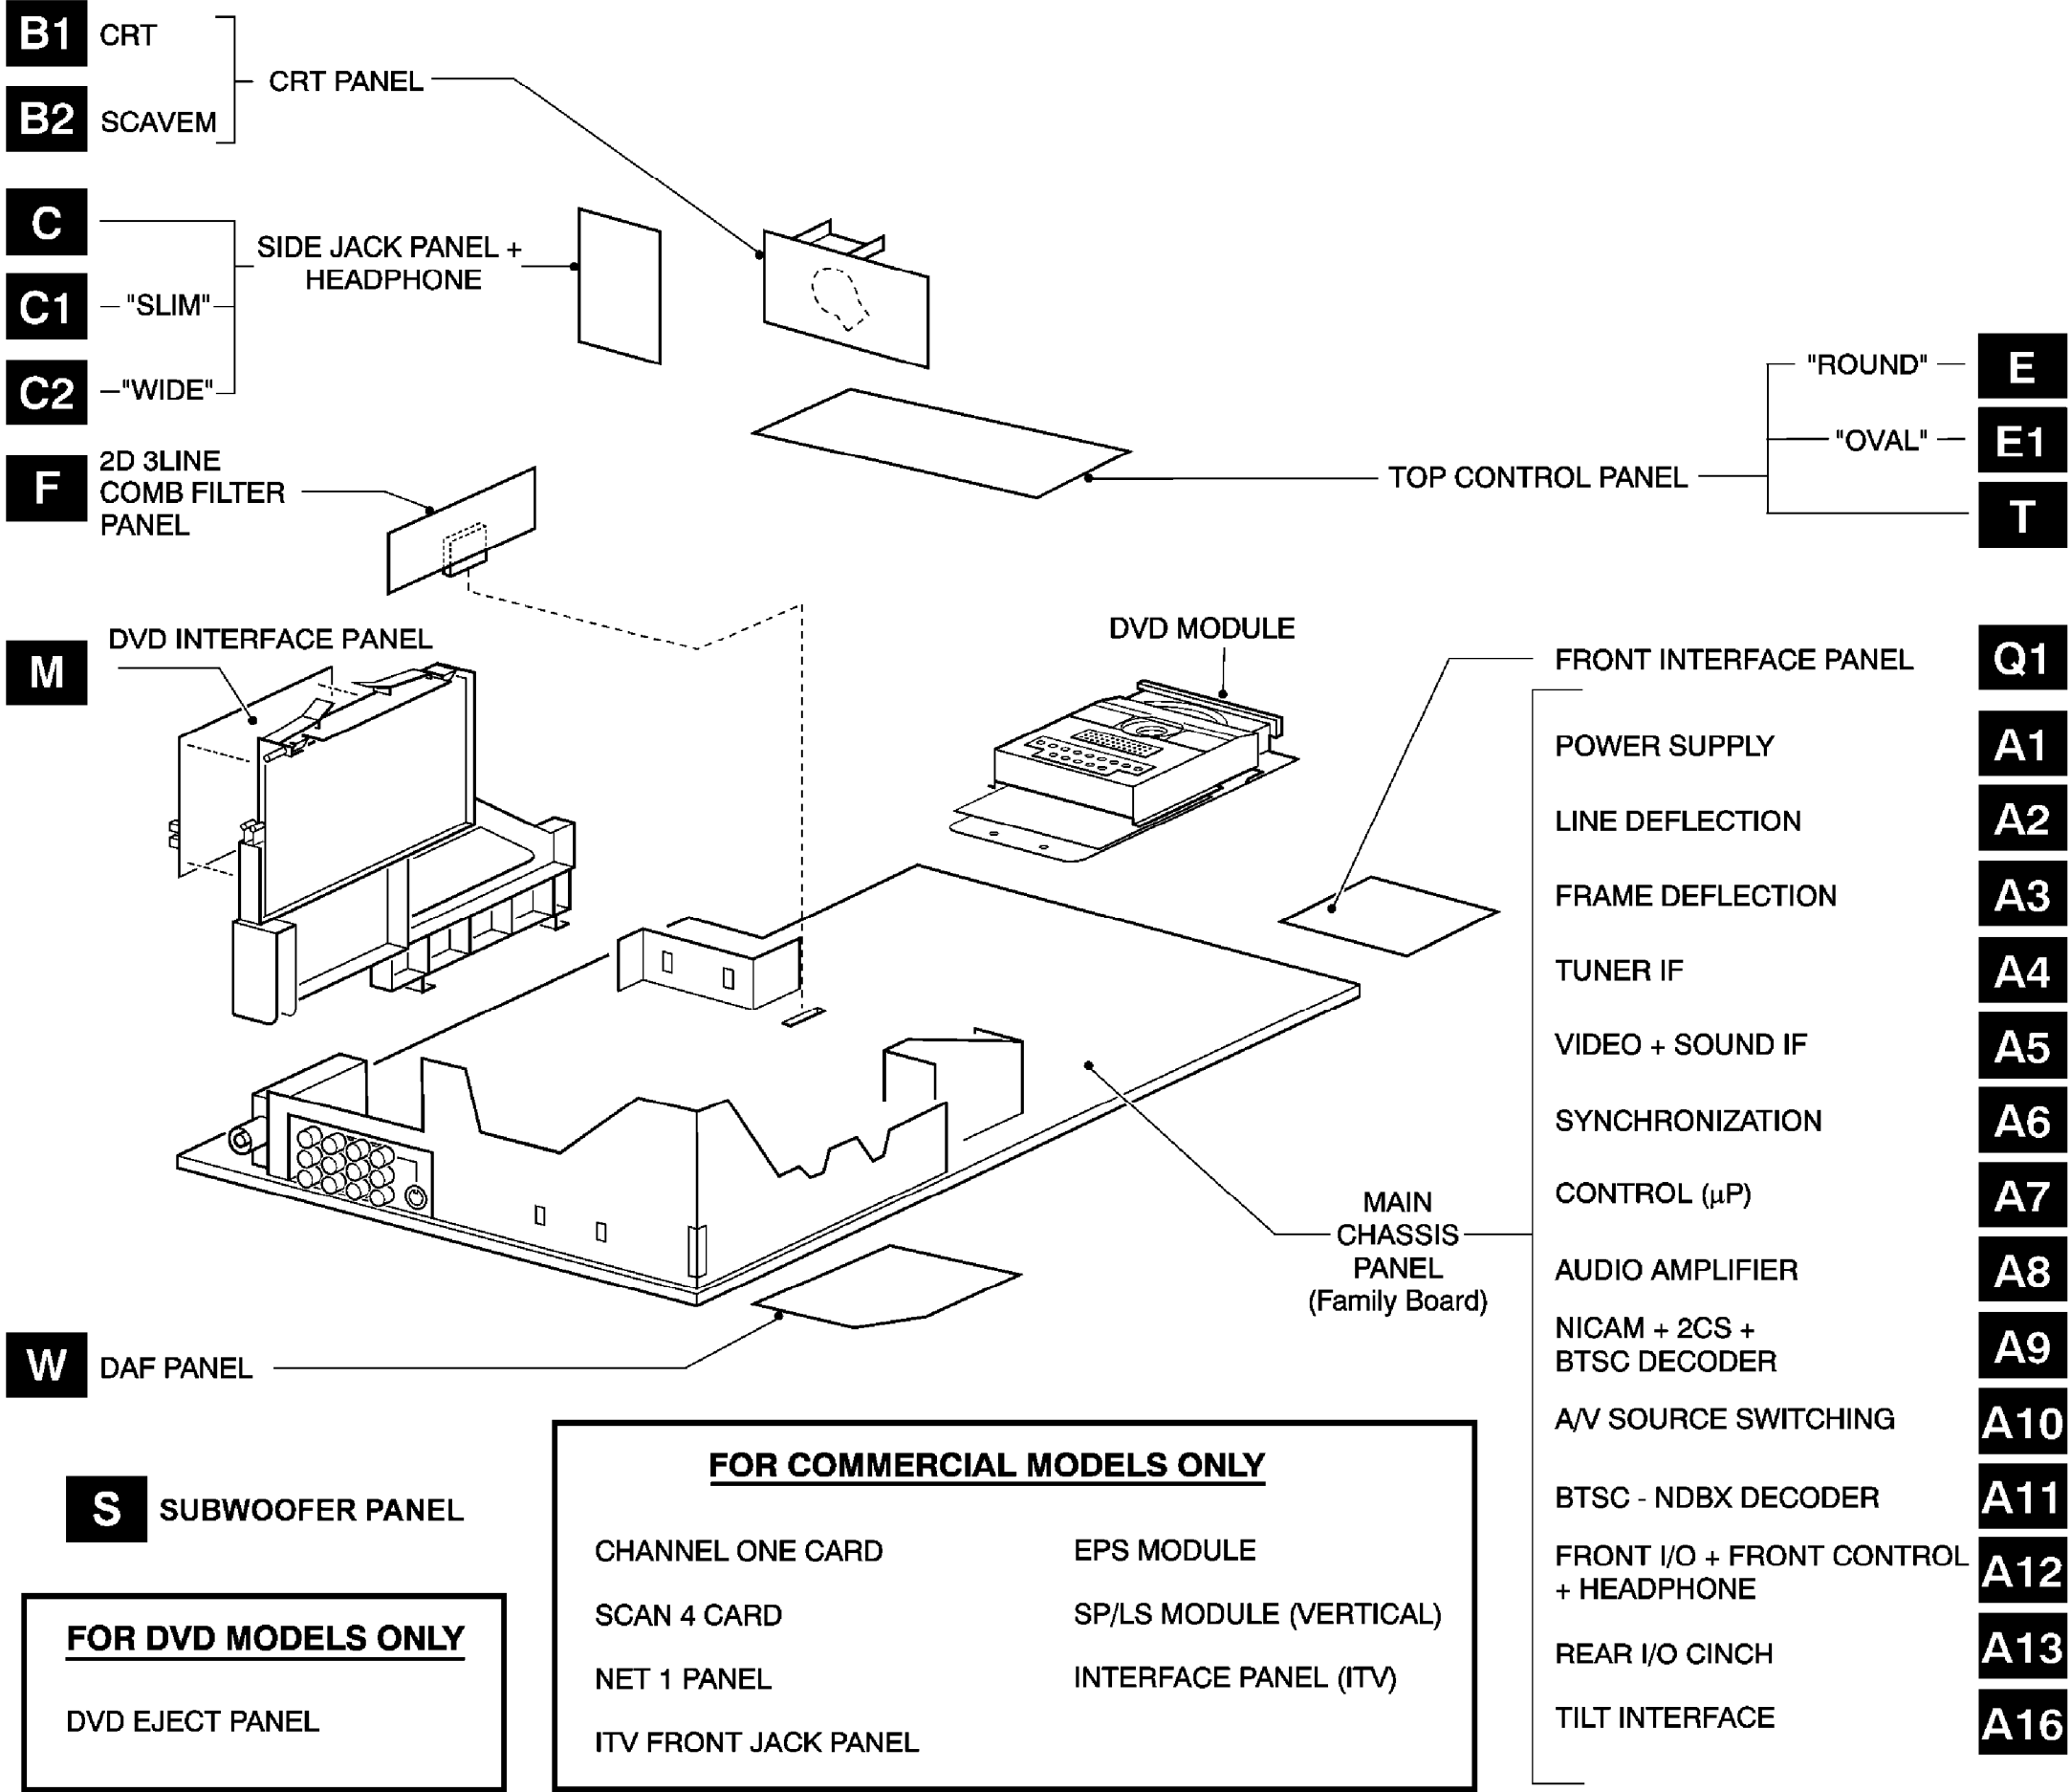

ACTIVATE HOT SPOTS AND
CLICK HERE FOR CONTENTS OF KIT

DEGAUSSING COIL TO 1505 OF G / W

MAINS 150 - 276 V SINGLE RANGE 90 - 276 V FULL RANGE

OR TO 0283 OF Q1

9505 3504 ZPB

9500 0231 SDW

1500 T4E.250V 9502 for ITV only

9508 5501 9506 5500 9509 3508 9507 3507 DSP

0213 FOR ITV ONLY

7522 BC847B

7521 BZX284-C22

7515 TCET1104G4

7541 PDTC114ET

7542 BC857B

7540 BC547B

7560 LE33CZ

7564 BC857B

7561 PDTC1432T

7562 BC857B

7563 BAS316

7564 BC857B

7565 BAS216

7566 BAS216

7567 BAS216

7568 BAS216

7569 BAS216

7570 BAS216

7571 BAS216

7572 BAS216

7573 BAS216

7574 BAS216

7575 BAS216

7576 BAS216

7577 BAS216

7578 BAS216

7579 BAS216

7580 BAS216

7581 BAS216

7582 BAS216

7583 BAS216

7584 BAS216

7585 BAS216

7586 BAS216

7587 BAS216

7588 BAS216

7589 BAS216

7590 BAS216

7591 BAS216

7592 BAS216

7593 BAS216

7594 BAS216

7595 BAS216

7596 BAS216

7597 BAS216

7598 BAS216

7599 BAS216

7600 BAS216

7601 BAS216

7602 BAS216

7603 BAS216

7604 BAS216

7605 BAS216

7606 BAS216

7607 BAS216

7608 BAS216

7609 BAS216

7610 BAS216

7611 BAS216

7612 BAS216

7613 BAS216

7614 BAS216

7615 BAS216

7616 BAS216

7617 BAS216

7618 BAS216

7619 BAS216

7620 BAS216

7621 BAS216

7622 BAS216

7623 BAS216

7624 BAS216

7625 BAS216

7626 BAS216

7627 BAS216

7628 BAS216

7629 BAS216

7630 BAS216

7631 BAS216

7632 BAS216

7633 BAS216

7634 BAS216

7635 BAS216

7636 BAS216

7637 BAS216

7638 BAS216

7639 BAS216

7640 BAS216

7641 BAS216

7642 BAS216

7643 BAS216

7644 BAS216

7645 BAS216

7646 BAS216

7647 BAS216

7648 BAS216

7649 BAS216

7650 BAS216

7651 BAS216

7652 BAS216

7653 BAS216

7654 BAS216

7655 BAS216

7656 BAS216

7657 BAS216

7658 BAS216

7659 BAS216

7660 BAS216

7661 BAS216

7662 BAS216

7663 BAS216

7664 BAS216

7665 BAS216

7666 BAS216

7667 BAS216

7668 BAS216

7669 BAS216

7670 BAS216

7671 BAS216

7672 BAS216

7673 BAS216

7674 BAS216

7675 BAS216

7676 BAS216

7677 BAS216

7678 BAS216

7679 BAS216

7680 BAS216

7681 BAS216

7682 BAS216

7683 BAS216

7684 BAS216

7685 BAS216

7686 BAS216

7687 BAS216

7688 BAS216

7689 BAS216

7690 BAS216

7691 BAS216

7692 BAS216

7693 BAS216

7694 BAS216

7695 BAS216

7696 BAS216

7697 BAS216

7698 BAS216

7699 BAS216

7700 BAS216

7701 BAS216

7702 BAS216

7703 BAS216

7704 BAS216

7705 BAS216

7706 BAS216

7707 BAS216

7708 BAS216

7709 BAS216

7710 BAS216

7711 BAS216

7712 BAS216

7713 BAS216

7714 BAS216

7715 BAS216

7716 BAS216

7717 BAS216

7718 BAS216

7719 BAS216

7720 BAS216

7721 BAS216

7722 BAS216

7723 BAS216

7724 BAS216

7725 BAS216

7726 BAS216

7727 BAS216

7728 BAS216

7729 BAS216

7730 BAS216

7731 BAS216

7732 BAS216

7733 BAS216

7734 BAS216

7735 BAS216

7736 BAS216

7737 BAS216

7738 BAS216

7739 BAS216

7740 BAS216

7741 BAS216

7742 BAS216

7743 BAS216

7744 BAS216

7745 BAS216

7746 BAS216

7747 BAS216

7748 BAS216

7749 BAS216

7750 BAS216

7751 BAS216

7752 BAS216

7753 BAS216

7754 BAS216

7755 BAS216

7756 BAS216

7757 BAS216

7758 BAS216

7759 BAS216

7760 BAS216

7761 BAS216

7762 BAS216

7763 BAS216

7764 BAS216

7765 BAS216

7766 BAS216

7767 BAS216

7768 BAS216

7769 BAS216

7770 BAS216

7771 BAS216

7772 BAS216

7773 BAS216

7774 BAS216

7775 BAS216

7776 BAS216

7777 BAS216

7778 BAS216

7779 BAS216

7780 BAS216

7781 BAS216

7782 BAS216

7783 BAS216

7784 BAS216

7785 BAS216

7786 BAS216

7787 BAS216

7788 BAS216

7789 BAS216

7790 BAS216

7791 BAS216

7792 BAS216

7793 BAS216

7794 BAS216

7795 BAS216

7796 BAS216

7797 BAS216

7798 BAS216

7799 BAS216

7800 BAS216

7801 BAS216

7802 BAS216

7803 BAS216

7804 BAS216

7805 BAS216

7806 BAS216

7807 BAS216

7808 BAS216

7809 BAS216

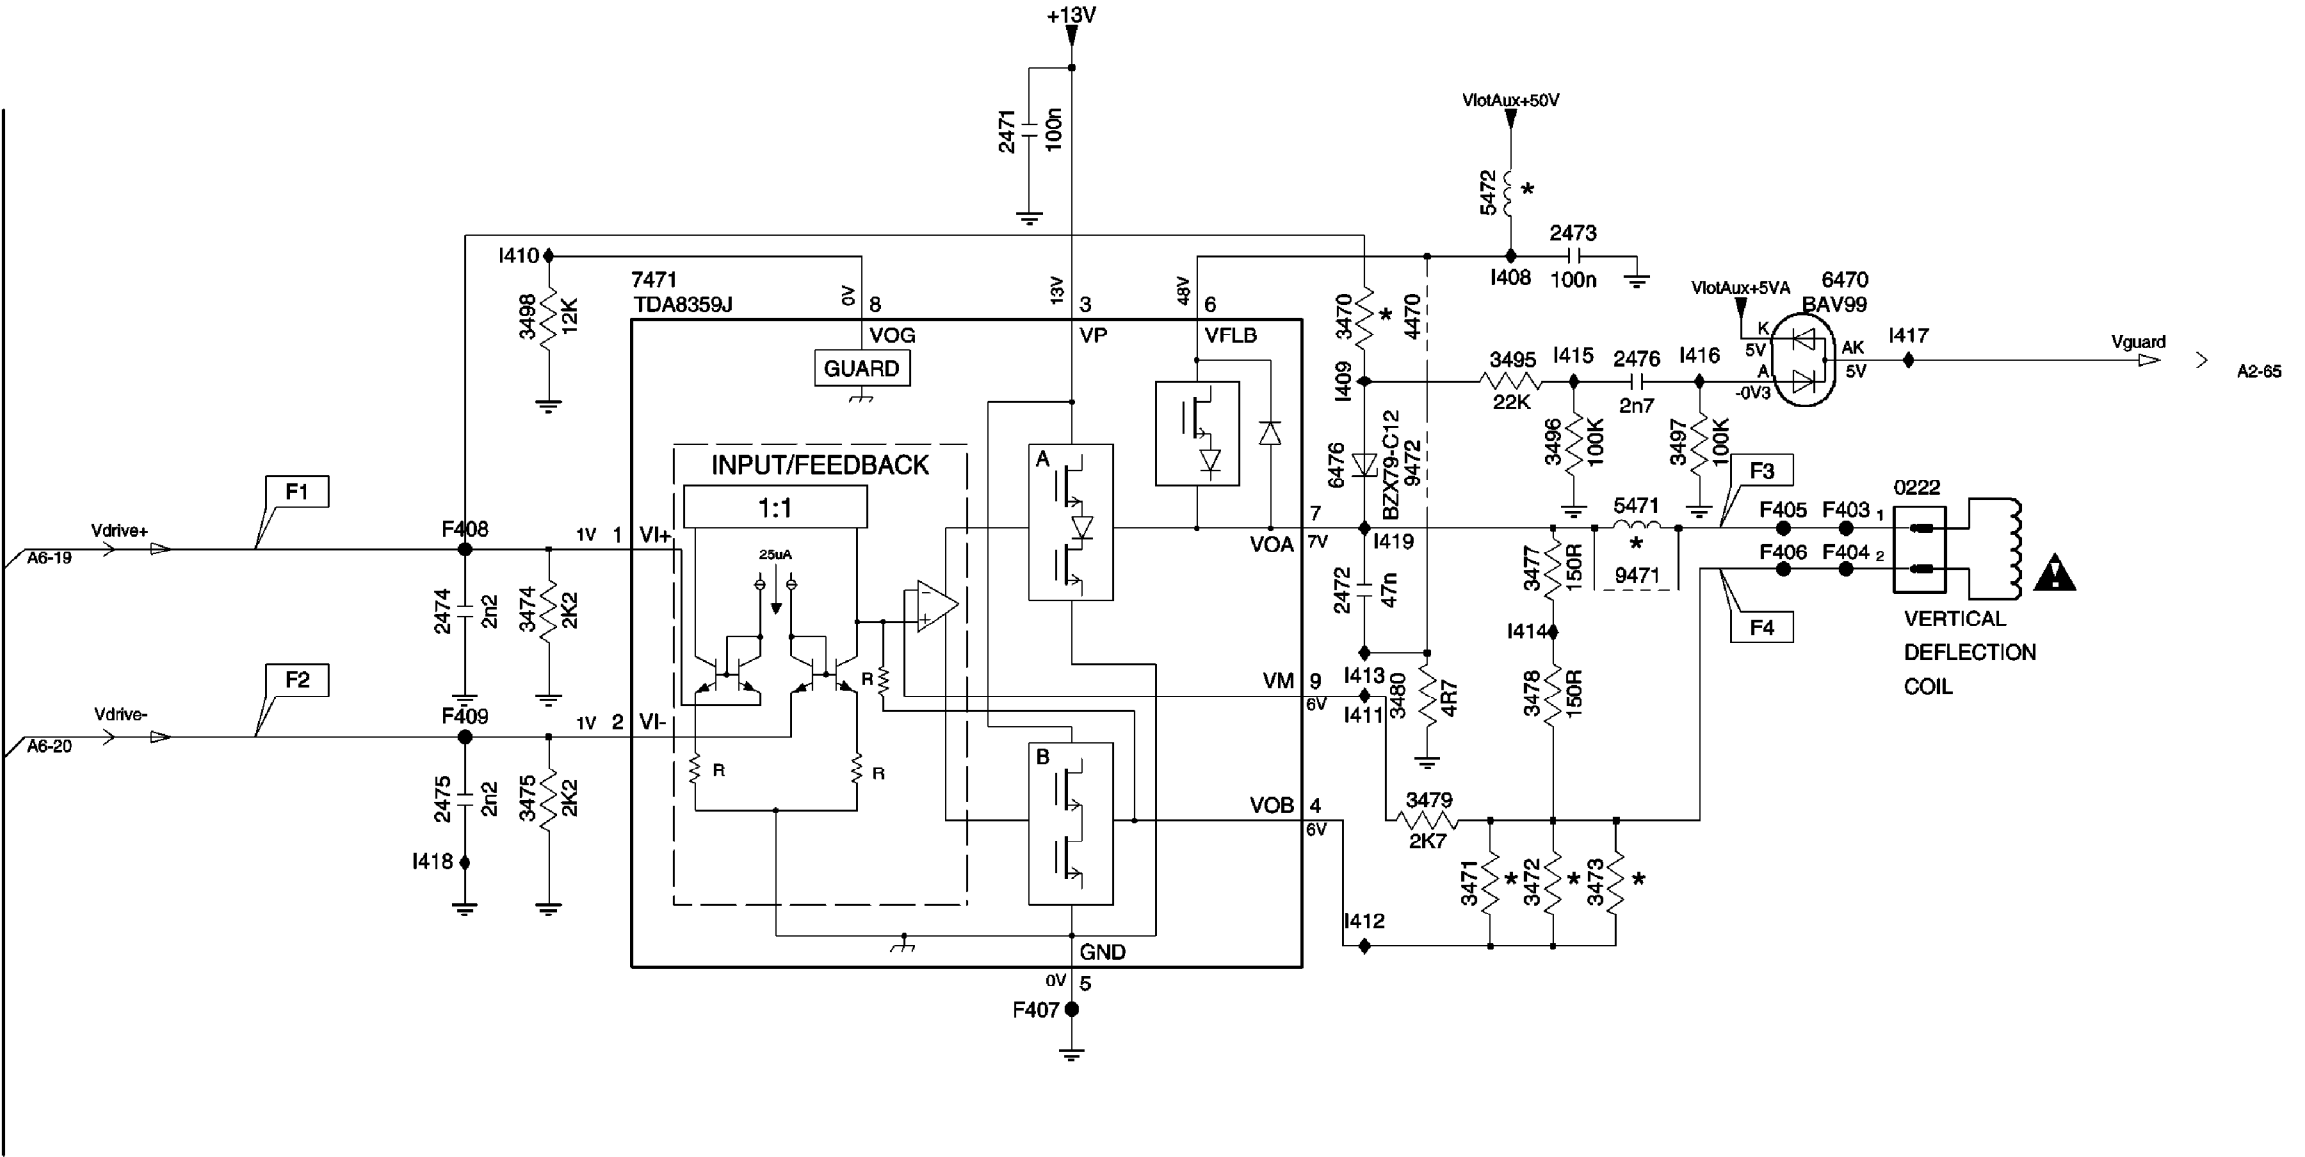
7810 BAS216

7811 BAS216


7812 BAS216


A3 FRAME DEFLECTION

VERTICAL REPAIR KIT
P/N 4835 310 57582
ACTIVATE HOT SPOTS AND
CLICK HERE FOR CONTENTS OF KIT





A 4 TUNER IF

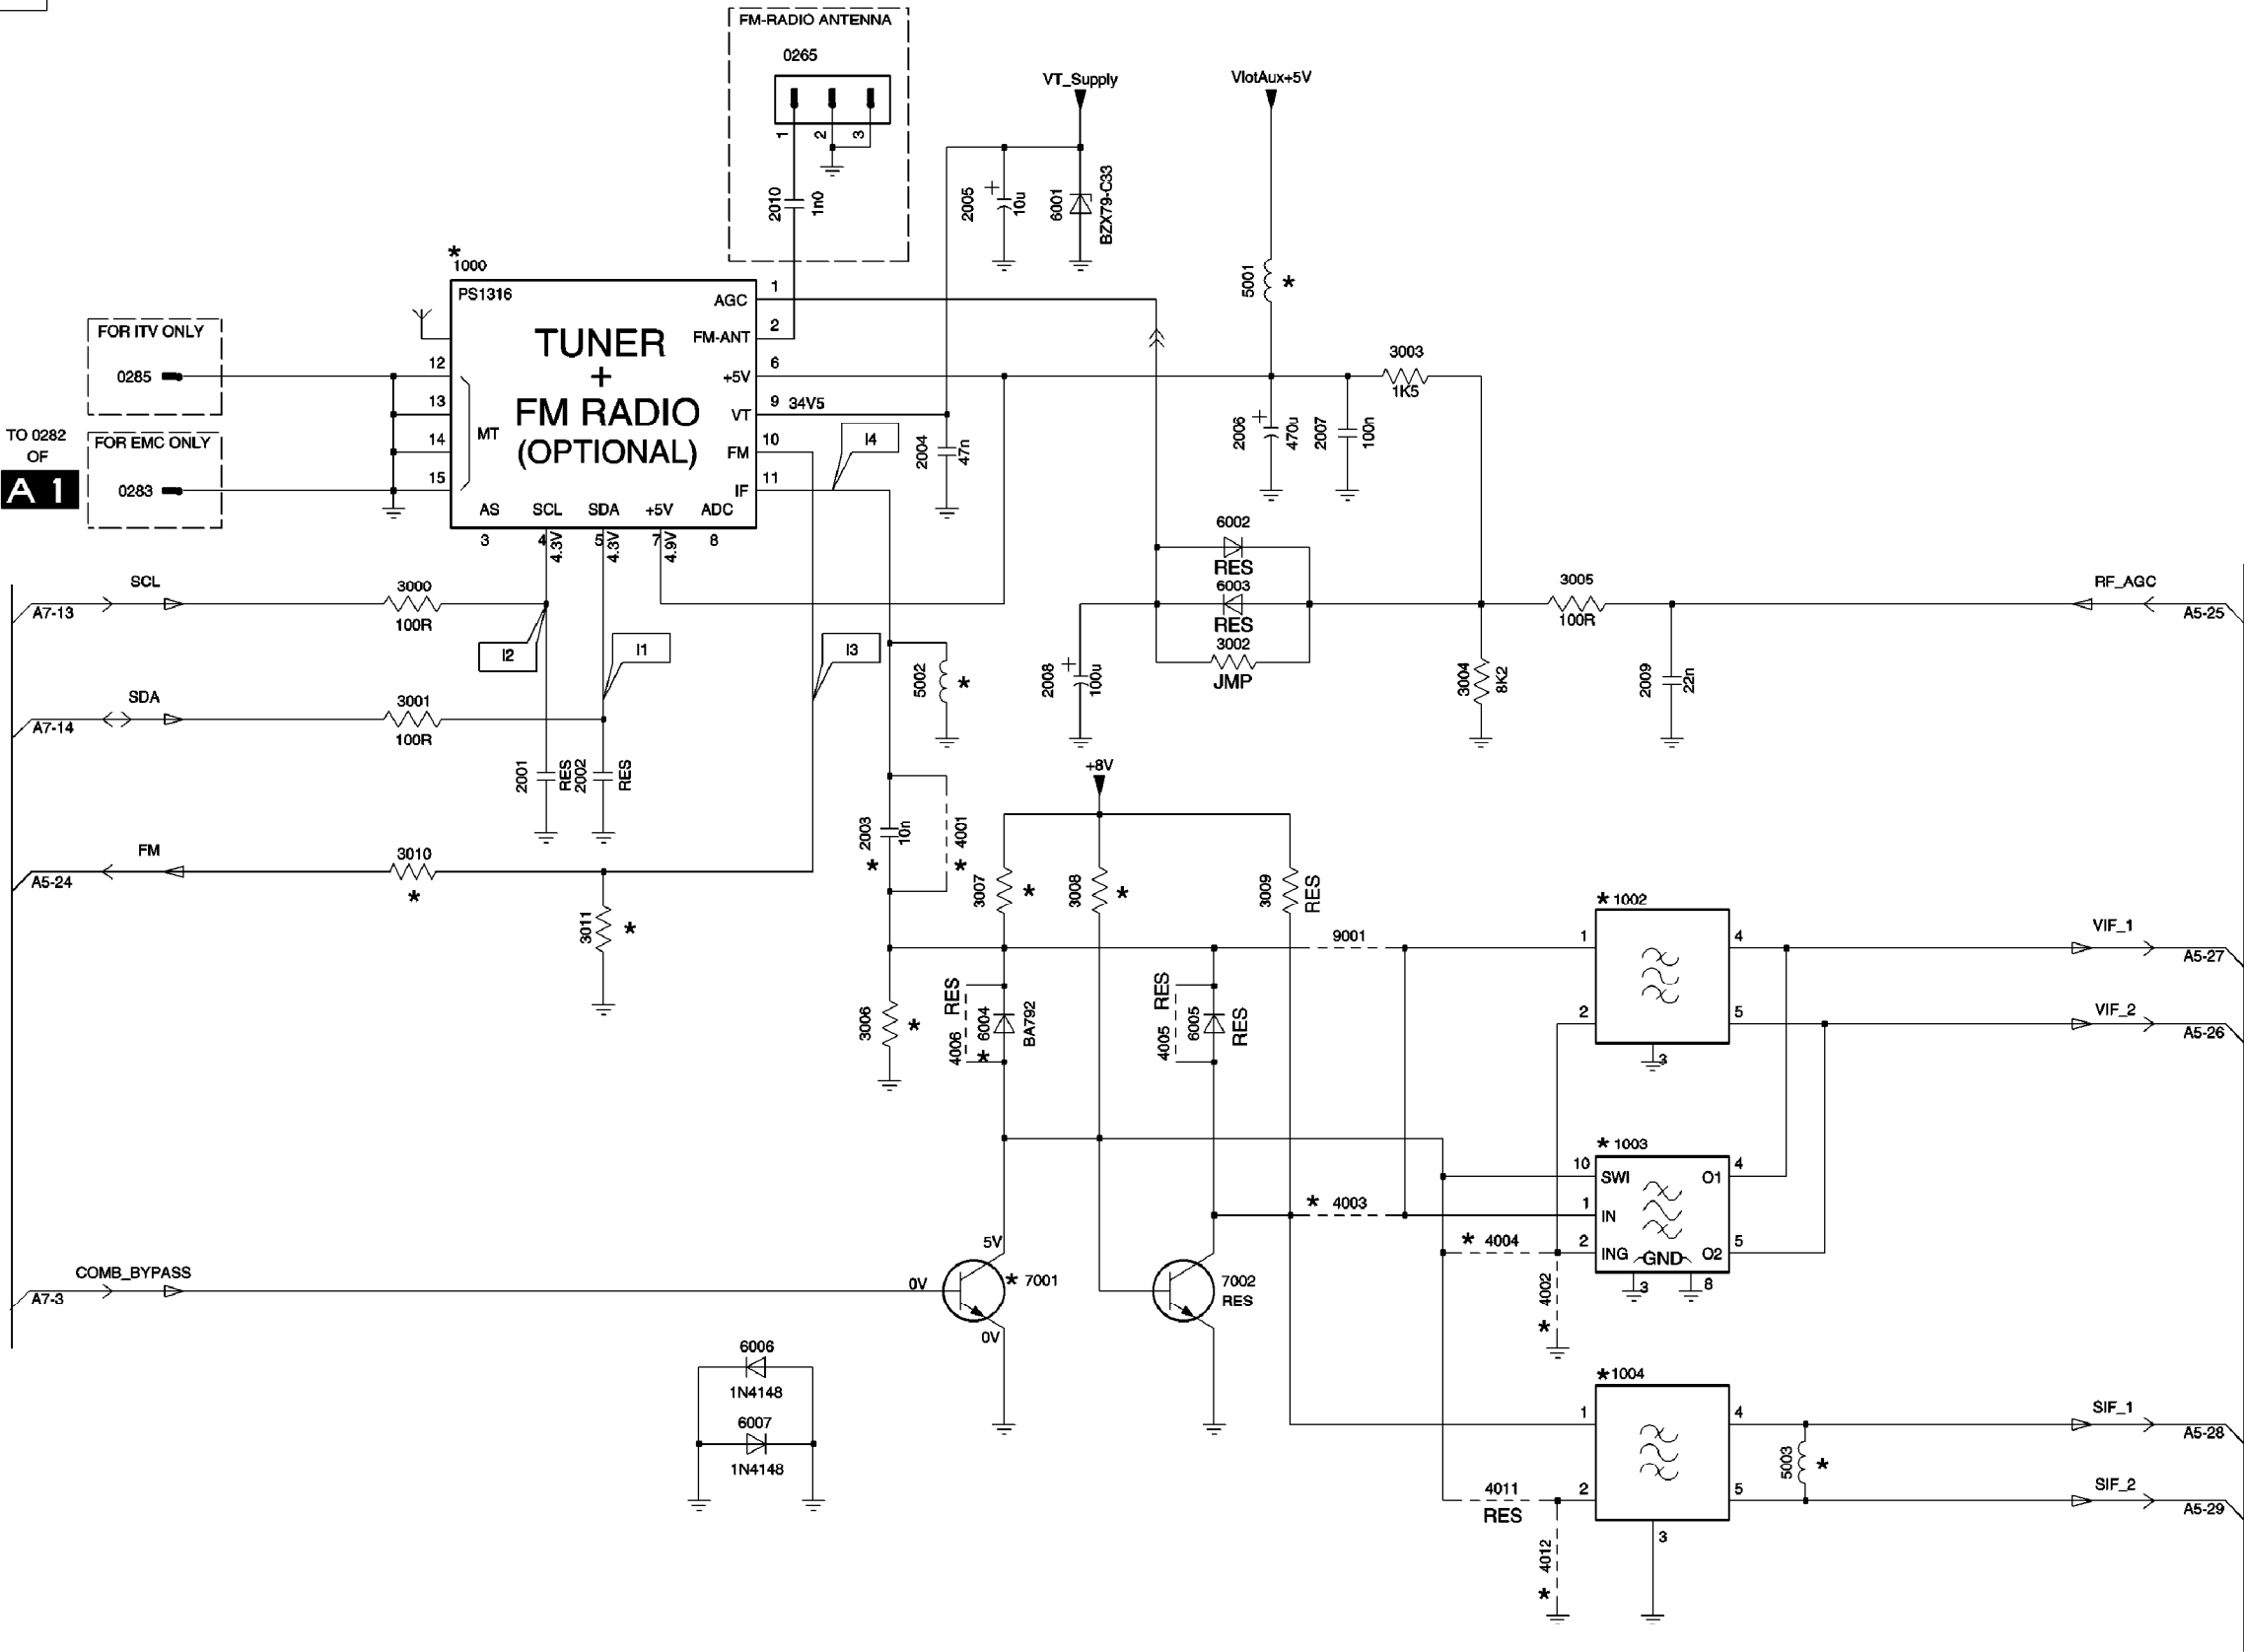


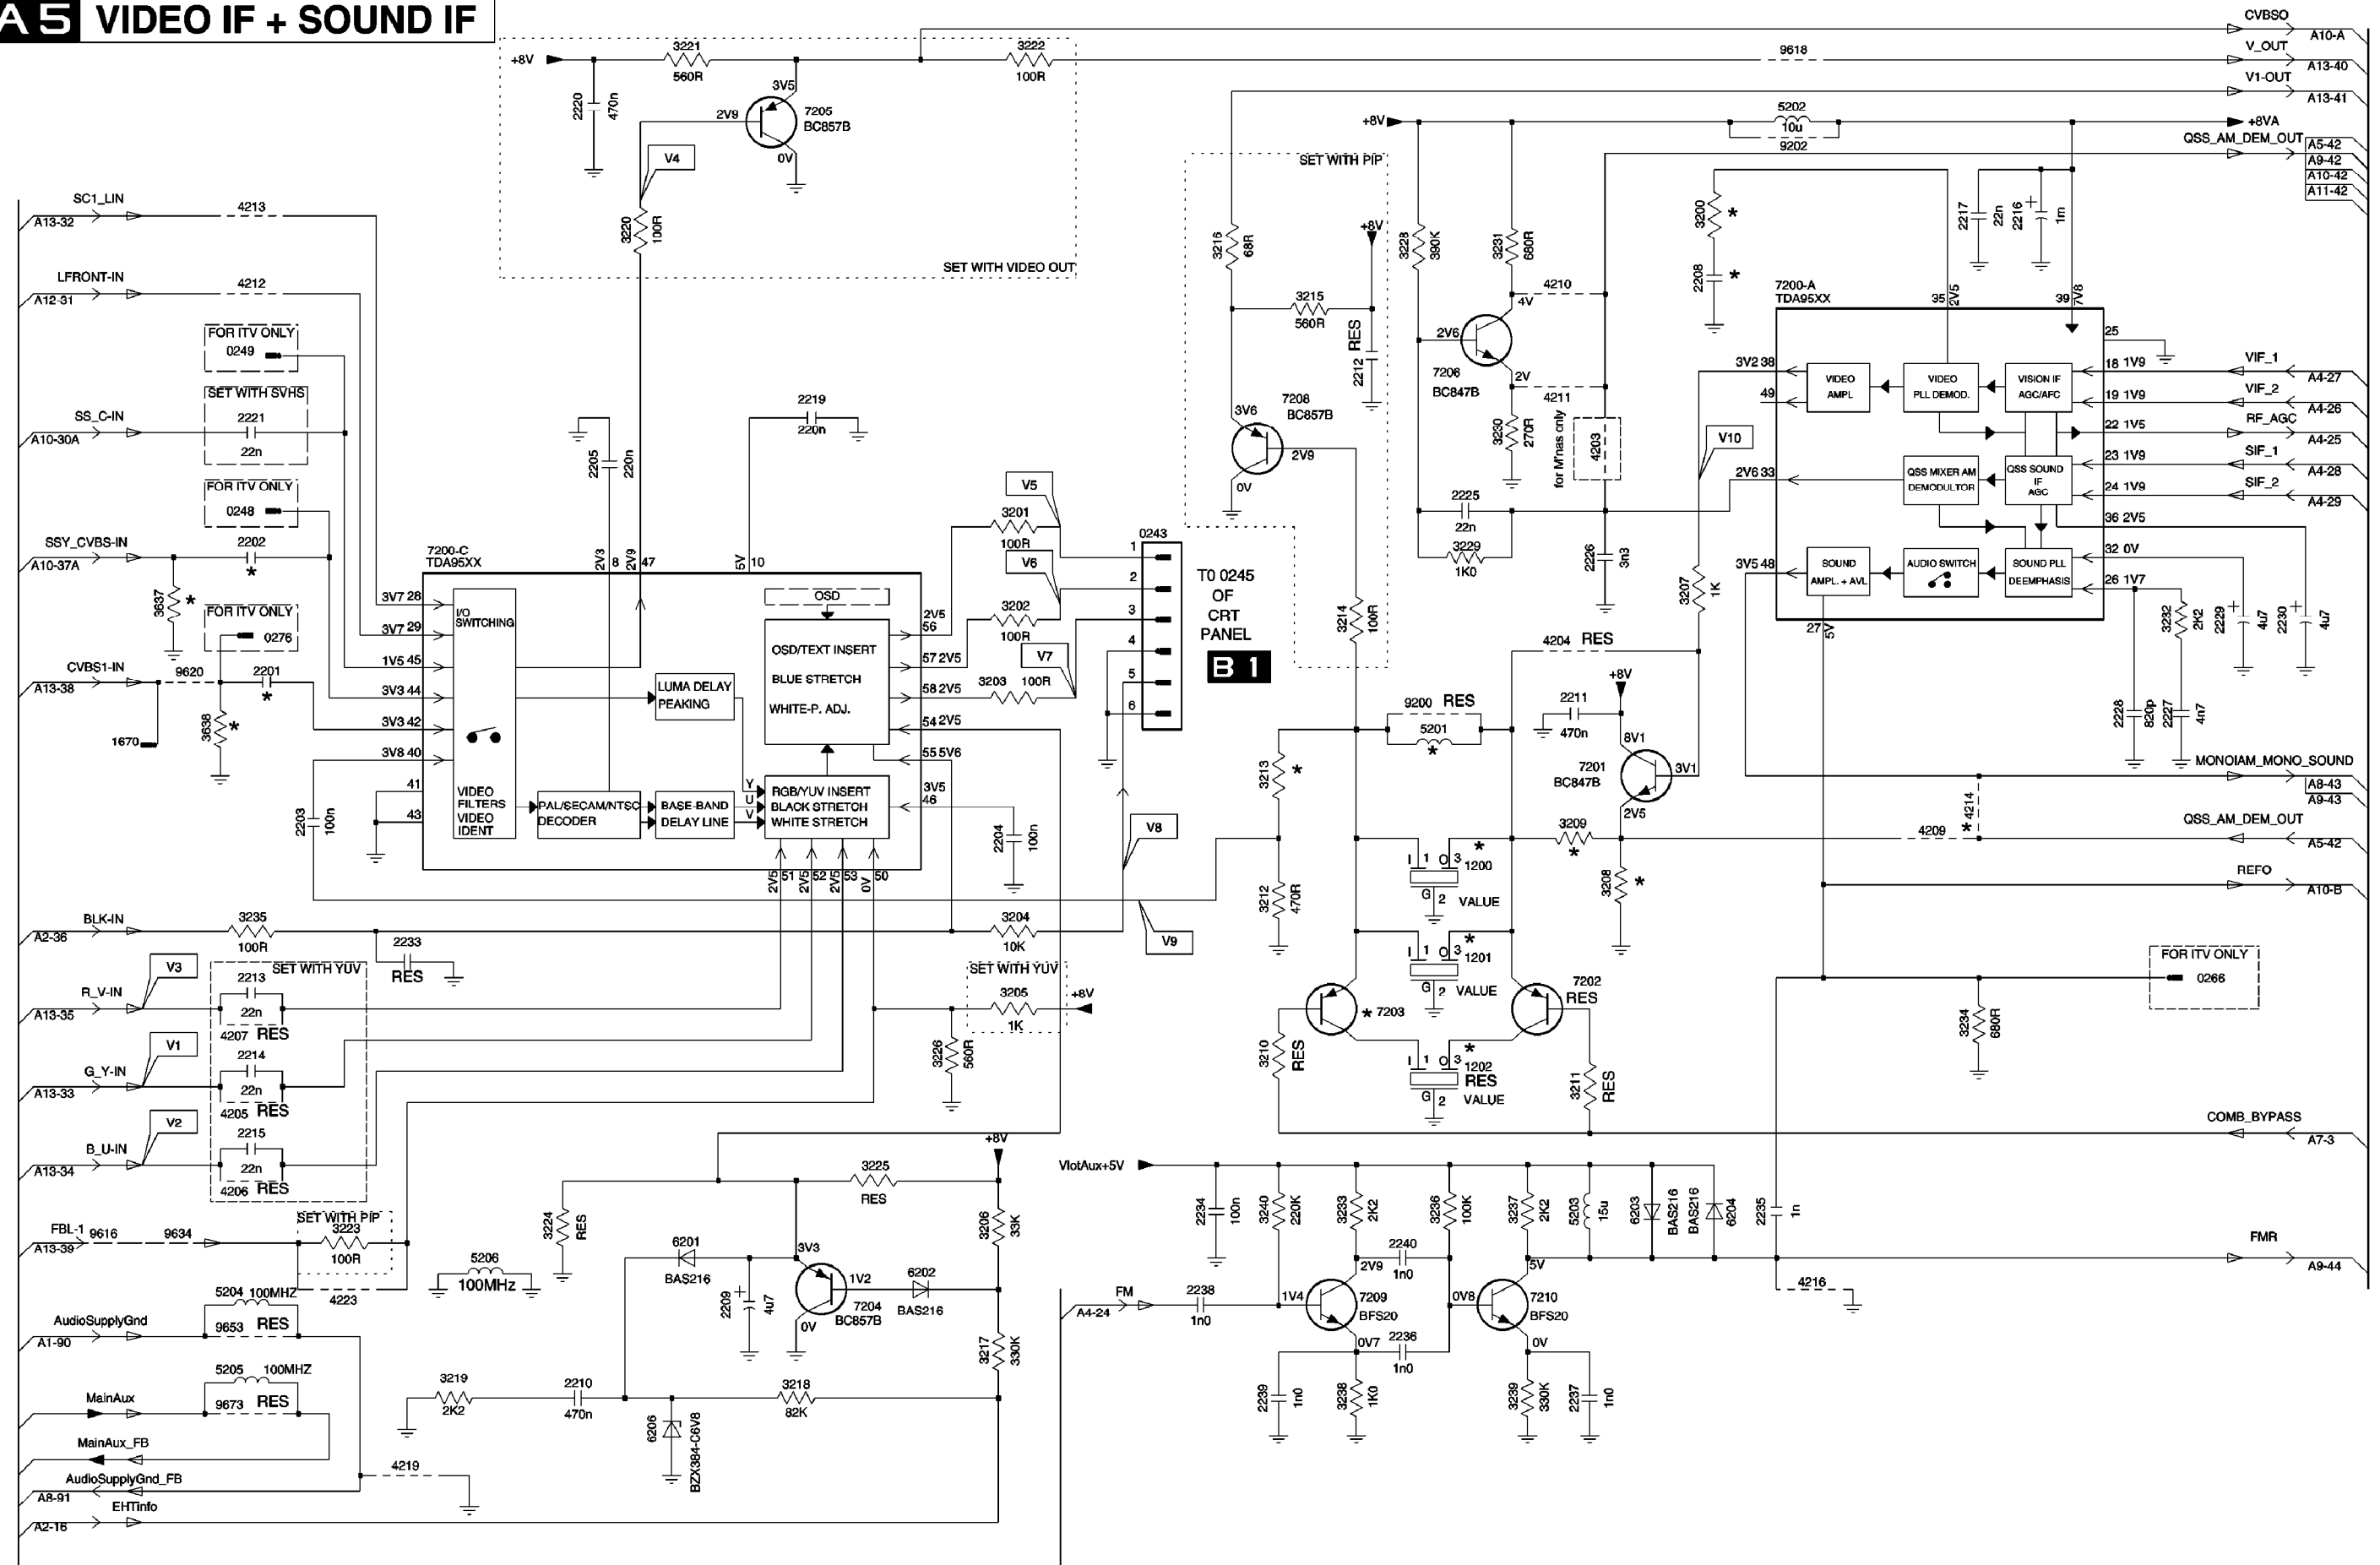

A 6 SYNCHRONISATION

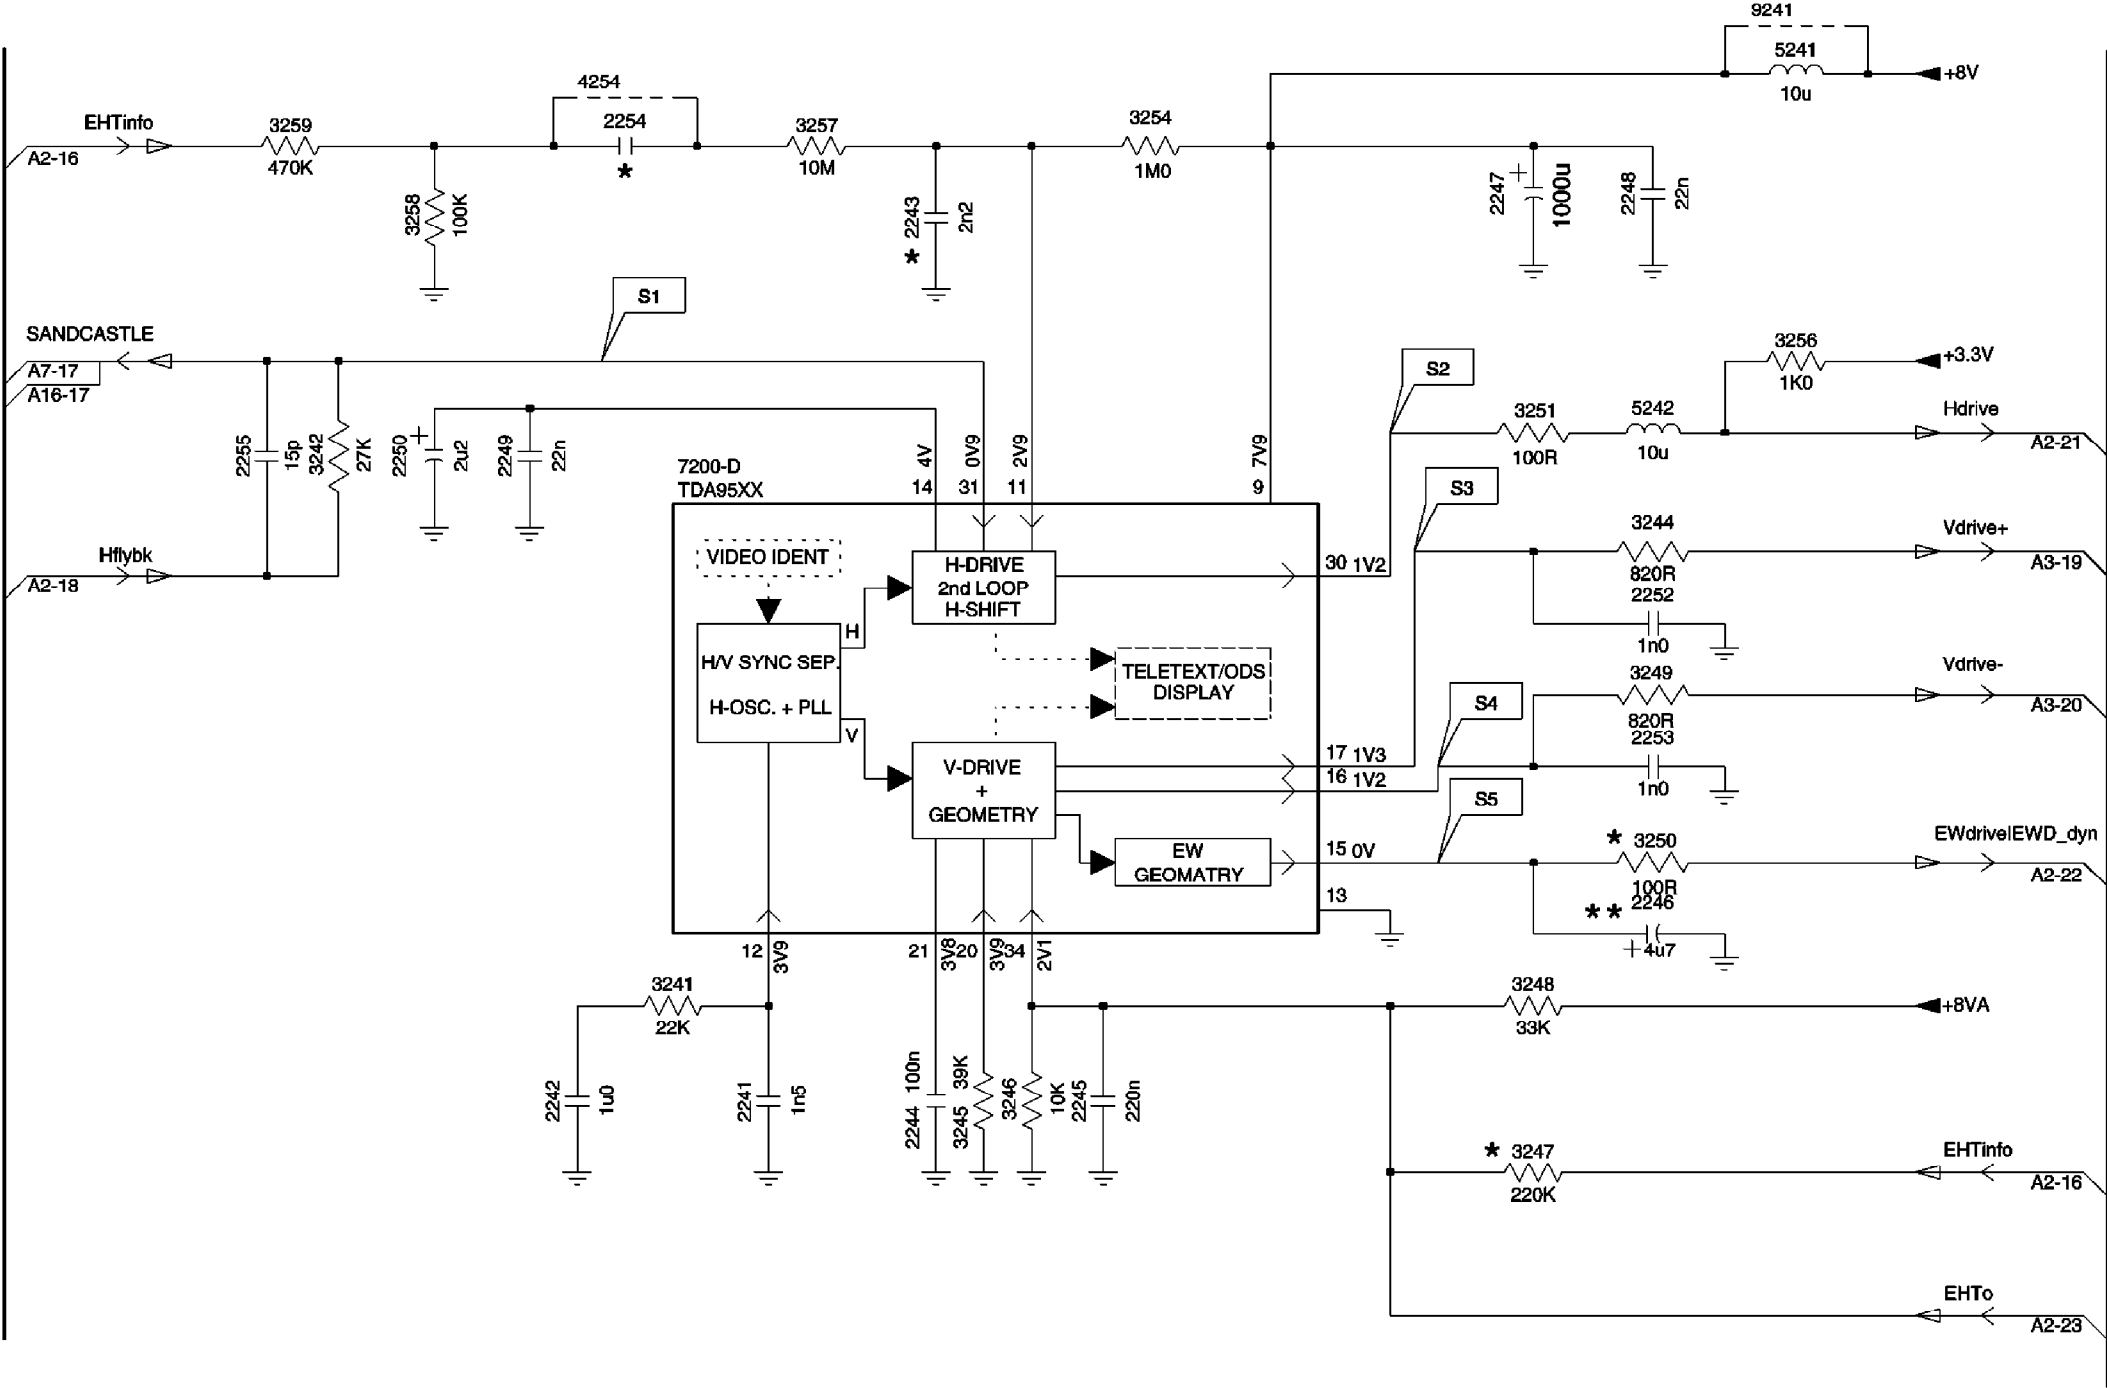


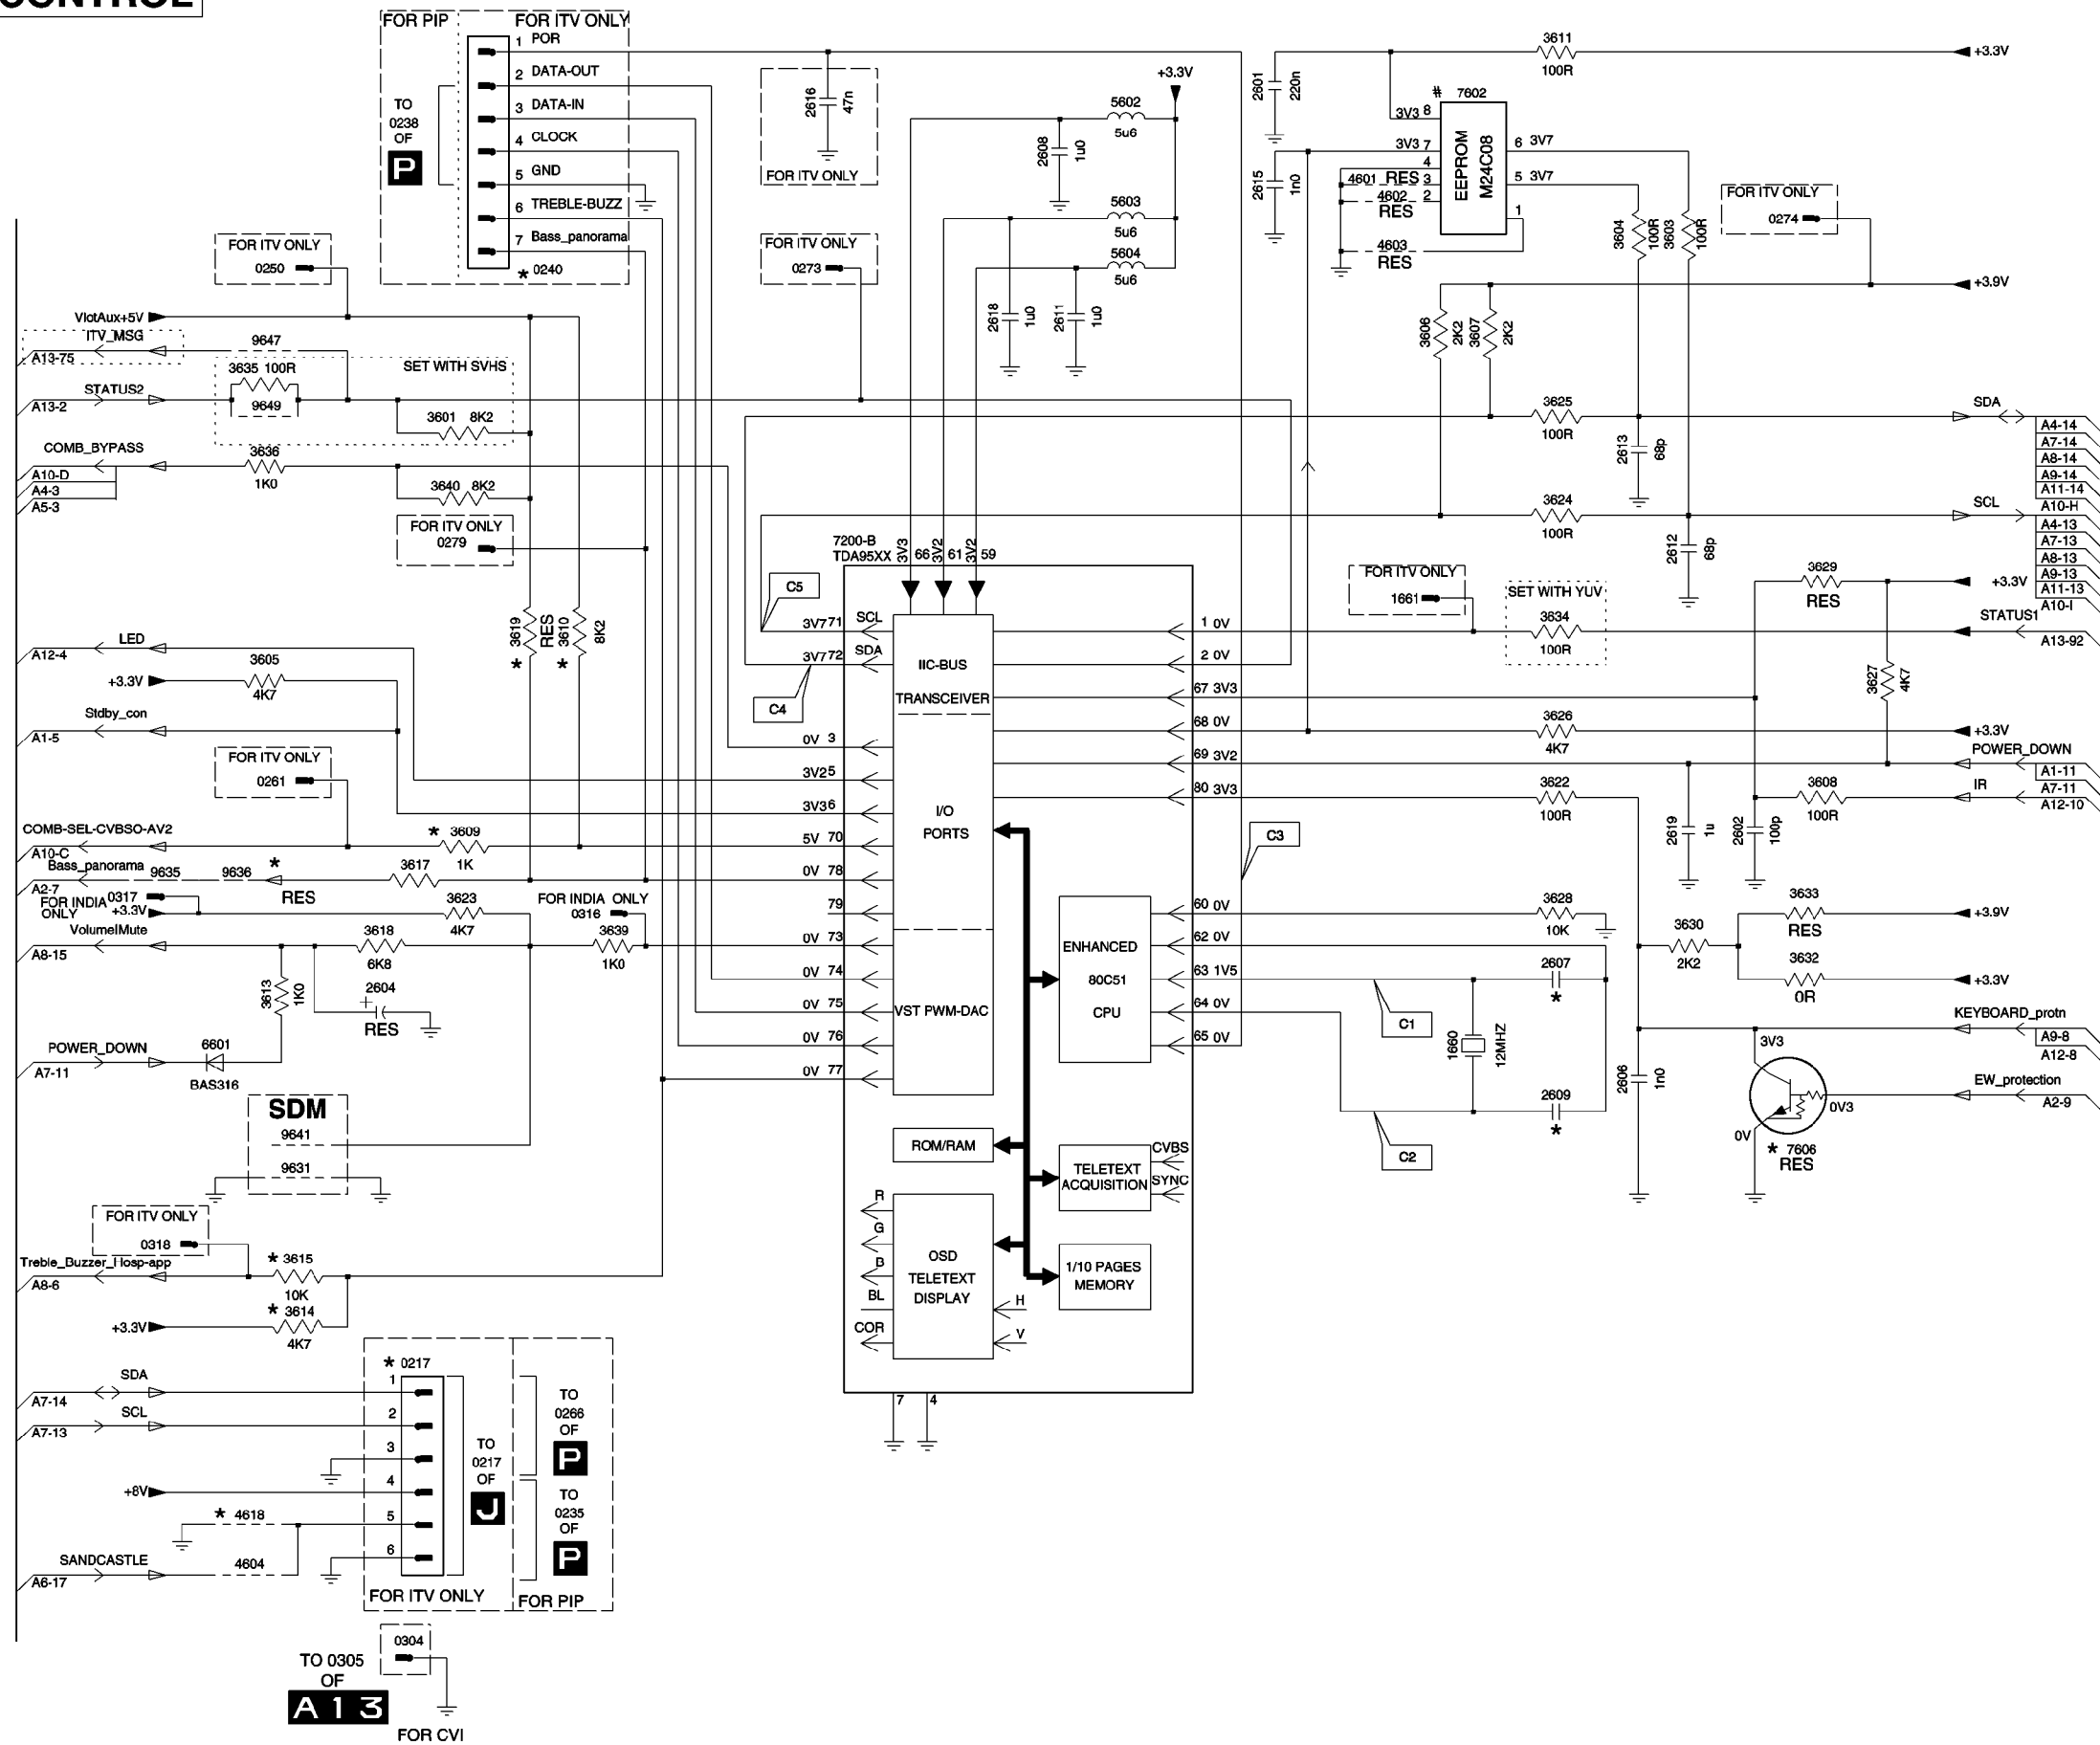

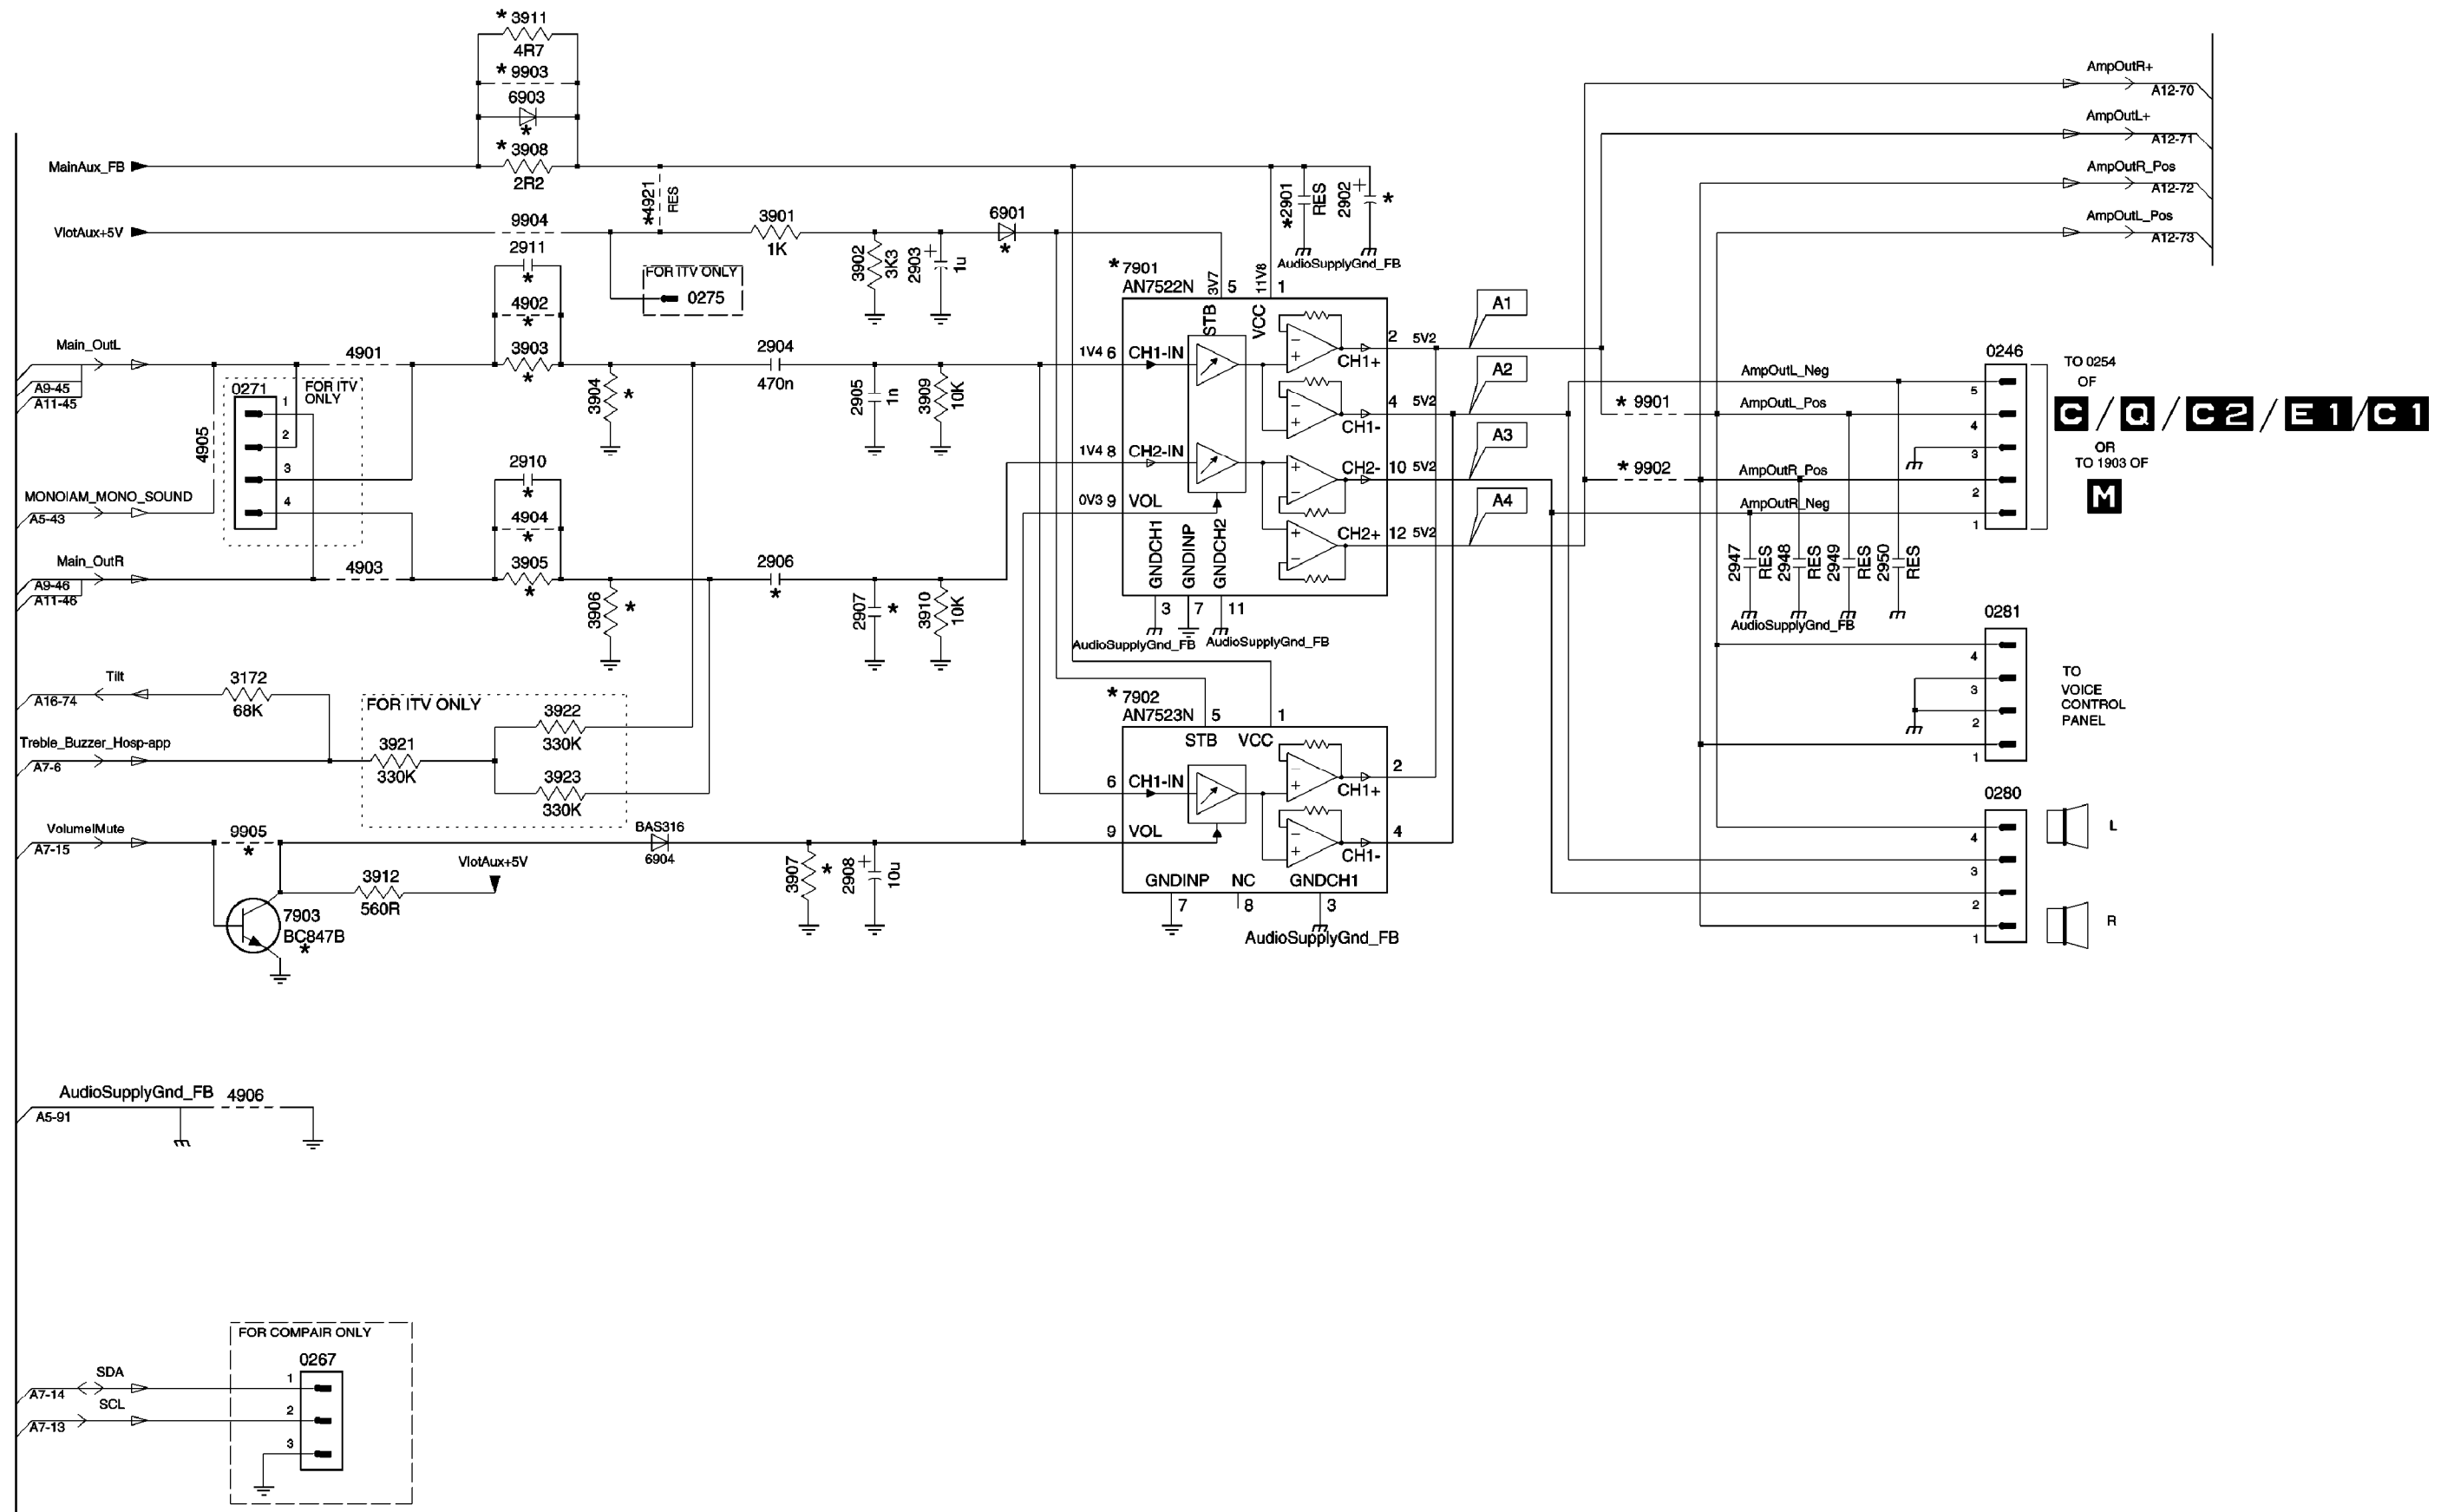



A 9 NICAM + 2CS + BTSC (STEREO/SAP) DECODER

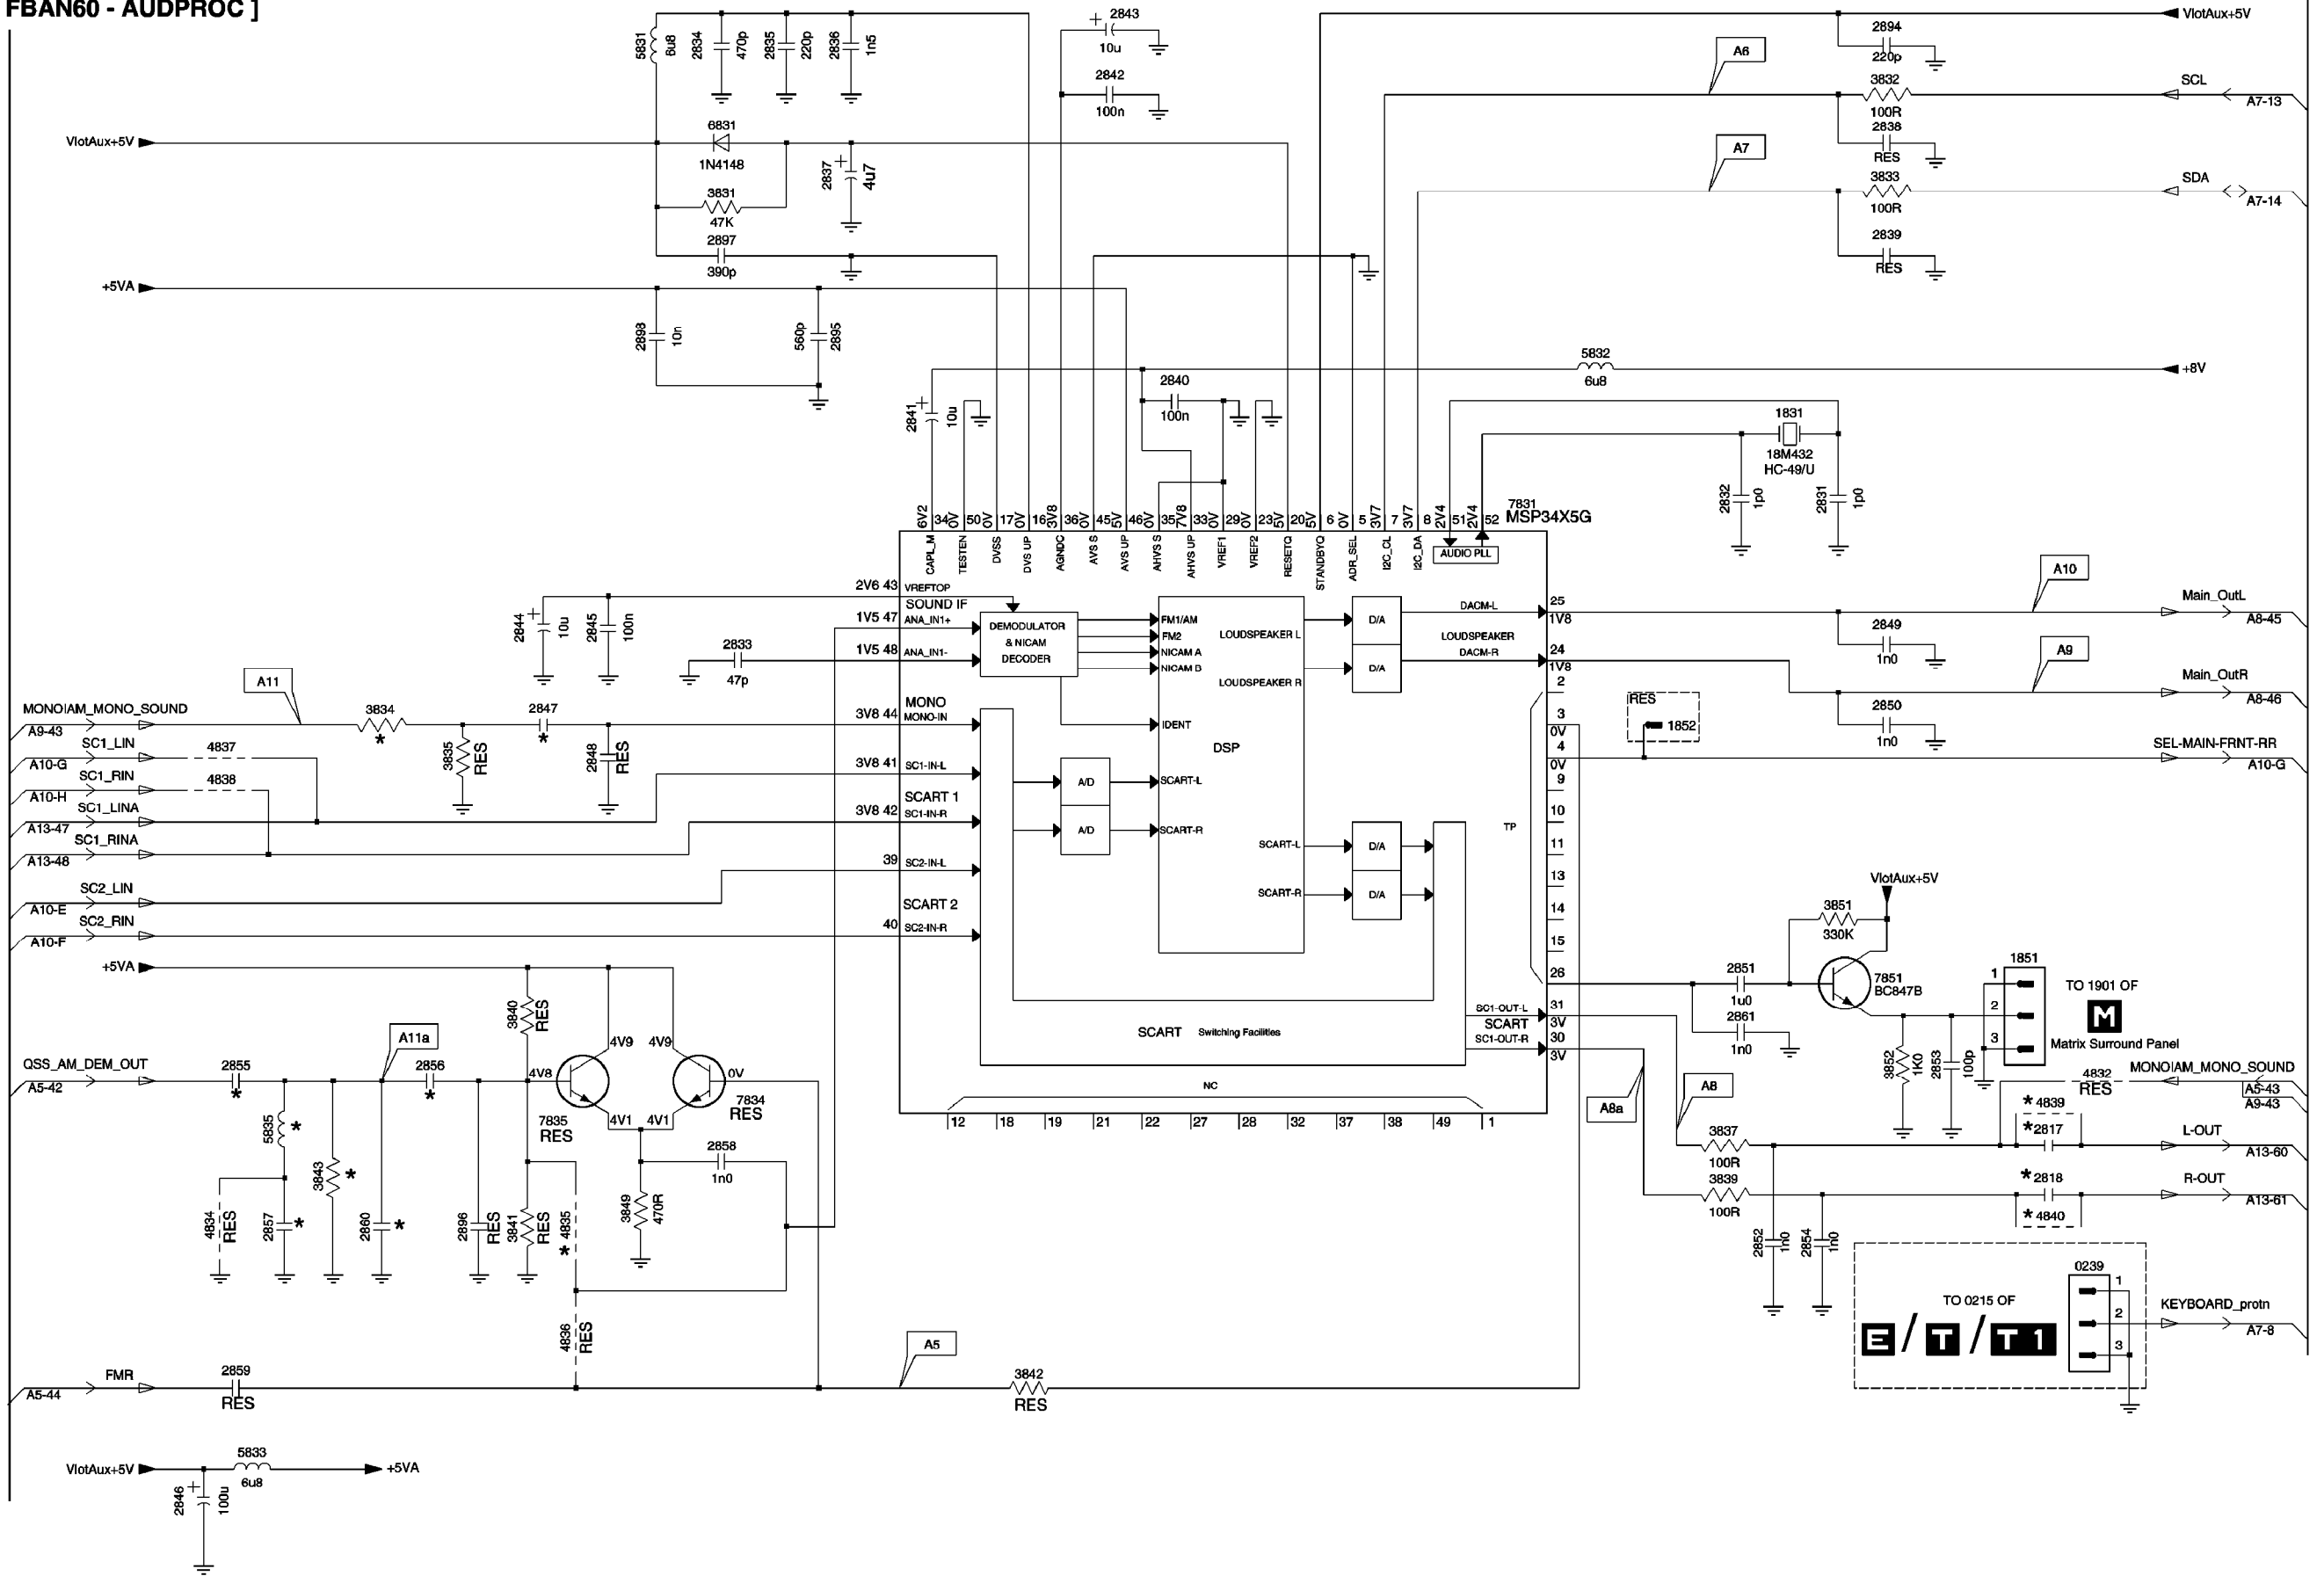
[FBAN60 - AUDPROC]




A 1 Ø AUDIO/VIDEO SOURCE SWITCHING

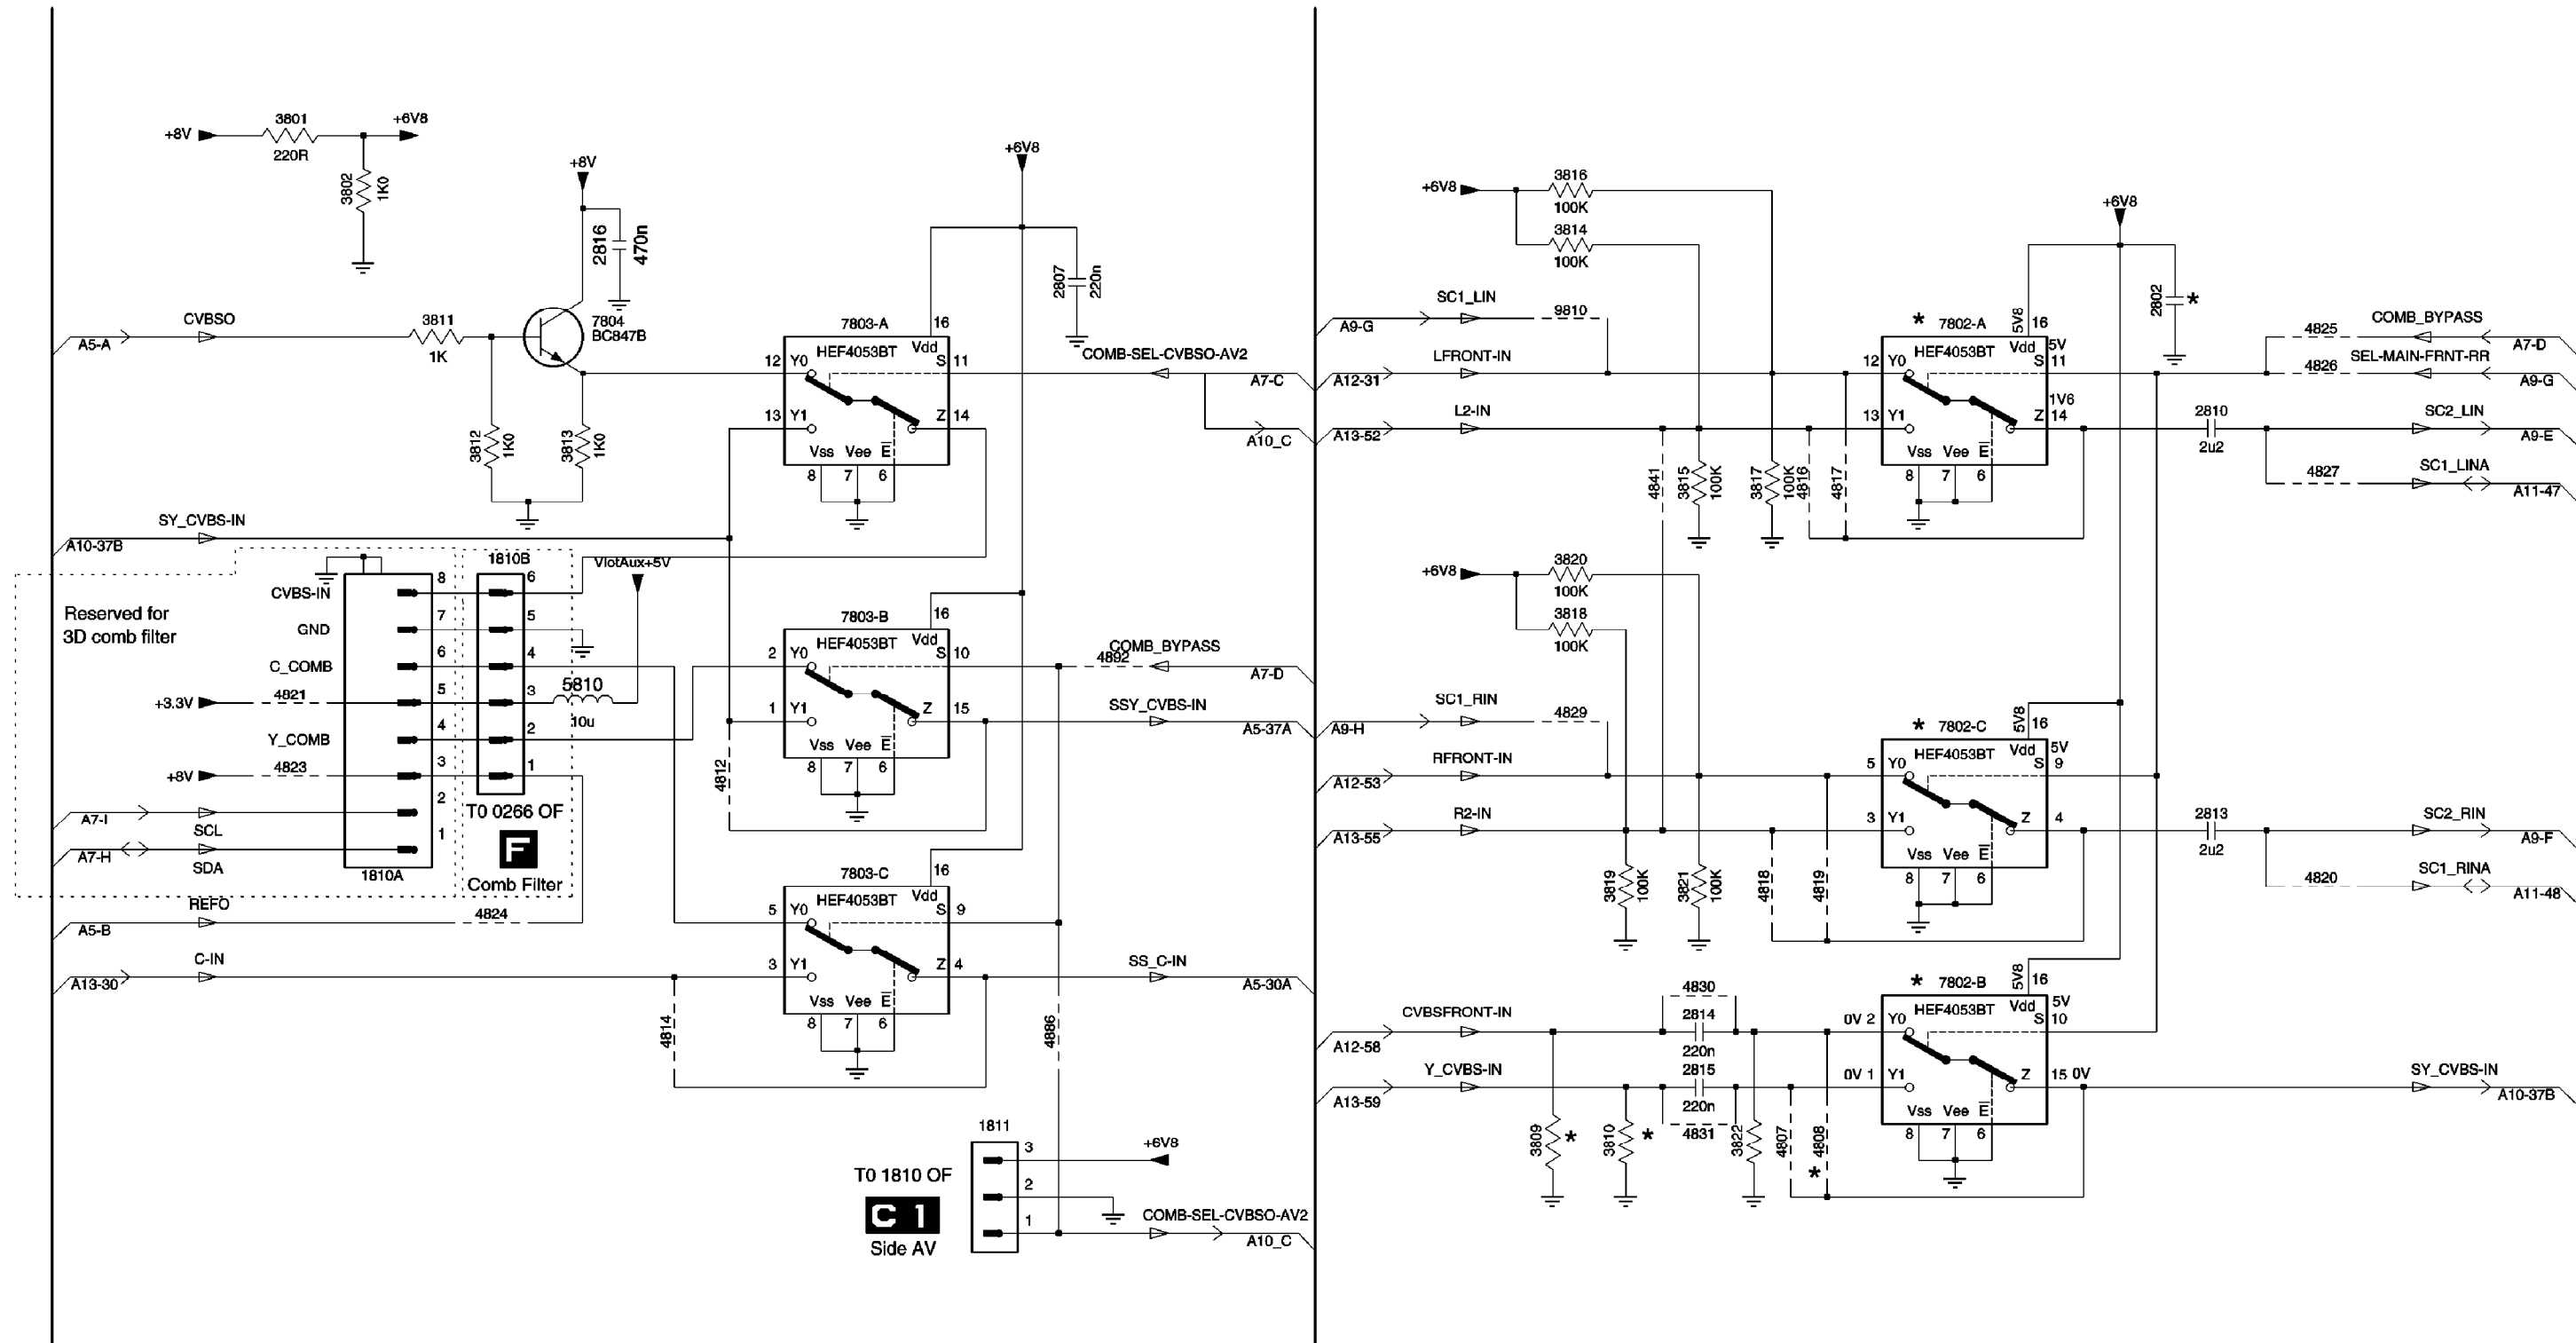

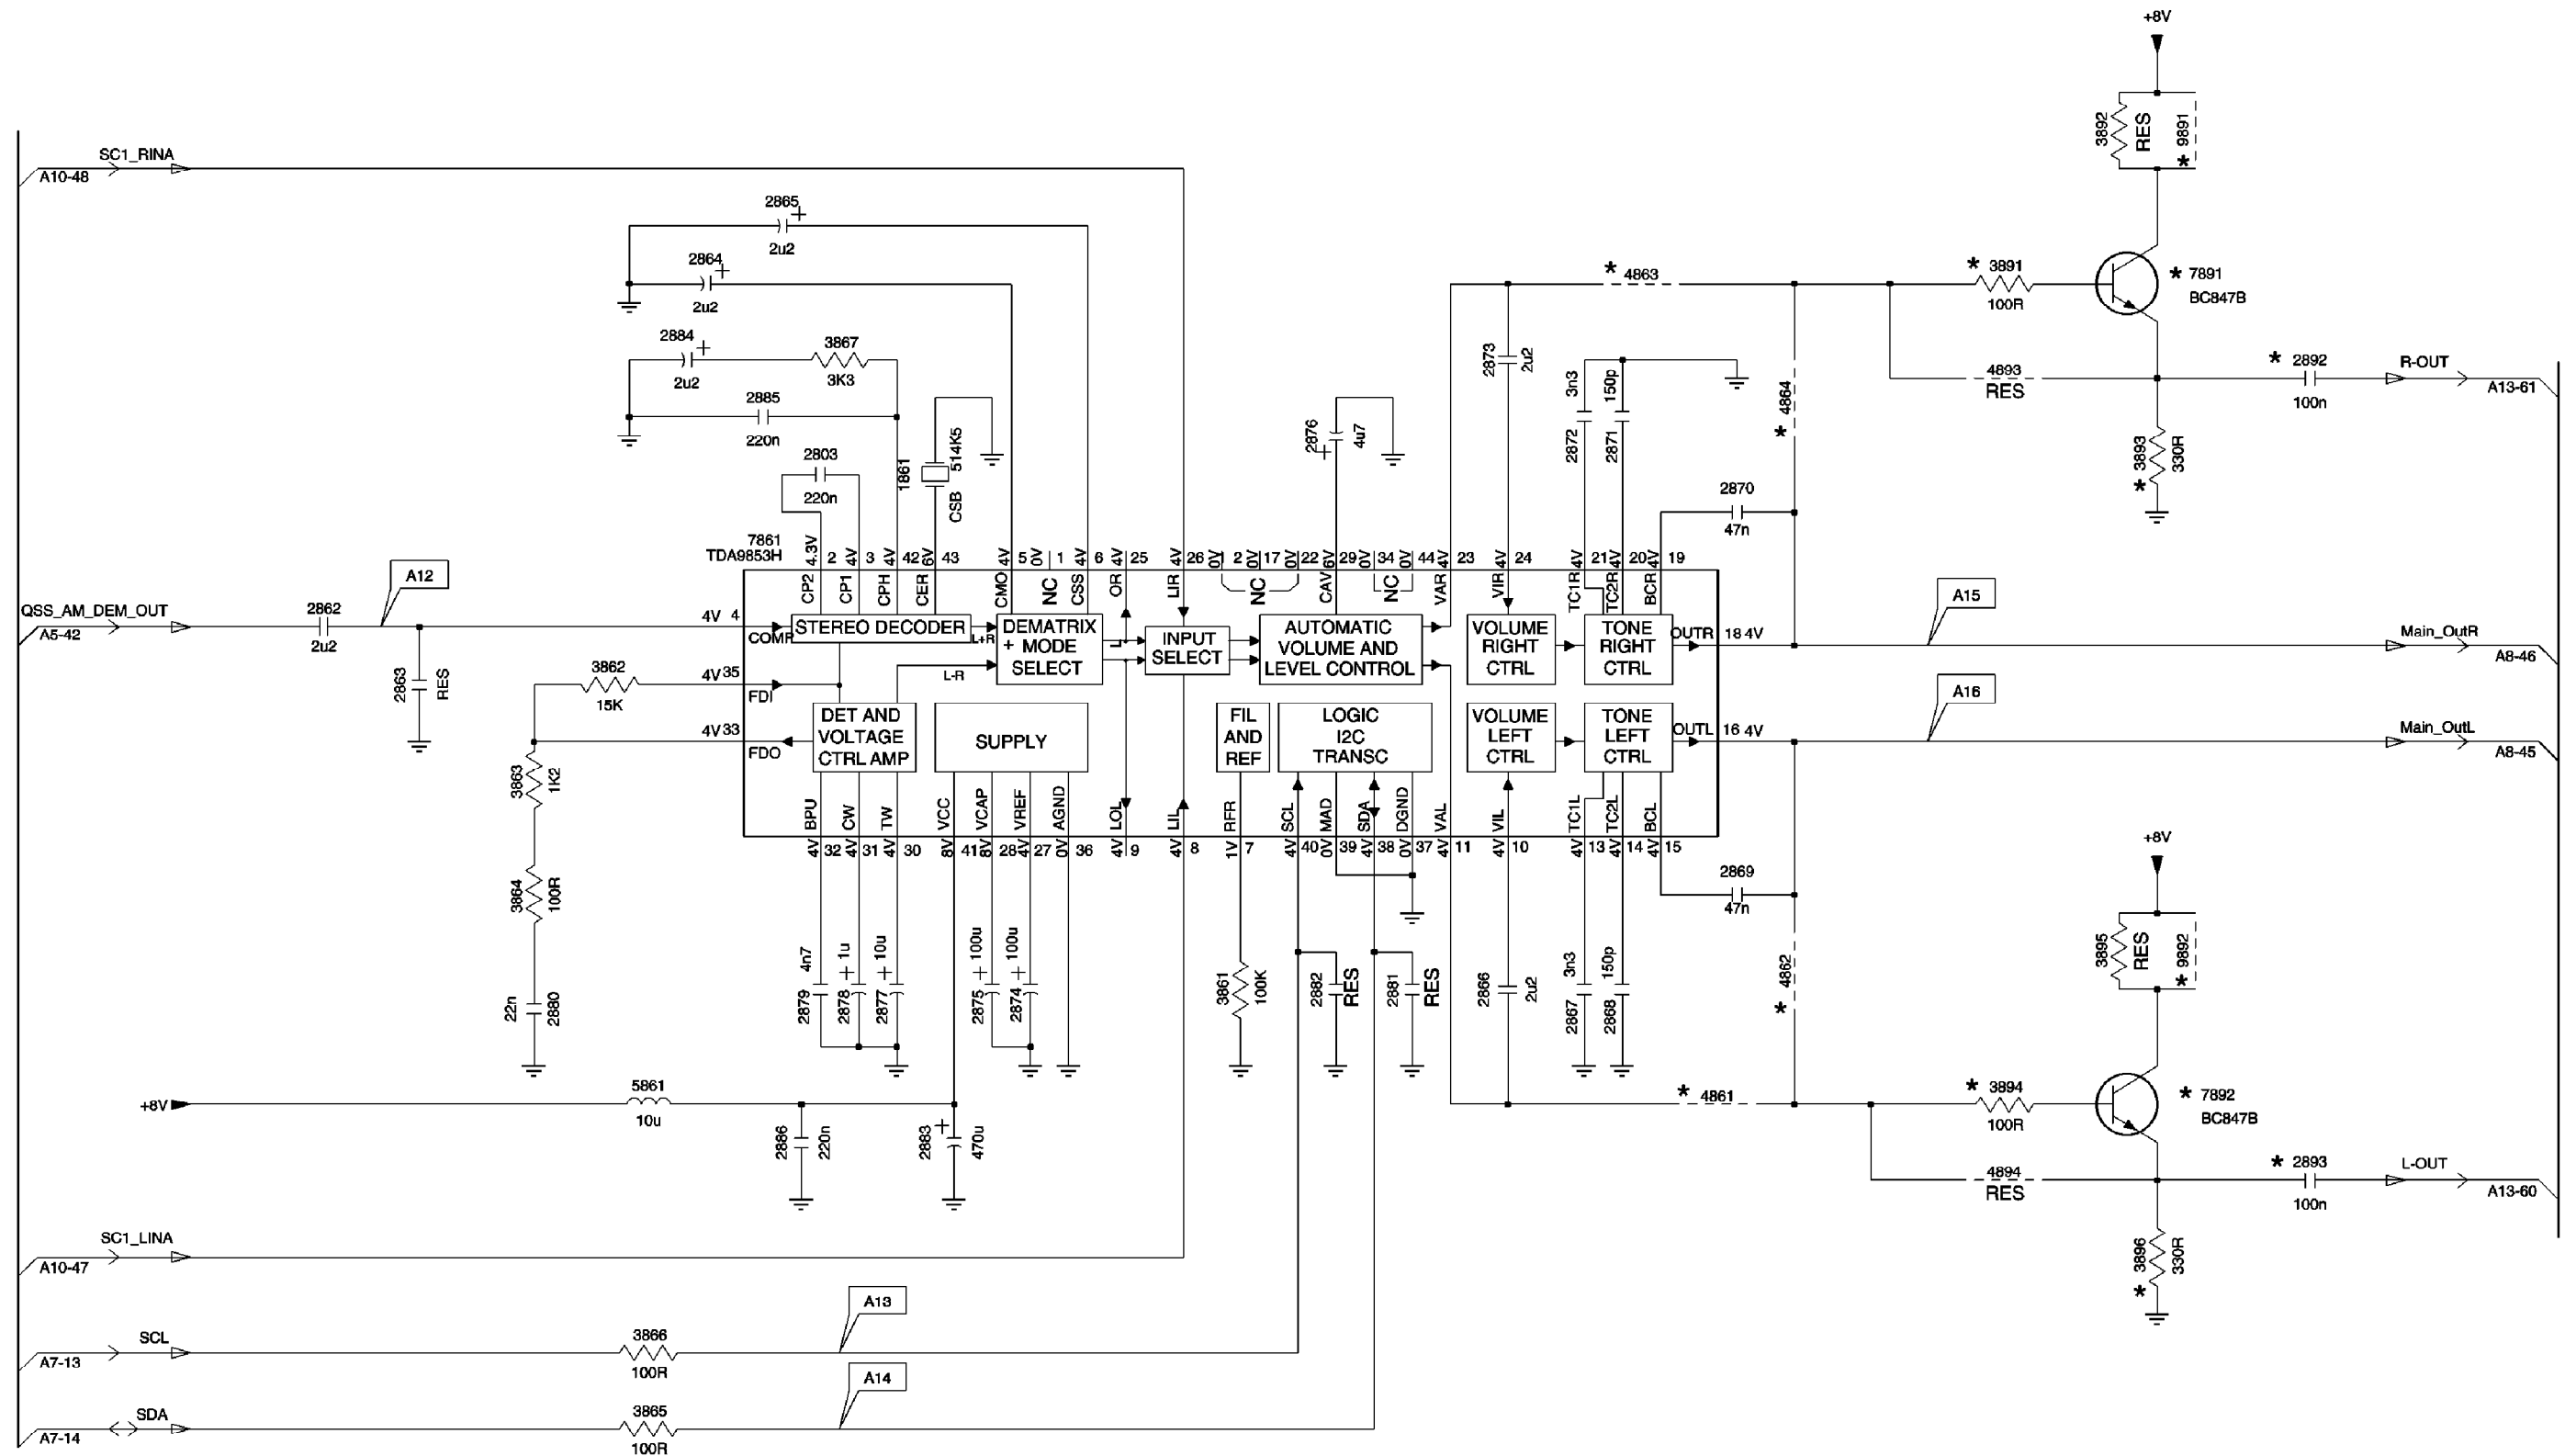


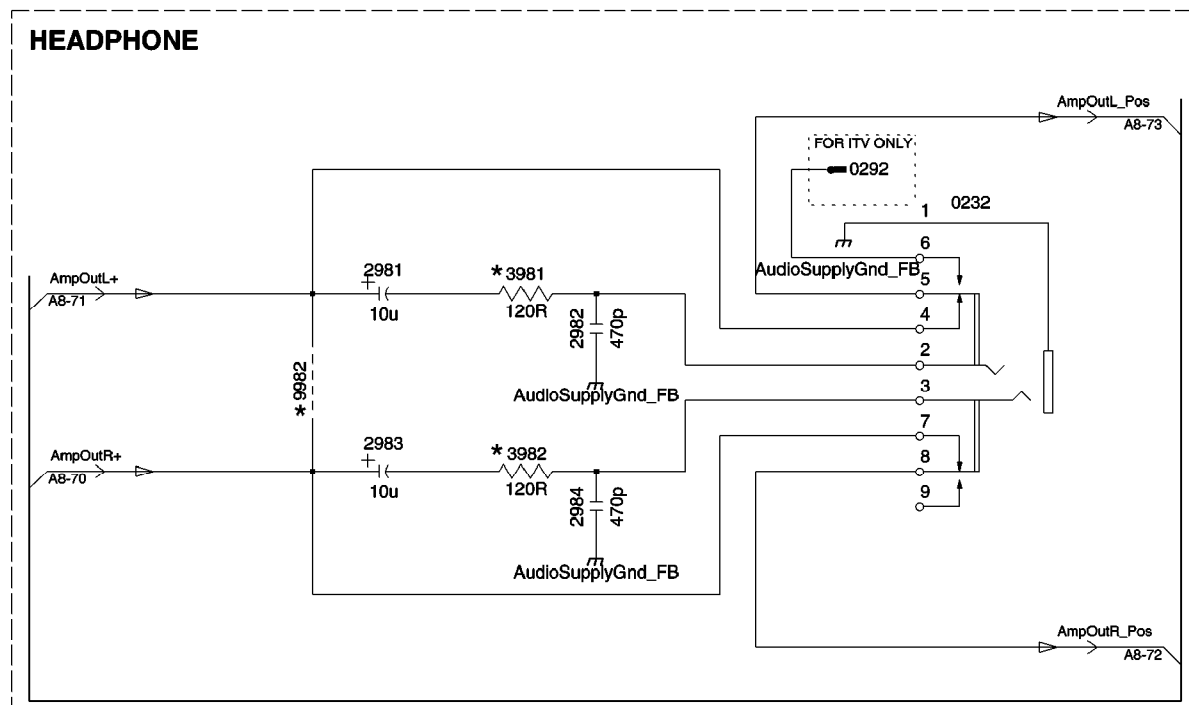


4694

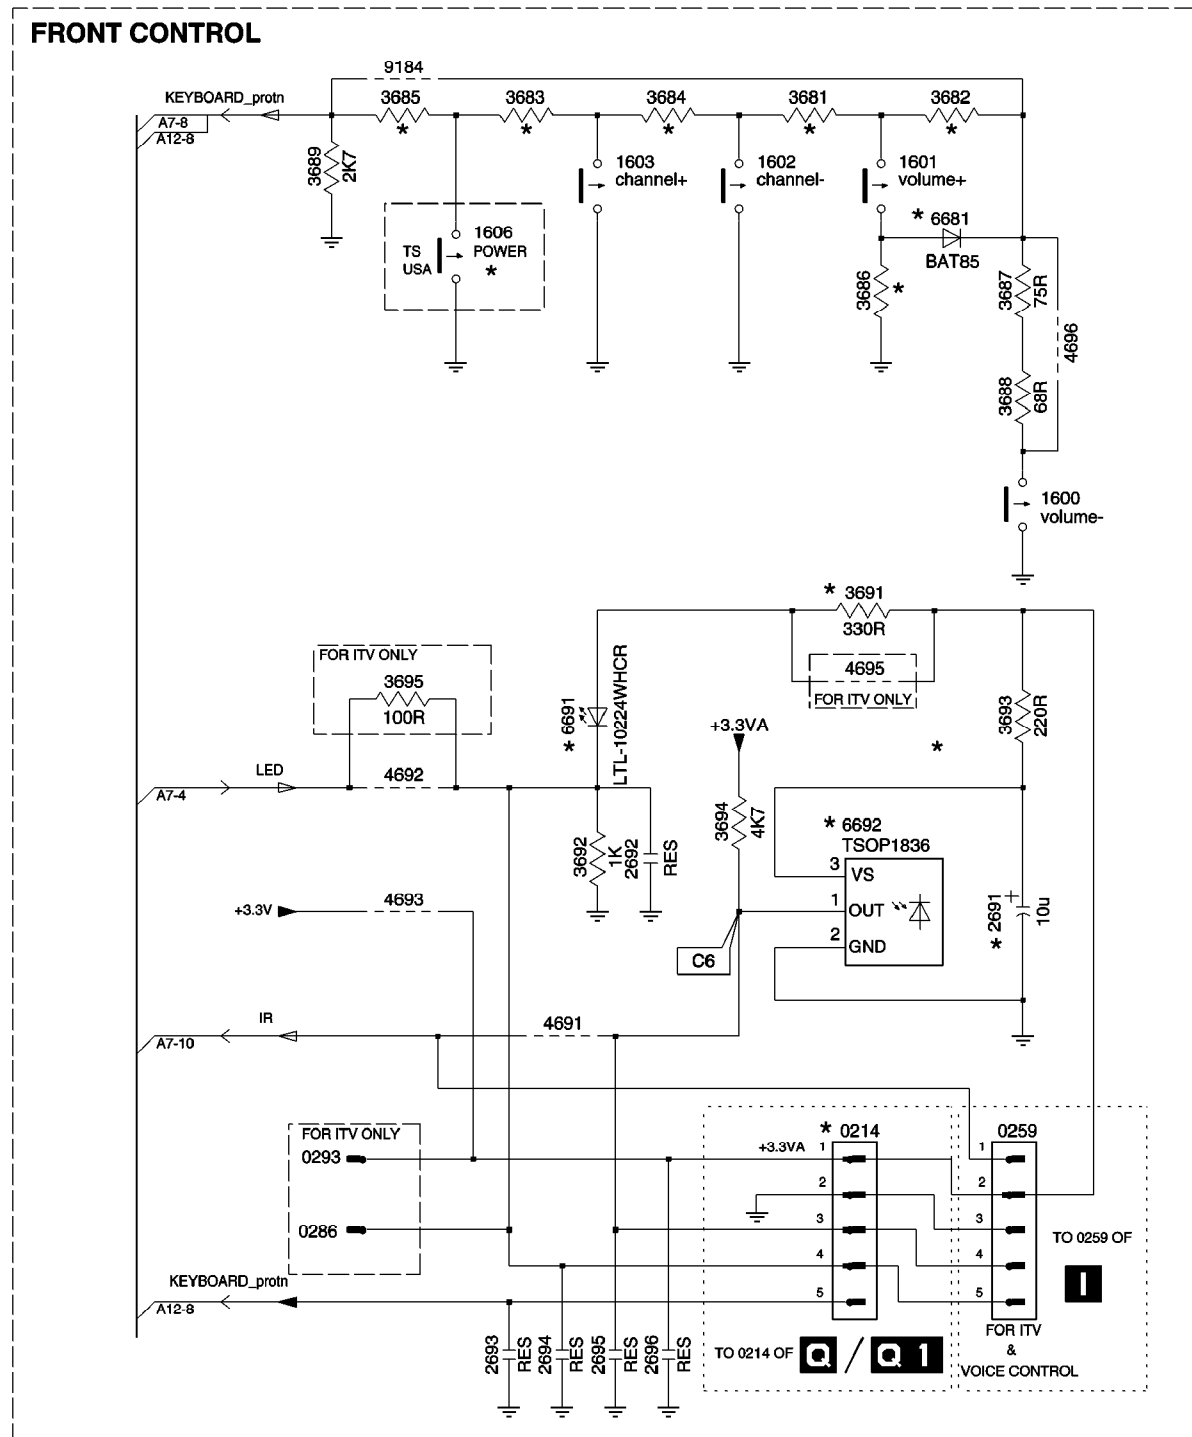


A 1 3 REAR I/O CINCH

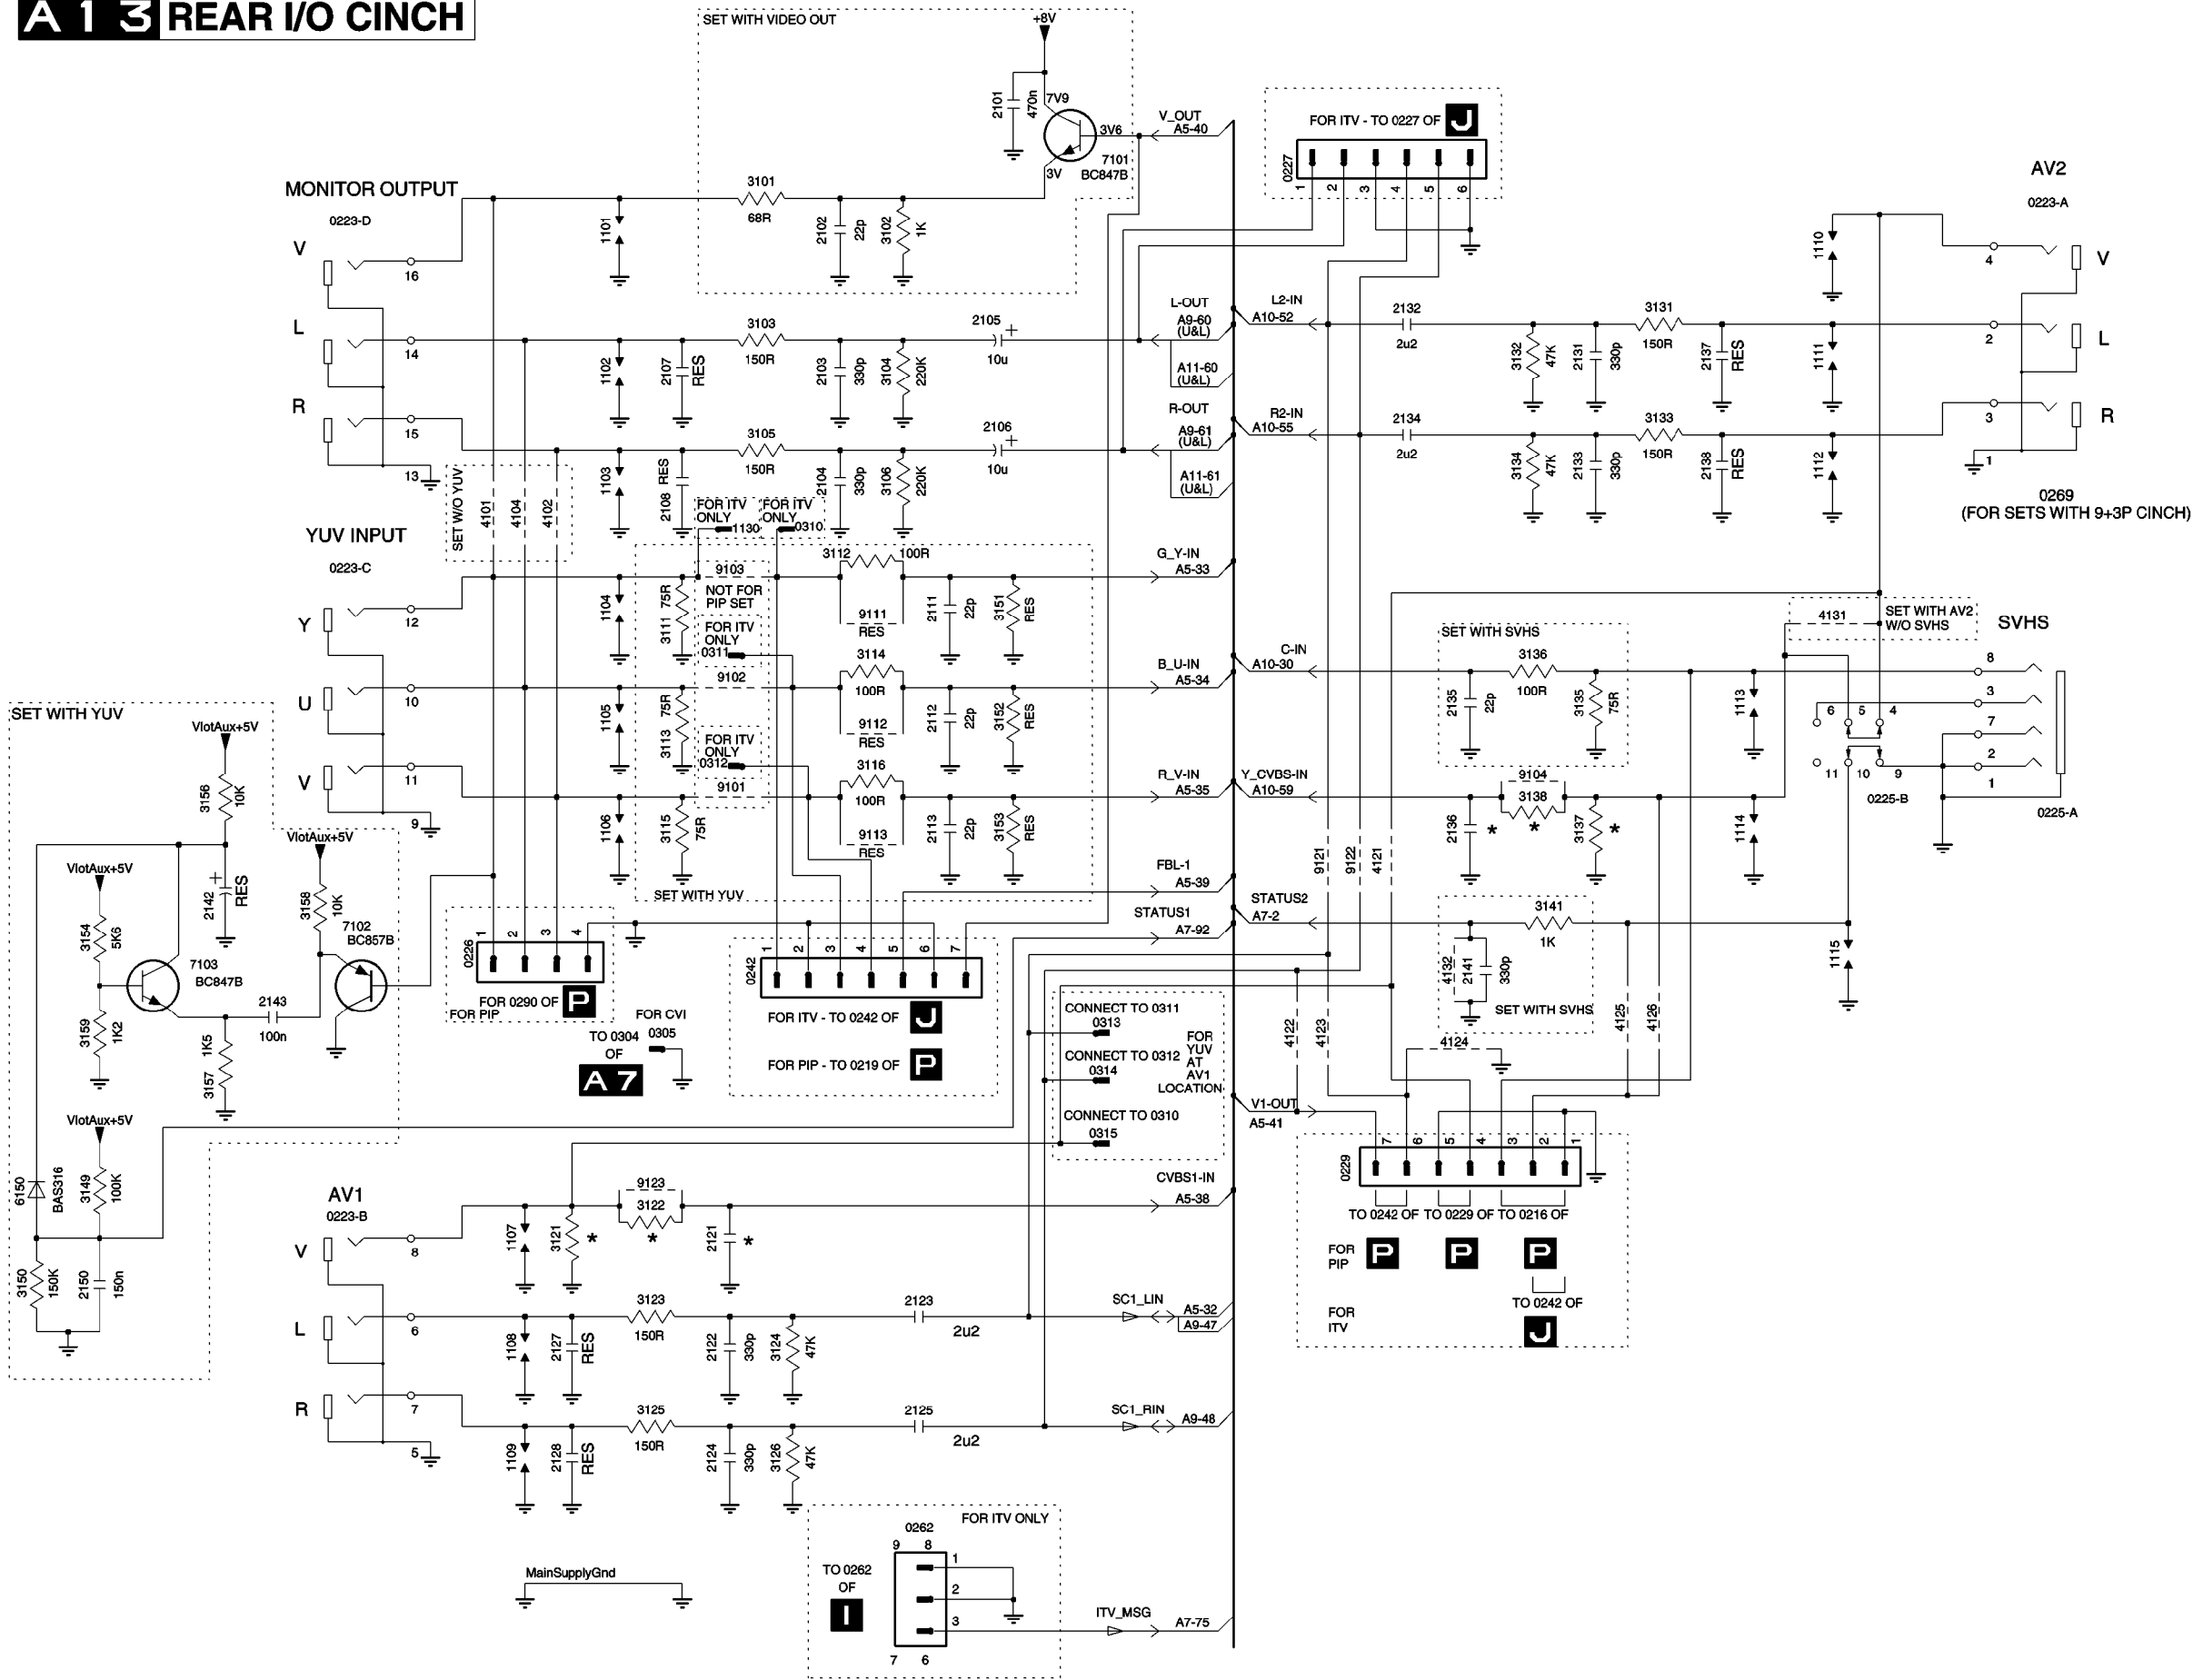


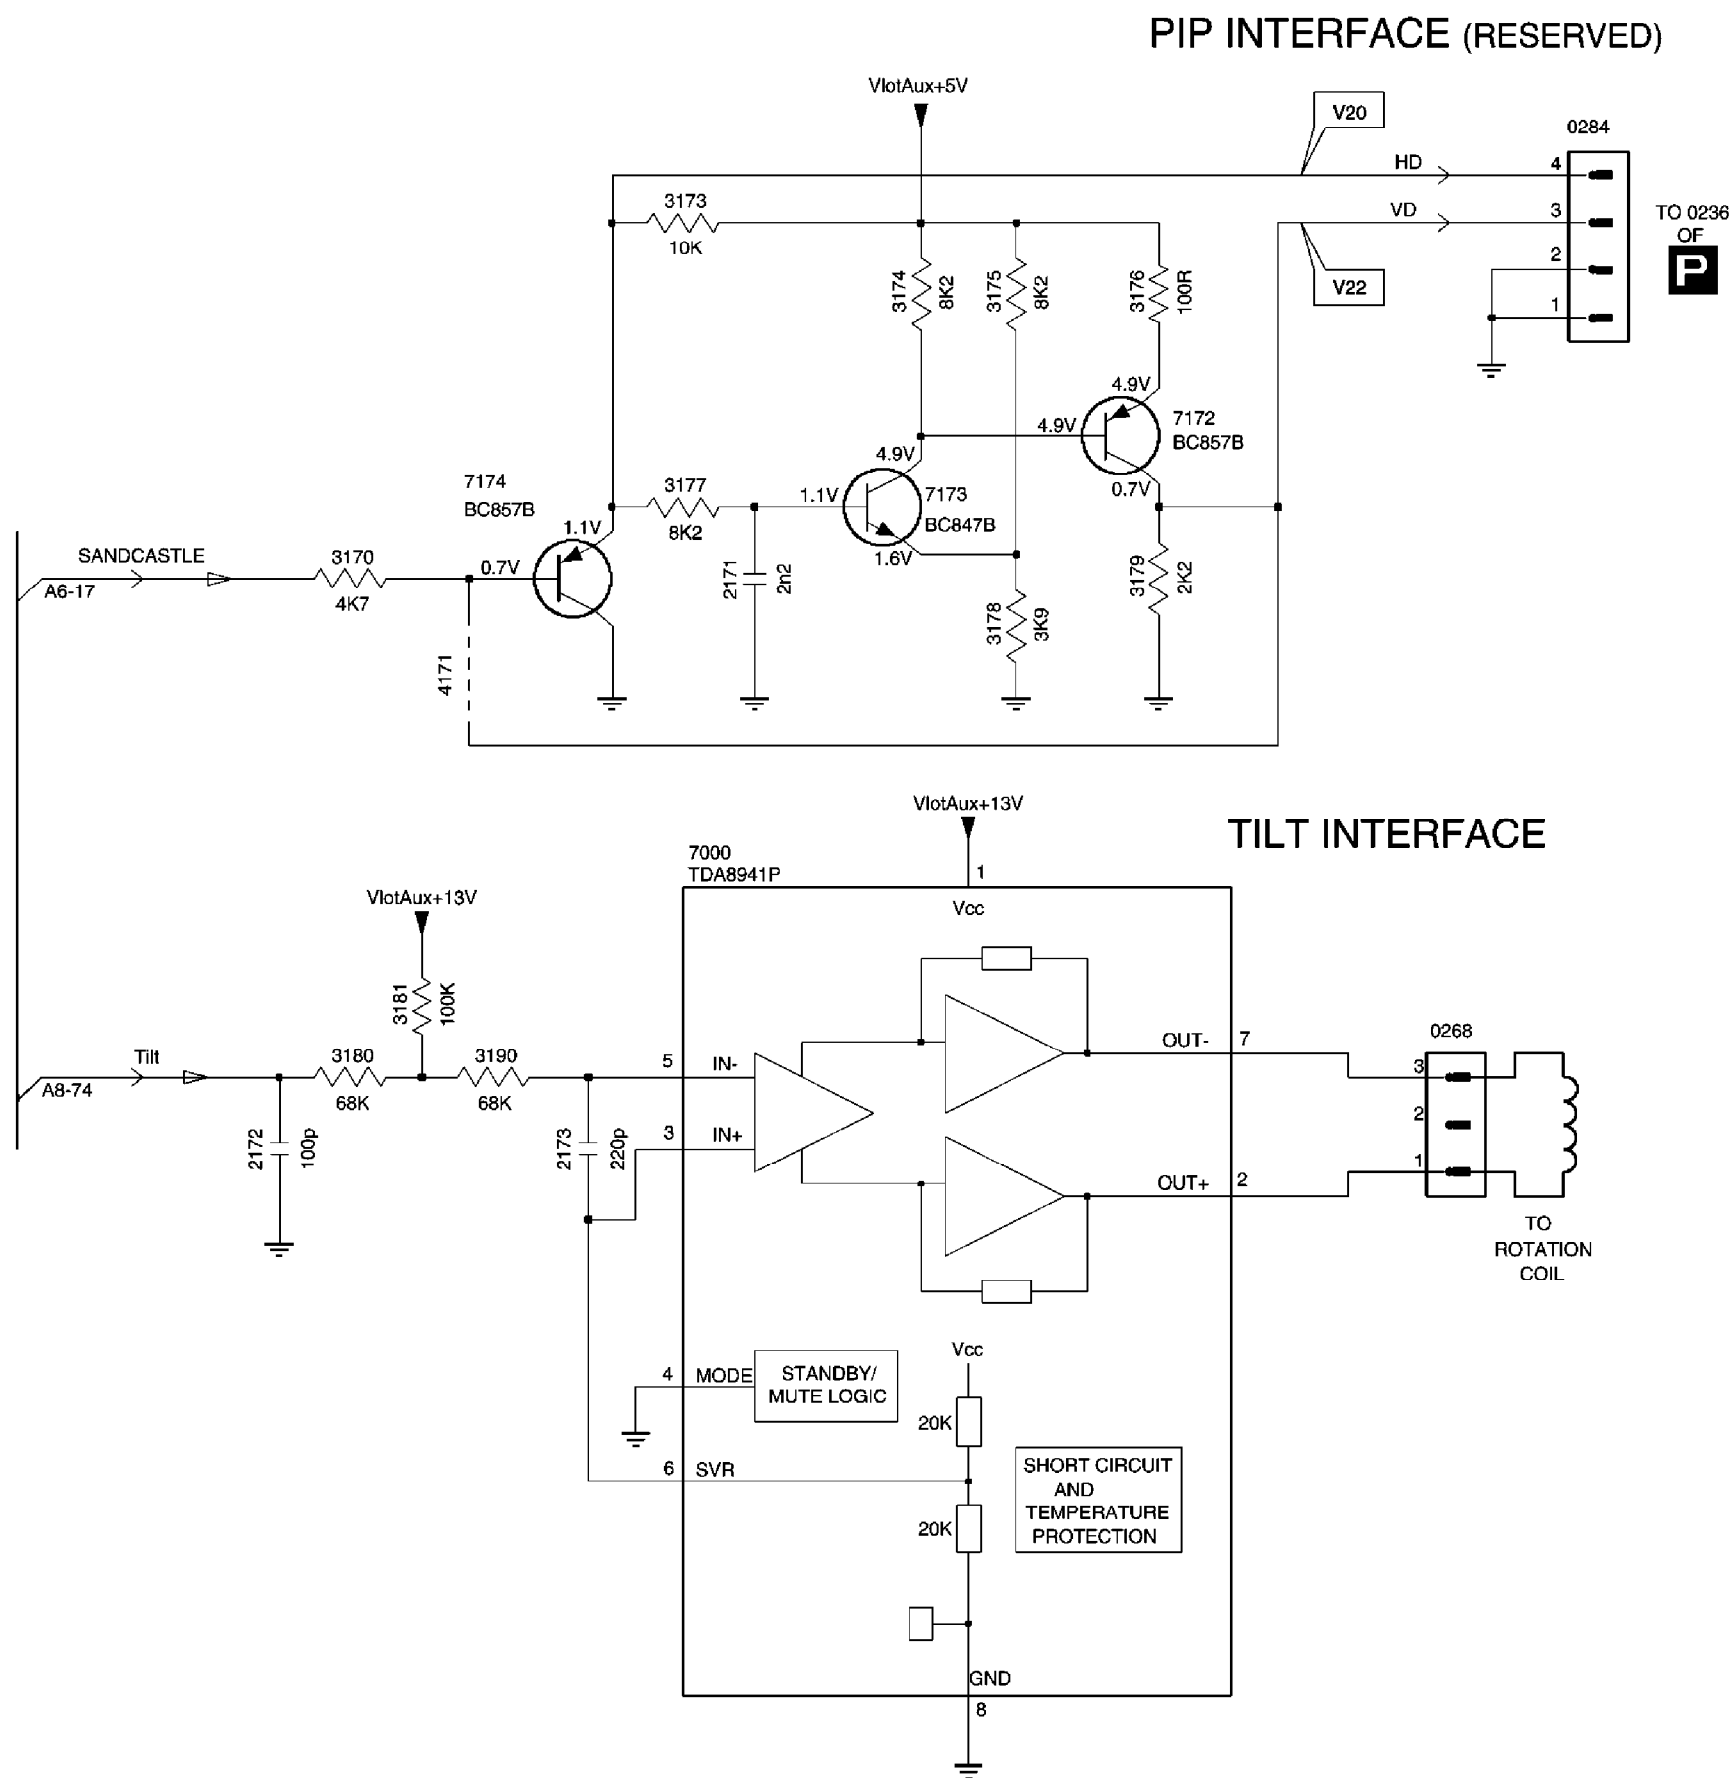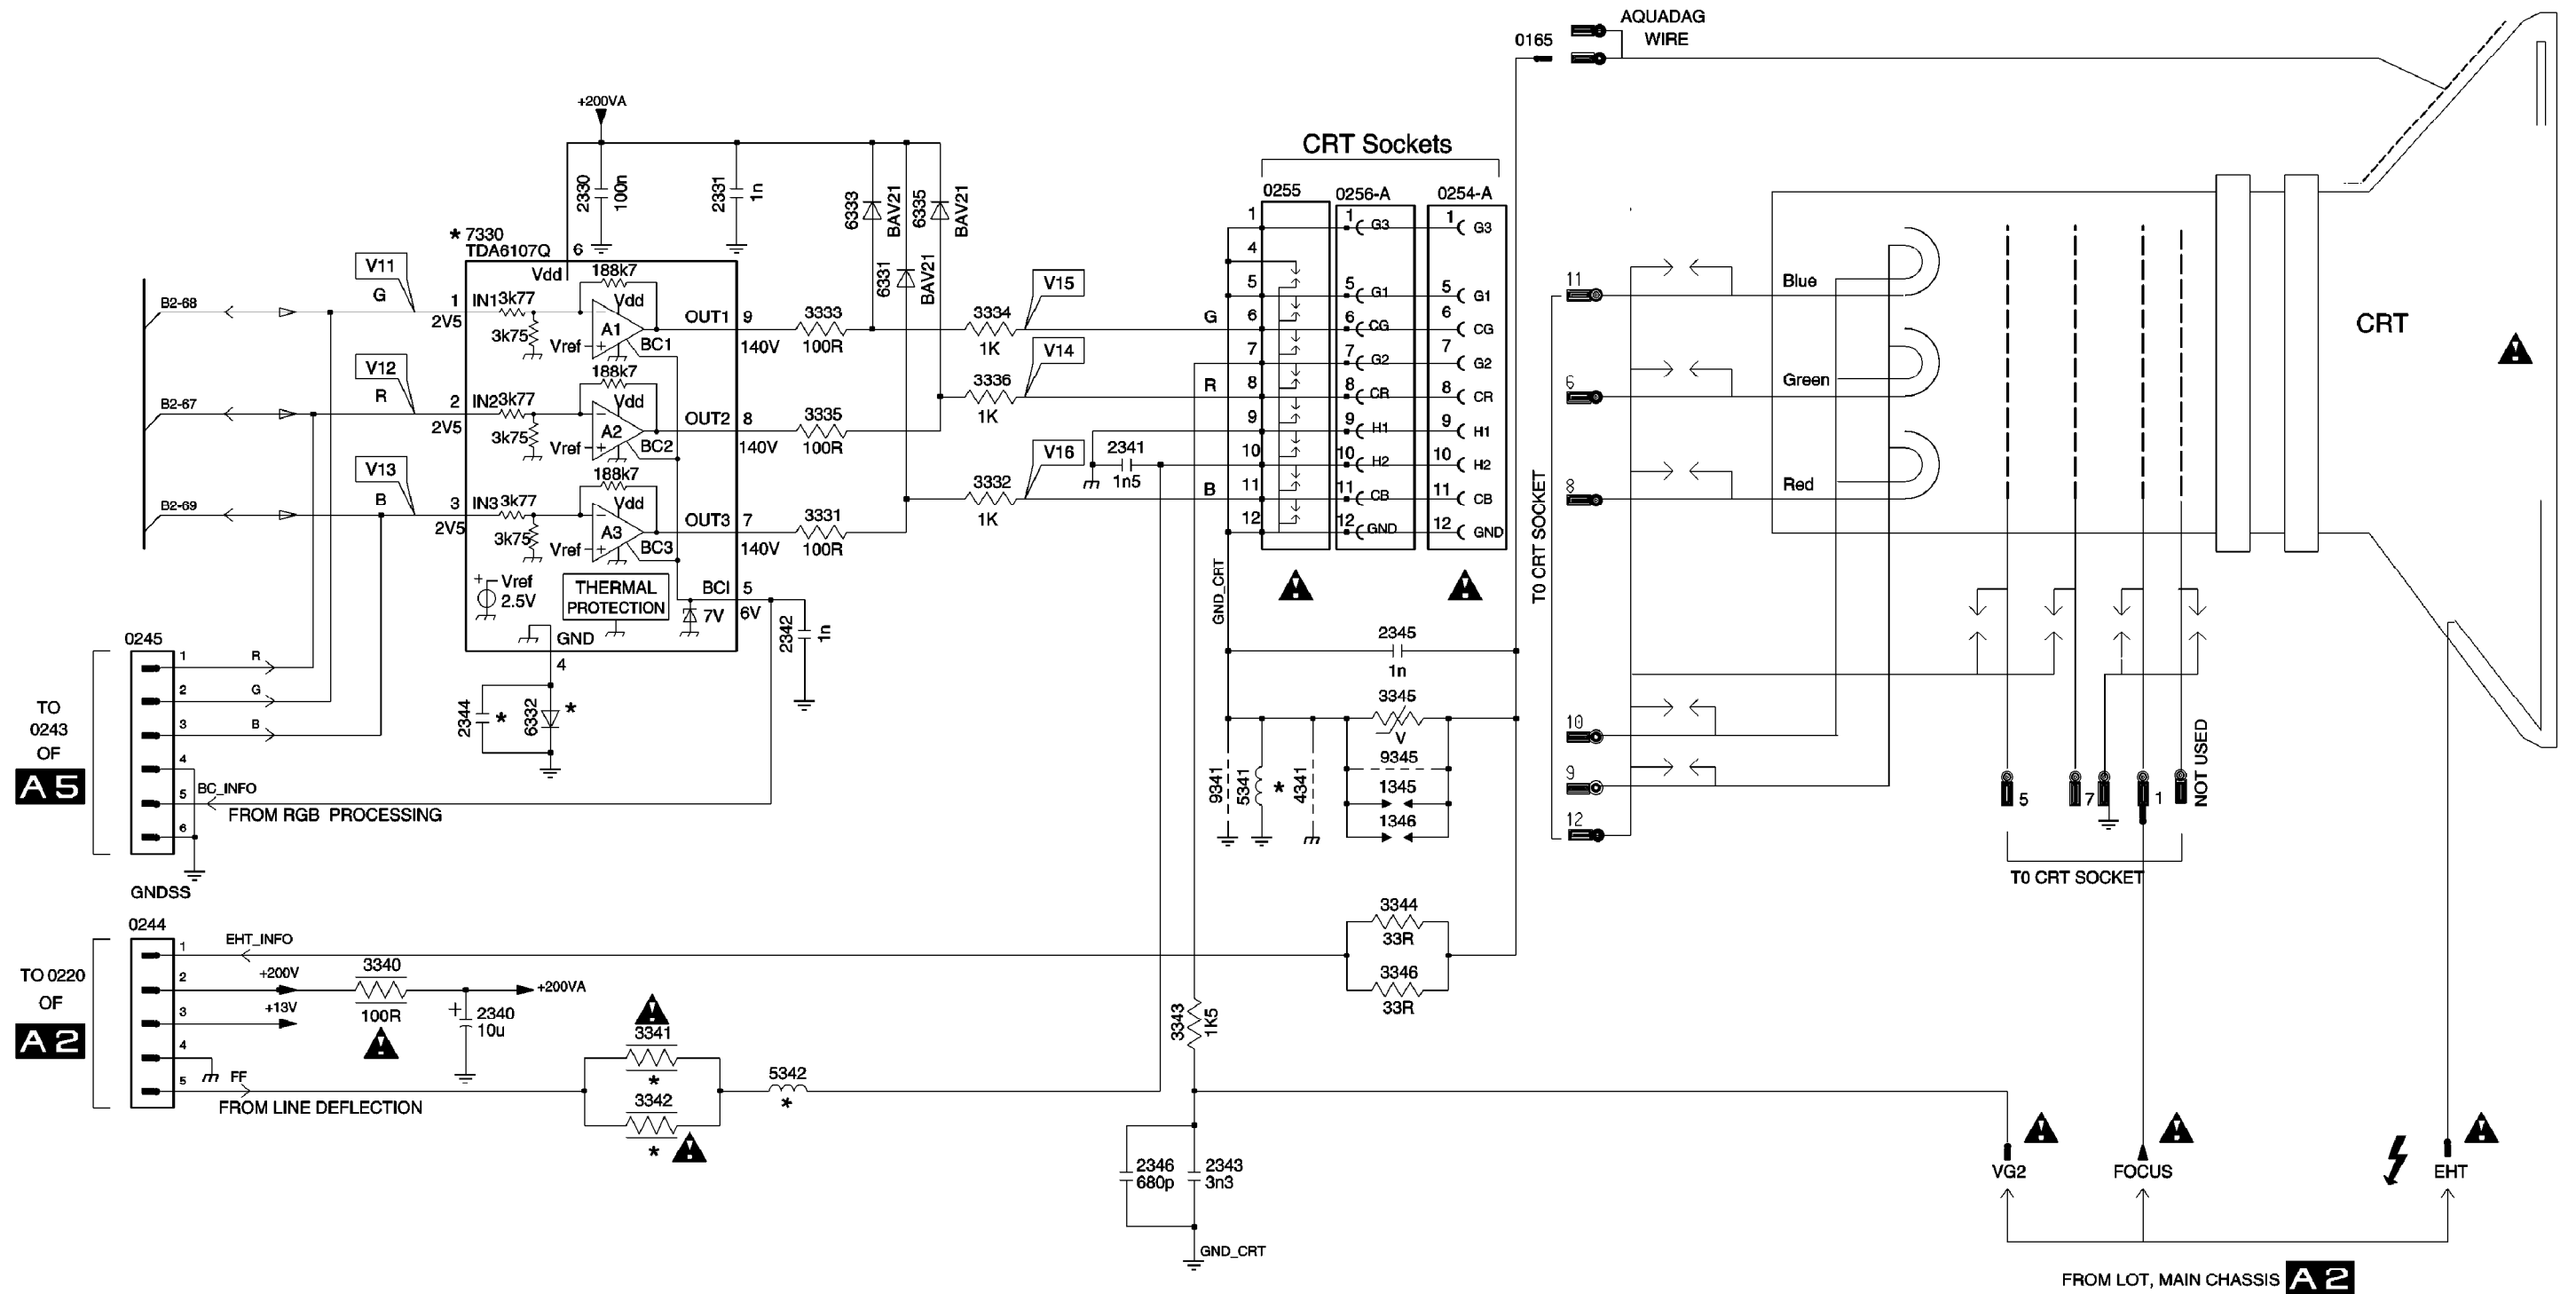
A 1 6 PIP INTERFACE CIRCUIT & TILT INTERFACE






B2 ECO SCAVEM

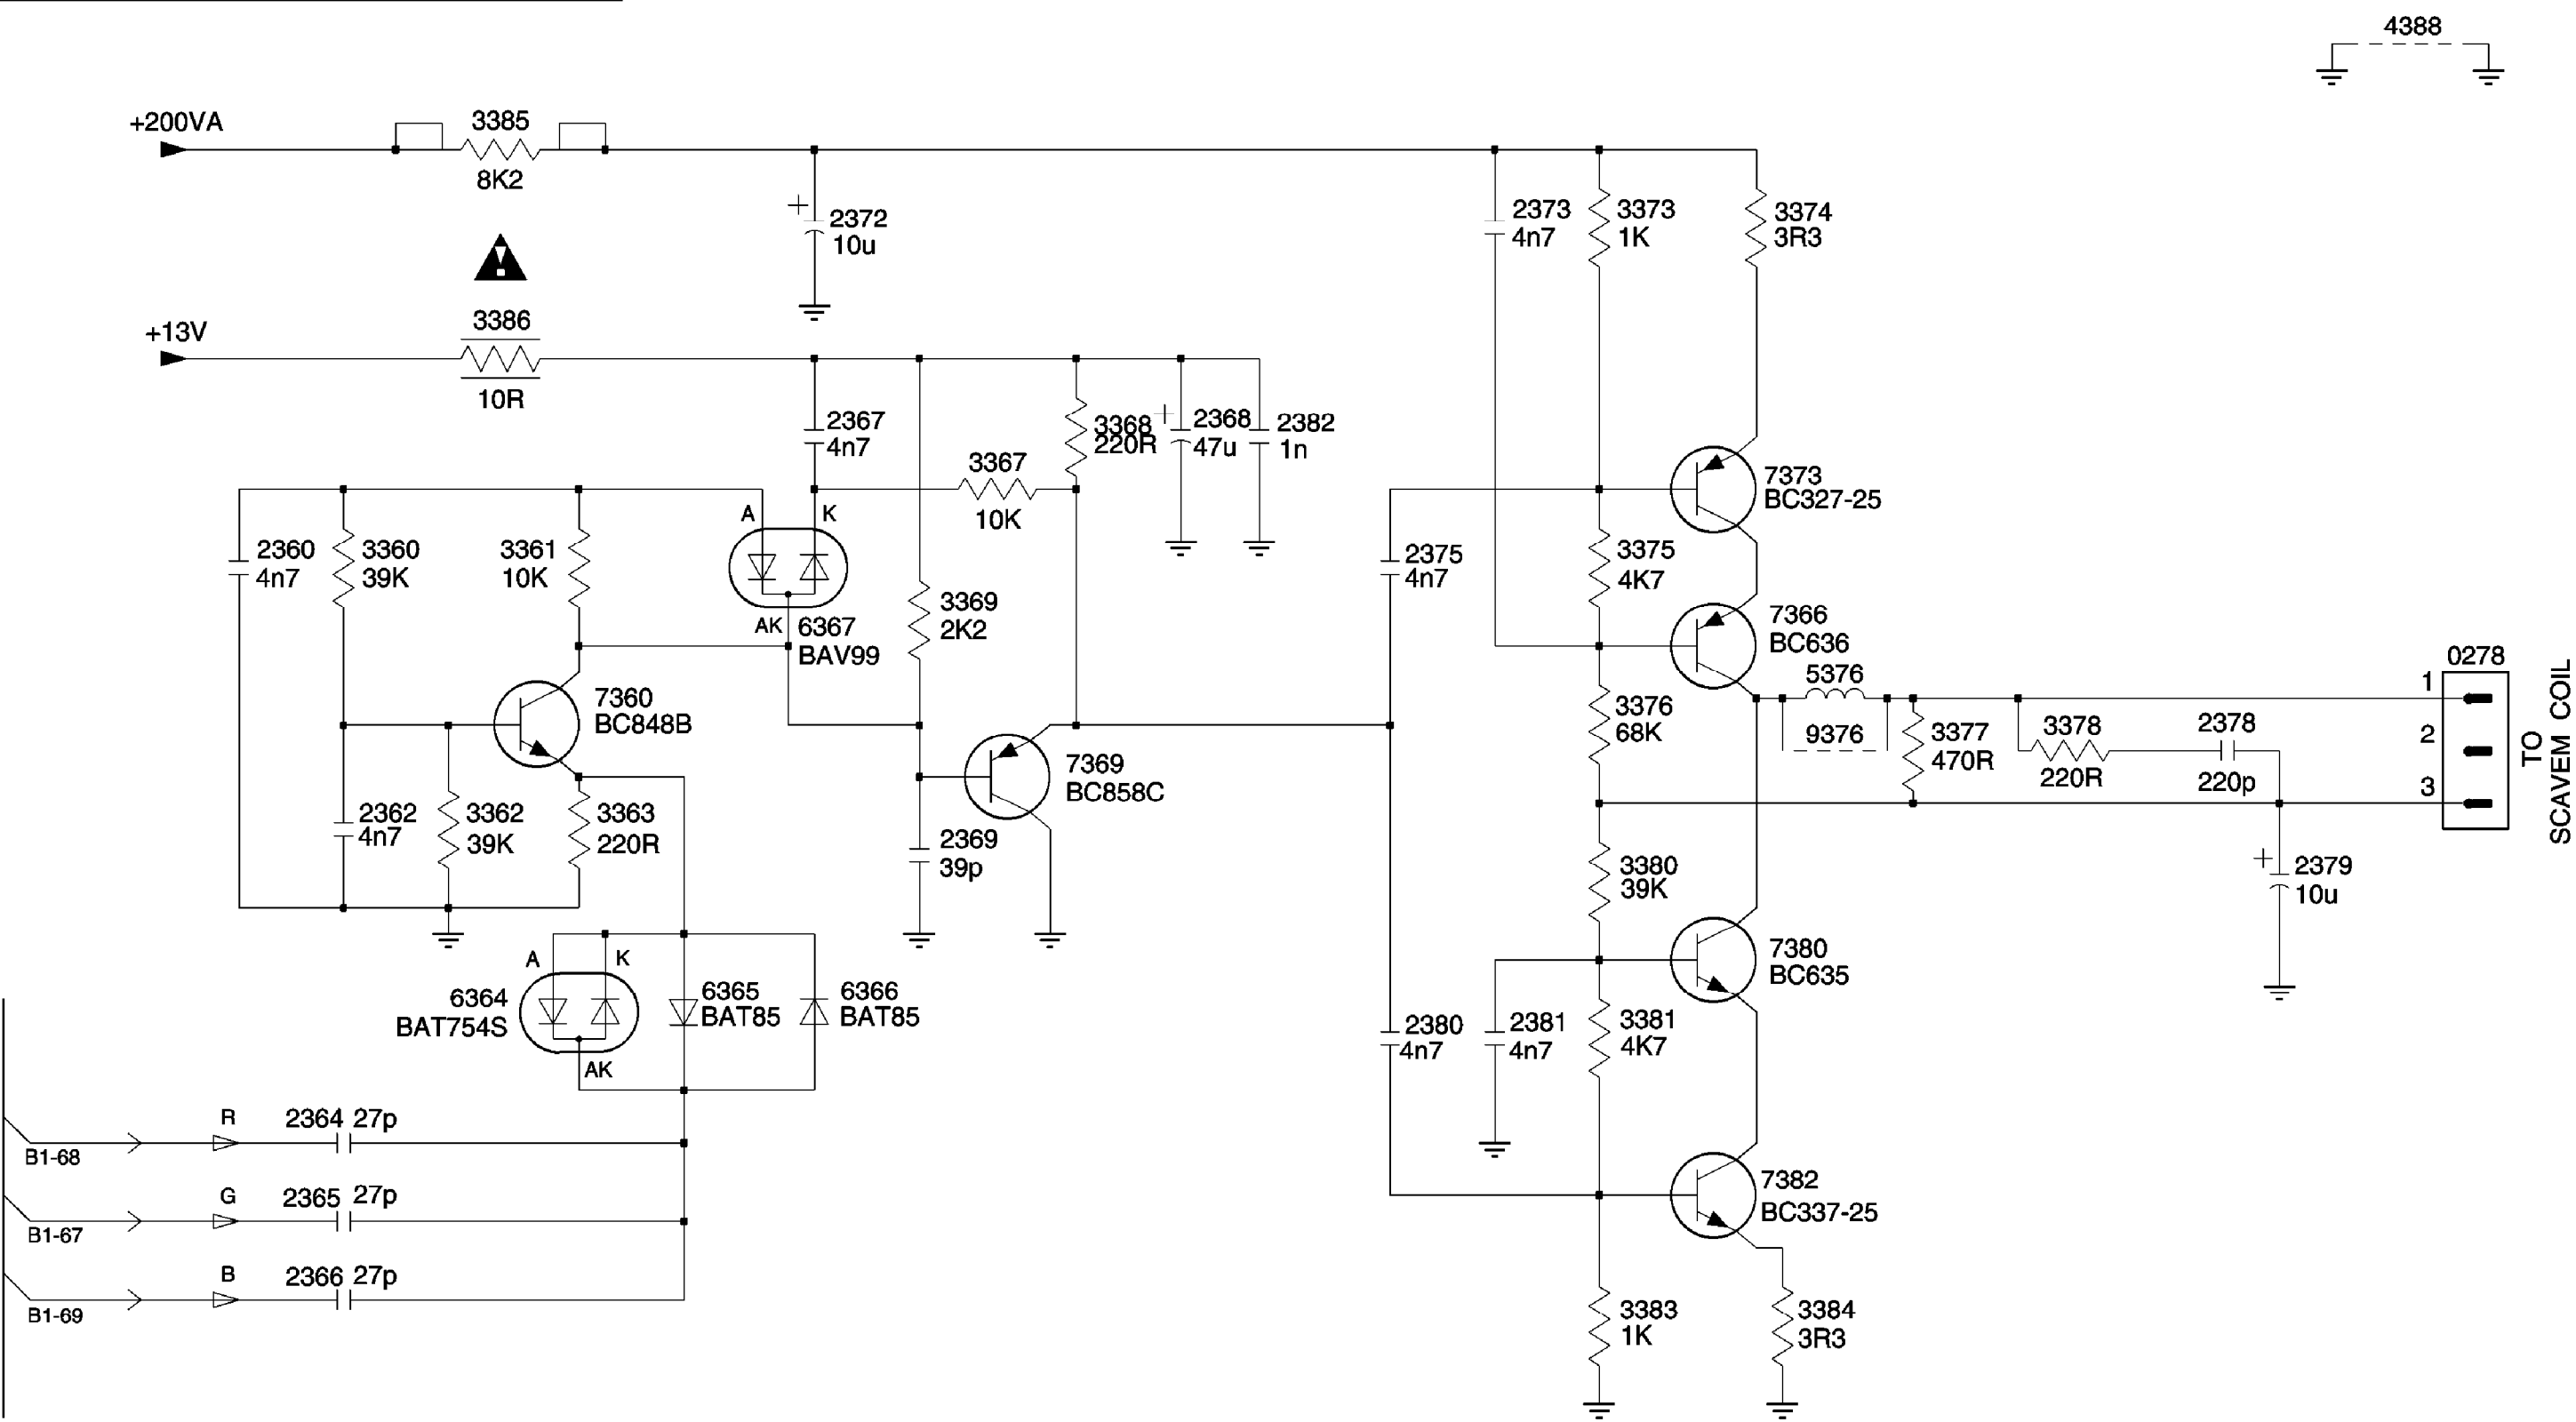


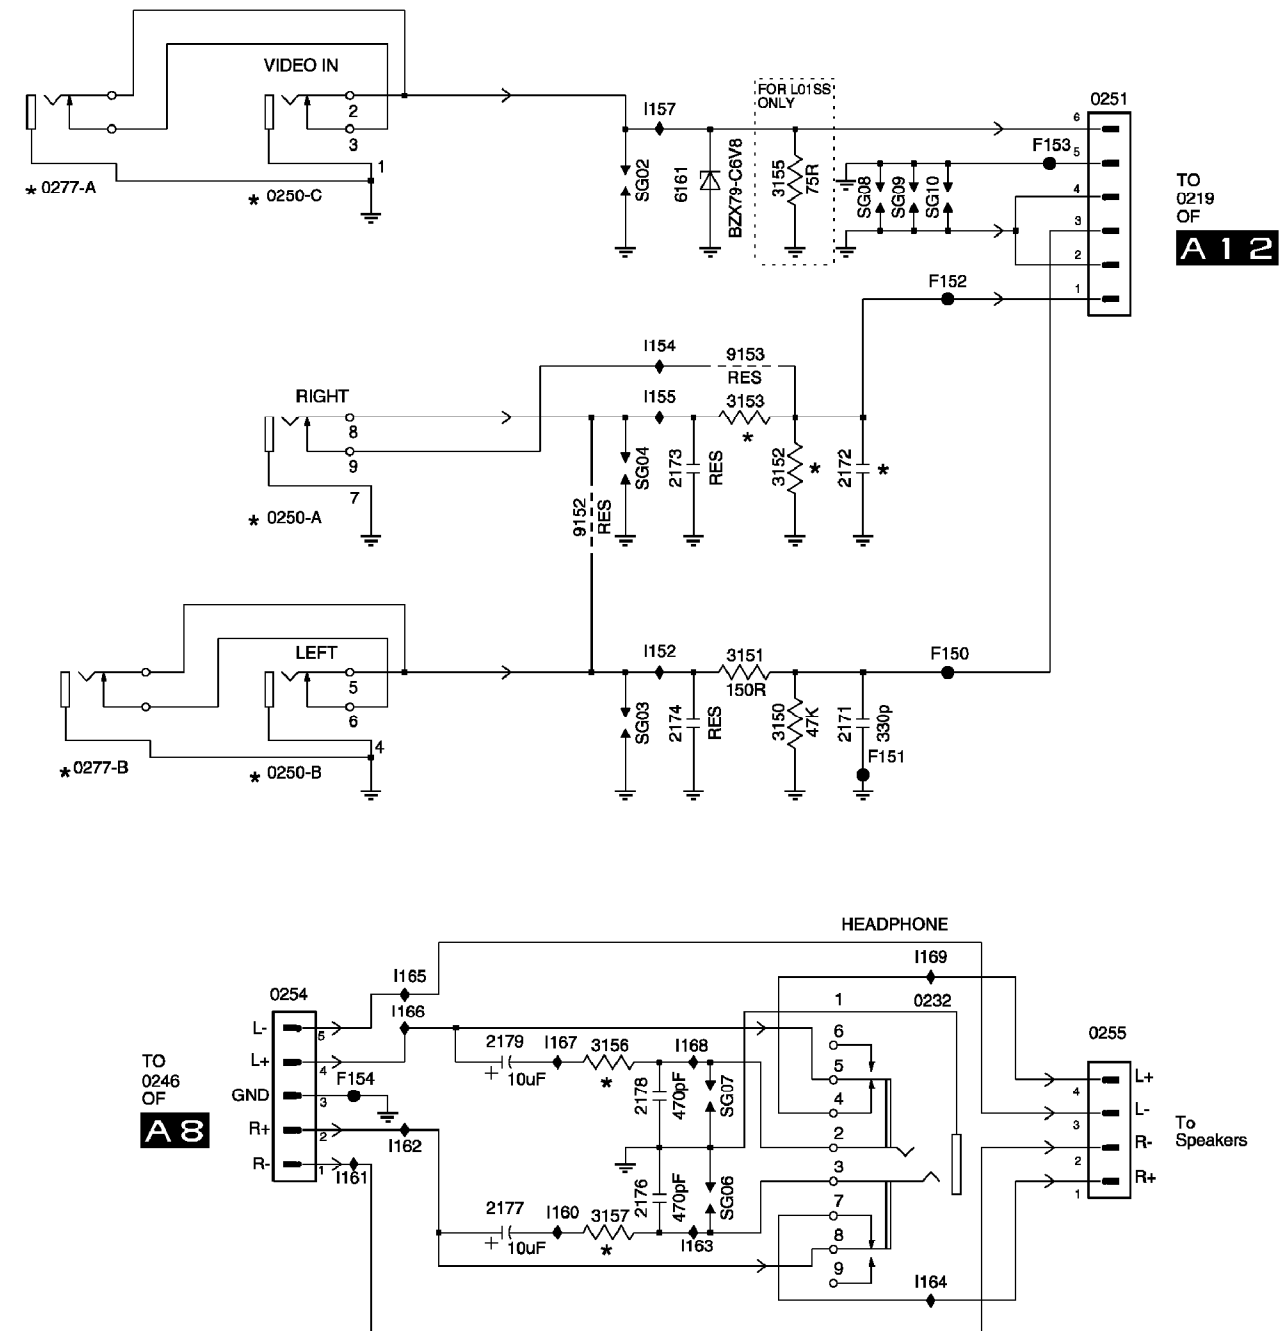


C 1 SIDE AV PANEL + HP PANEL (SLIM)

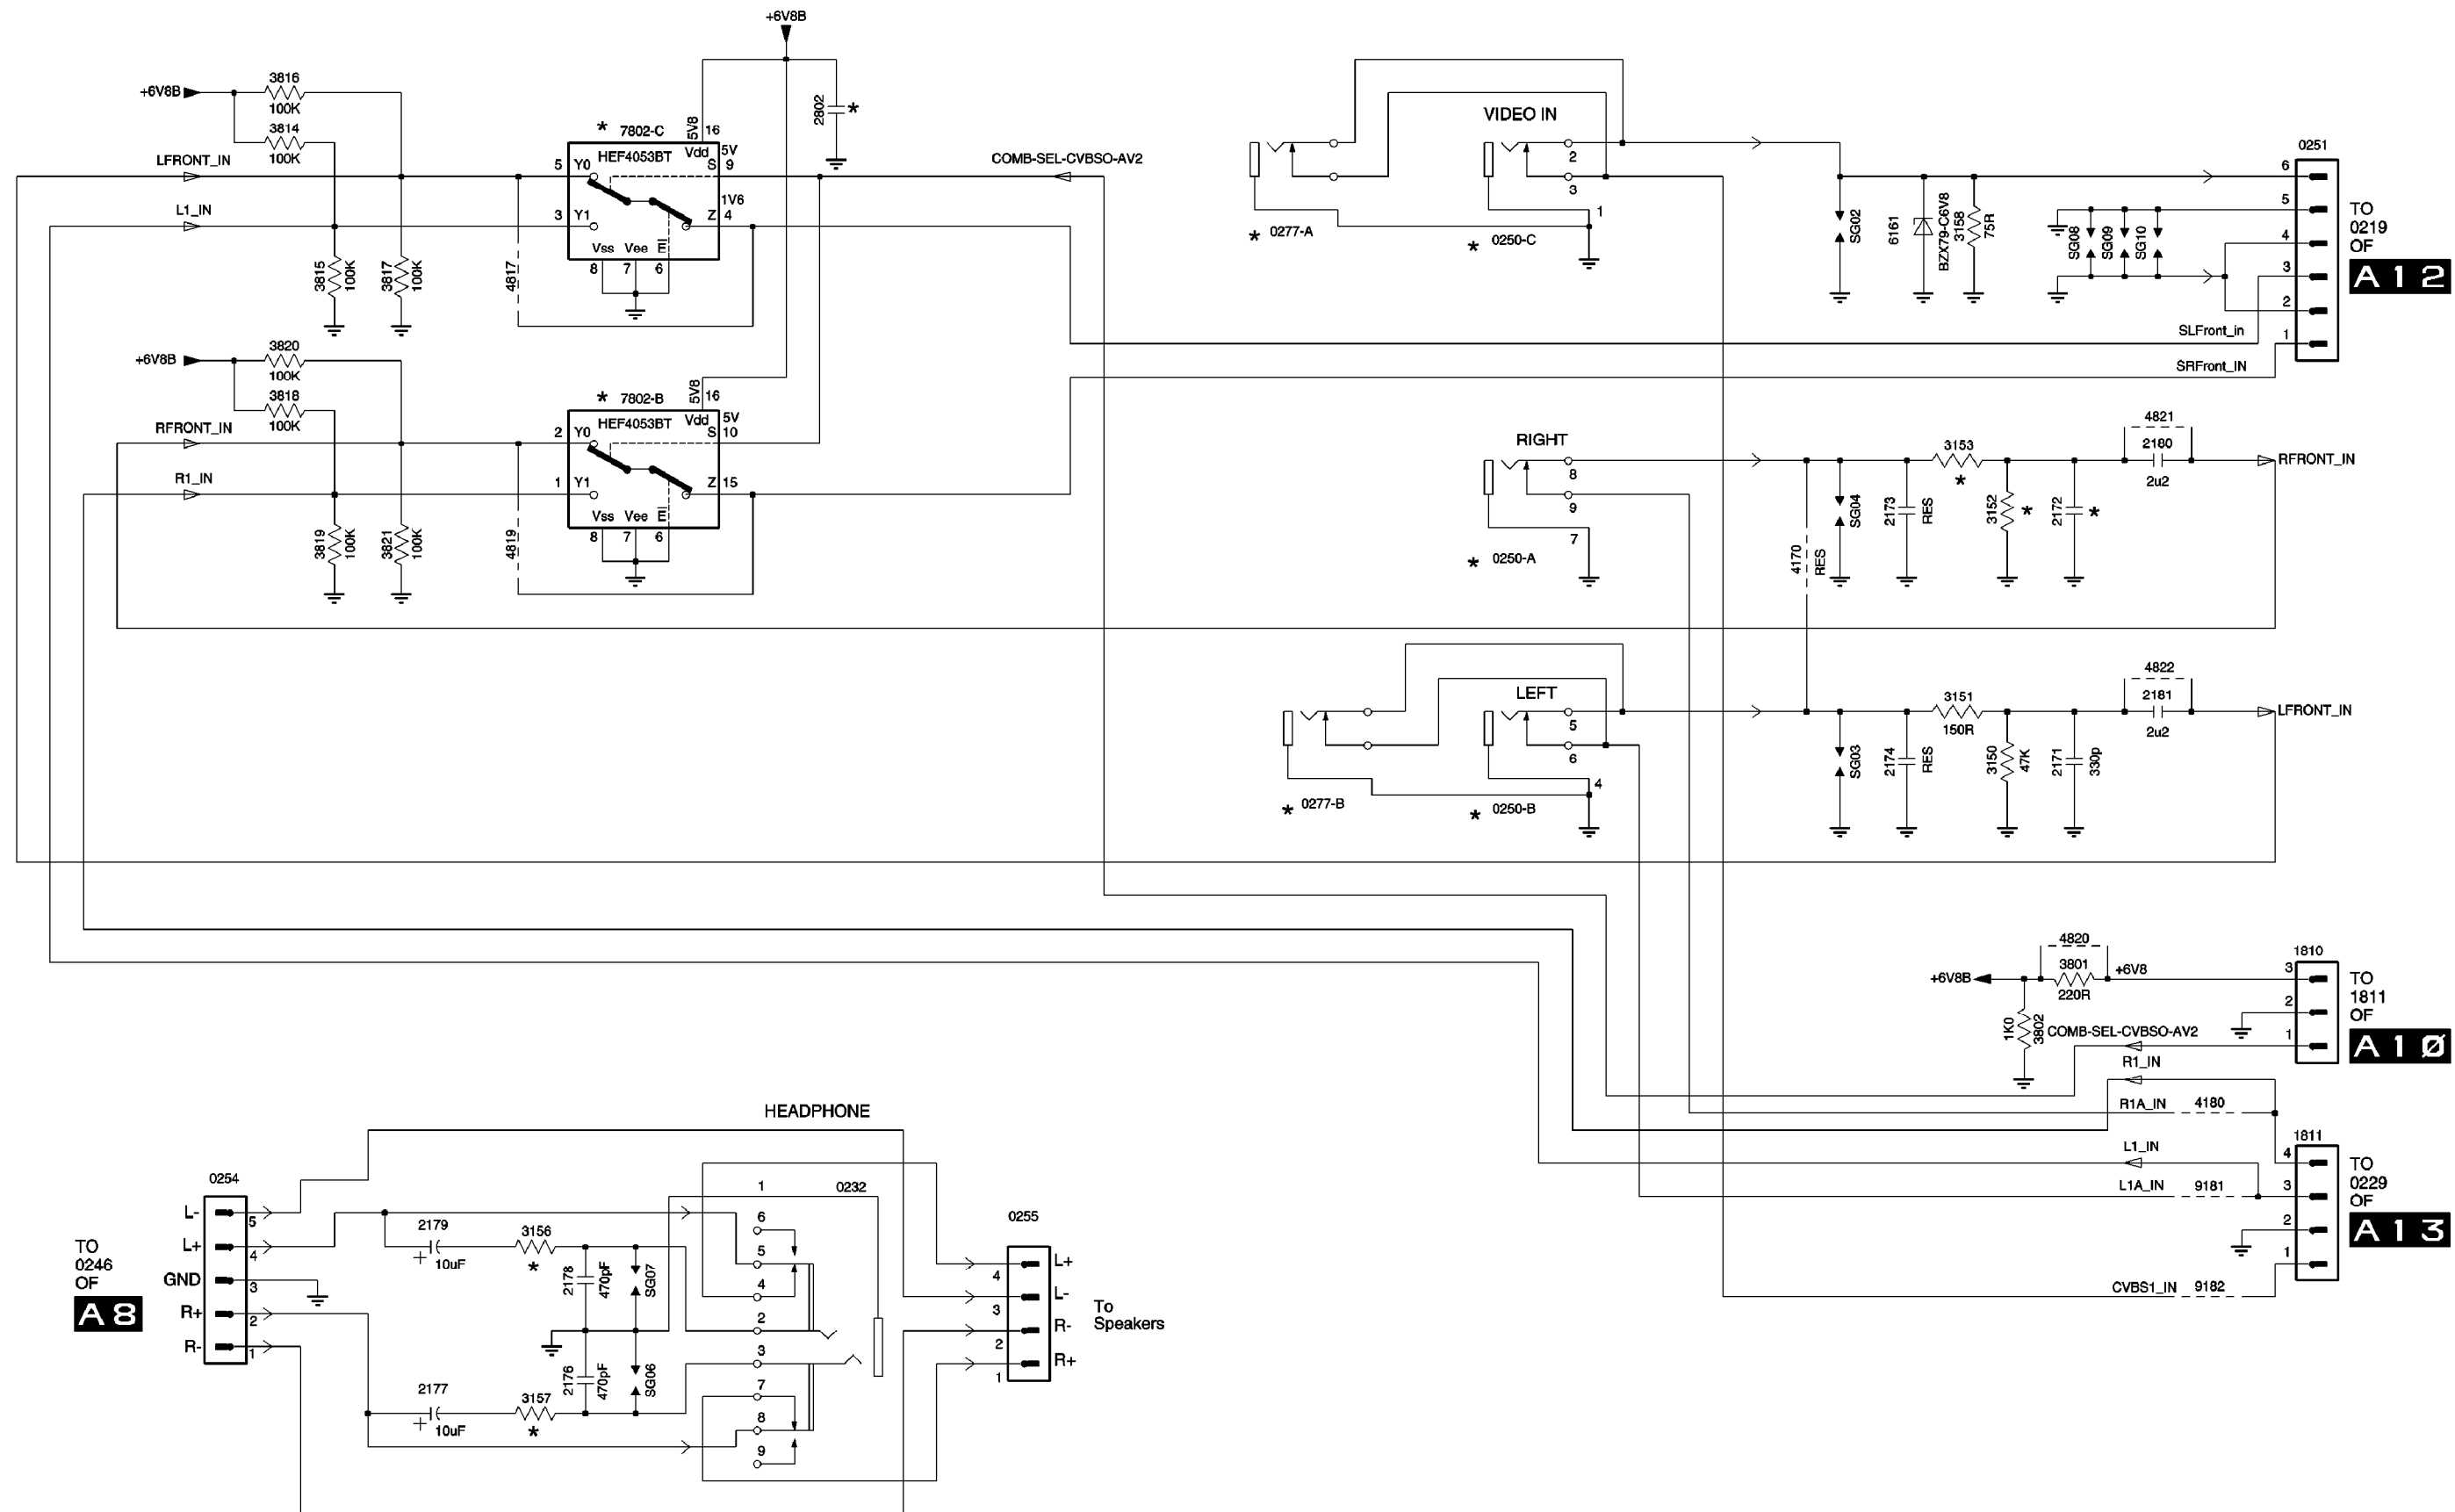



C2 SIDE AV PANEL + HP PANEL (WIDE)

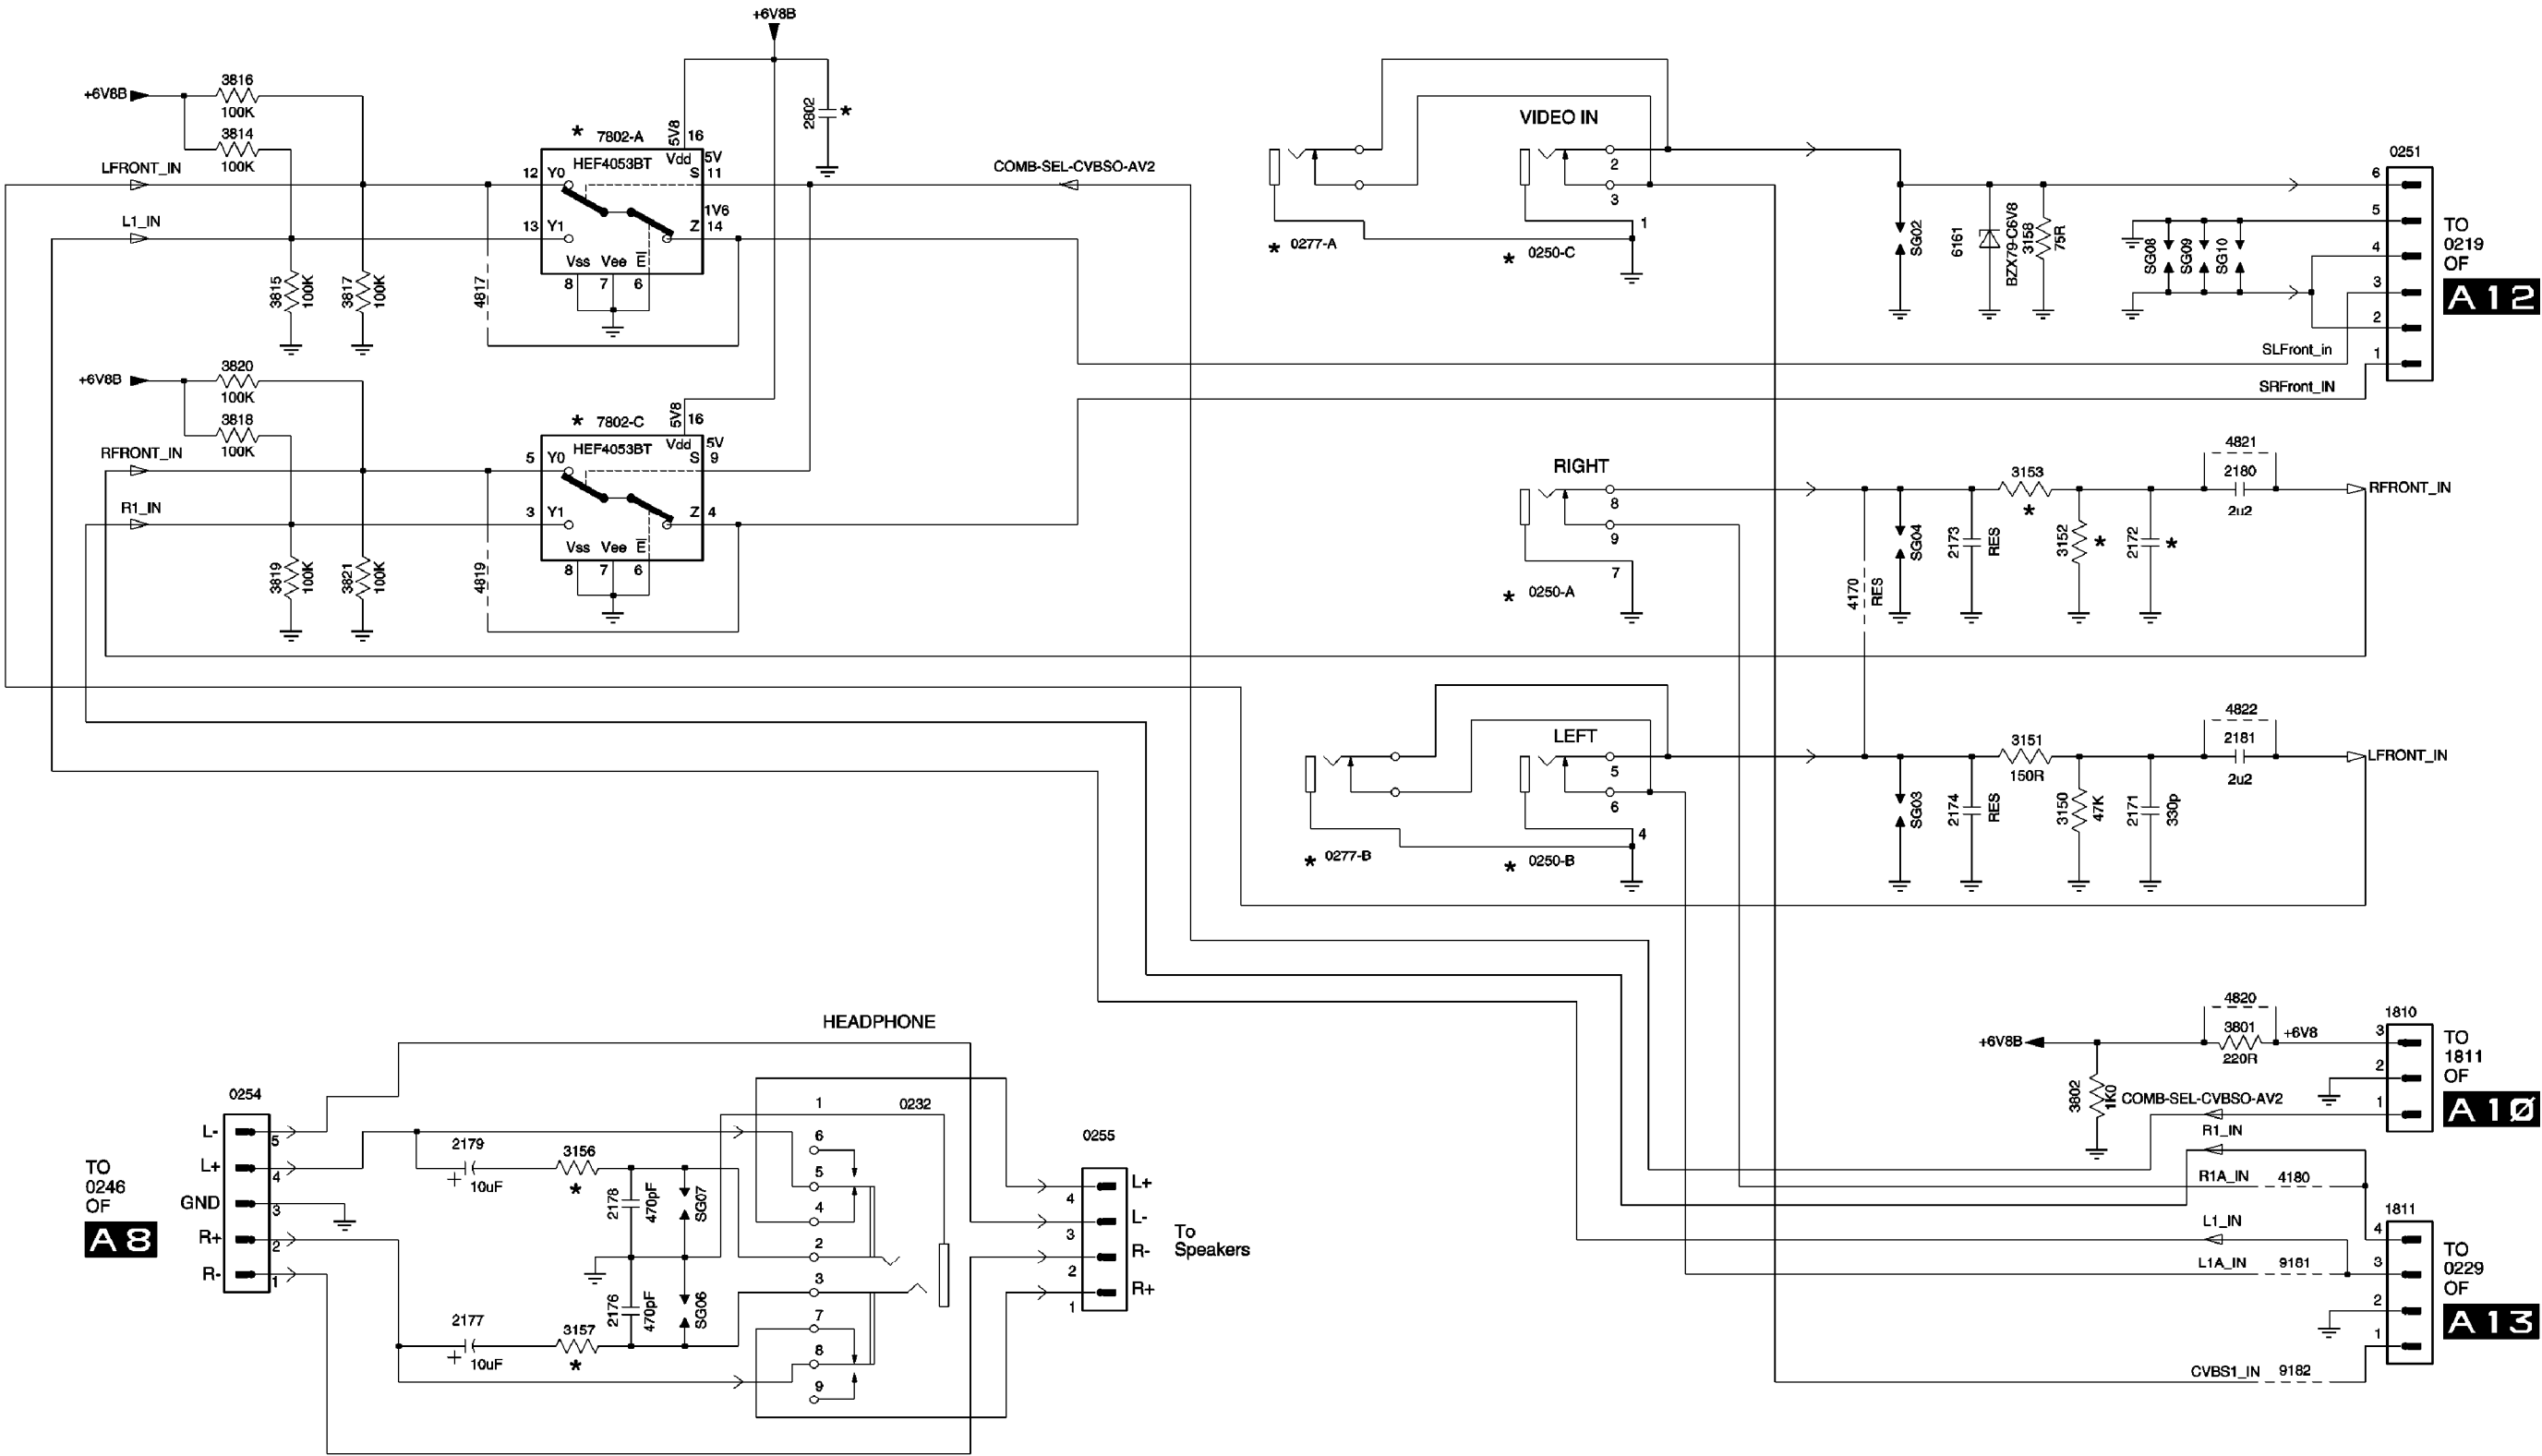

TOP CONTROL PANEL

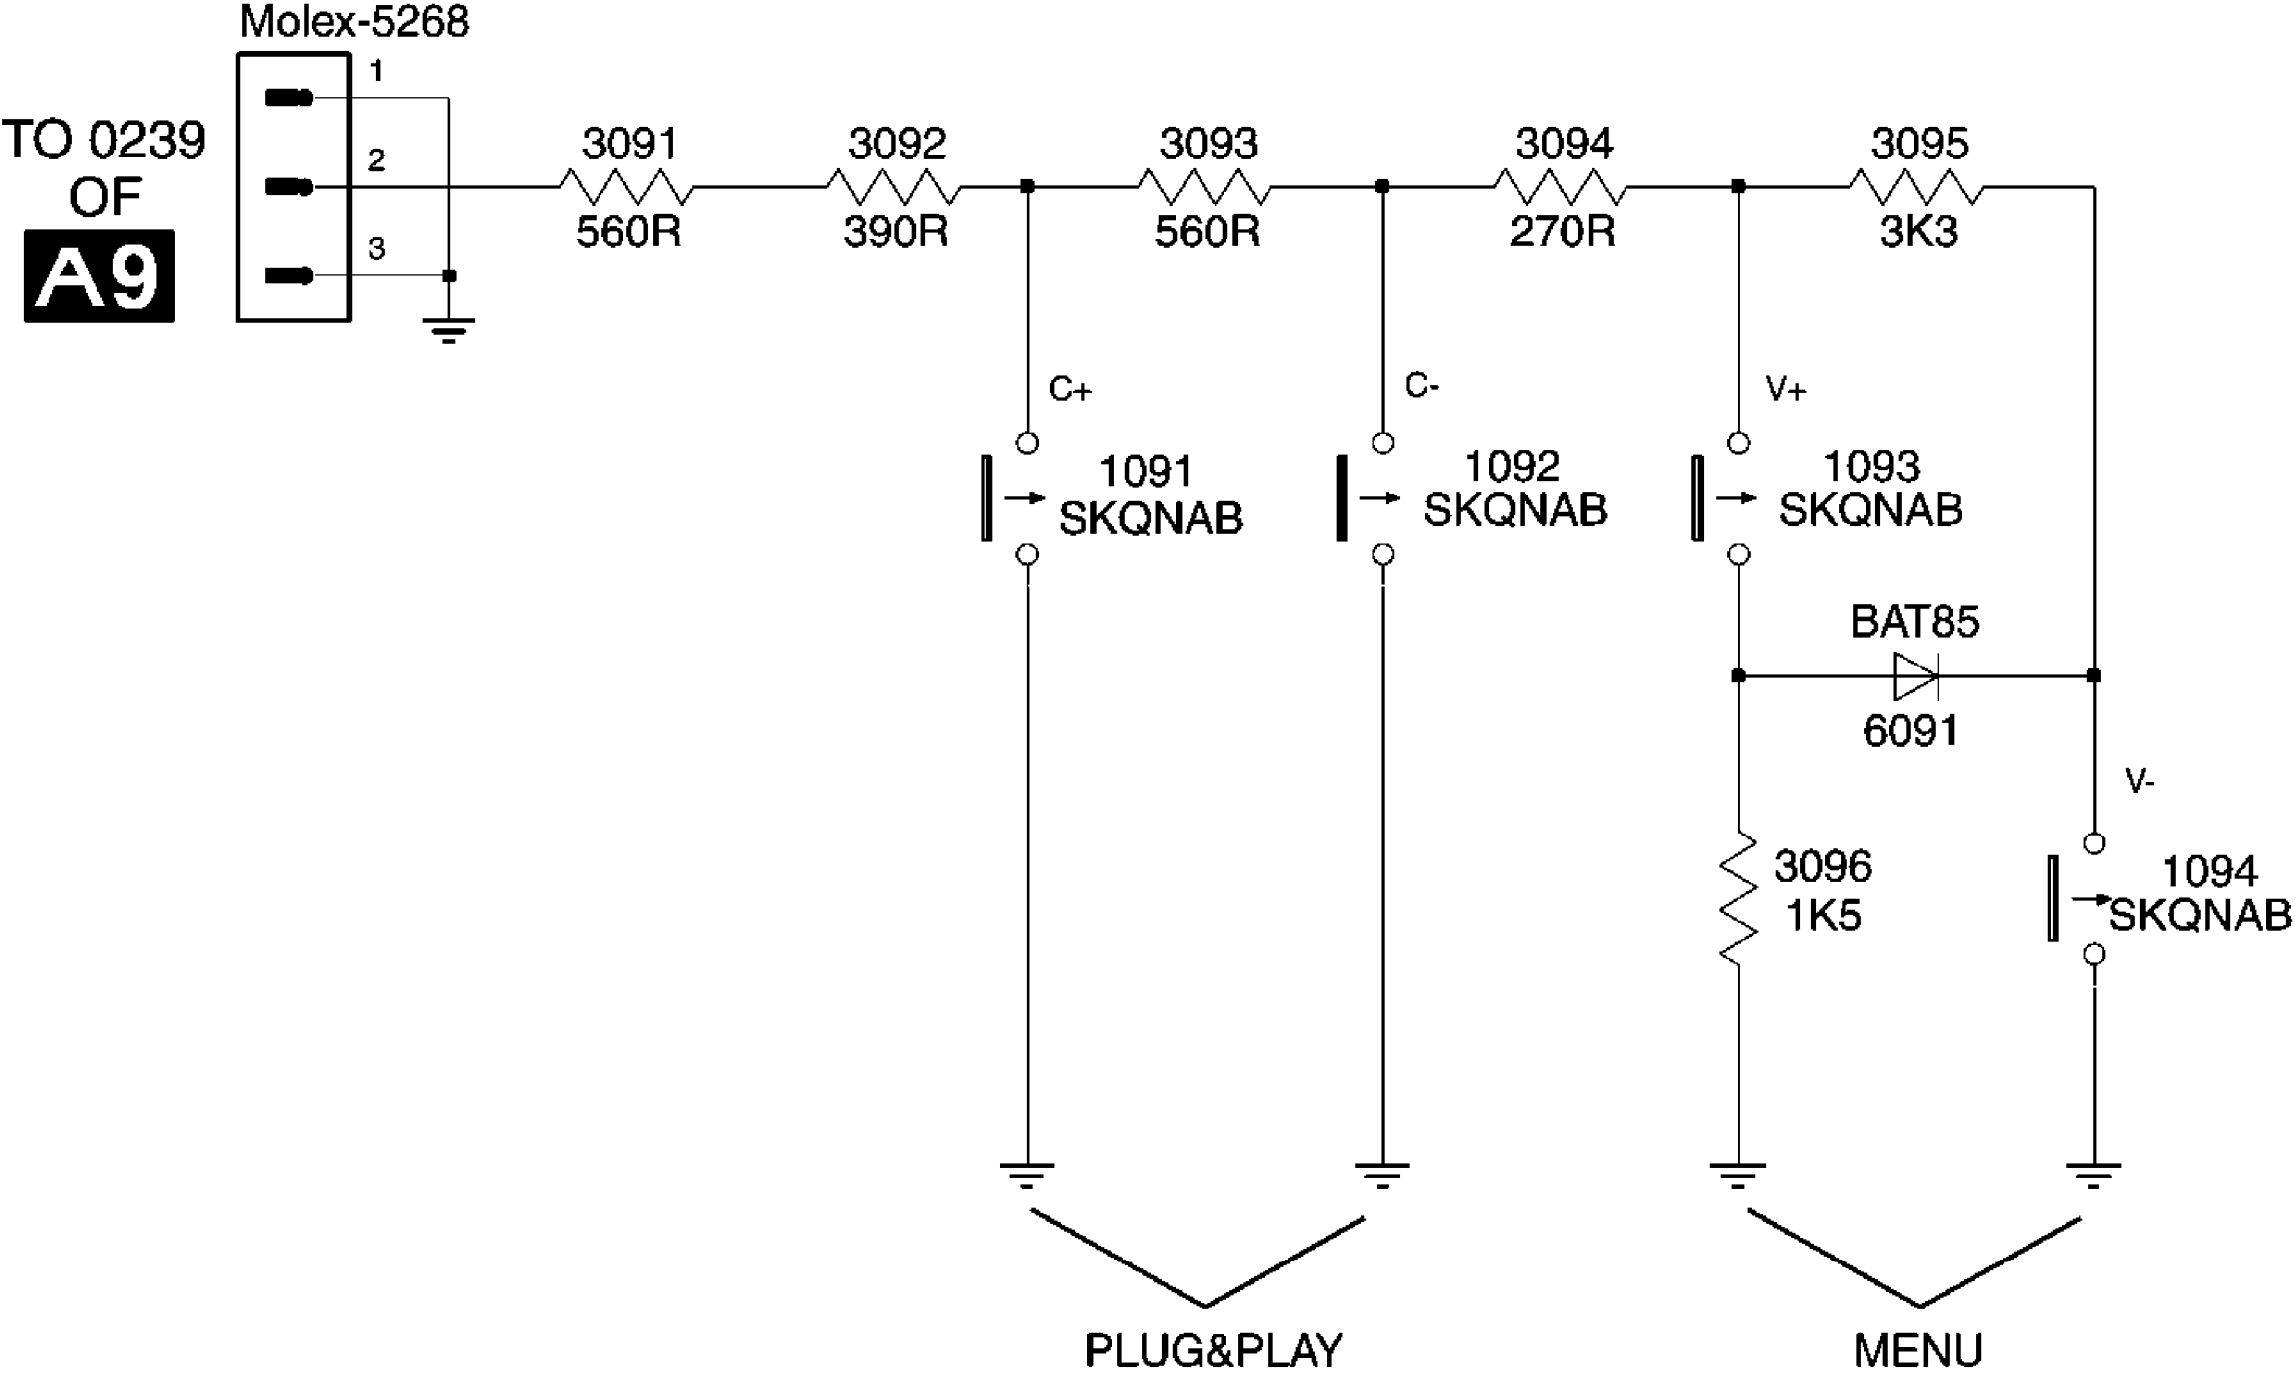


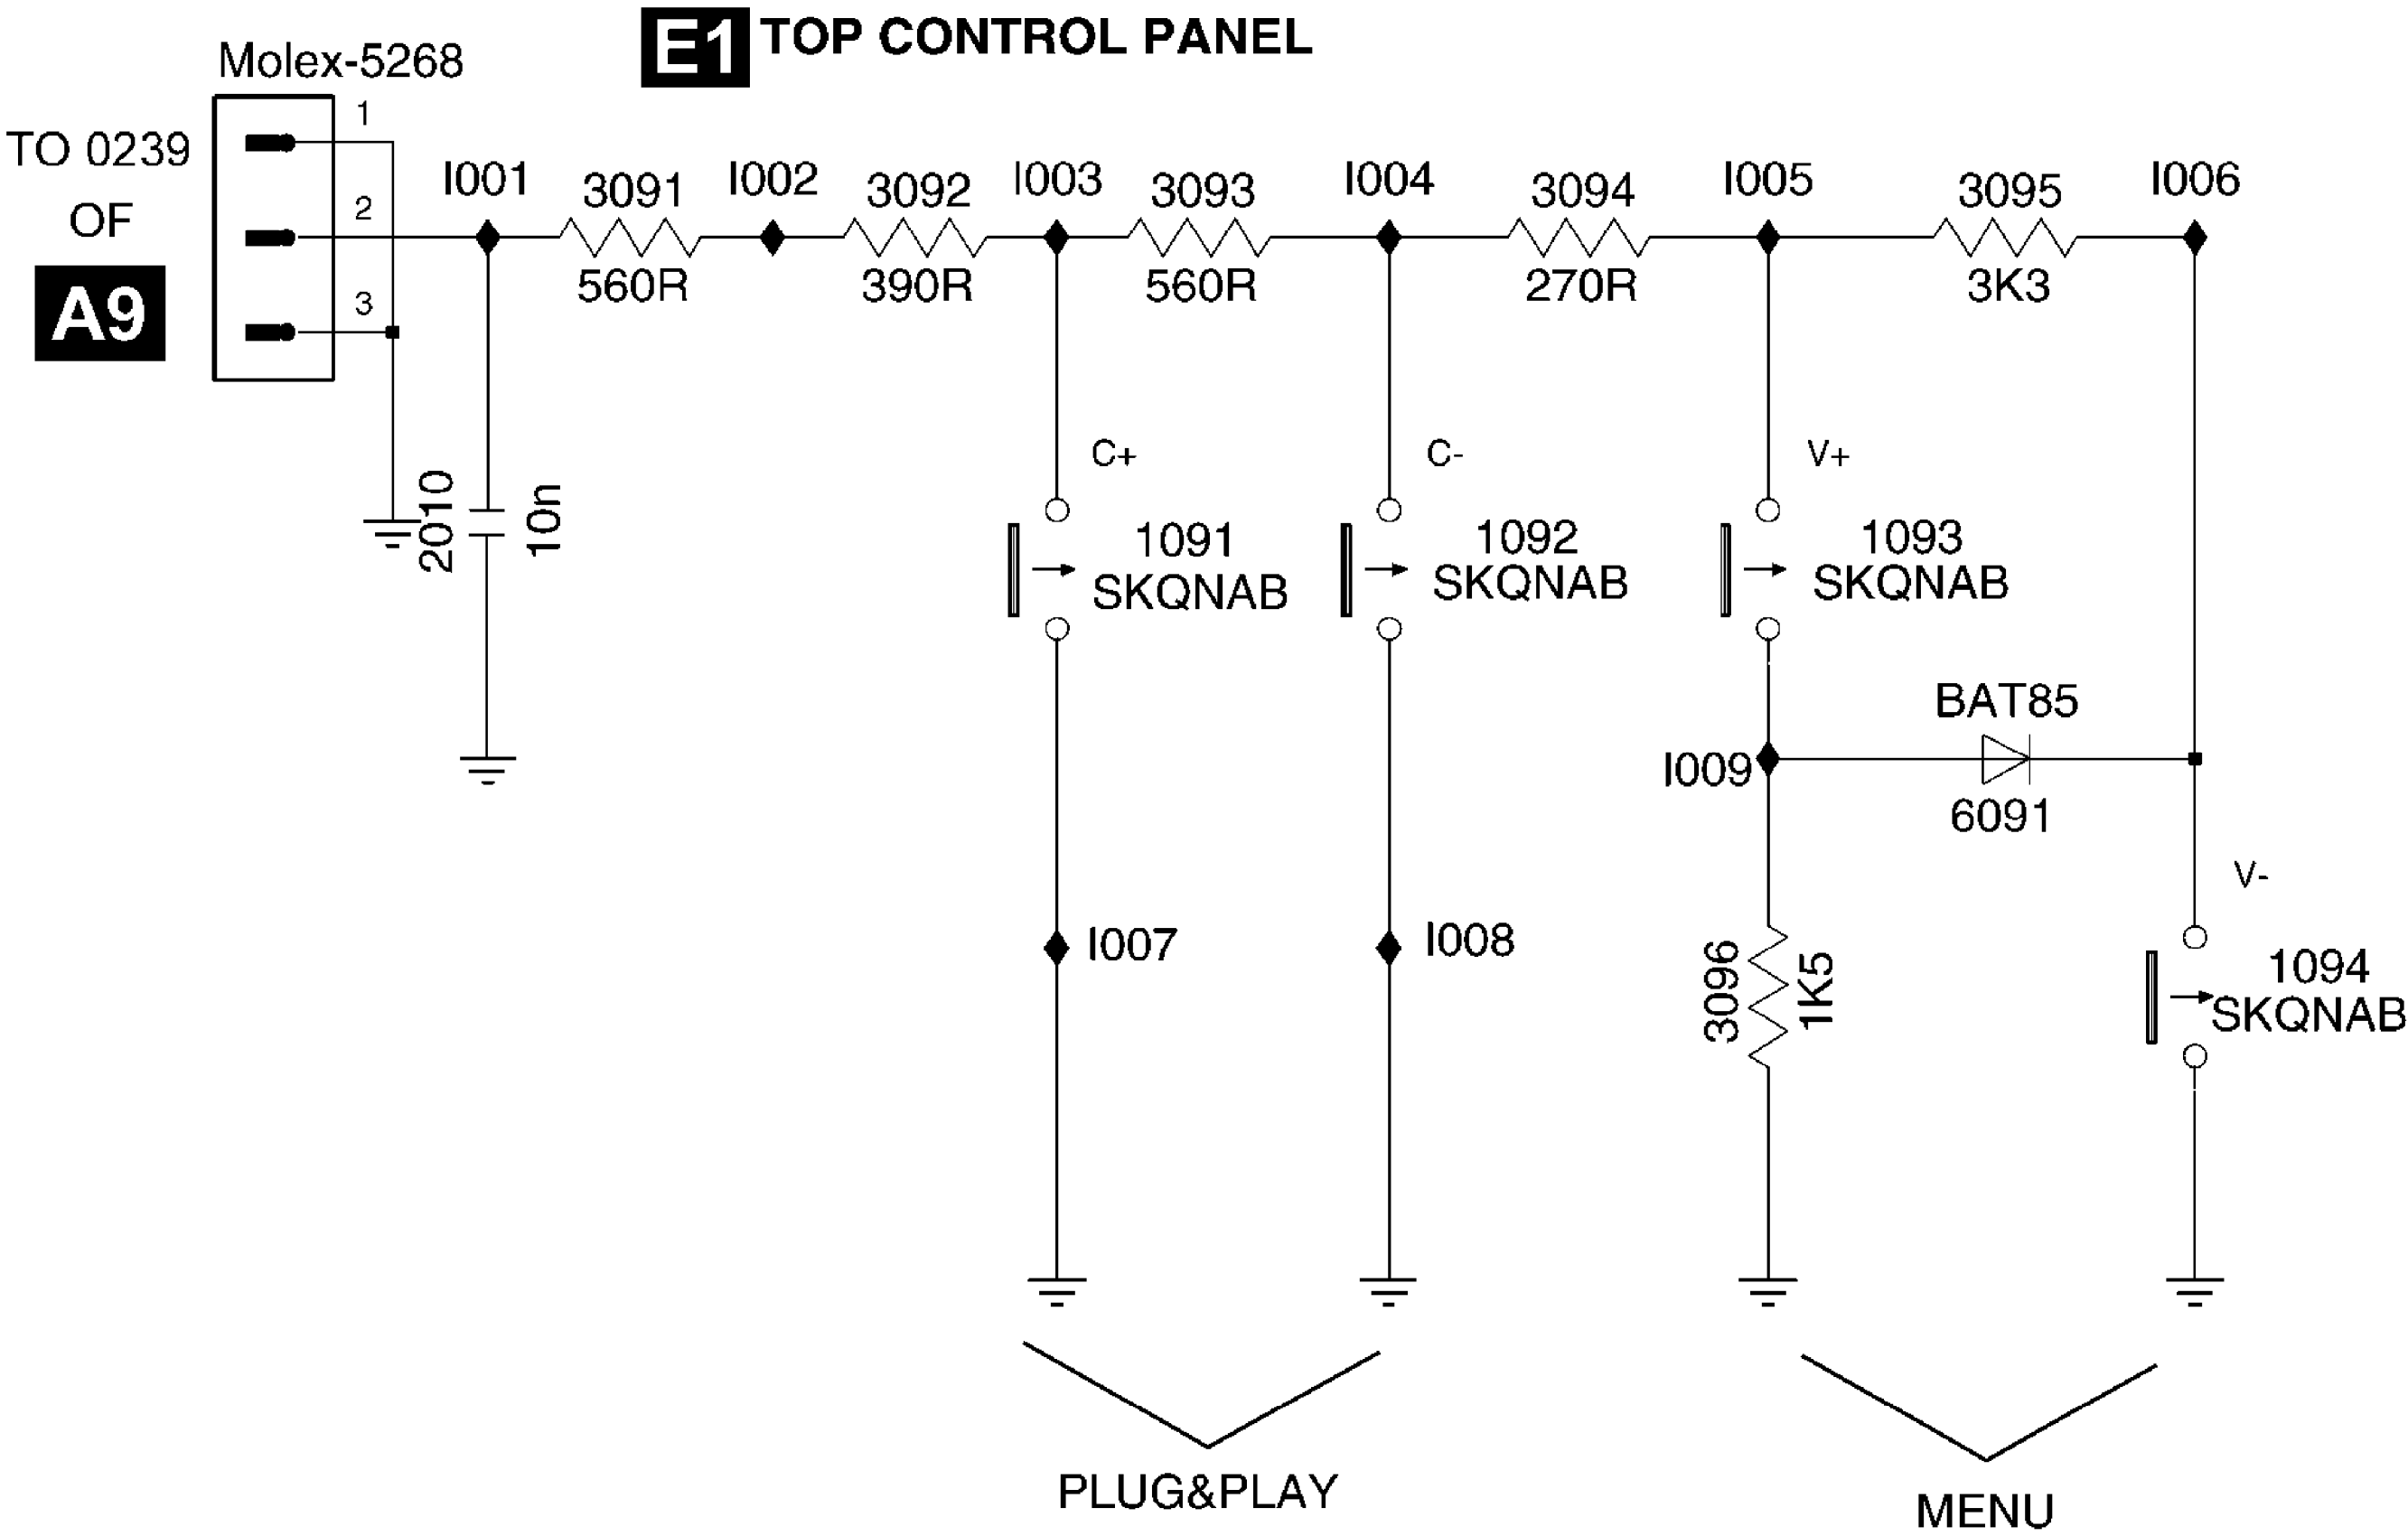

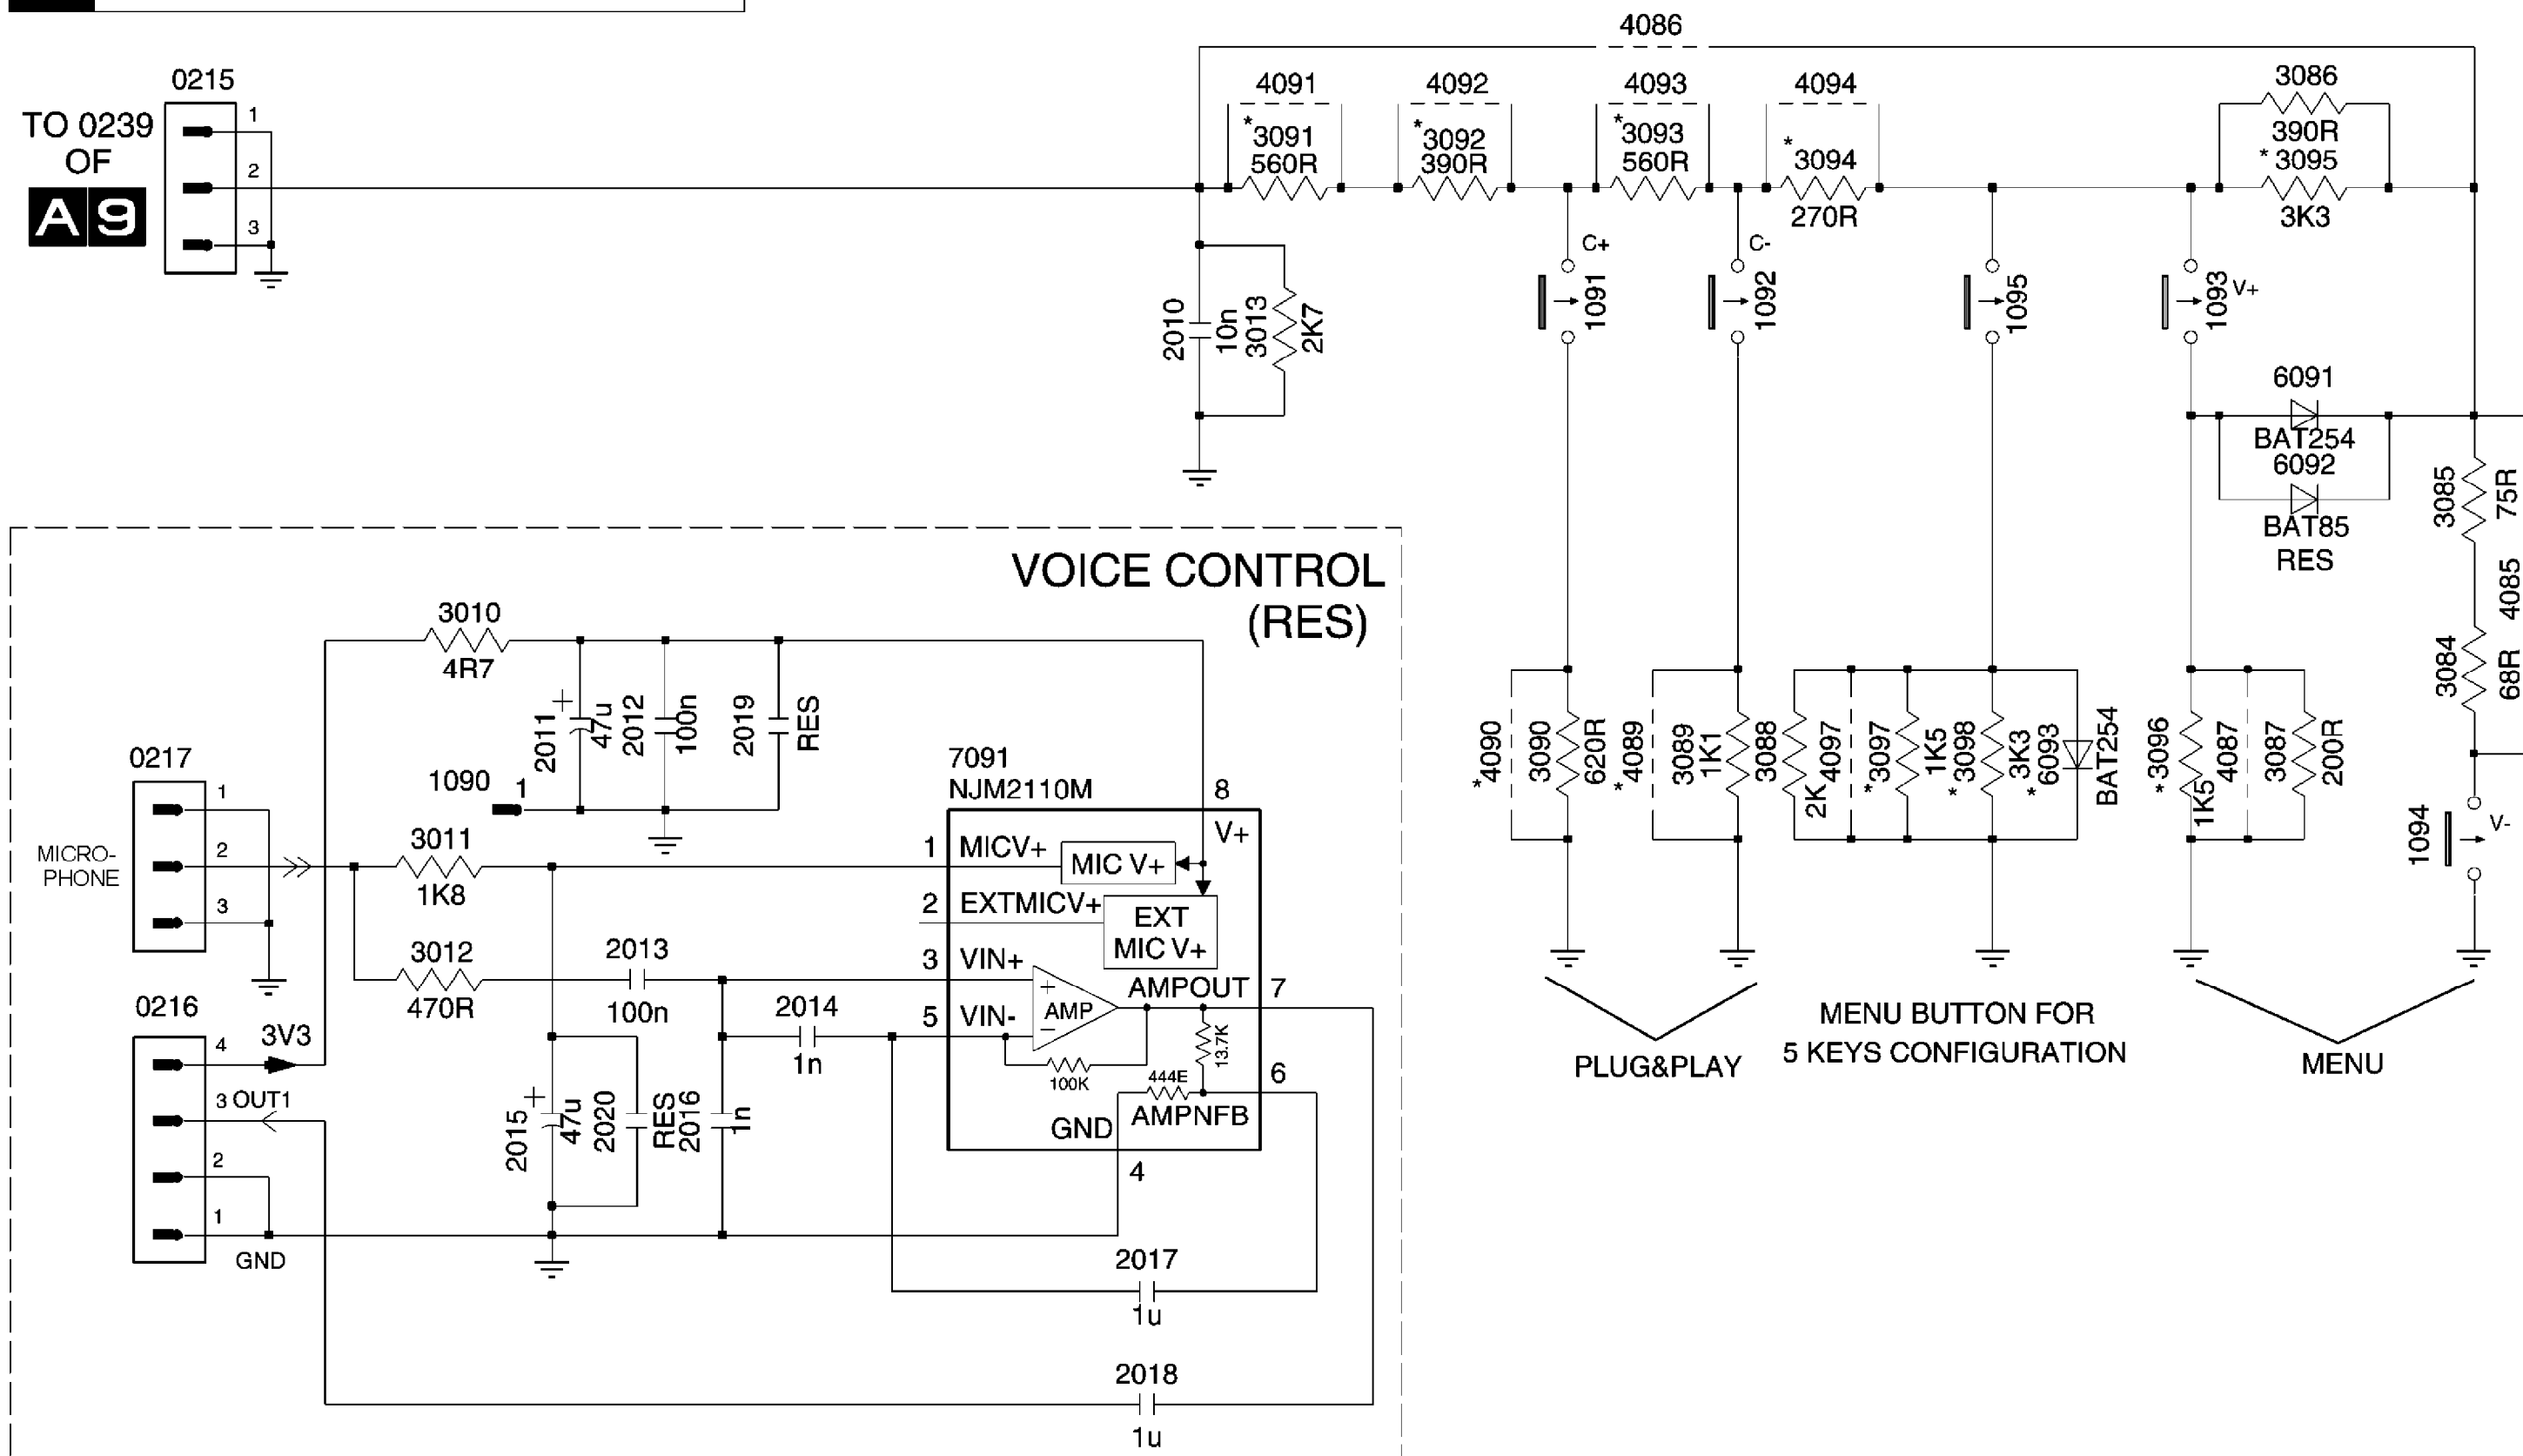


USED ONLY IN MODELS: 27PT663R37A, 27PT663R37C, 29PT563S85A, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 27PT563S37A, 30PW633F35A, 32LT621L/17 (7638) - [F] 2D 3 Line Comb Filter
32PT563S37A, 32PT563S37G, 32PW633R85C, 29PT663S85A, 36ST220P/35, 36ST230P/35, 32ST230P/35, 32ST220P/17, 32PT563R85G, 29PT6631/44


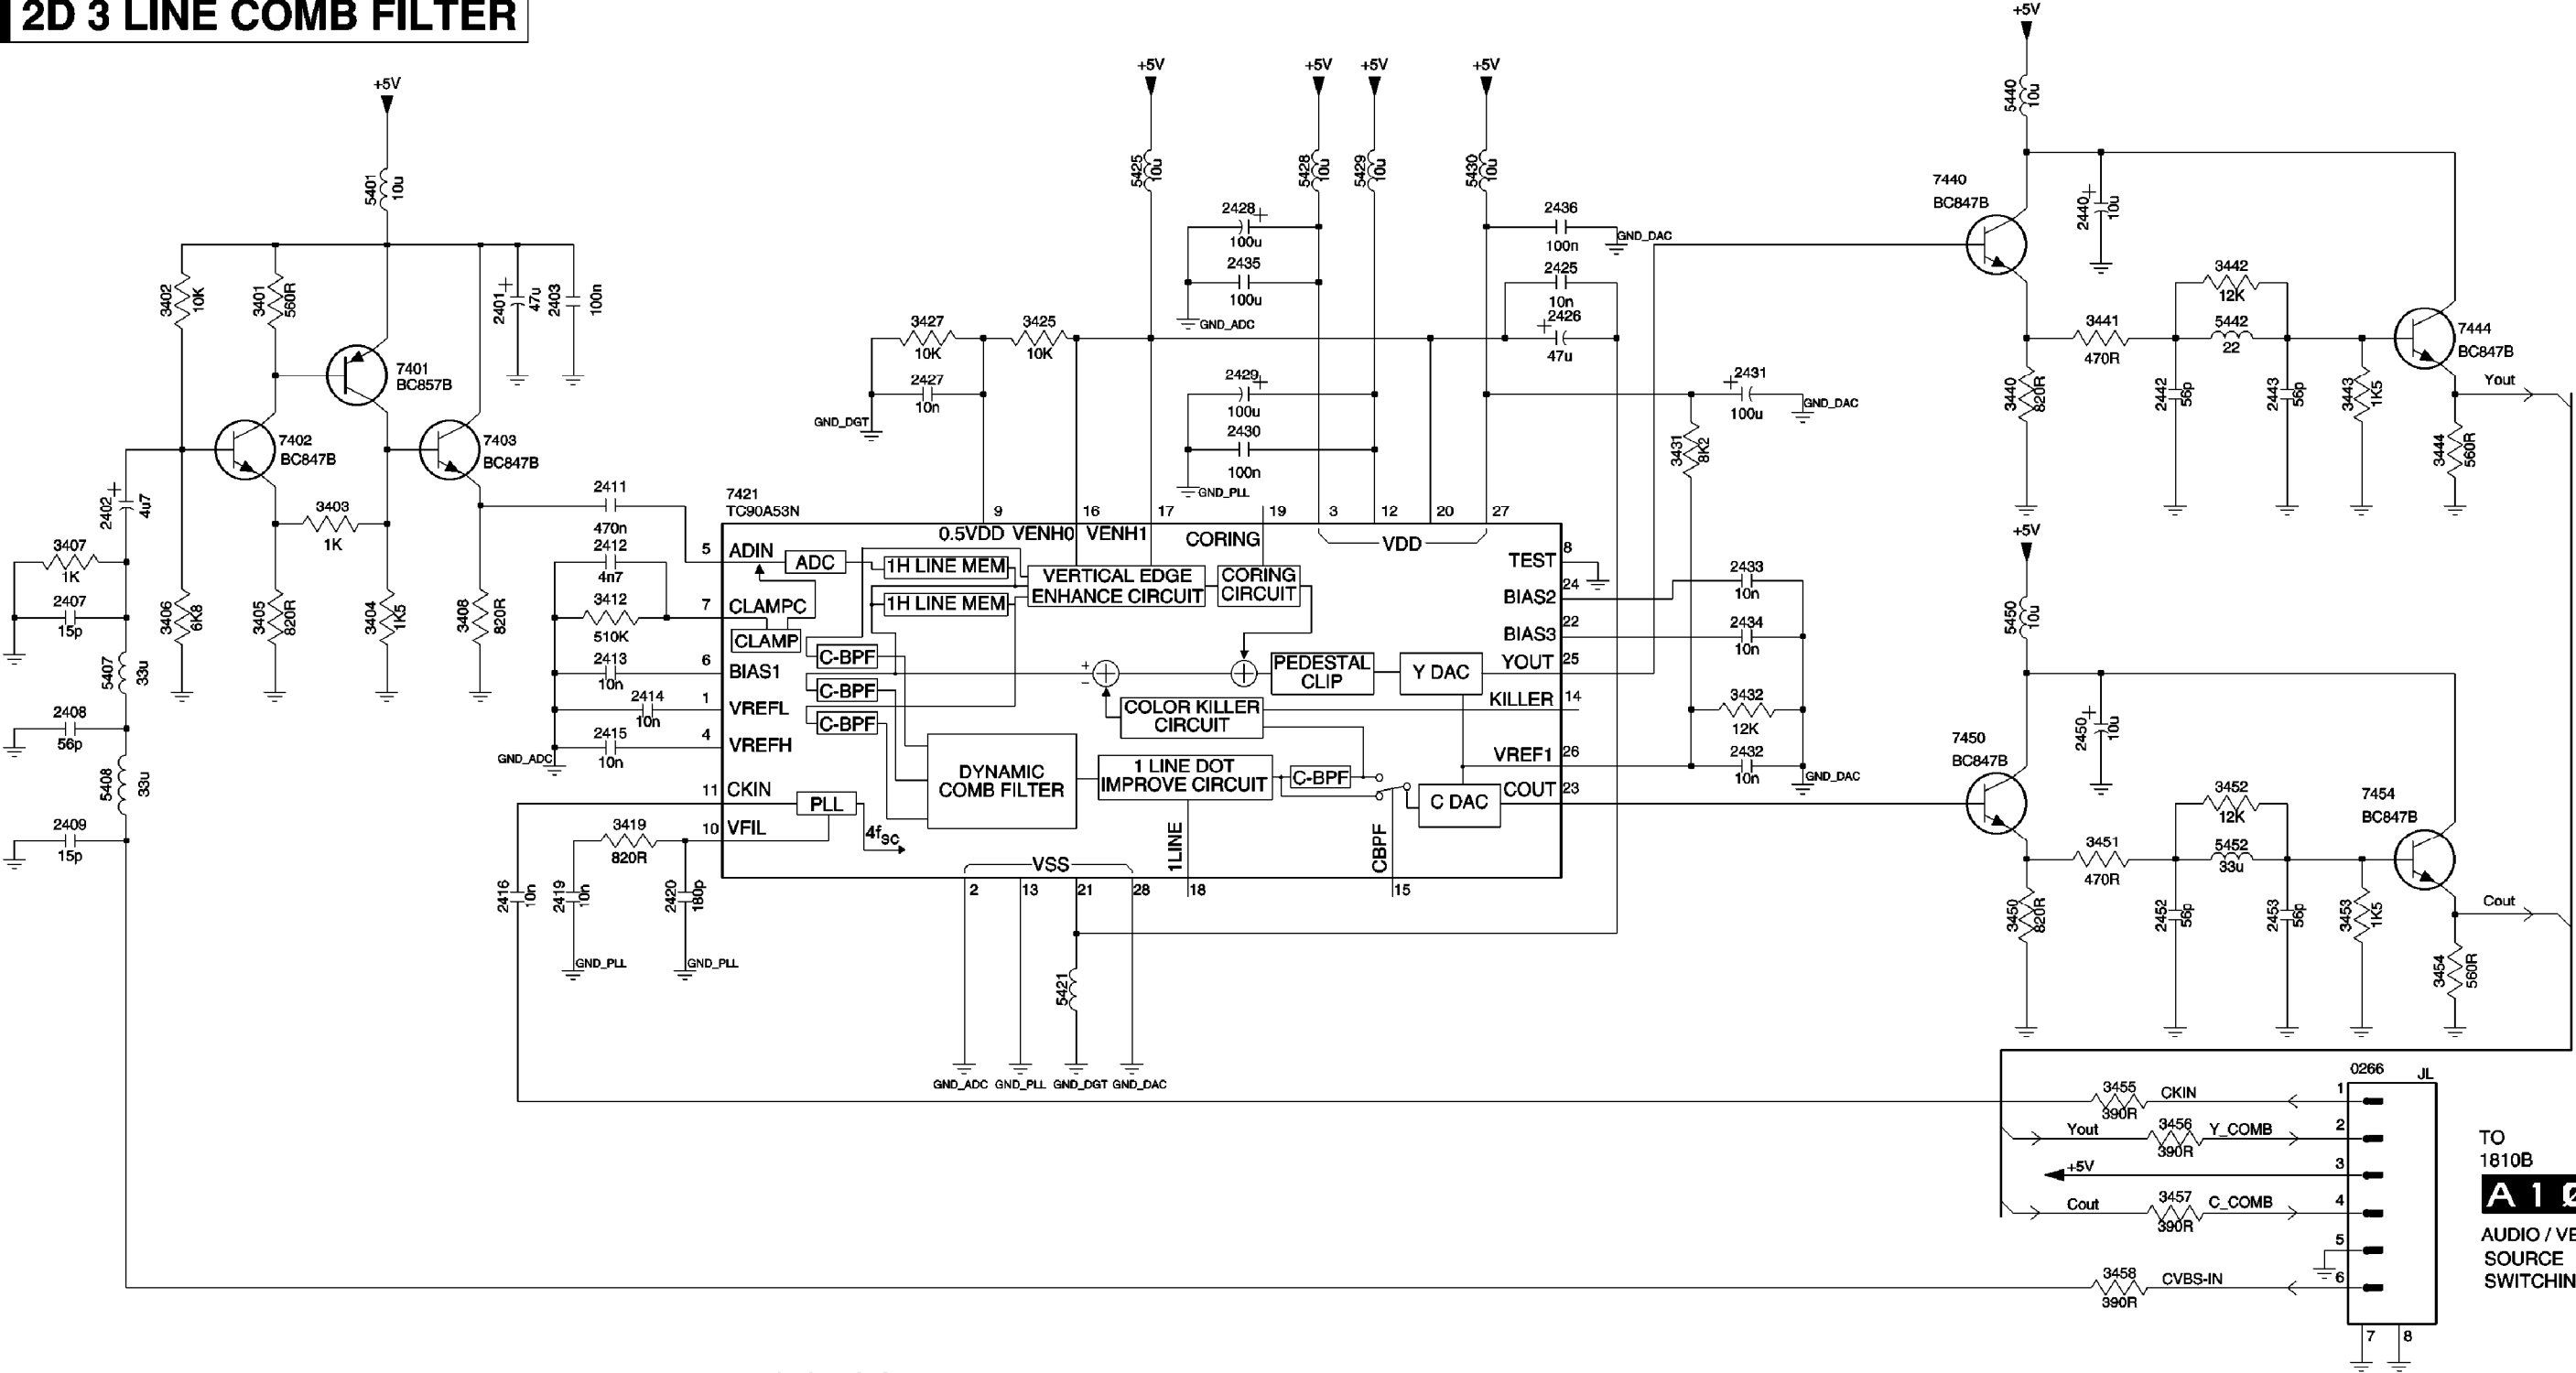
F 2D 3 LINE COMB FILTER




TO
1810B
A 1 0
AUDIO / VEDEO
SOURCE
SWITCHING

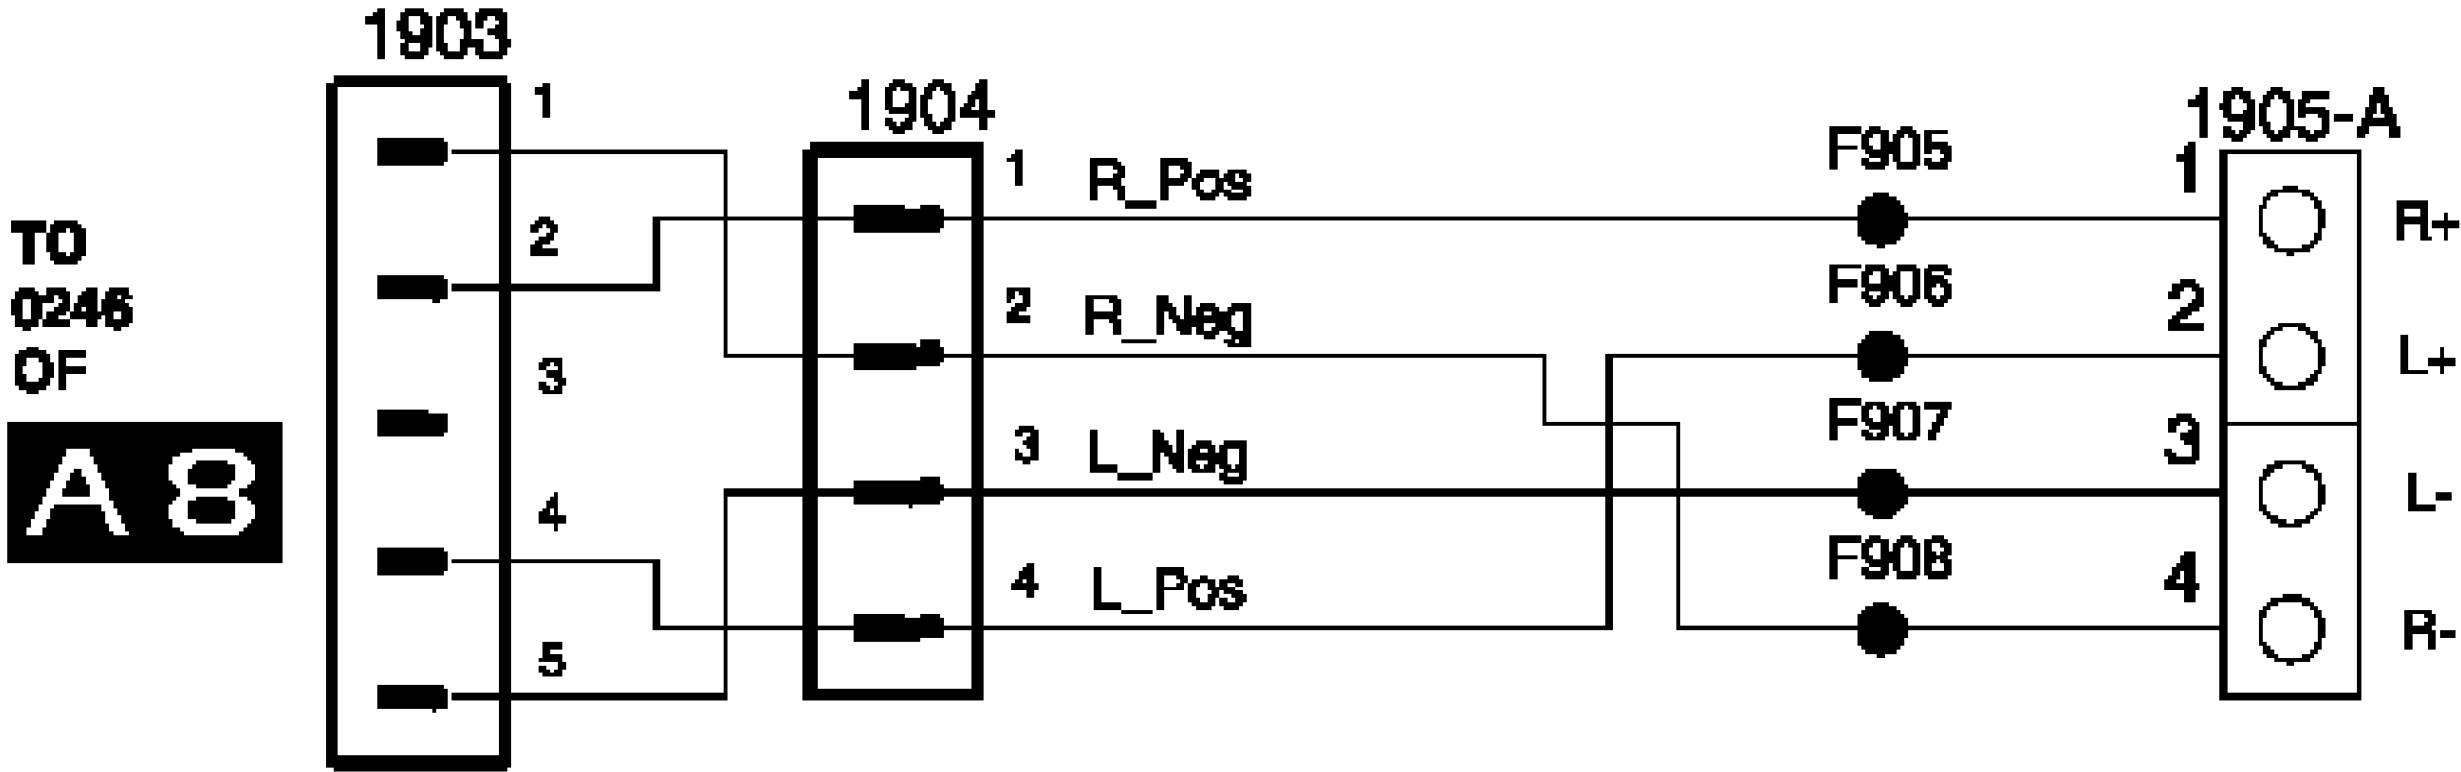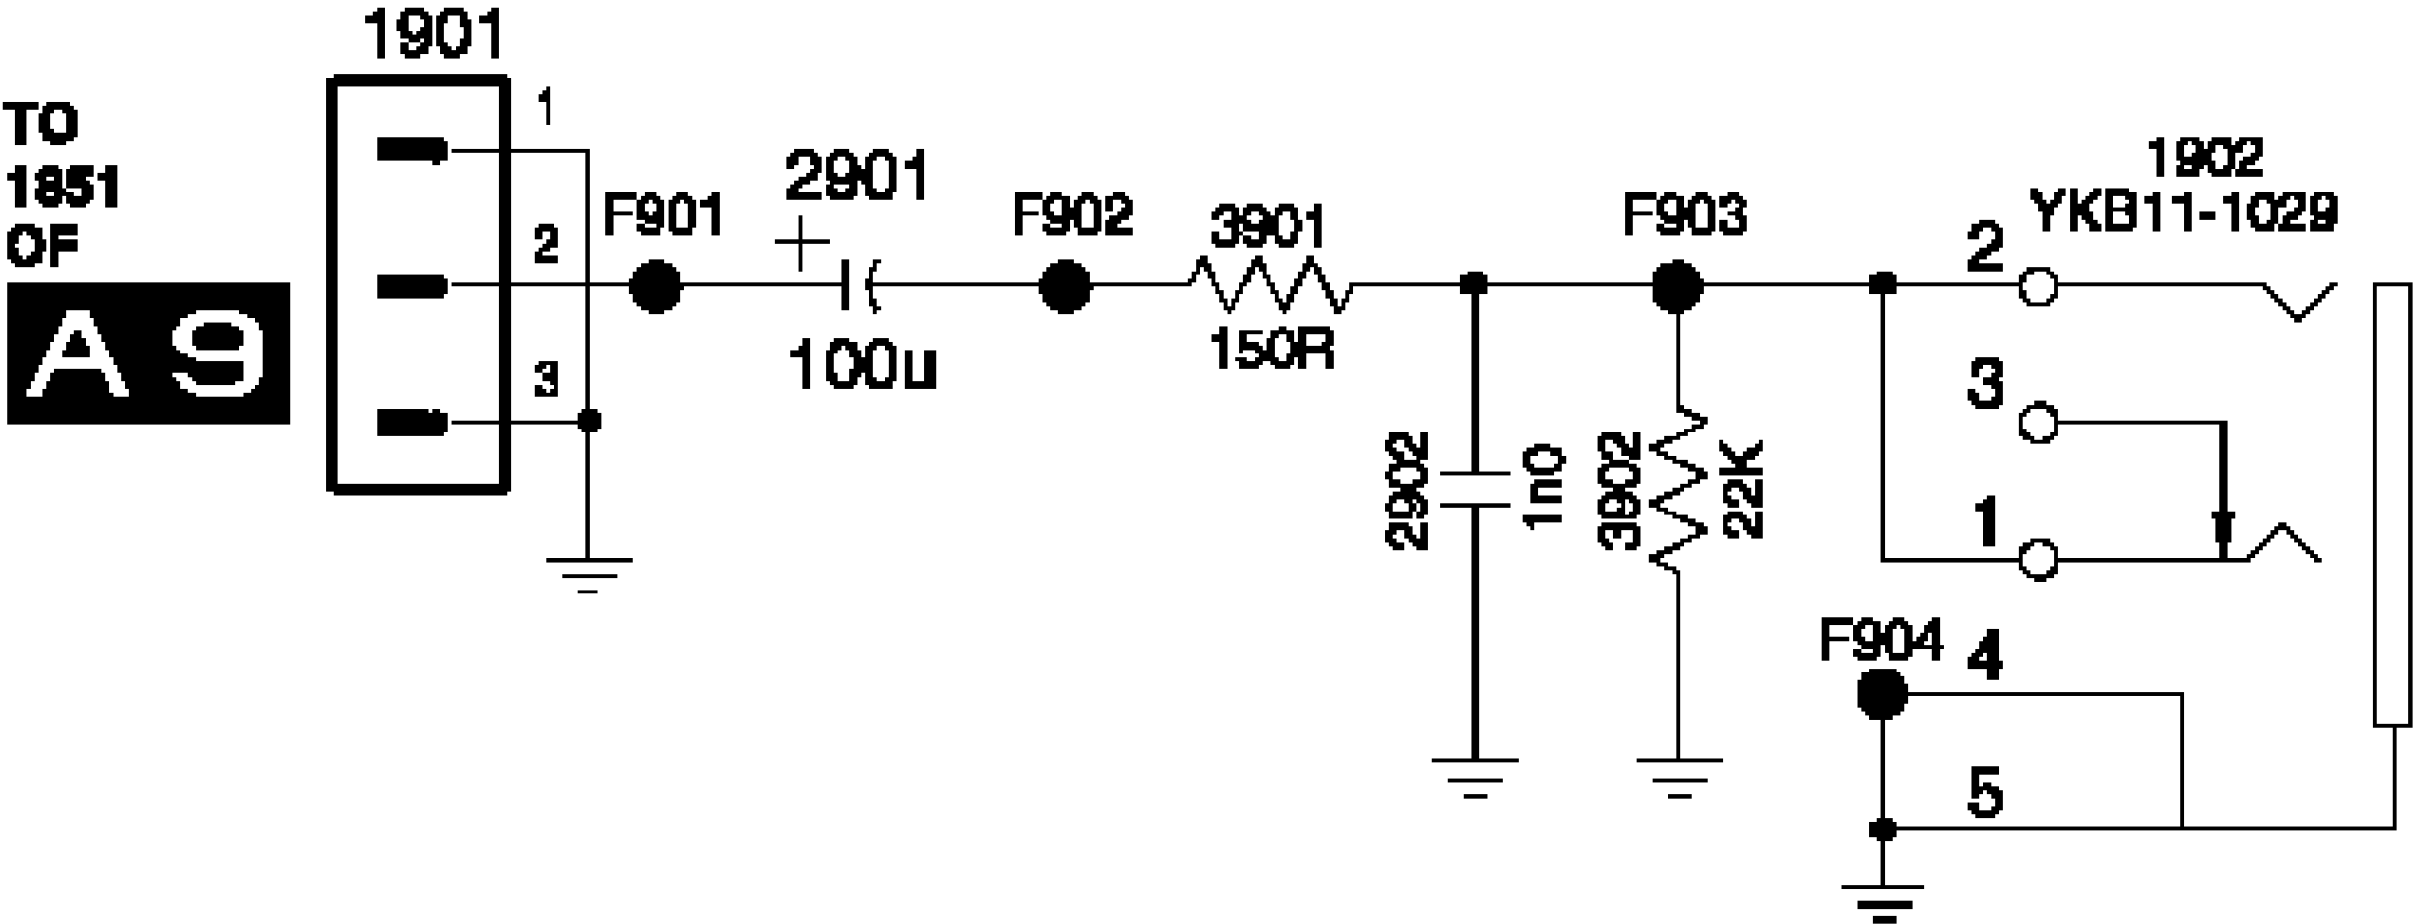
DC VOLTAGES






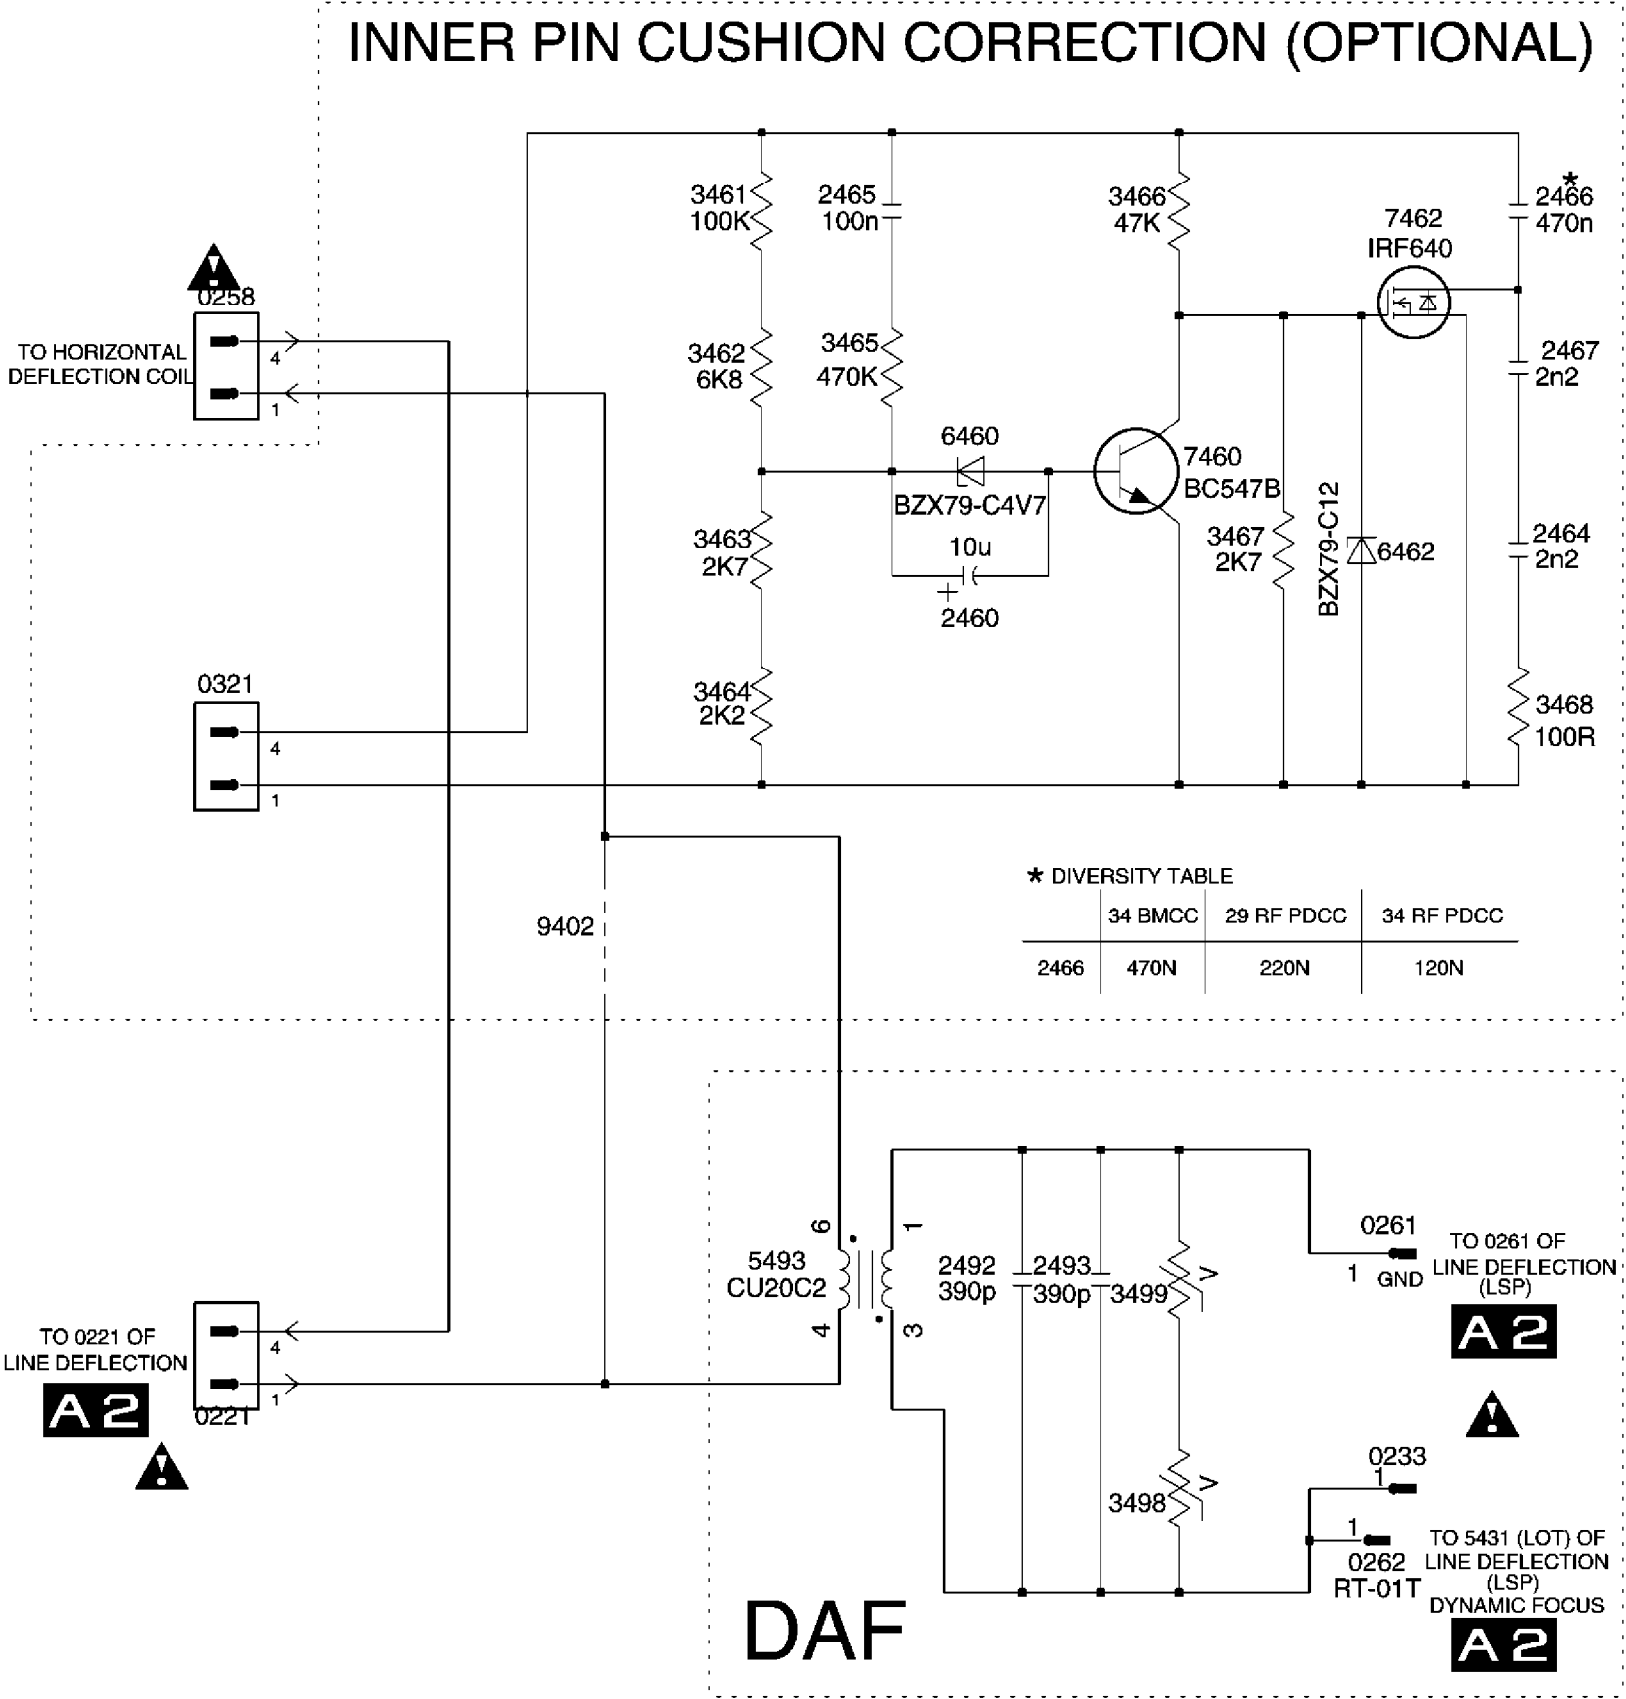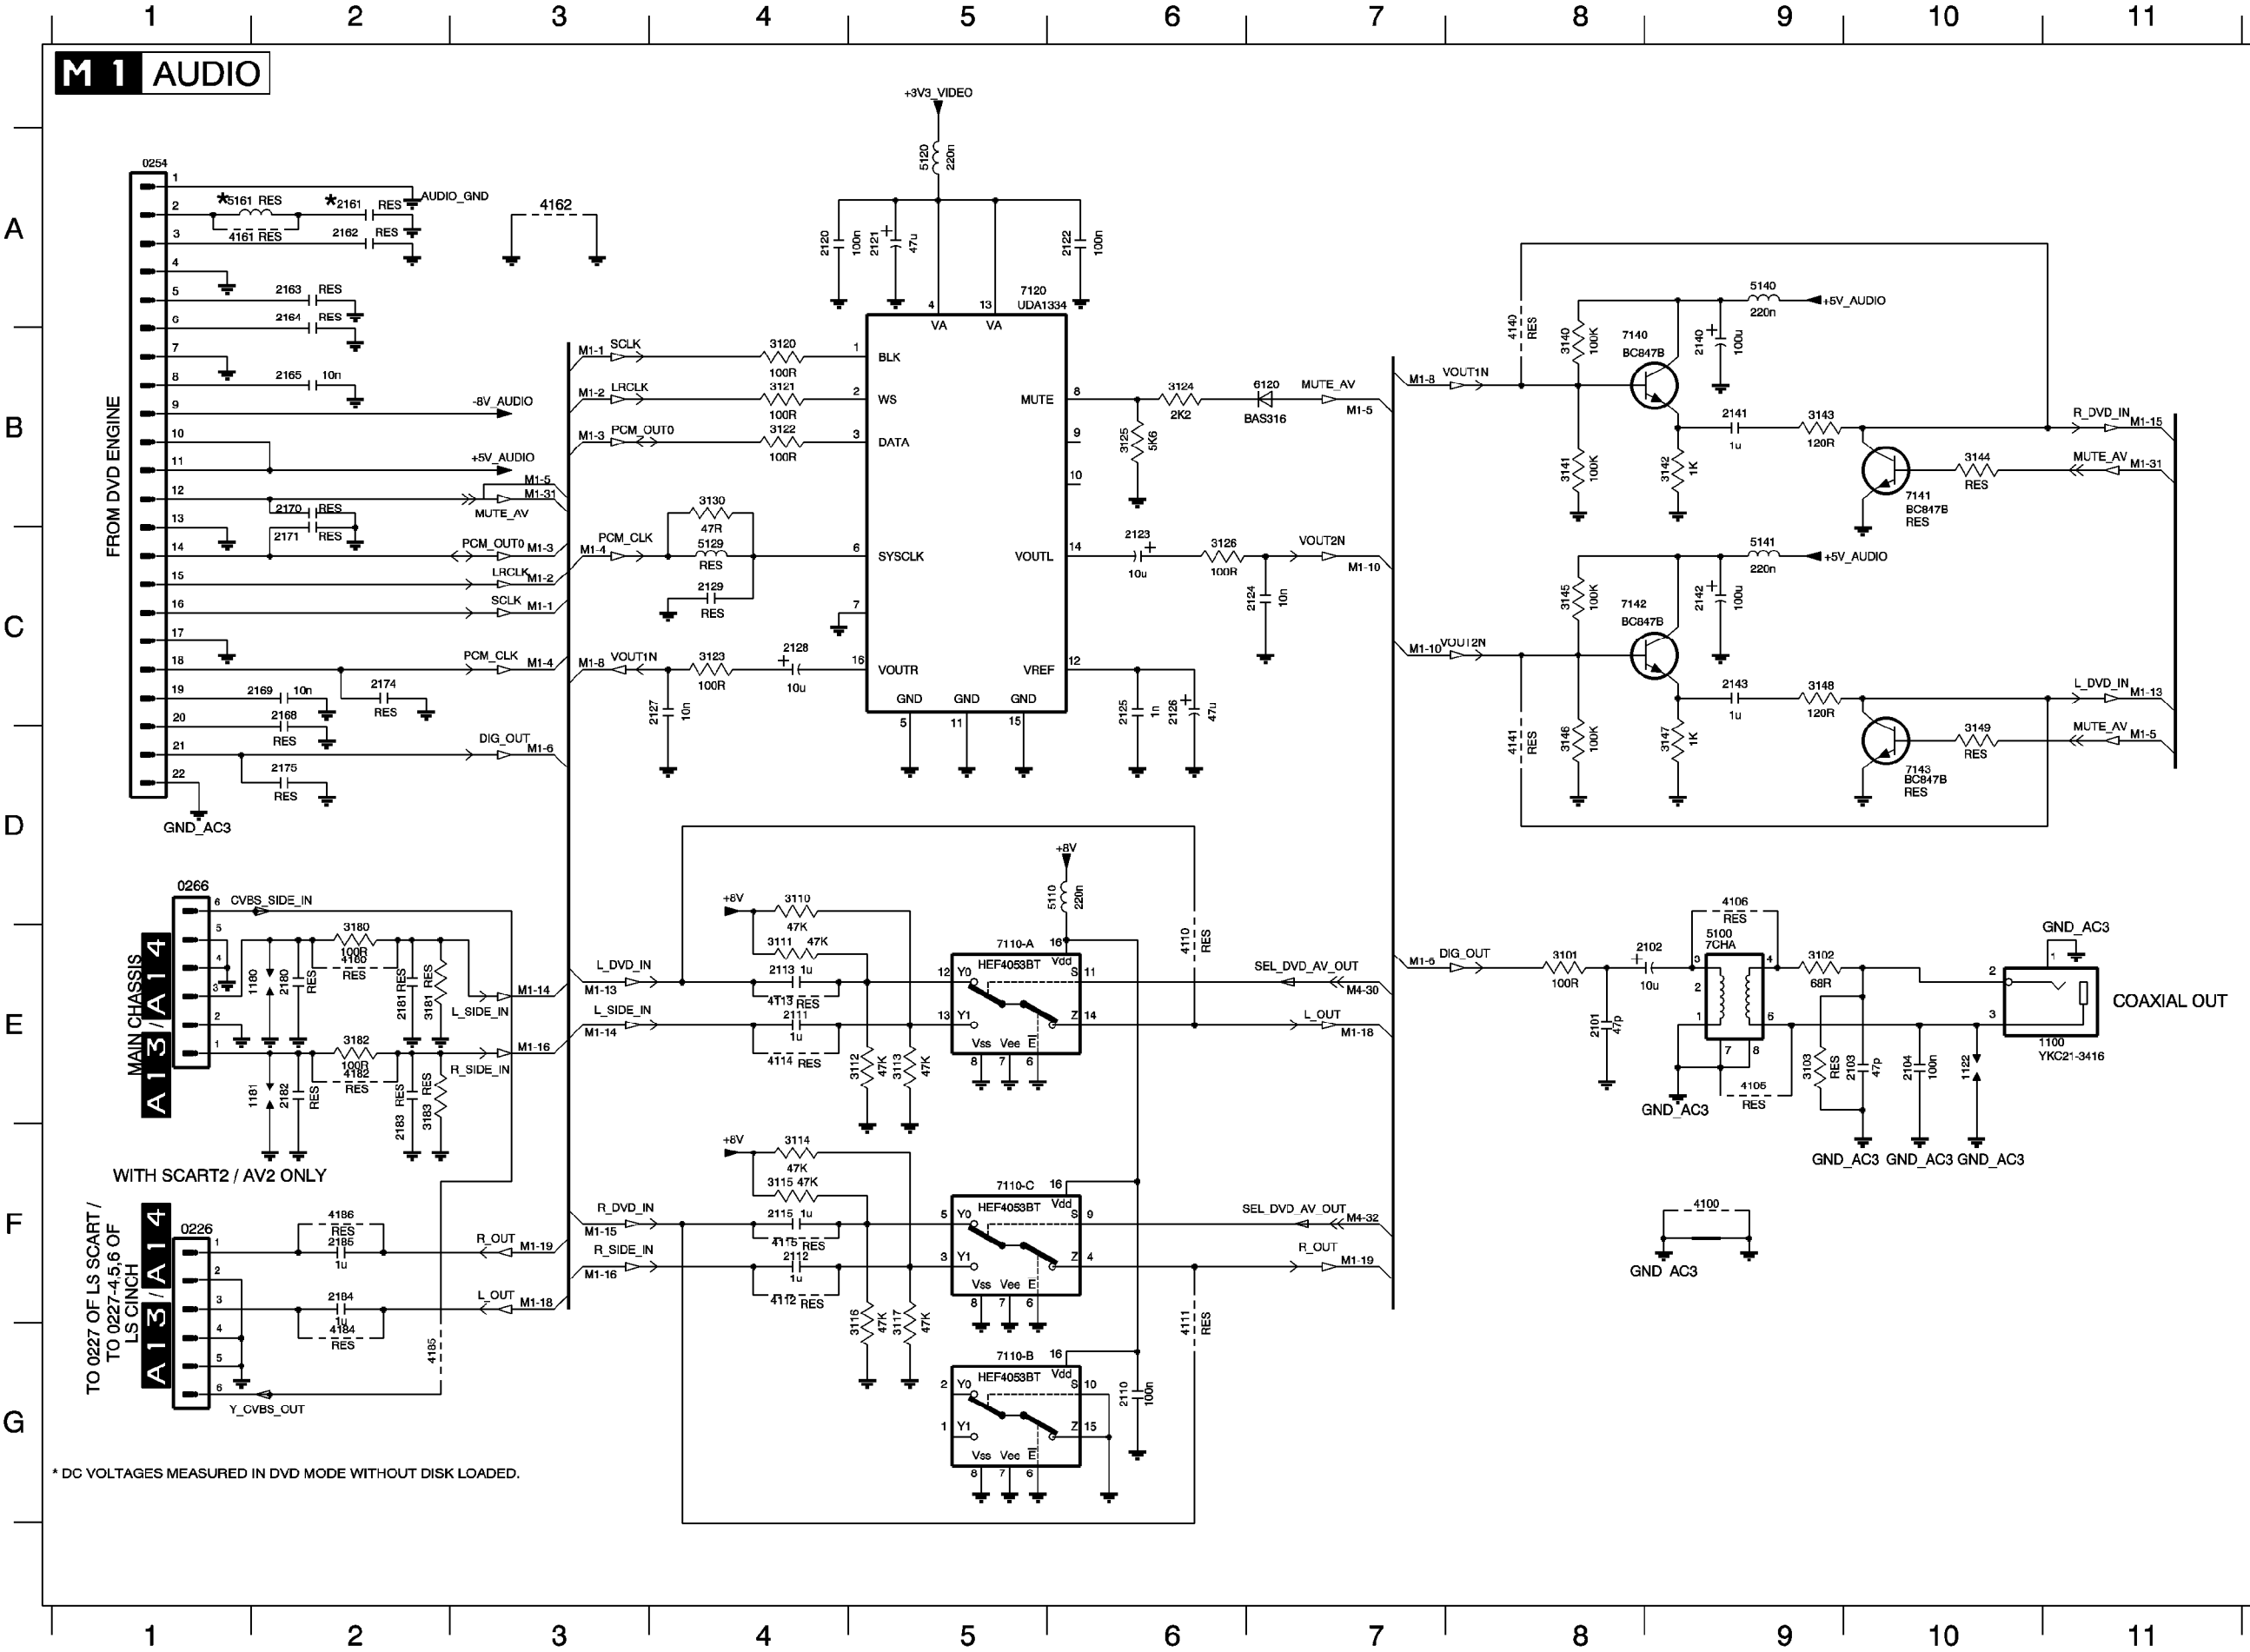W DAF PANEL & INNER PIN CUSHION CORRECTION






0226 F1	4182 E2
0254 A1	4184 G2
0266 D1	4185 G2
1100 E10	4186 F2
1122 E10	5100 E9
1180 E1	5110 D6
1181 E1	5120 A5
2101 E8	5129 C4
2102 E9	5140 A9
2103 E10	5141 C9
2104 E10	5161 A1
2110 G6	6120 B7
2111 E4	7110-A E5
2112 F4	7110-B G5
2113 E4	7110-C F5
2115 F4	7120 A5
2120 A4	7140 B8
2121 A5	7141 B10
2122 A6	7142 C8
2123 C6	7143 D10
2124 C7	
2125 C6	
2126 C6	
2127 C4	
2128 C4	
2129 C4	
2140 B9	
2141 B9	
2142 C9	
2143 C9	
2161 A2	
2162 A2	
2163 A2	
2164 A2	
2165 B2	
2168 C2	
2169 C2	
2170 B2	
2171 C2	
2174 C2	
2175 D2	
2180 E2	
2181 E2	
2182 E2	
2183 F2	
2184 F2	
2185 F2	
3101 E8	
3102 E9	
3103 E9	
3110 D4	
3111 E4	
3112 E5	
3113 E5	
3114 F4	
3115 F4	
3116 F5	
3117 F5	
3120 B4	
3121 B4	
3122 B4	
3123 C4	
3124 B6	
3125 B6	
3126 C6	
3130 B4	
3140 B8	
3141 B8	
3142 B9	
3143 B9	
3144 B10	
3145 C8	
3146 D8	
3147 D9	
3148 C9	
3149 D10	
3180 E2	
3181 E2	
3182 E2	
3183 E2	
4100 F9	
4105 E9	
4106 D9	
4110 E6	
4111 F6	
4112 F4	
4113 E4	
4114 E4	
4115 F4	
4140 A8	
4141 D8	
4161 A1	
4162 A3	
4180 E2	

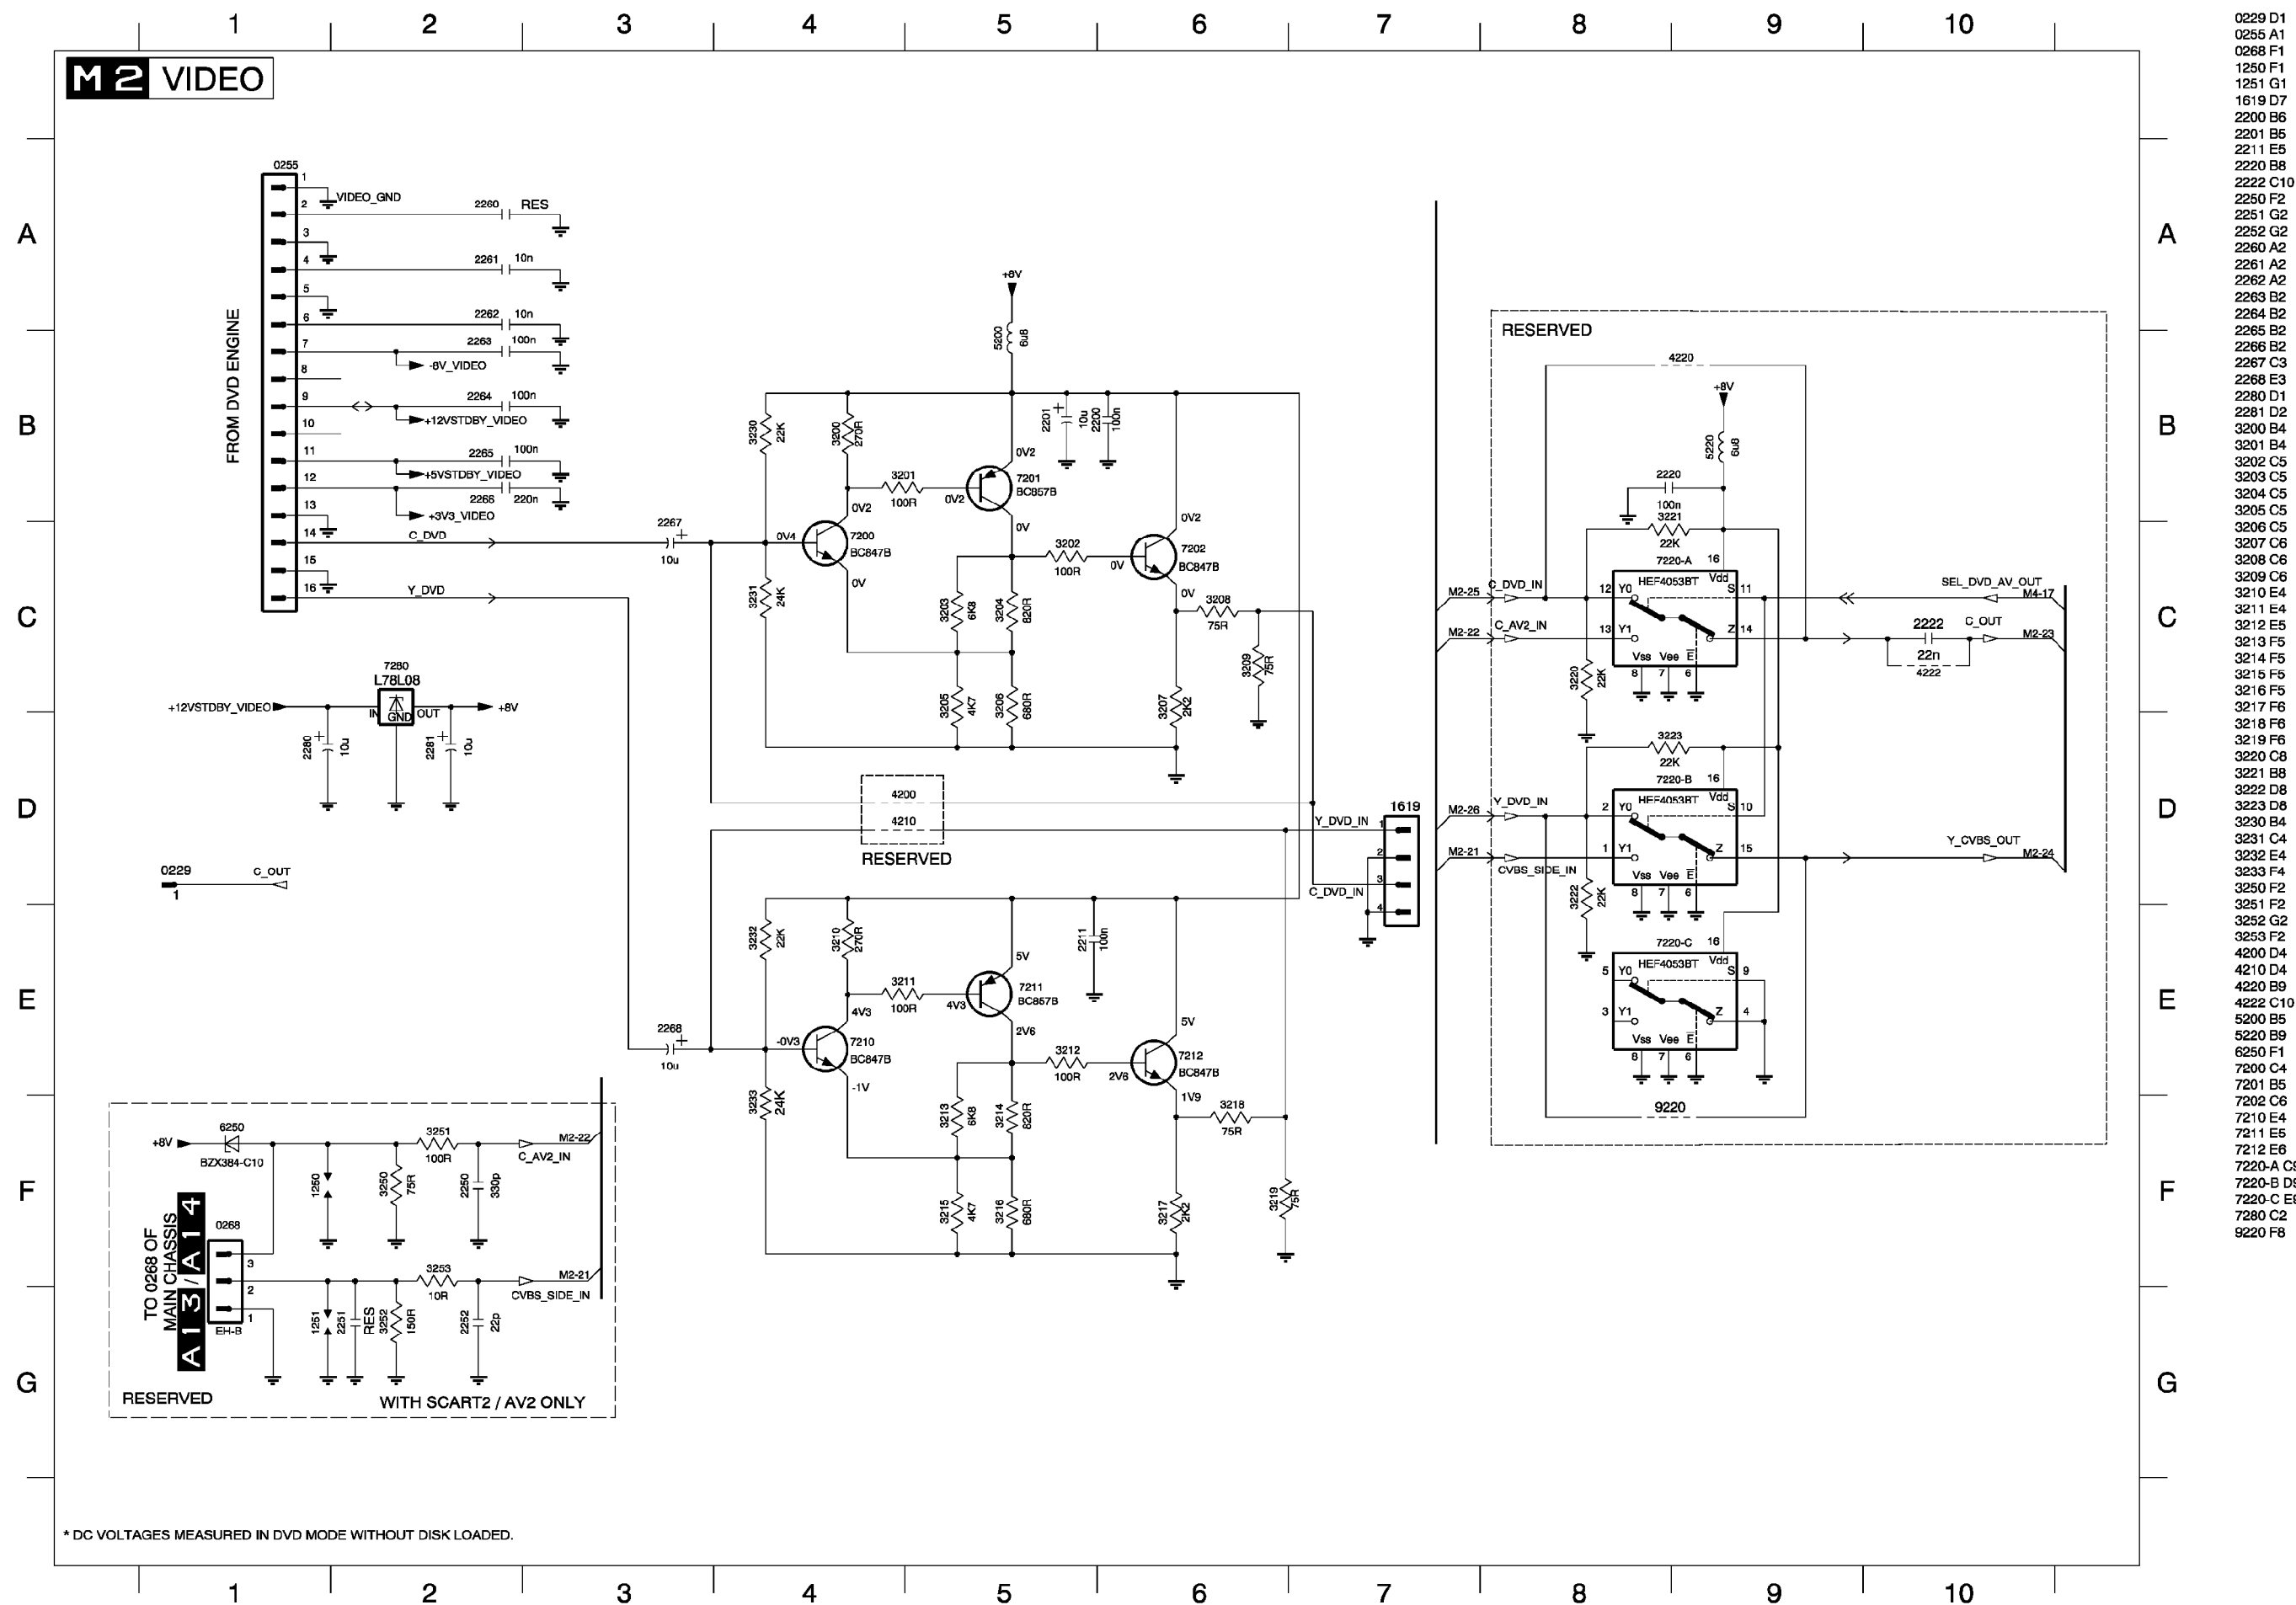




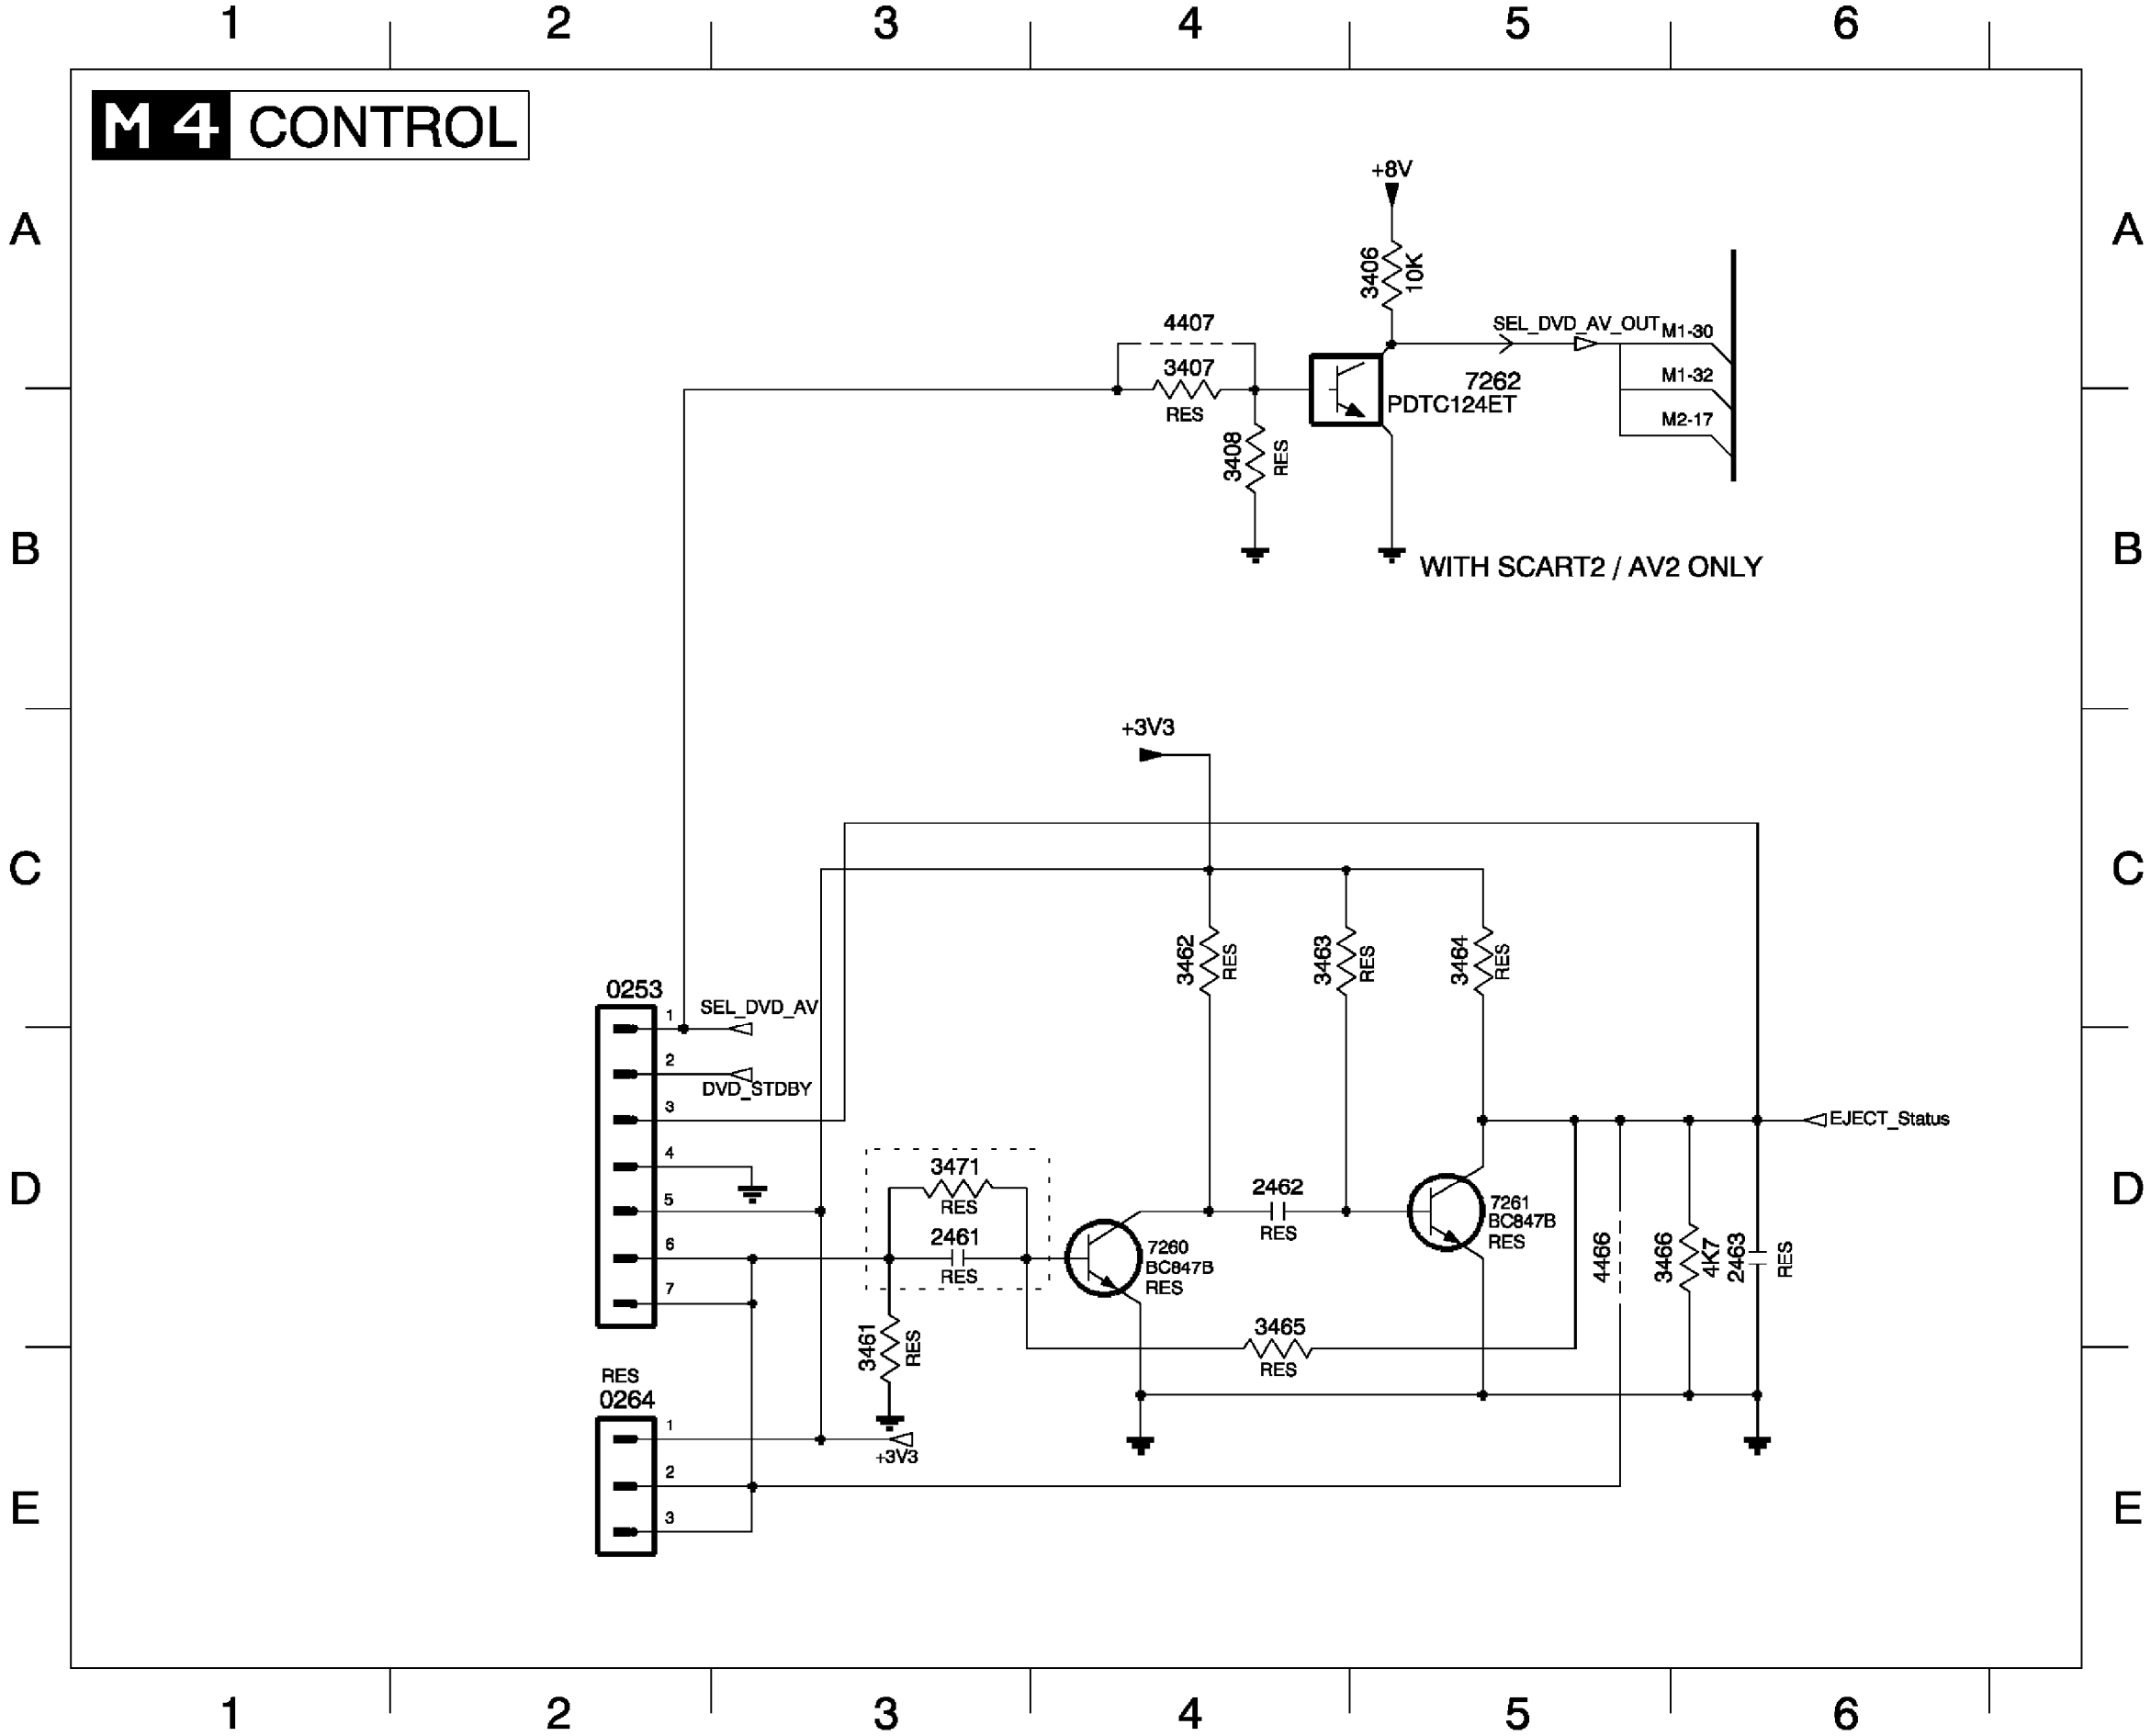




- 0253 C2
- 0264 E2
- 2461 D3
- 2462 D4
- 2463 D6
- 3406 A5
- 3407 A4
- 3408 B4
- 3461 D3
- 3462 C4
- 3463 C4
- 3464 C5
- 3465 D4
- 3466 D6
- 3471 D3
- 4407 A4
- 4466 D5
- 7260 D4
- 7261 D5
- 7262 A5

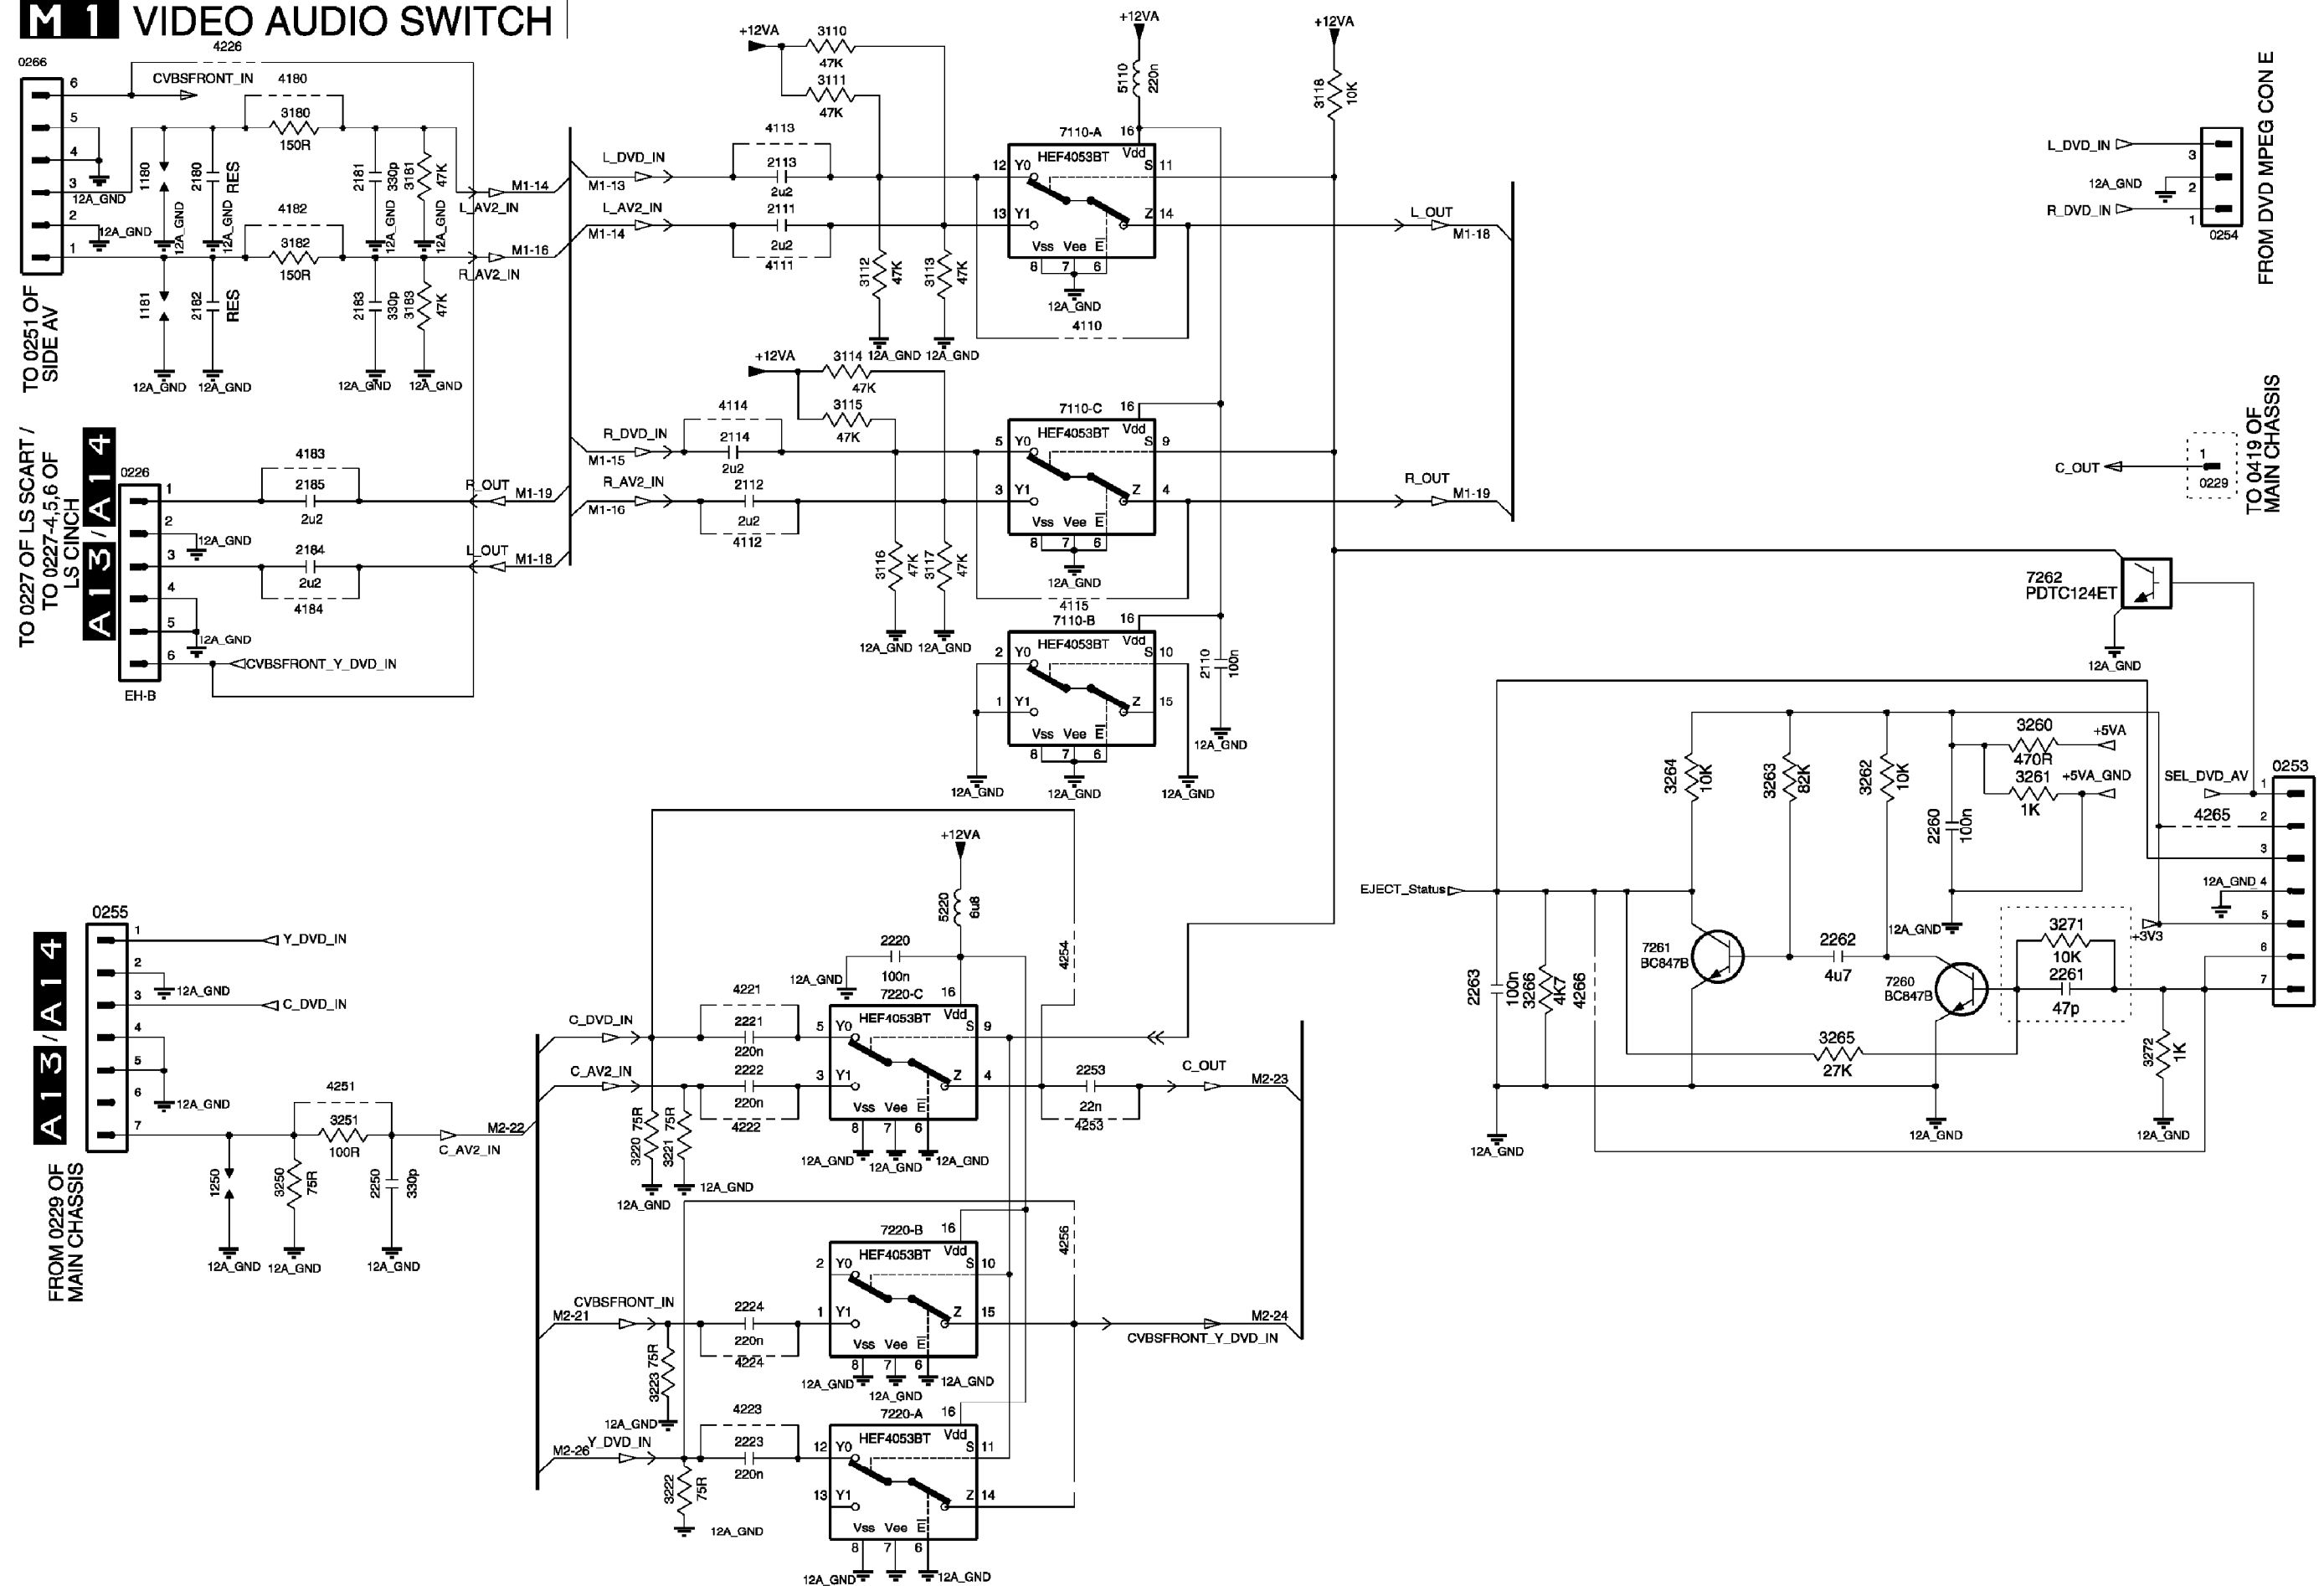M 1 VIDEO AUDIO SWITCH




M3 POWER SUPPLY

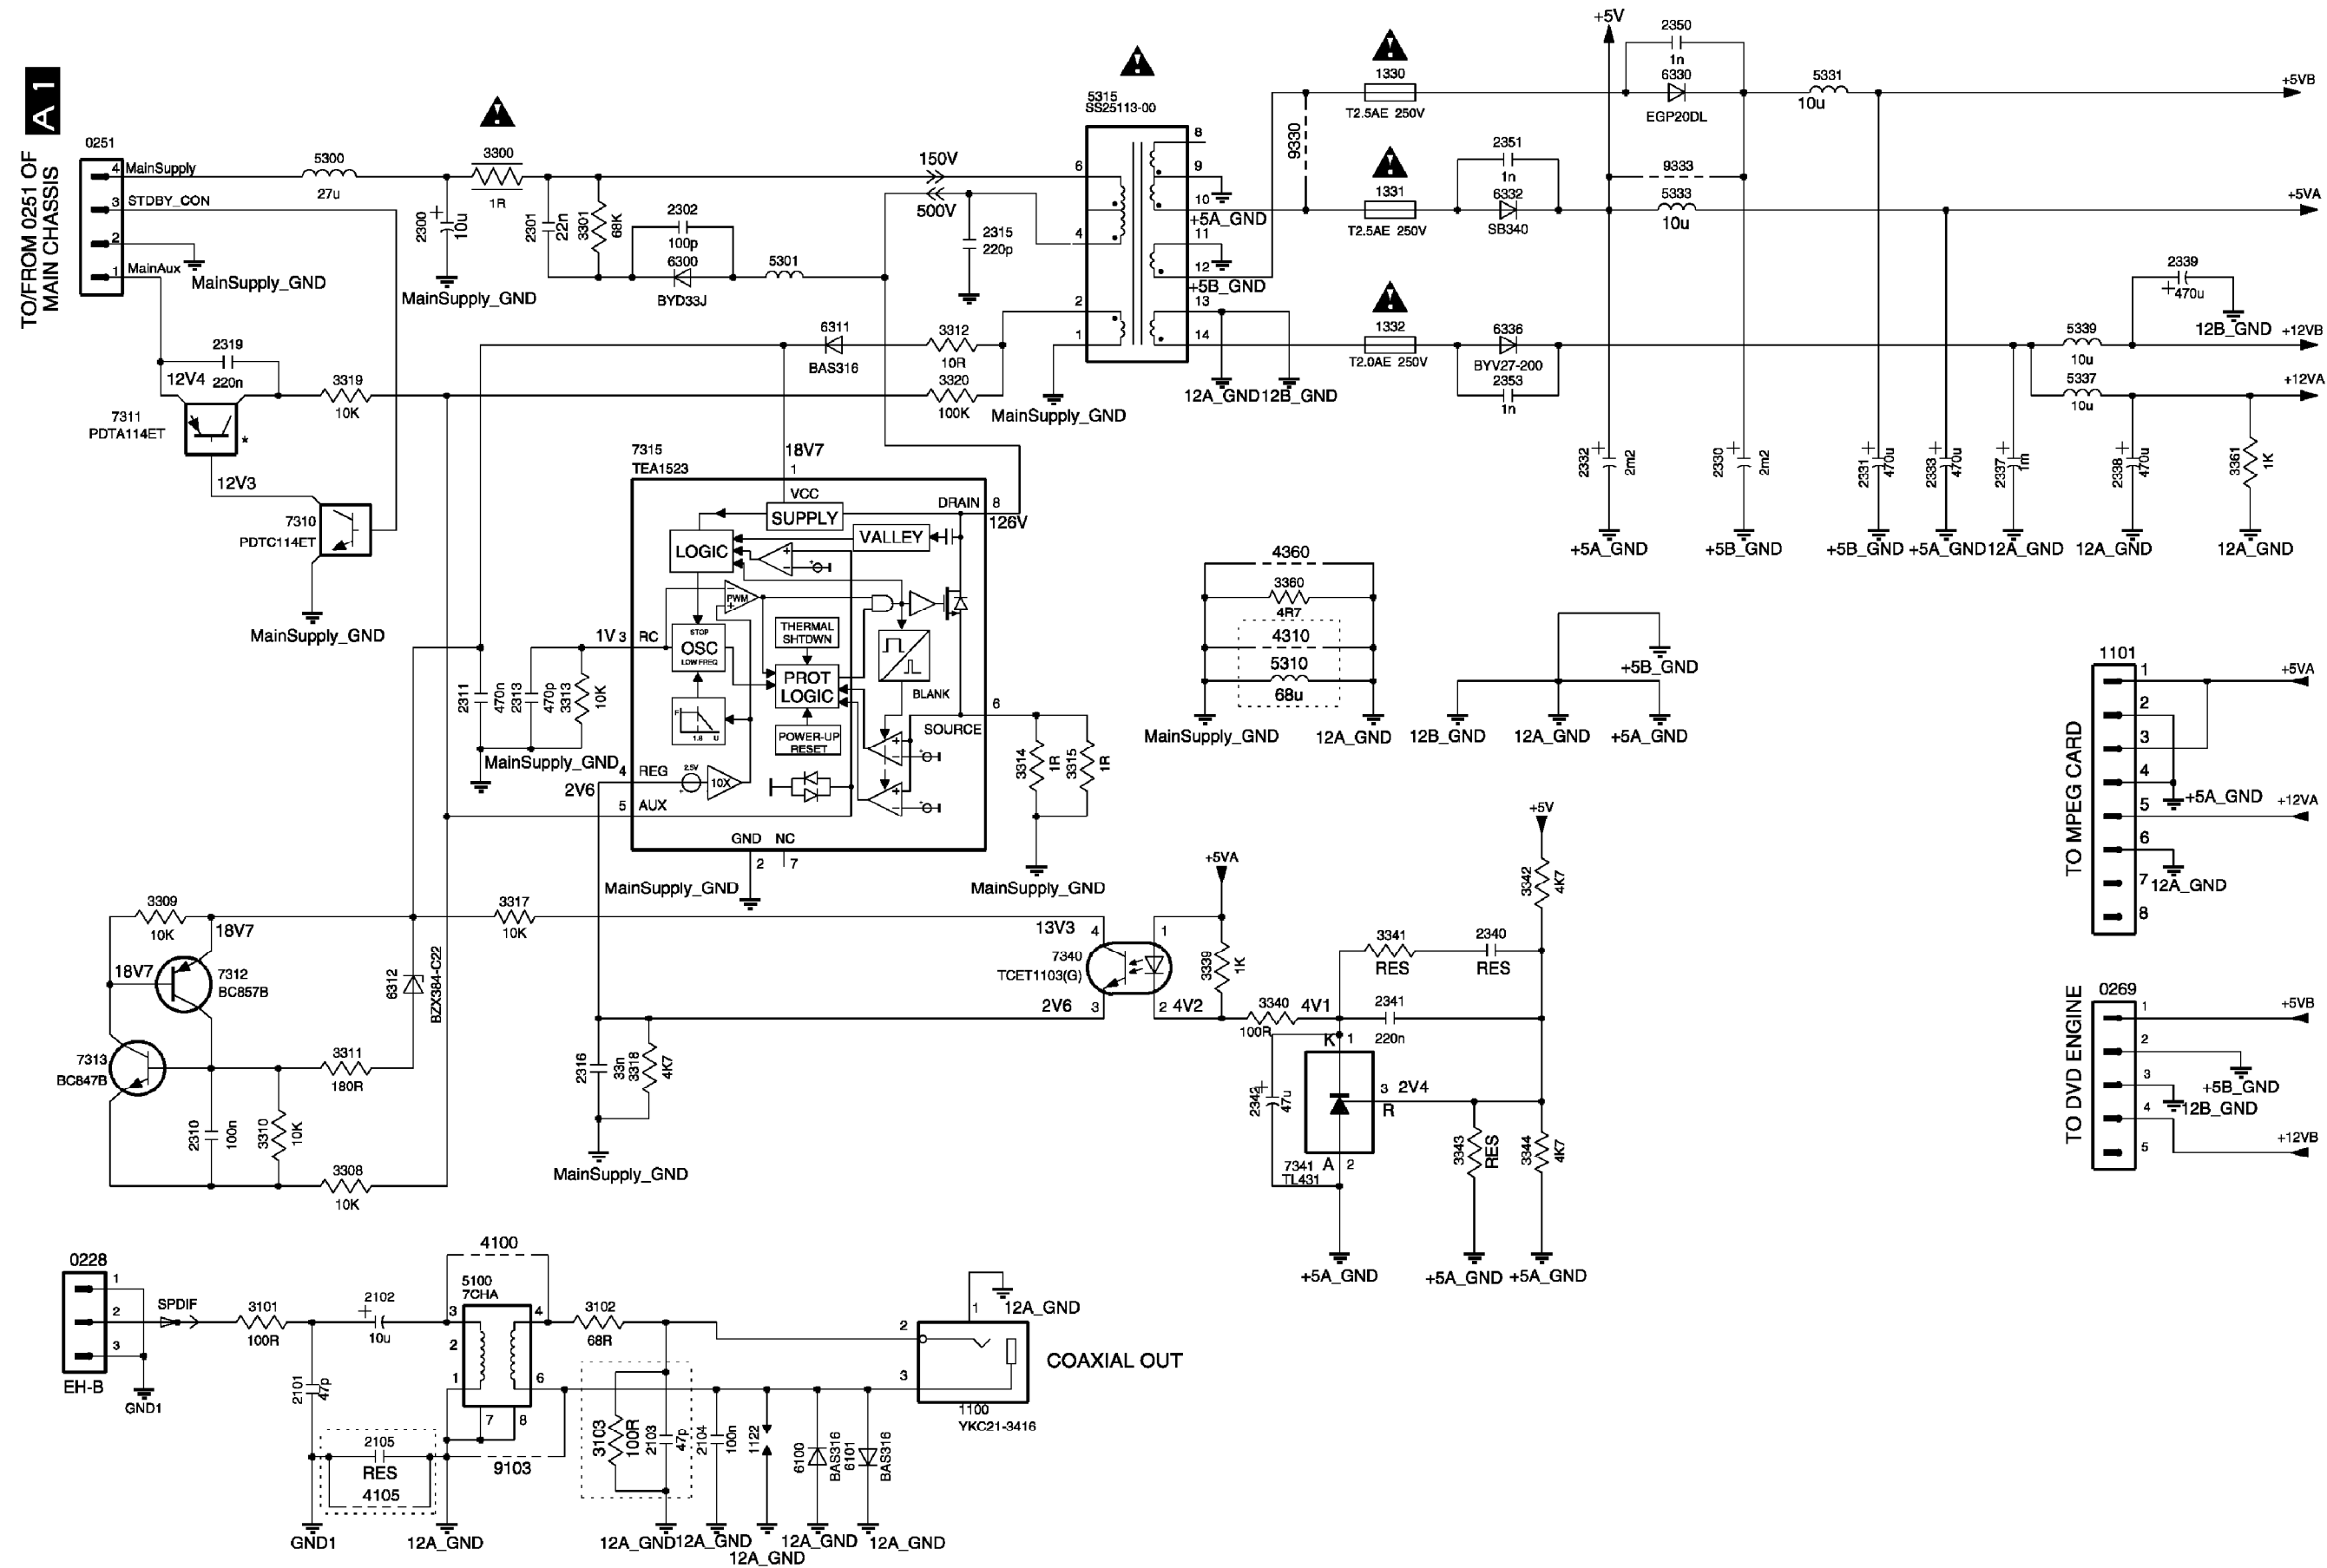


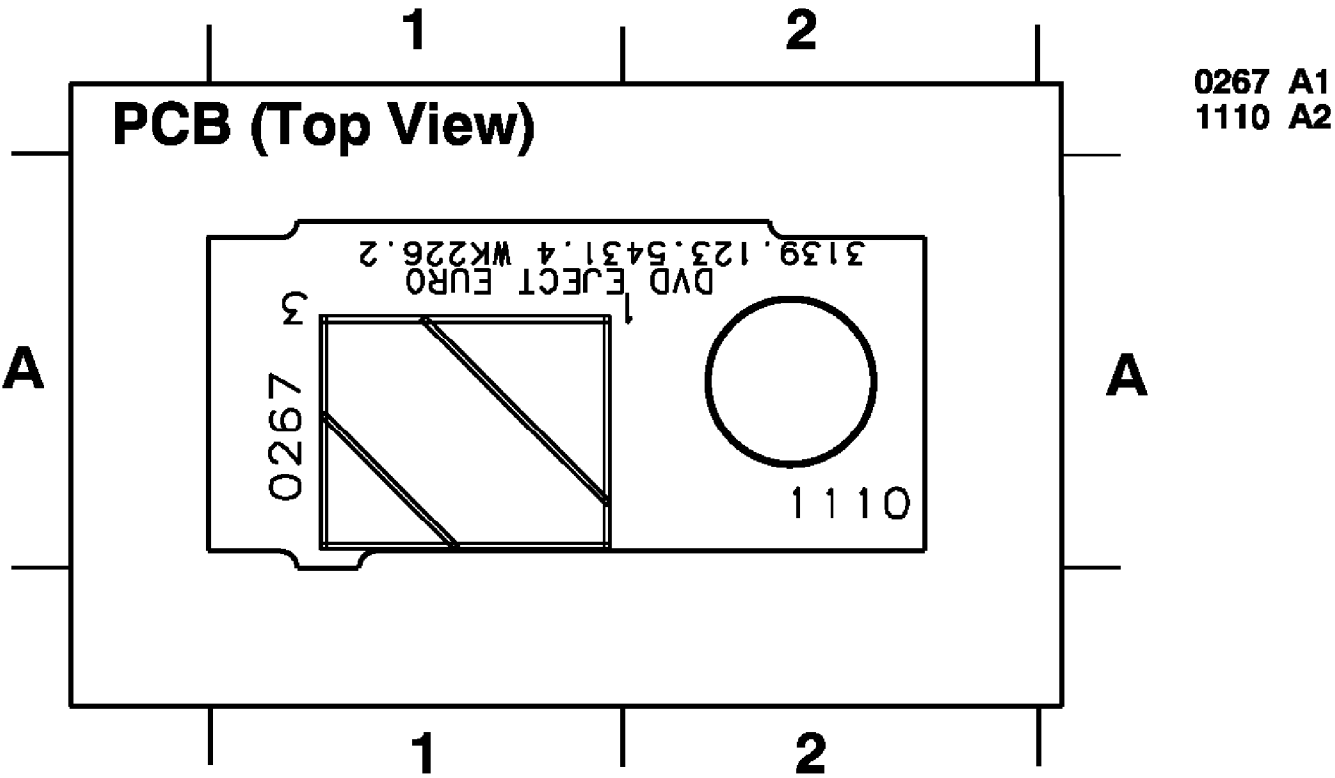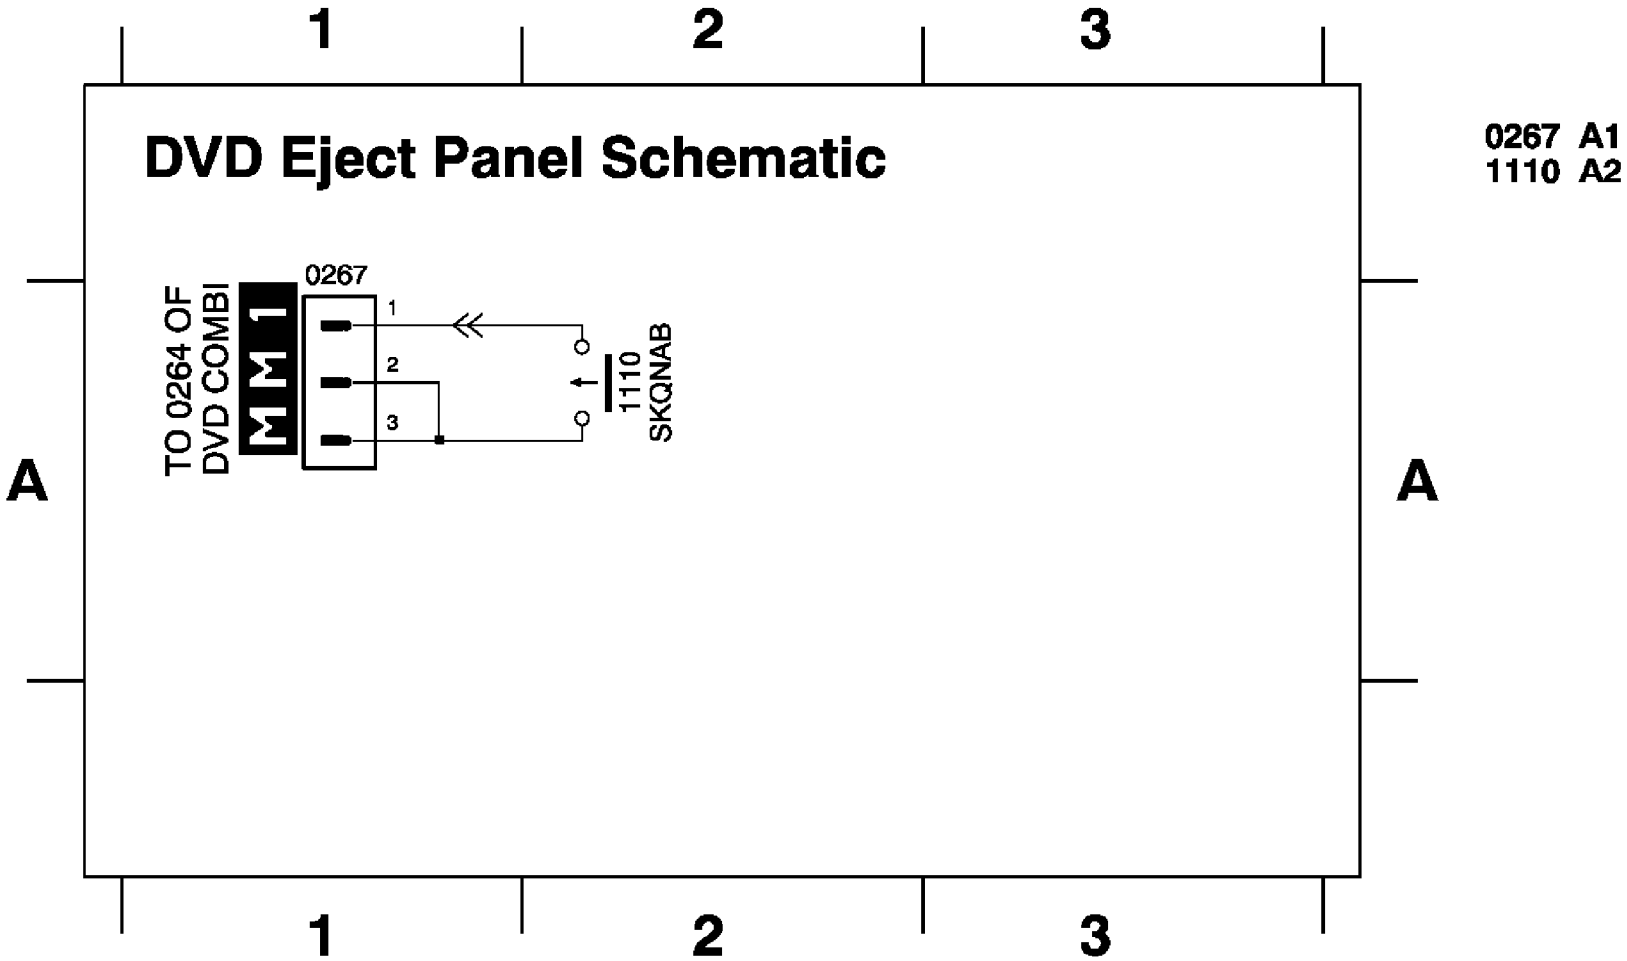



Channel One Card Schematic

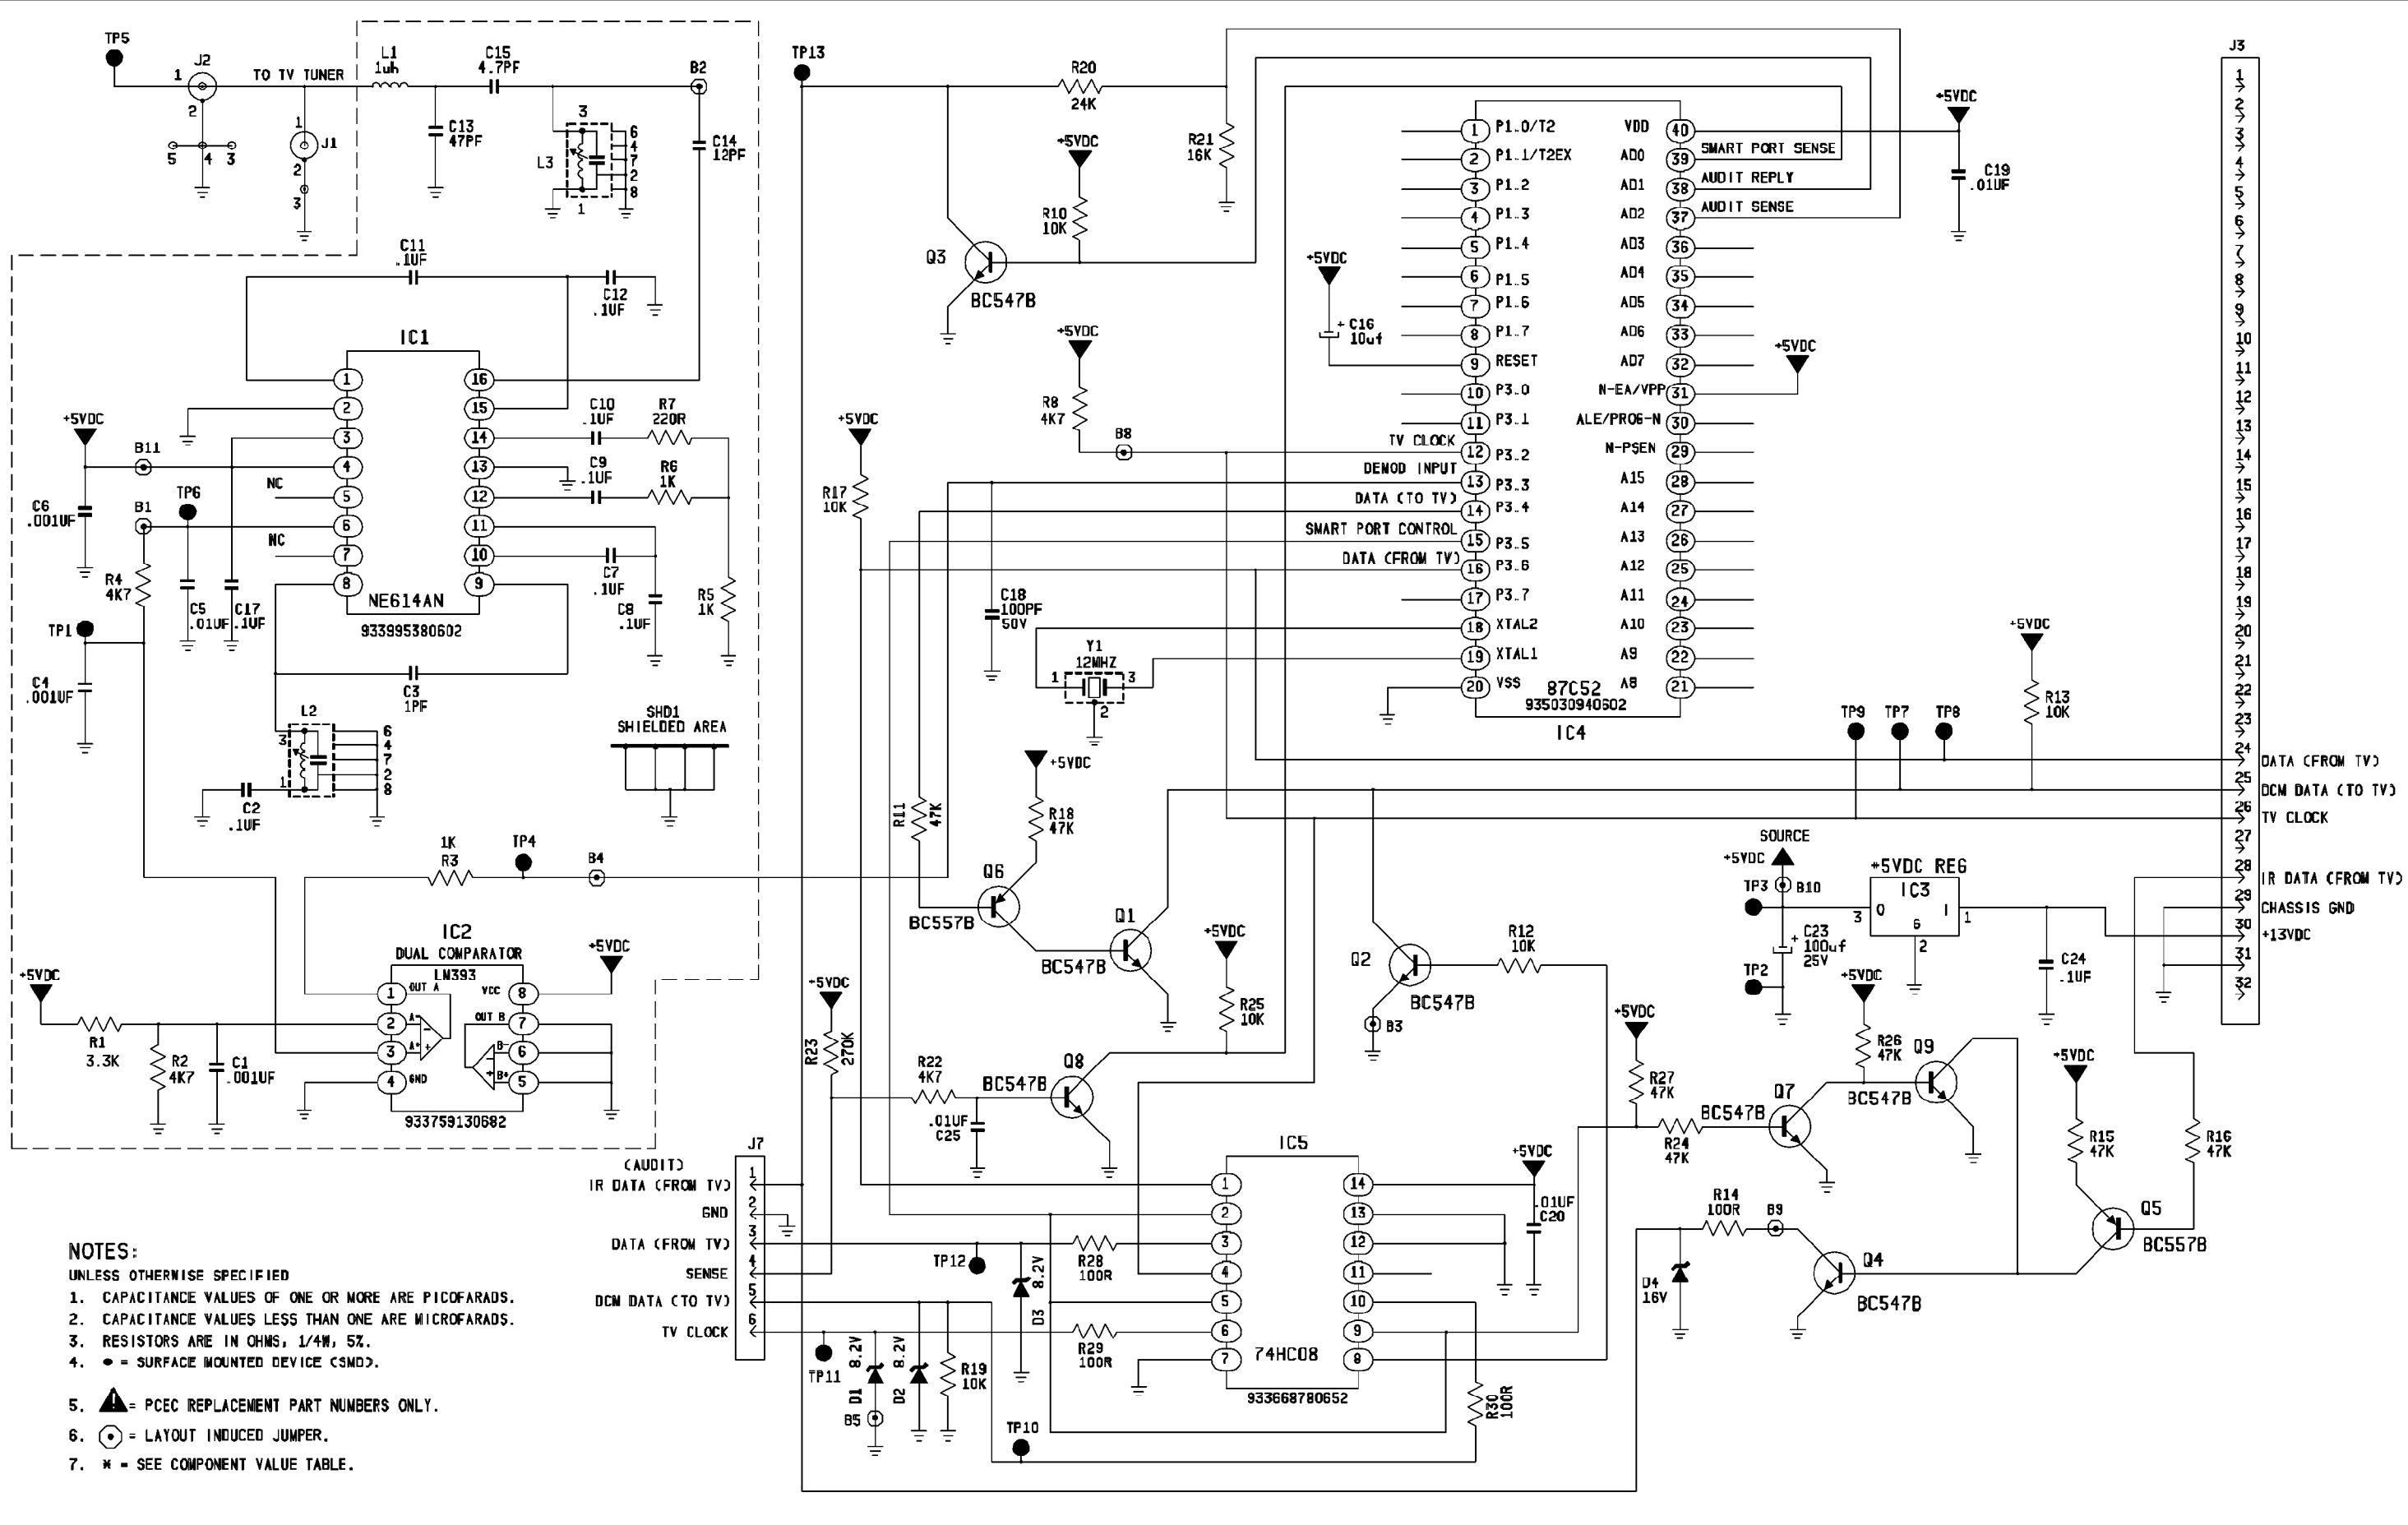


1 Scan 4 Card Schematic (1 of 3)

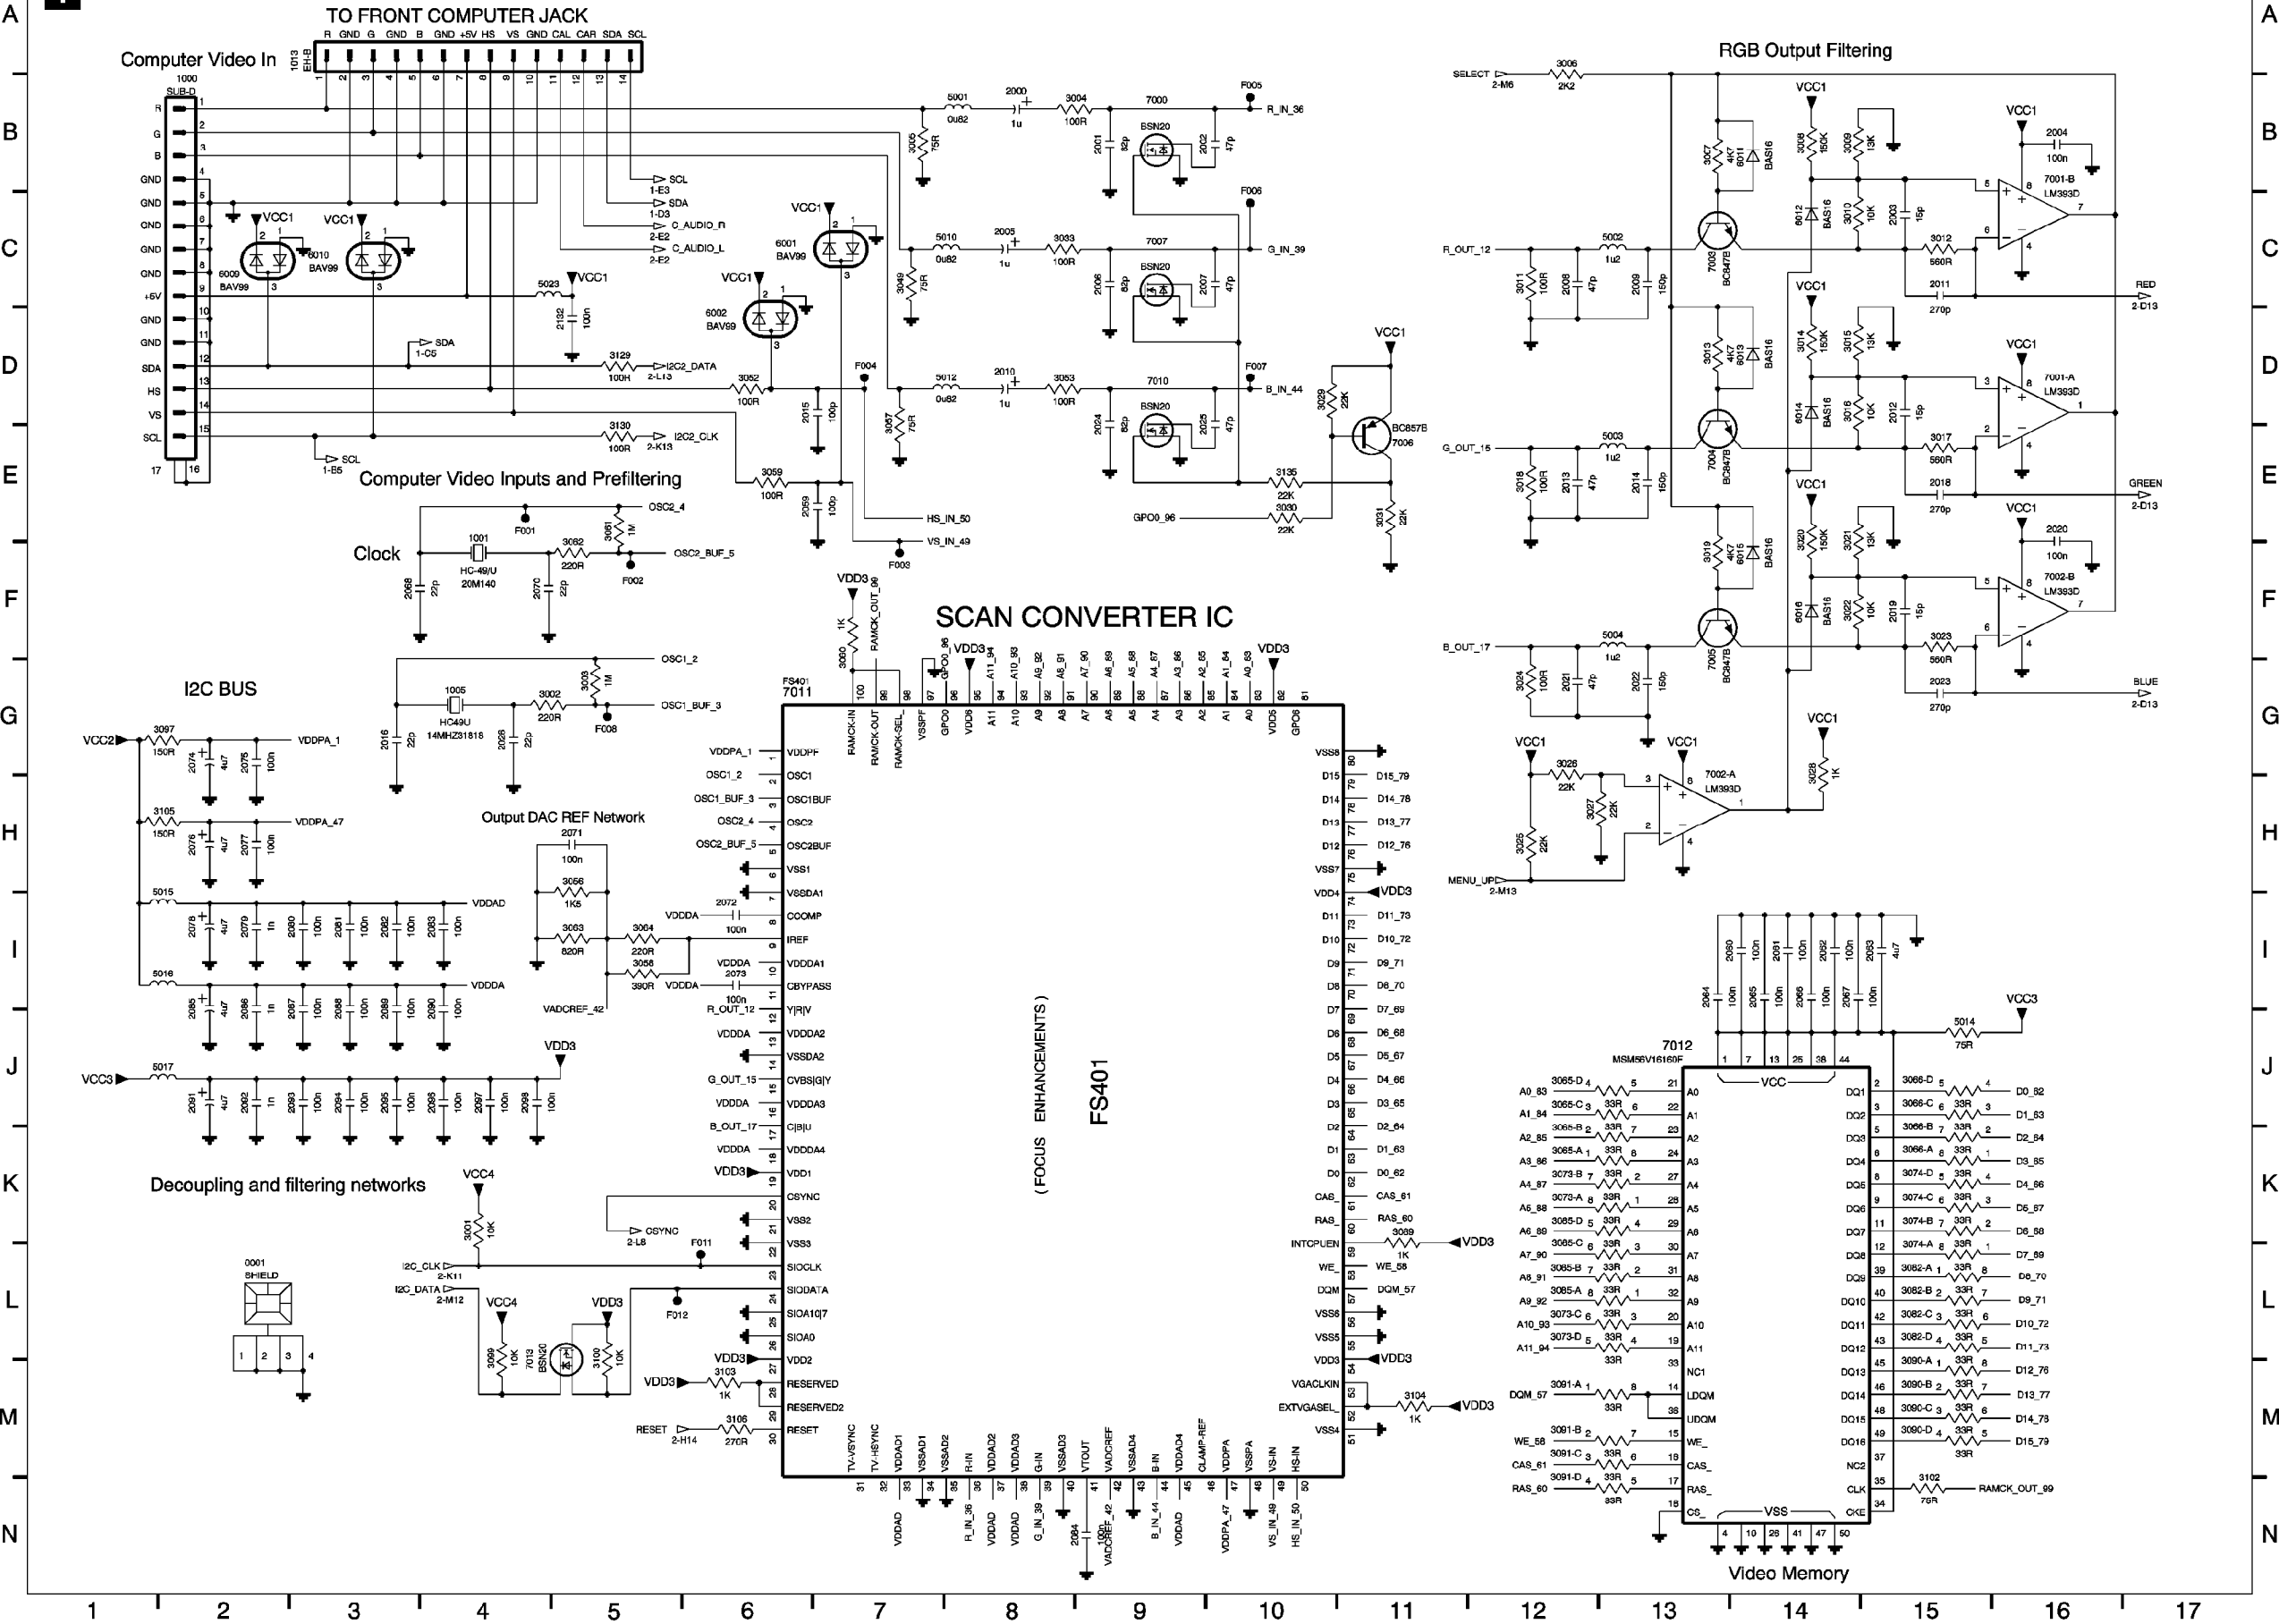

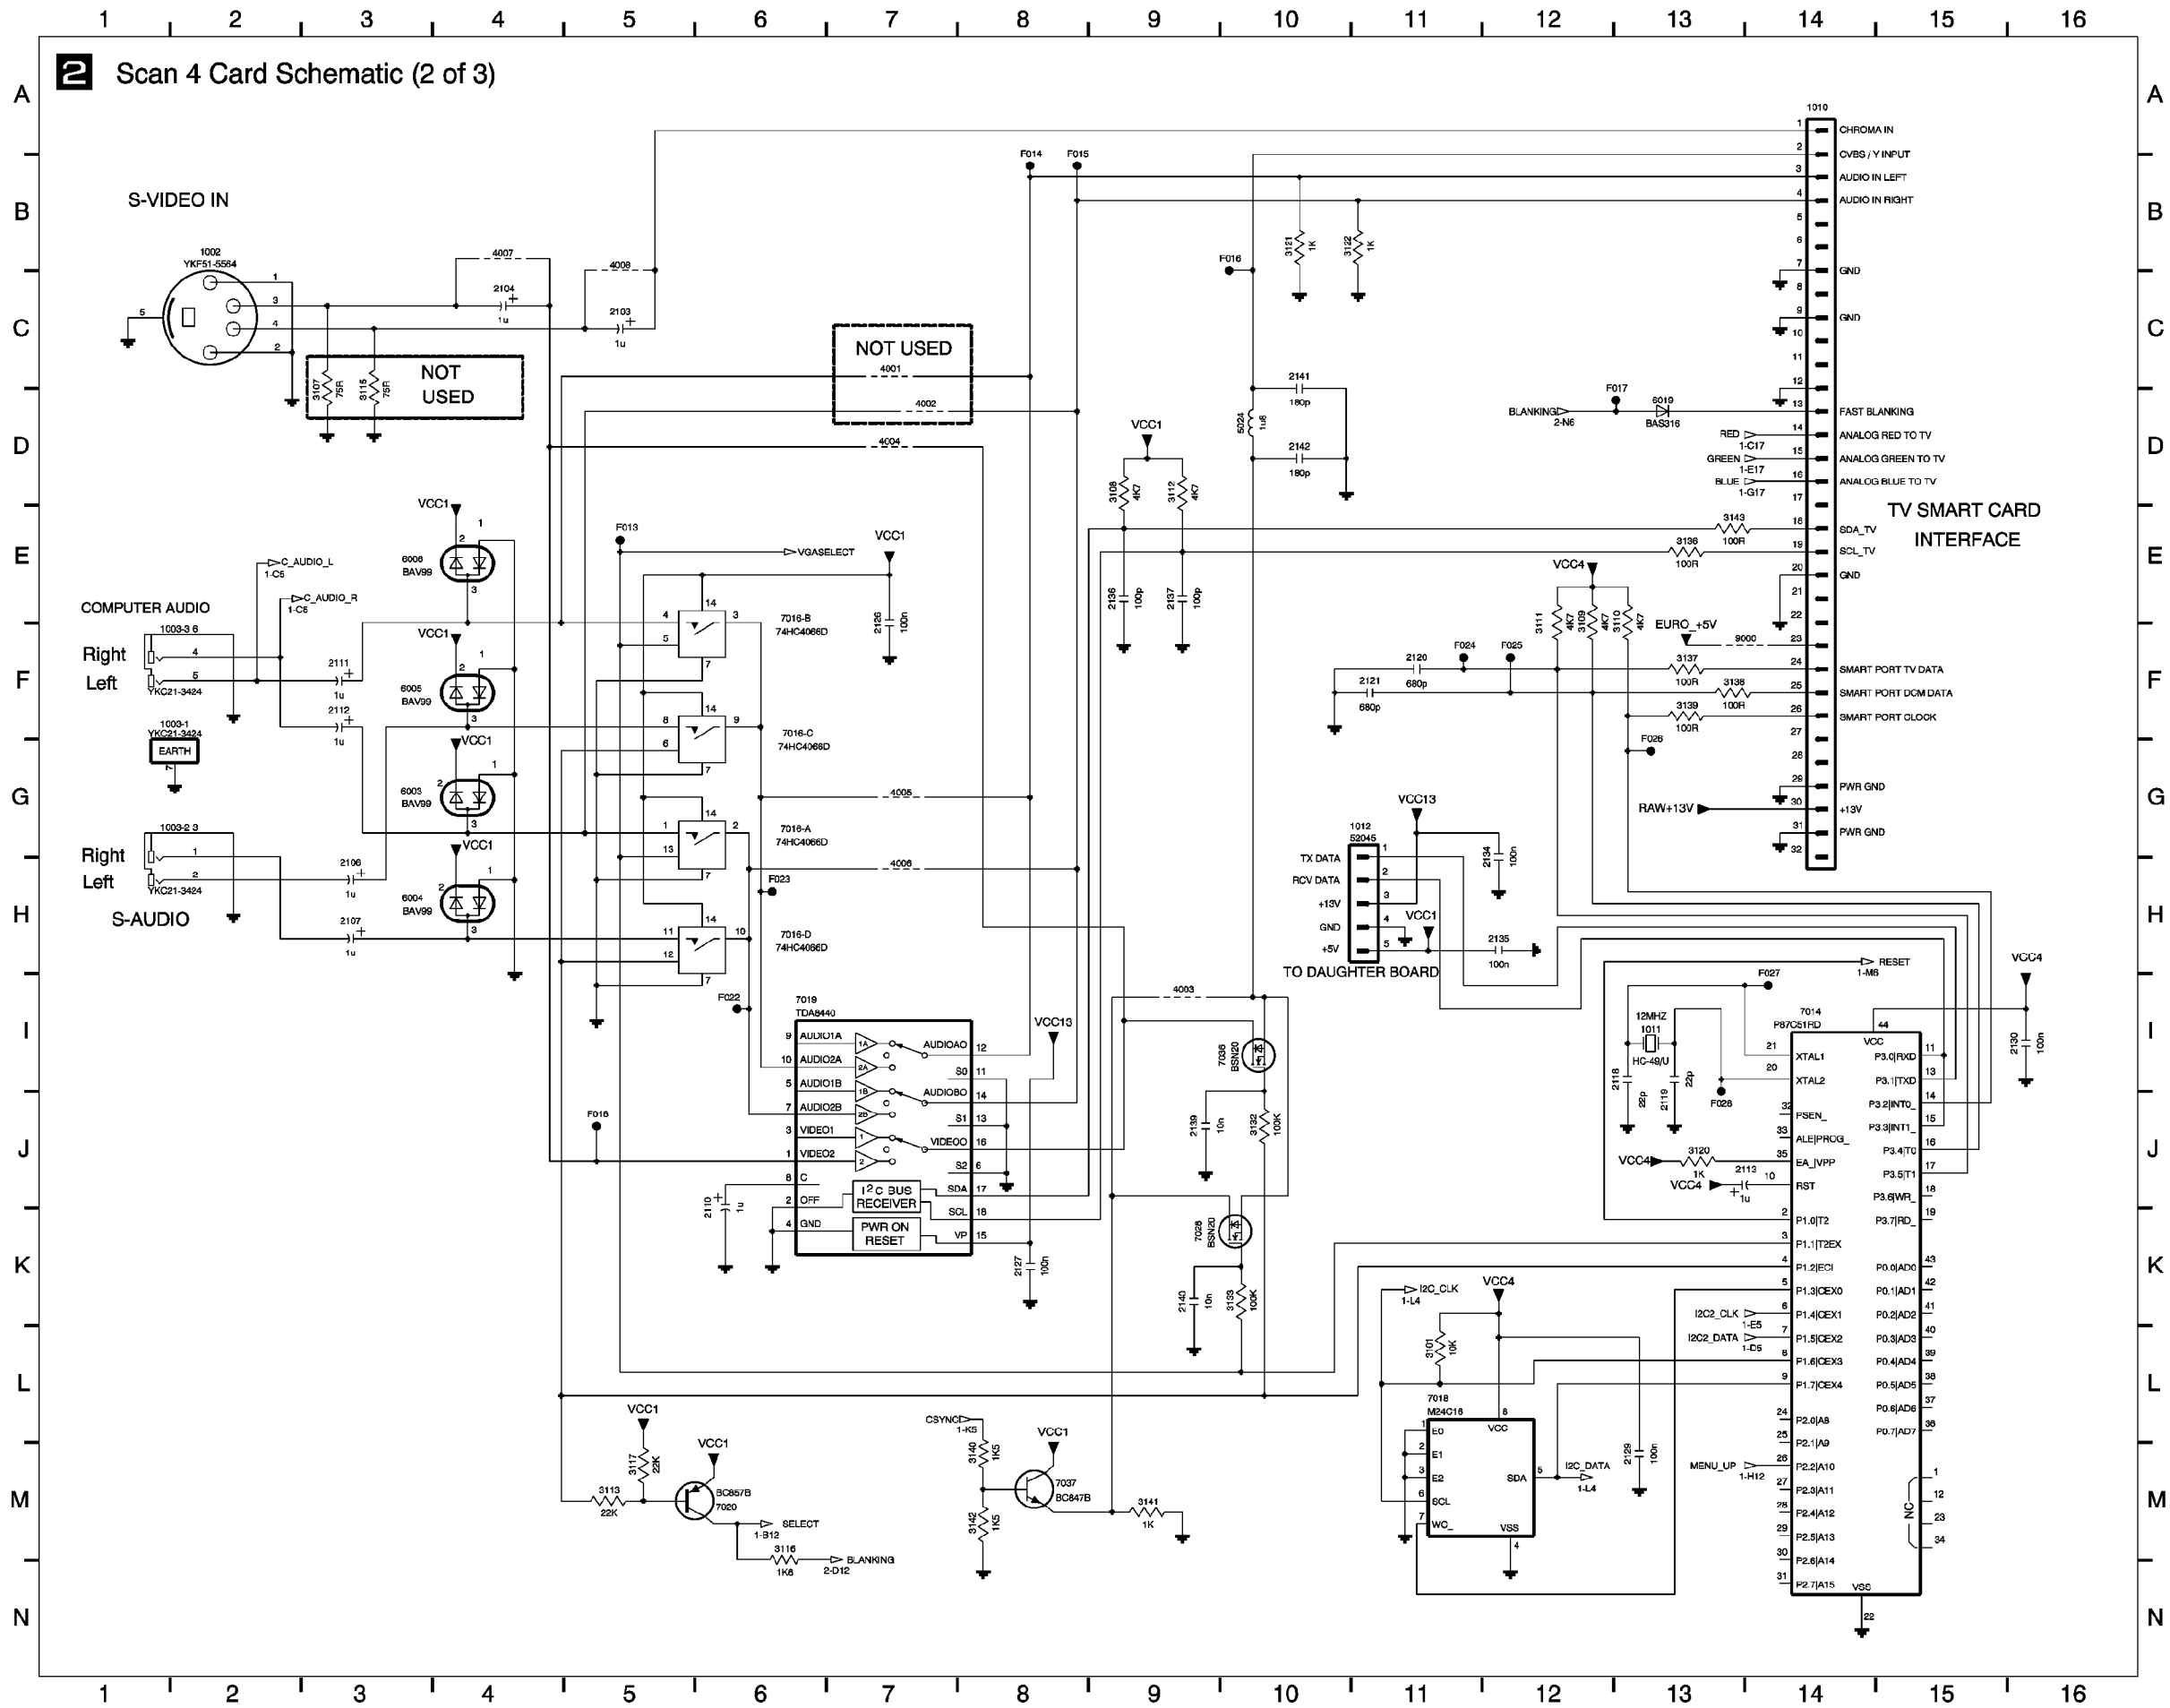


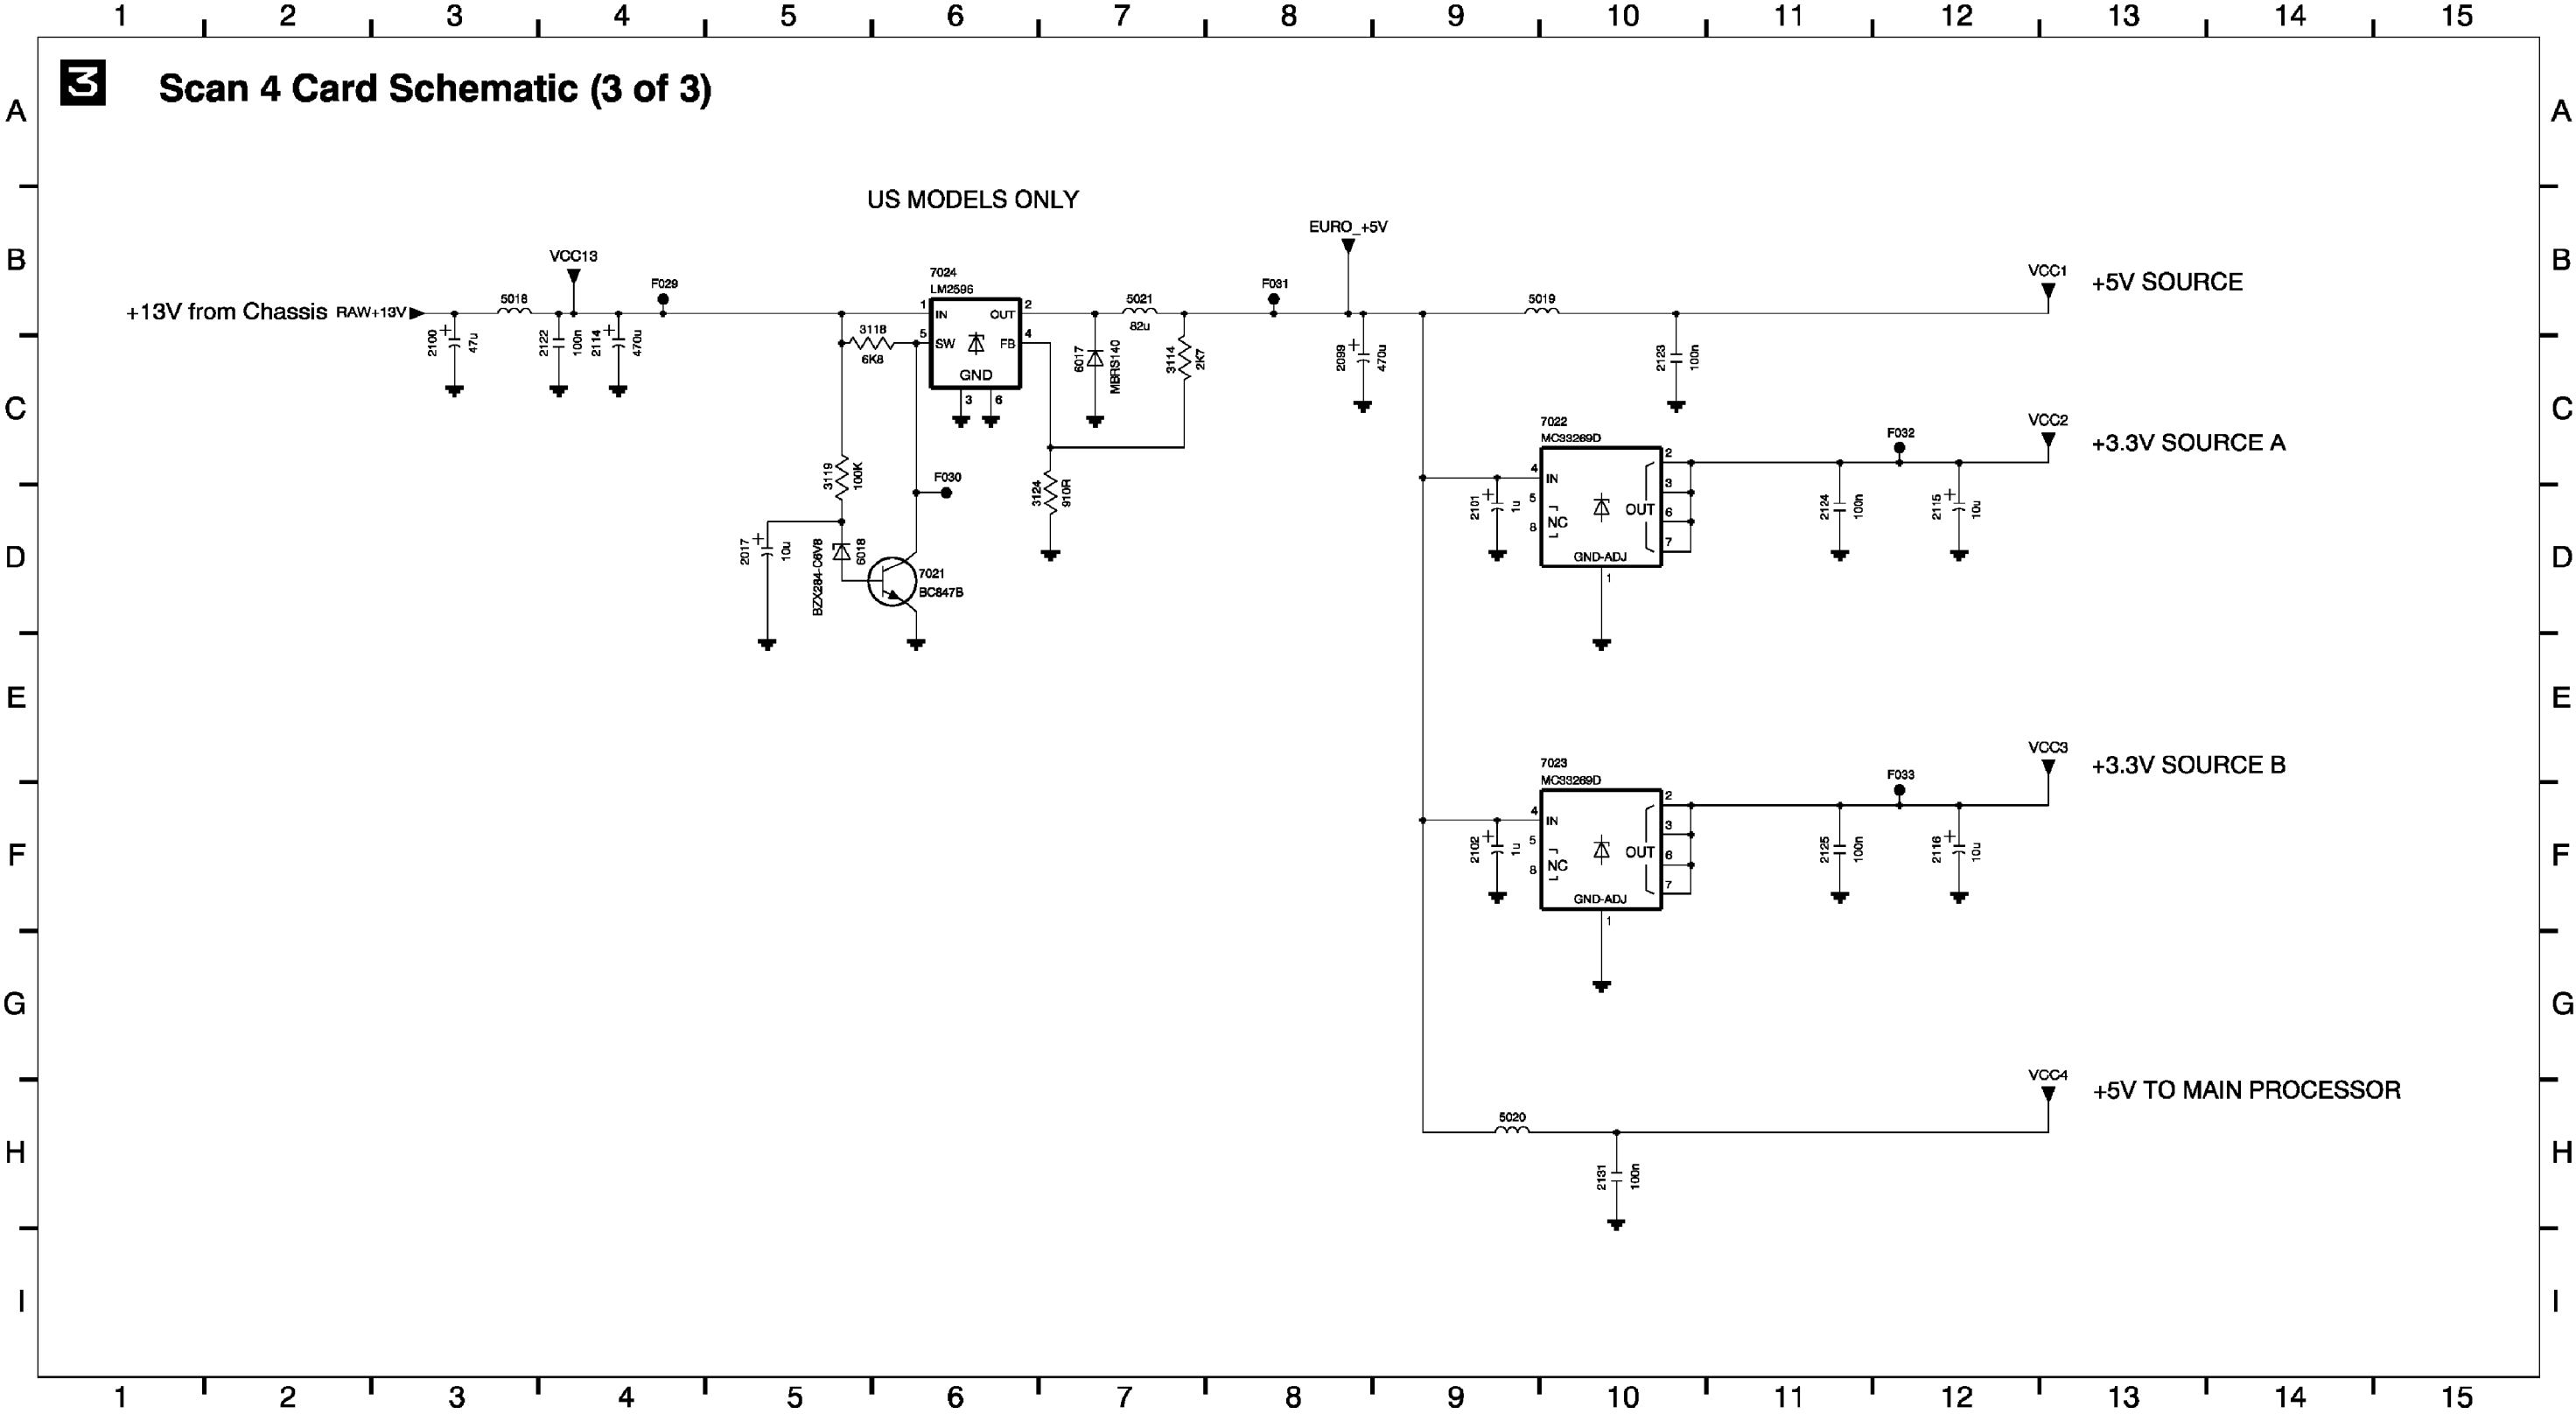


Net 1 Panel Schematic

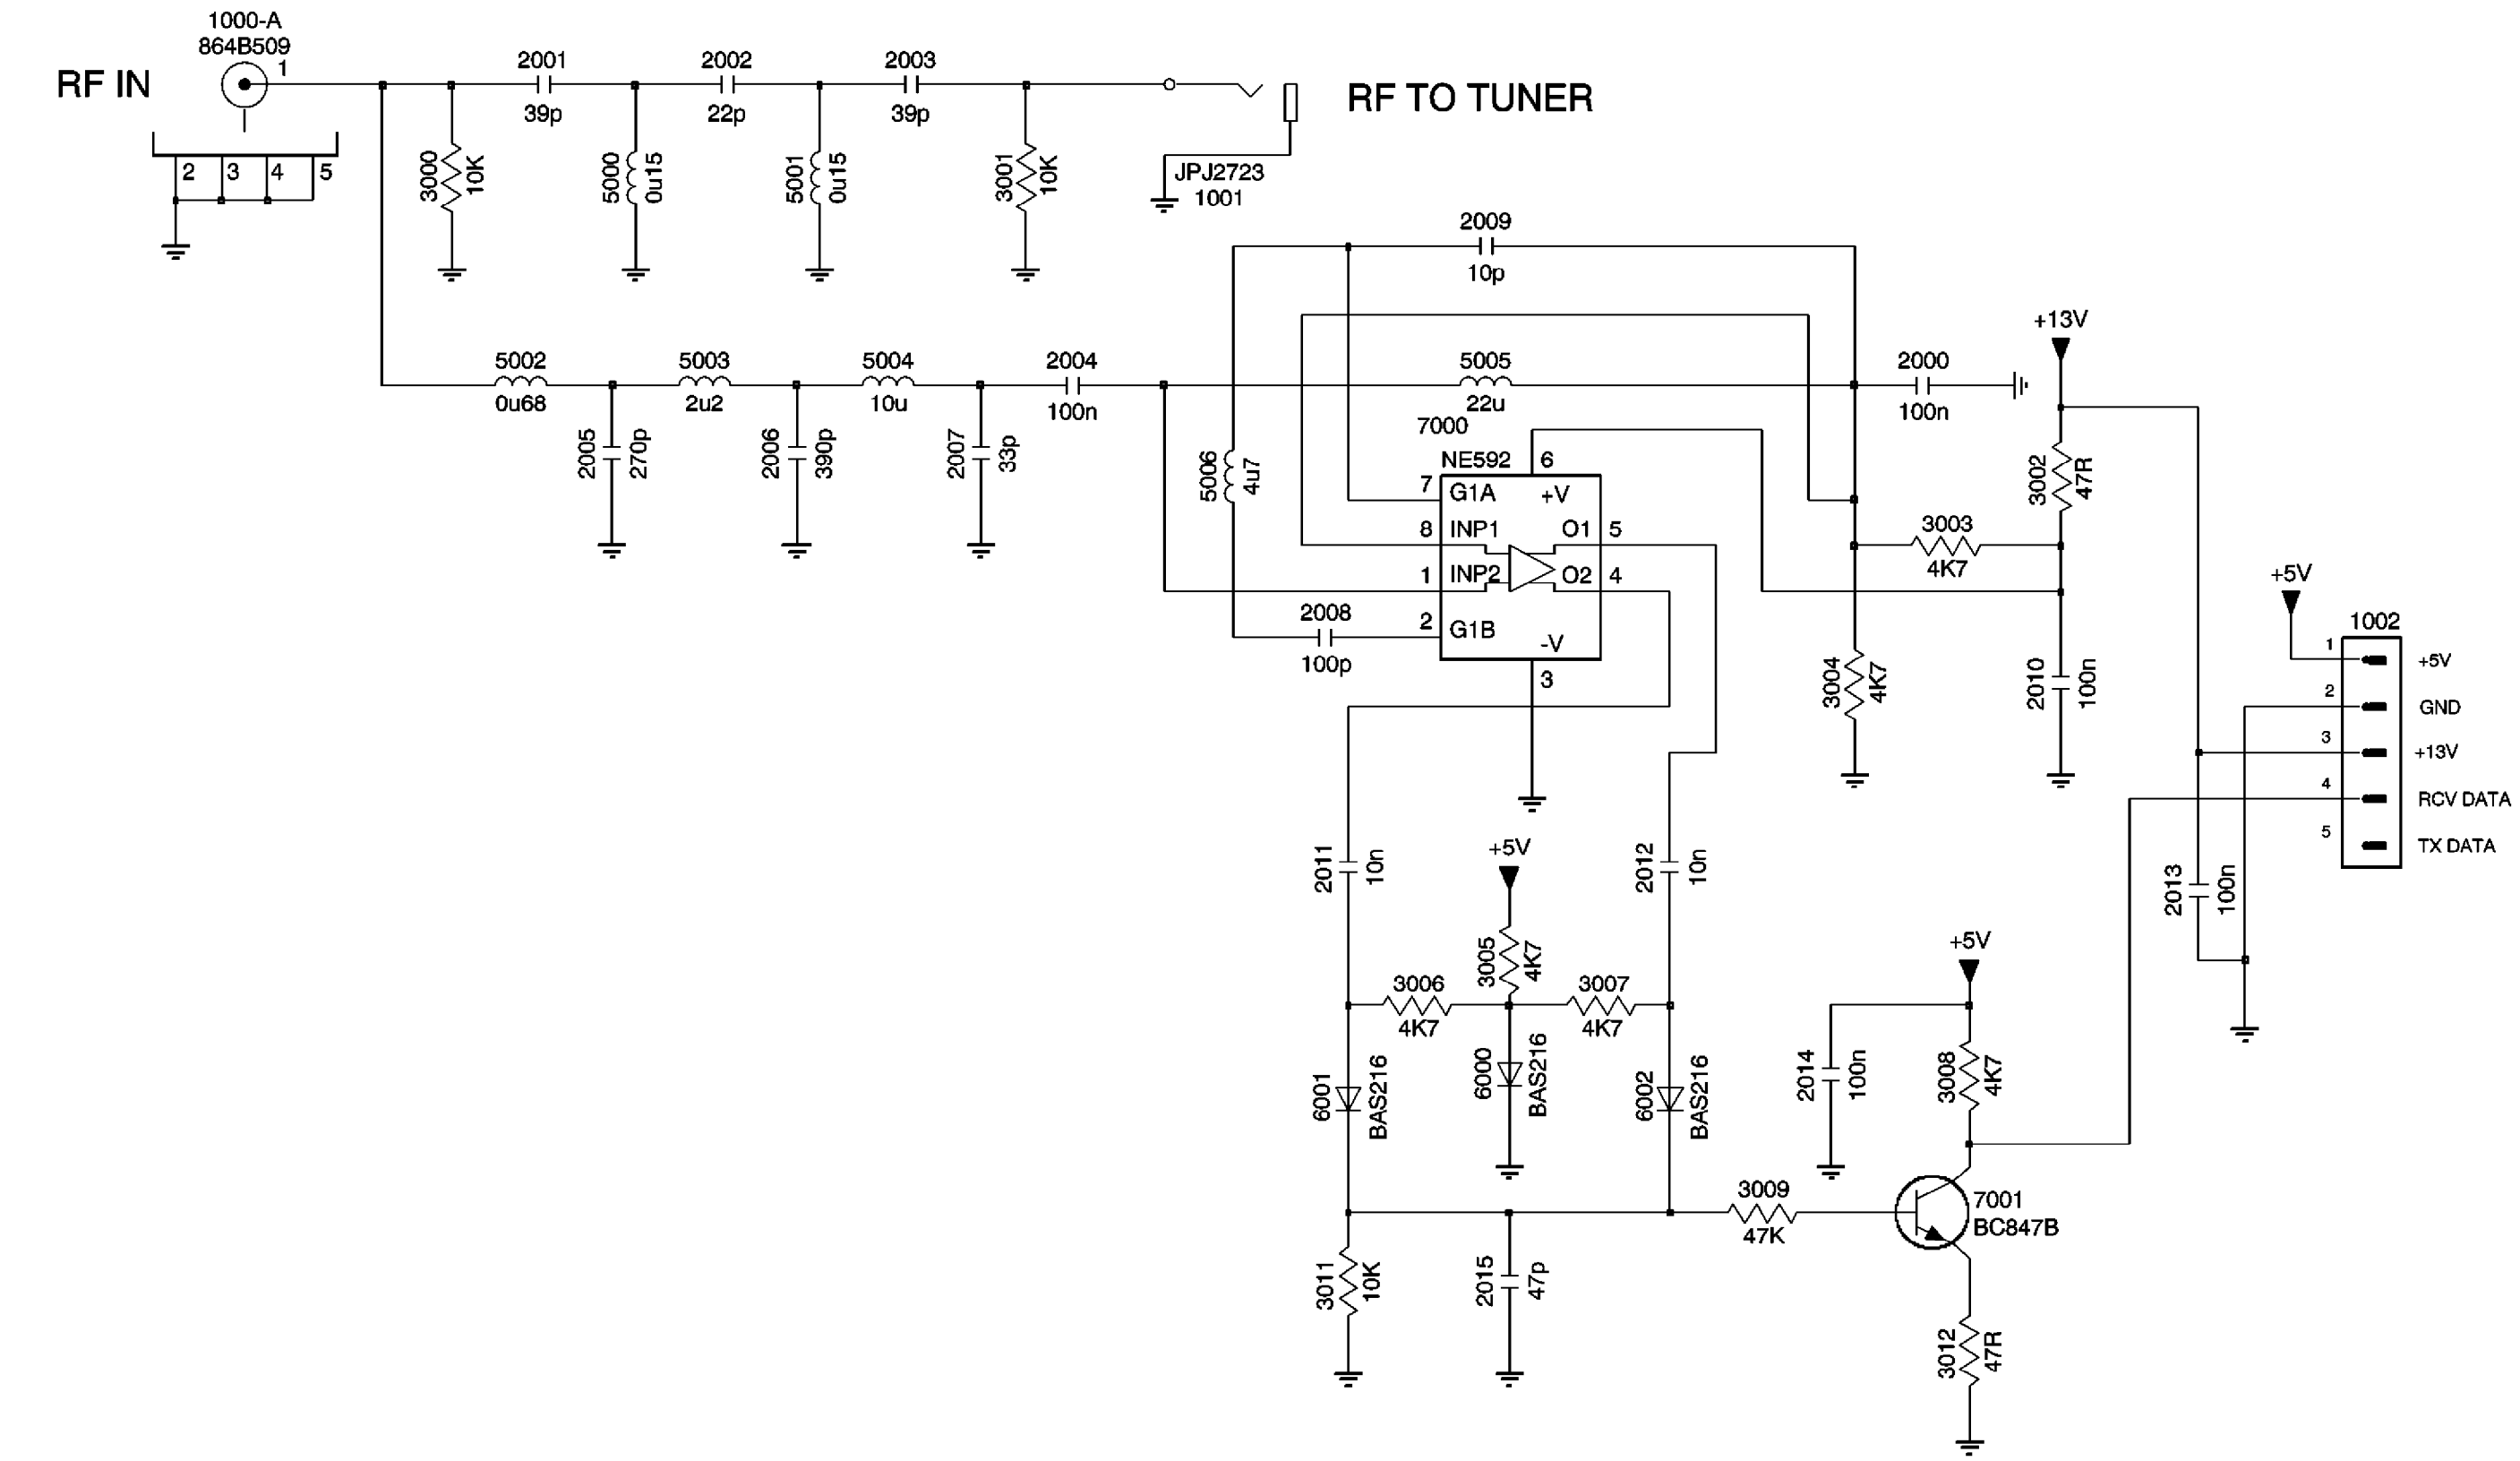


ITV Front Jack Panel

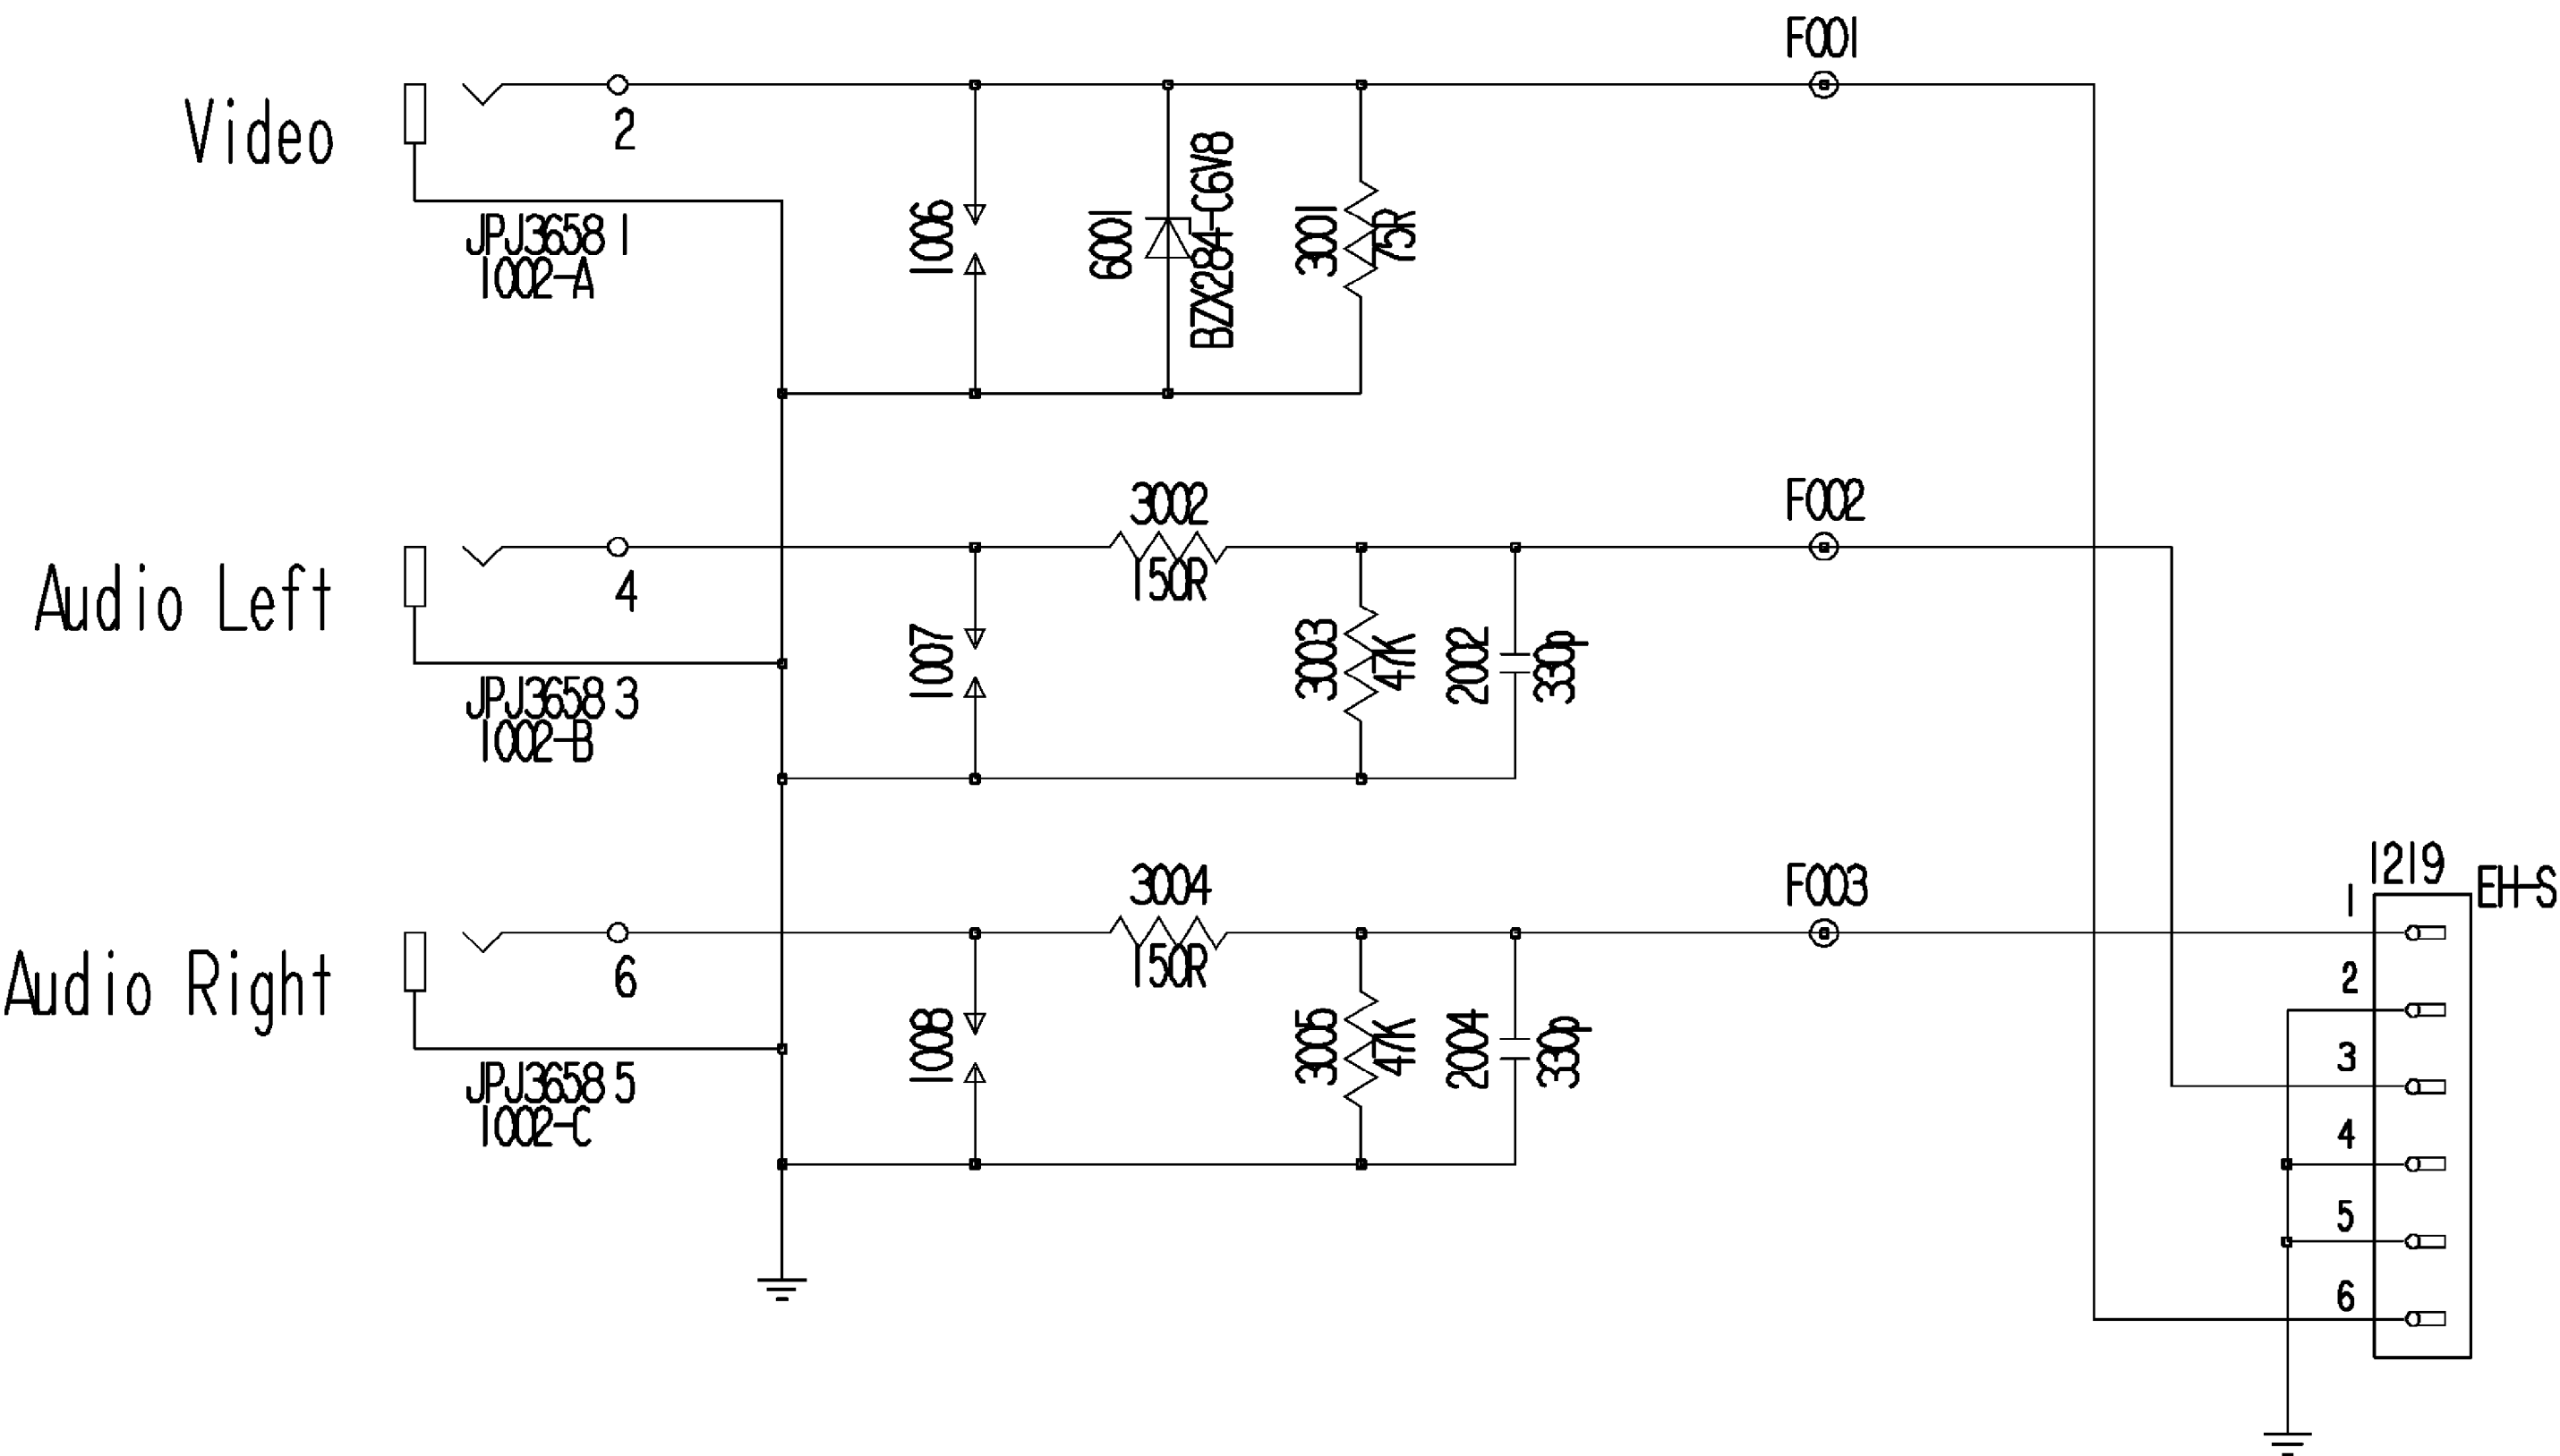


EPS PANEL SCHEMATIC

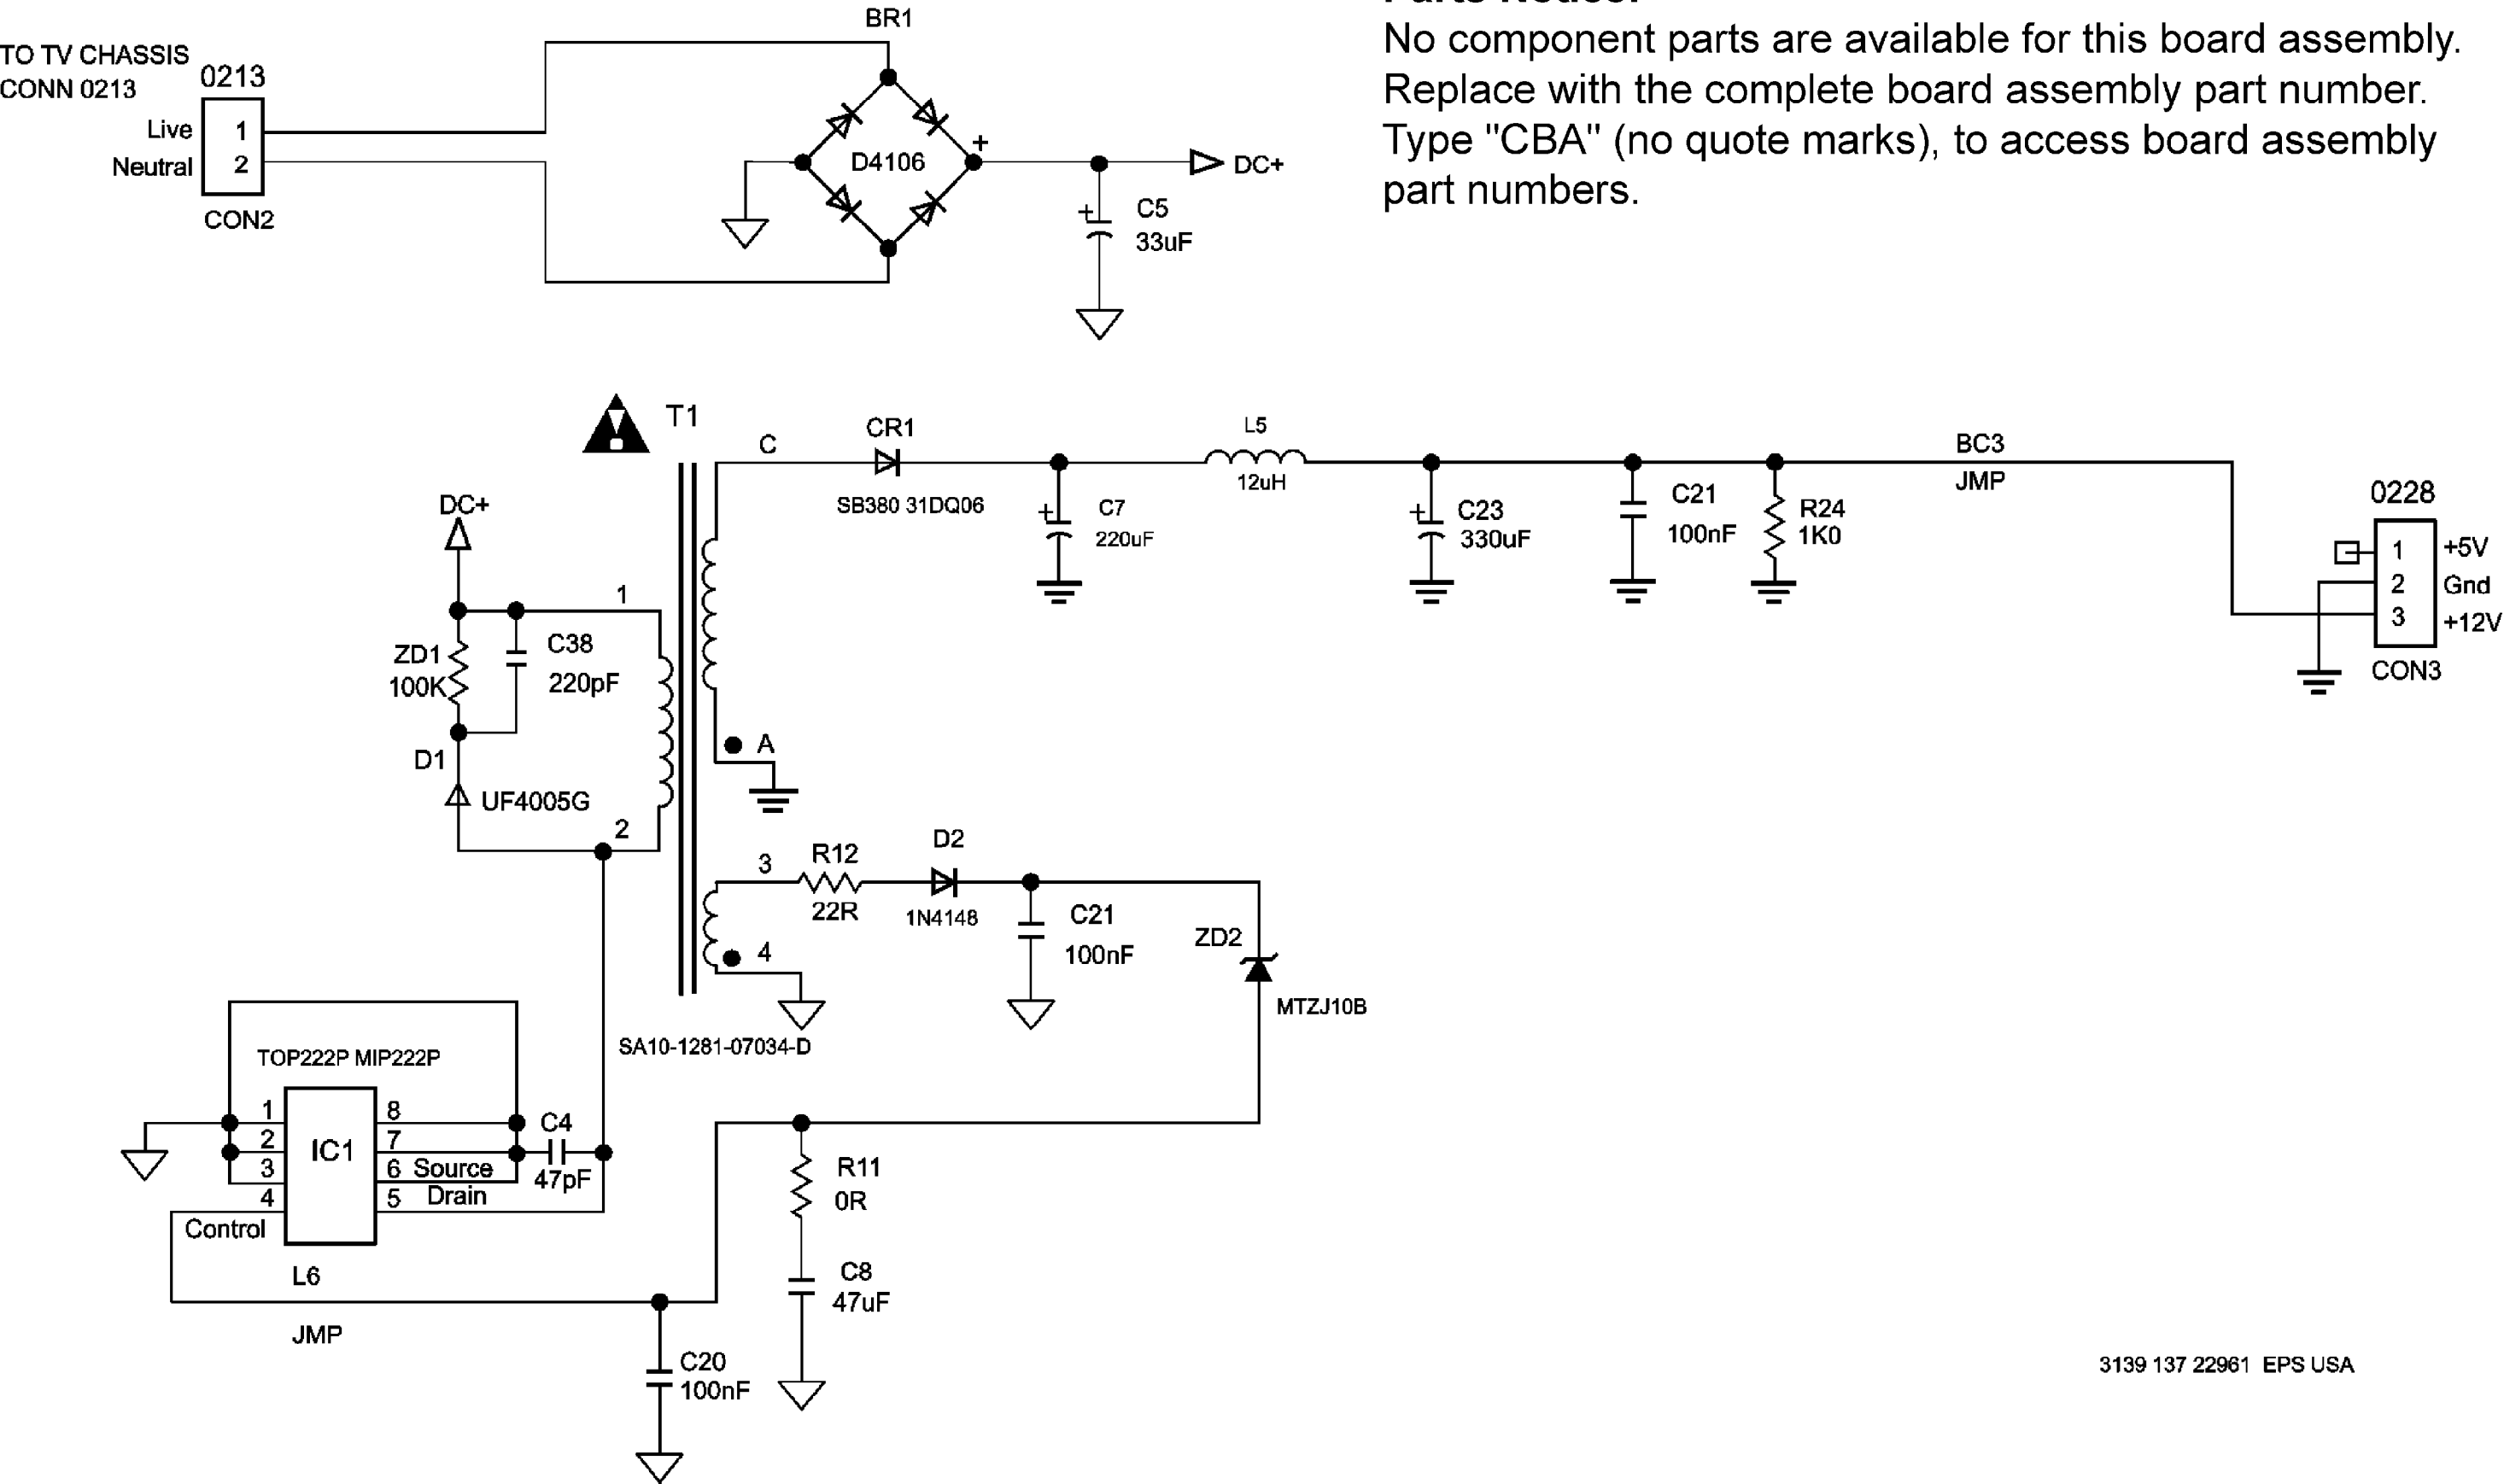


SP / LS Module, Vertical

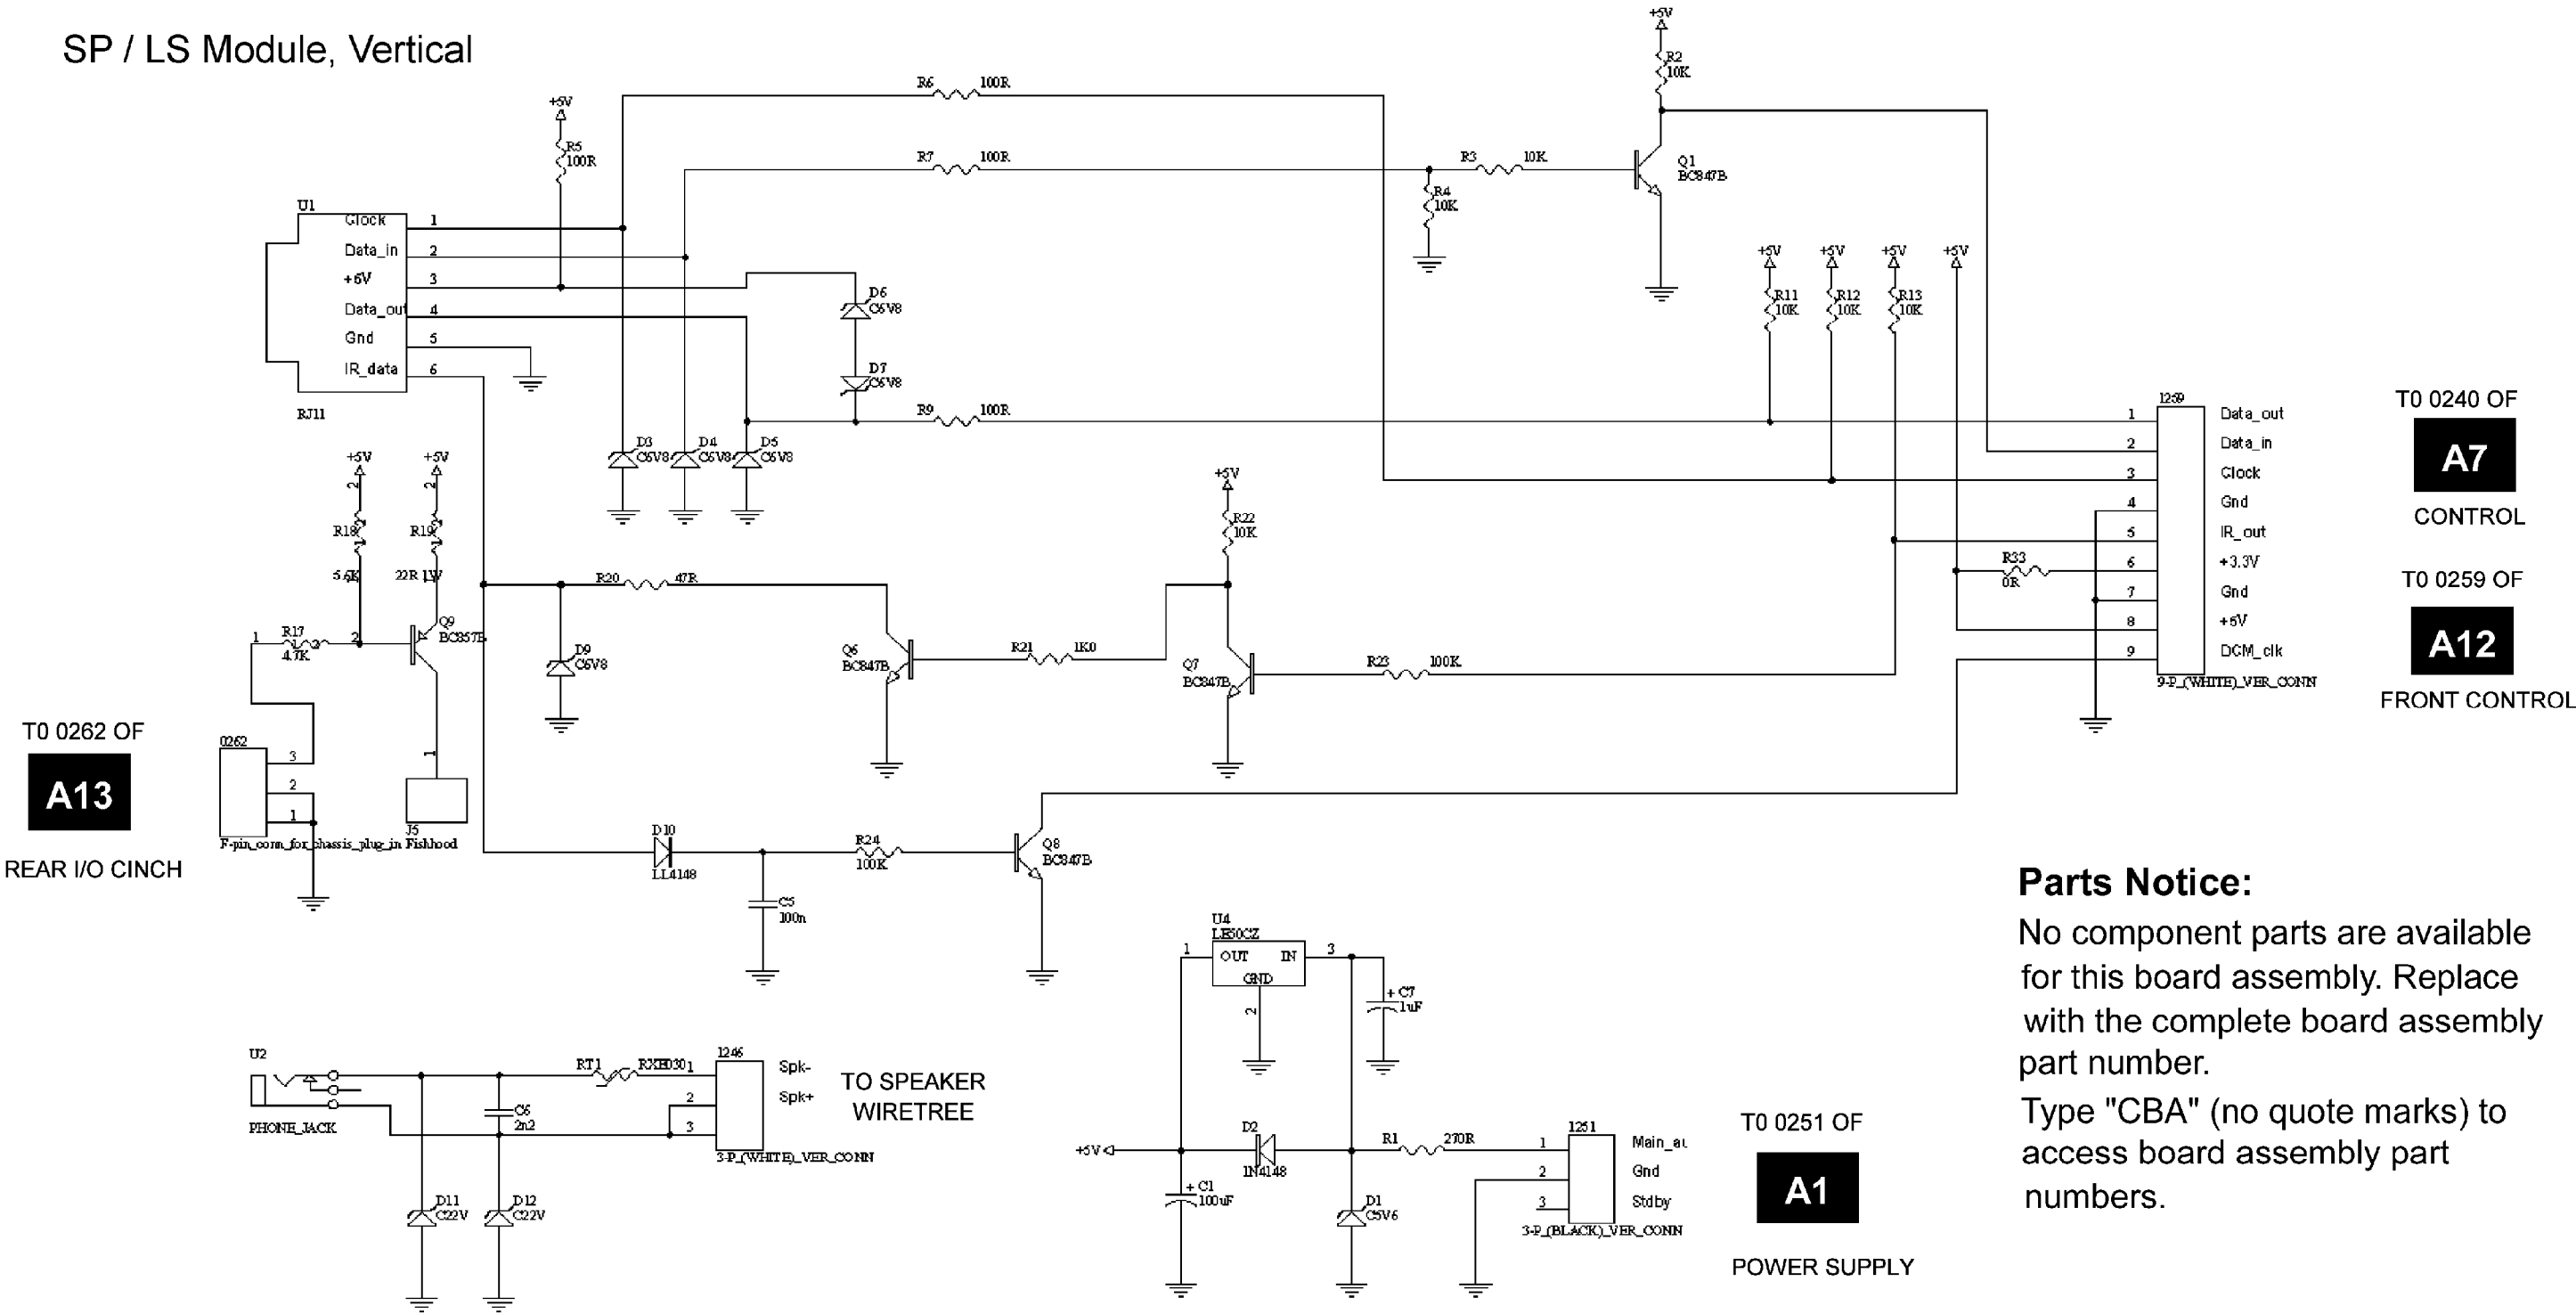


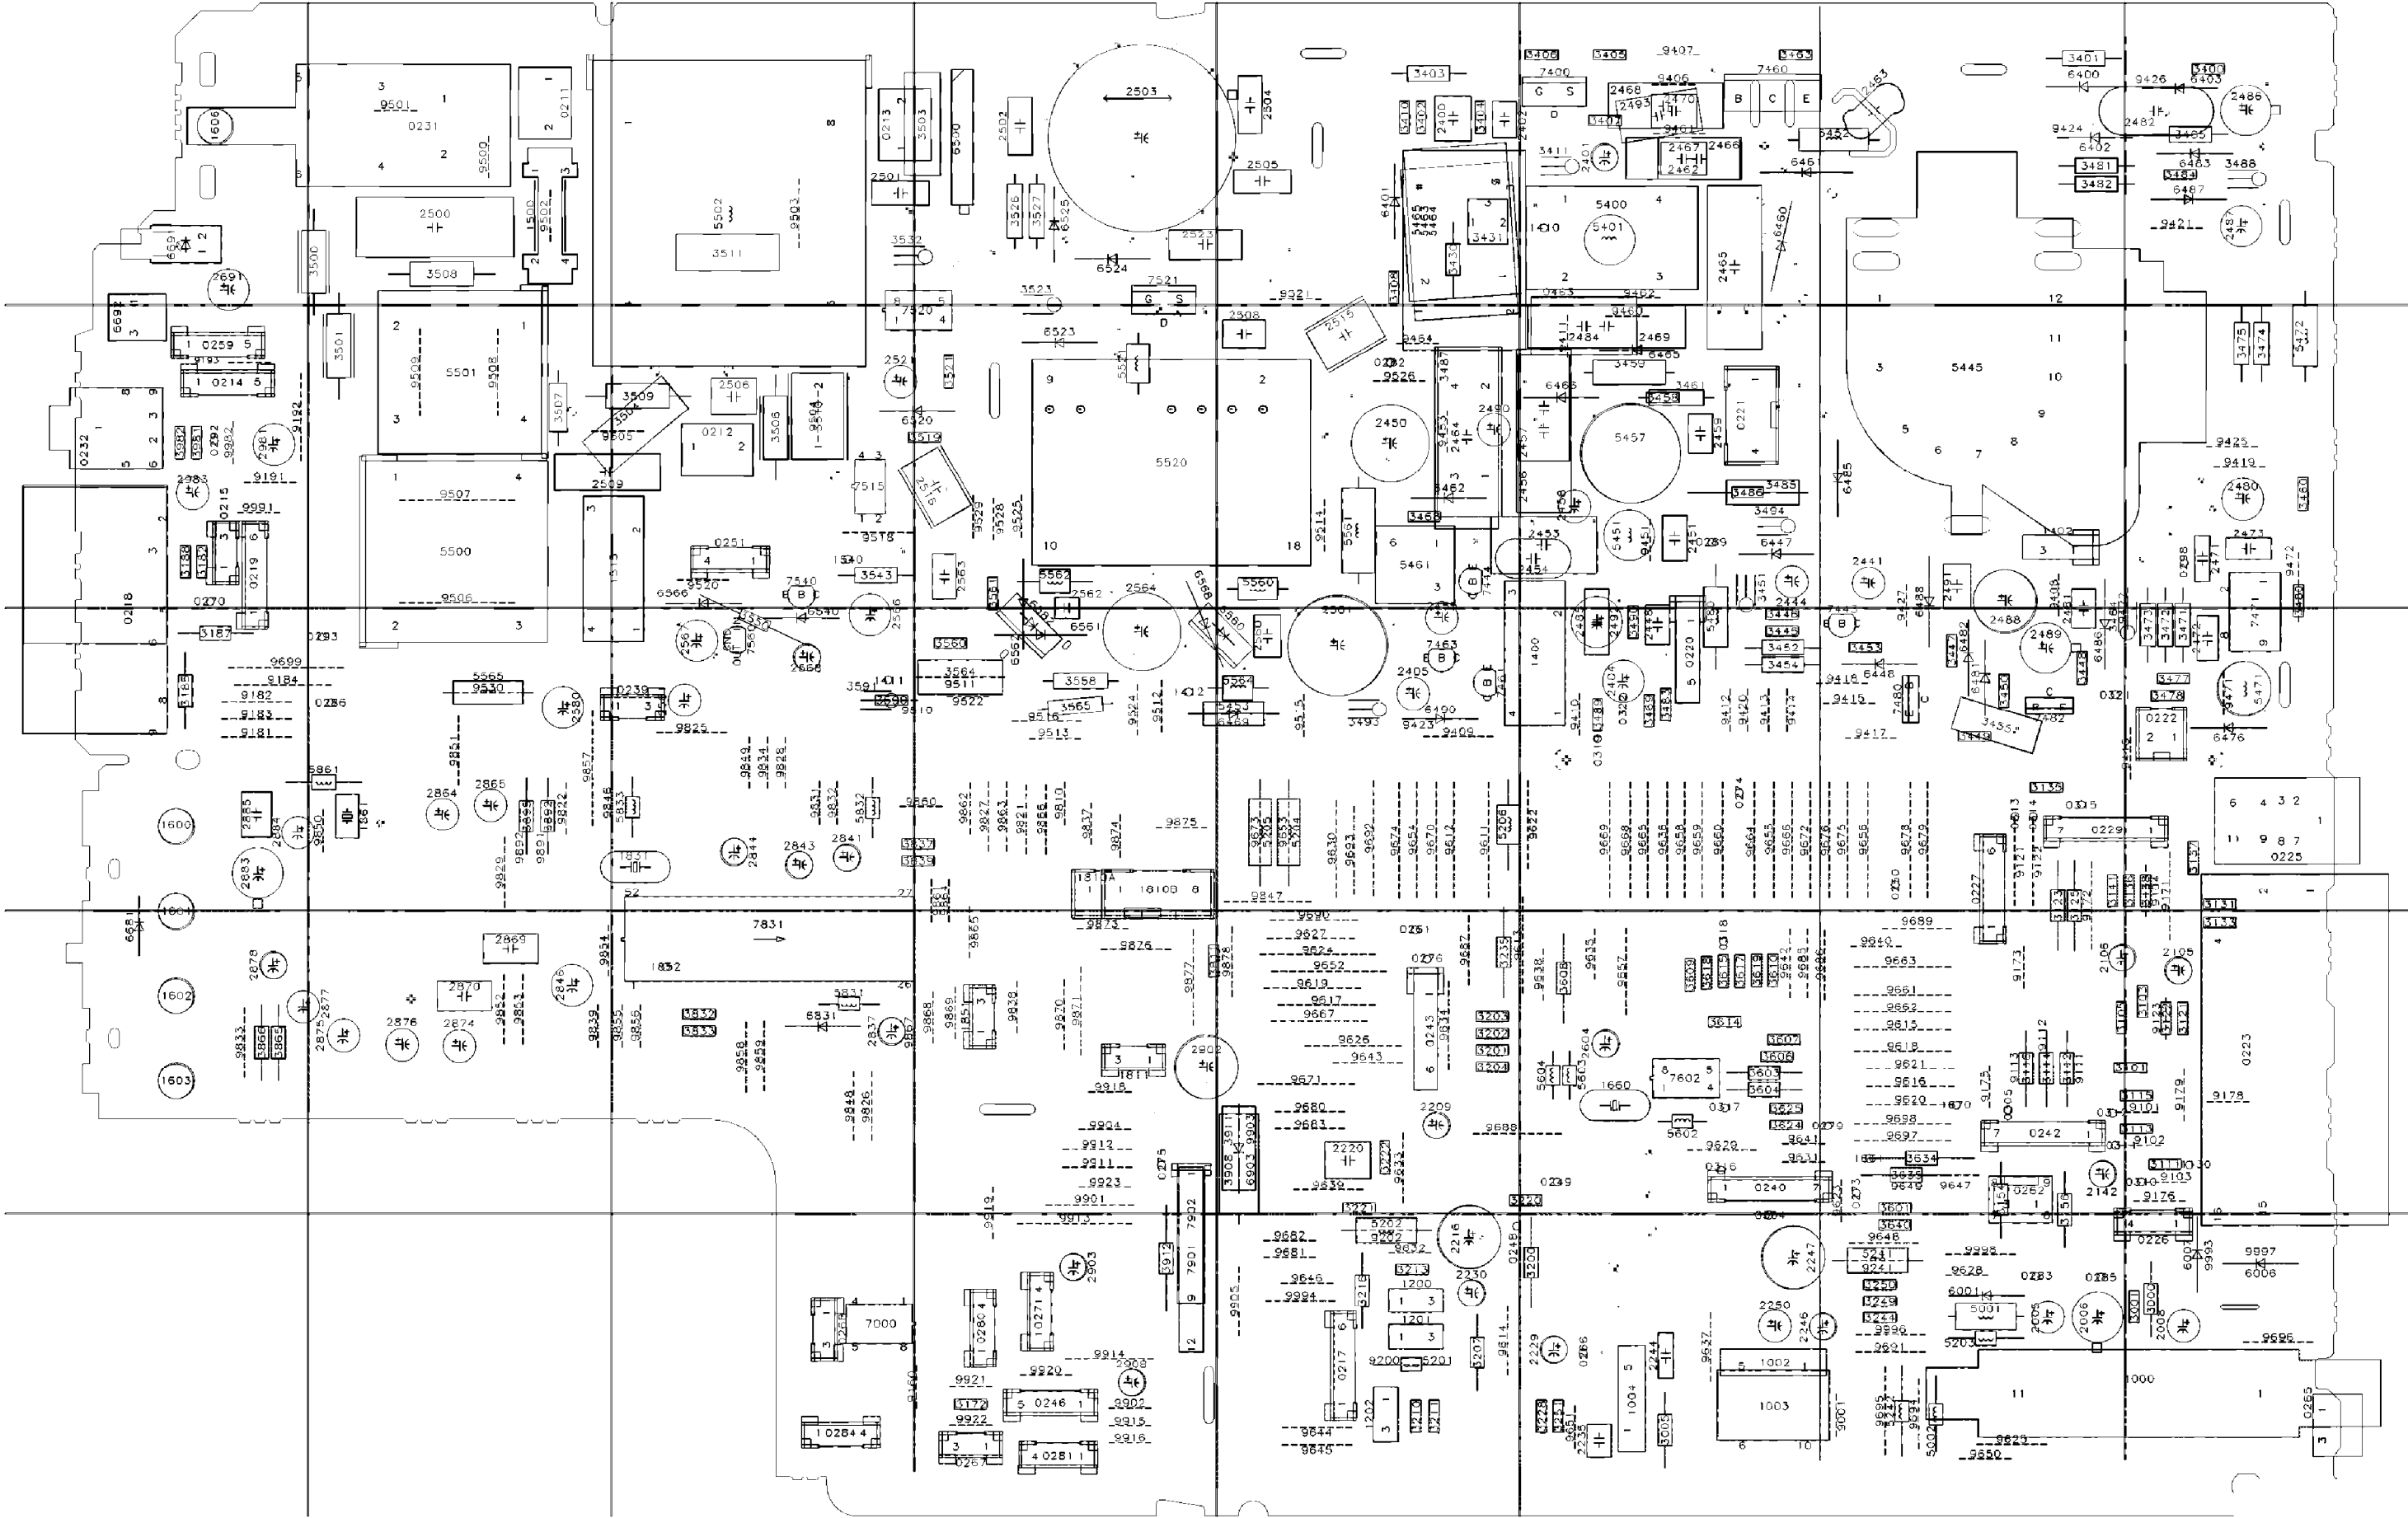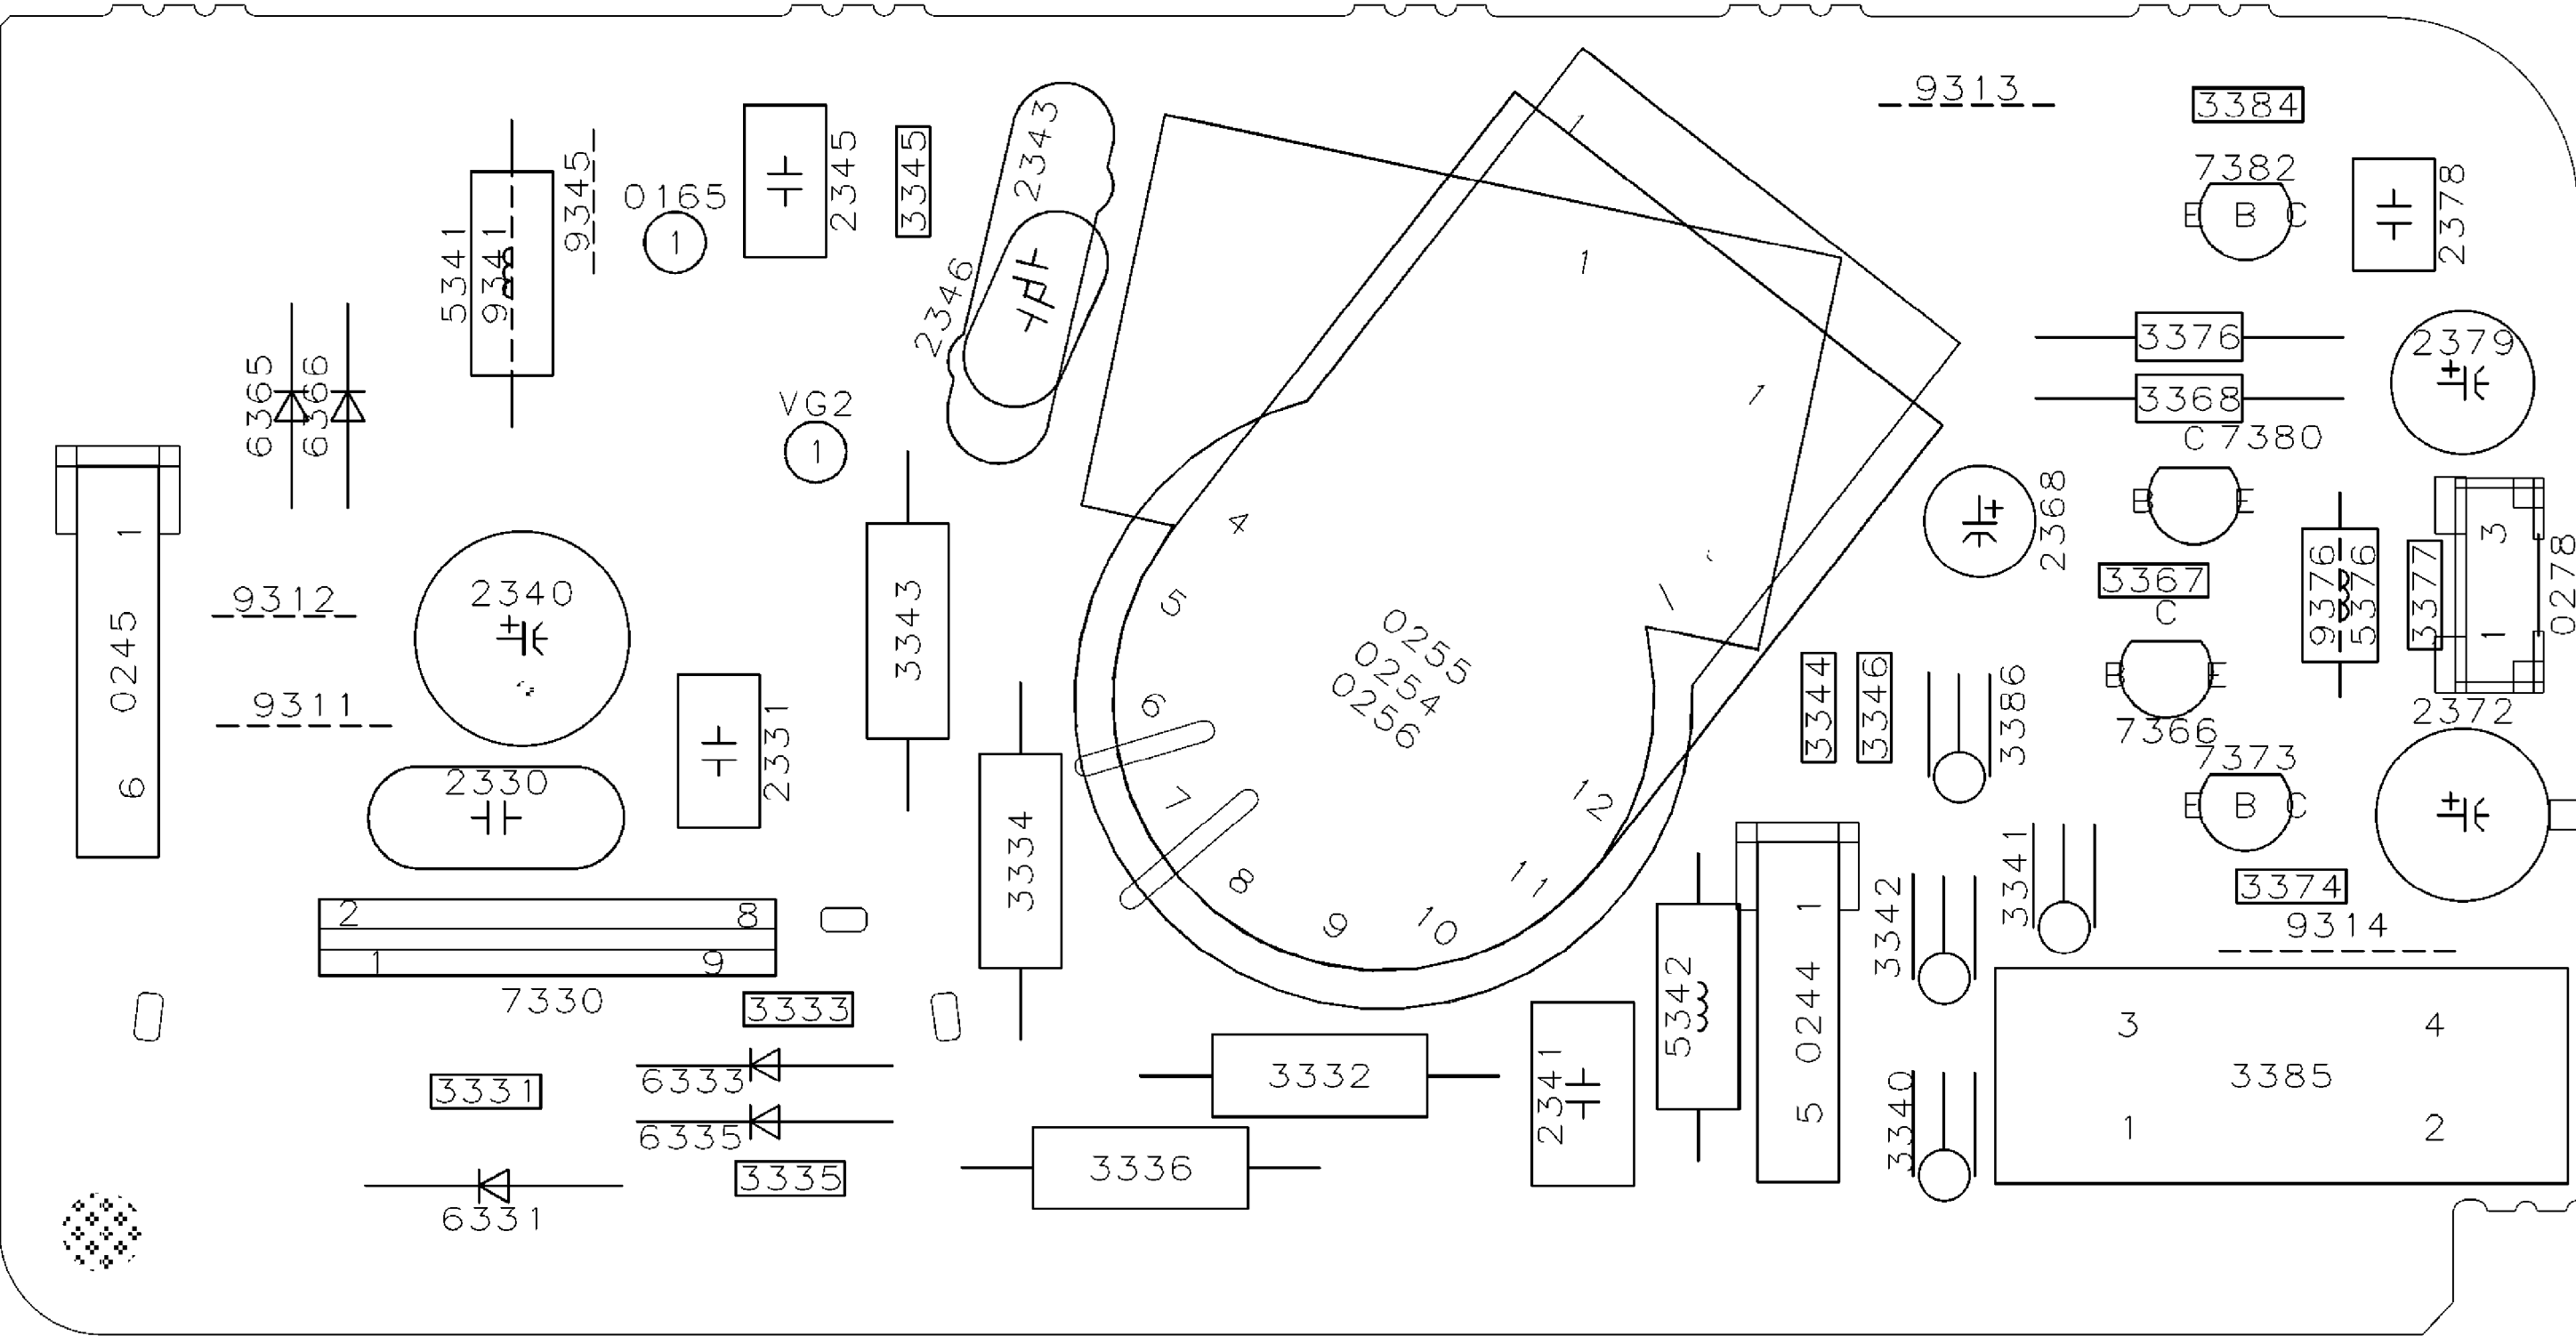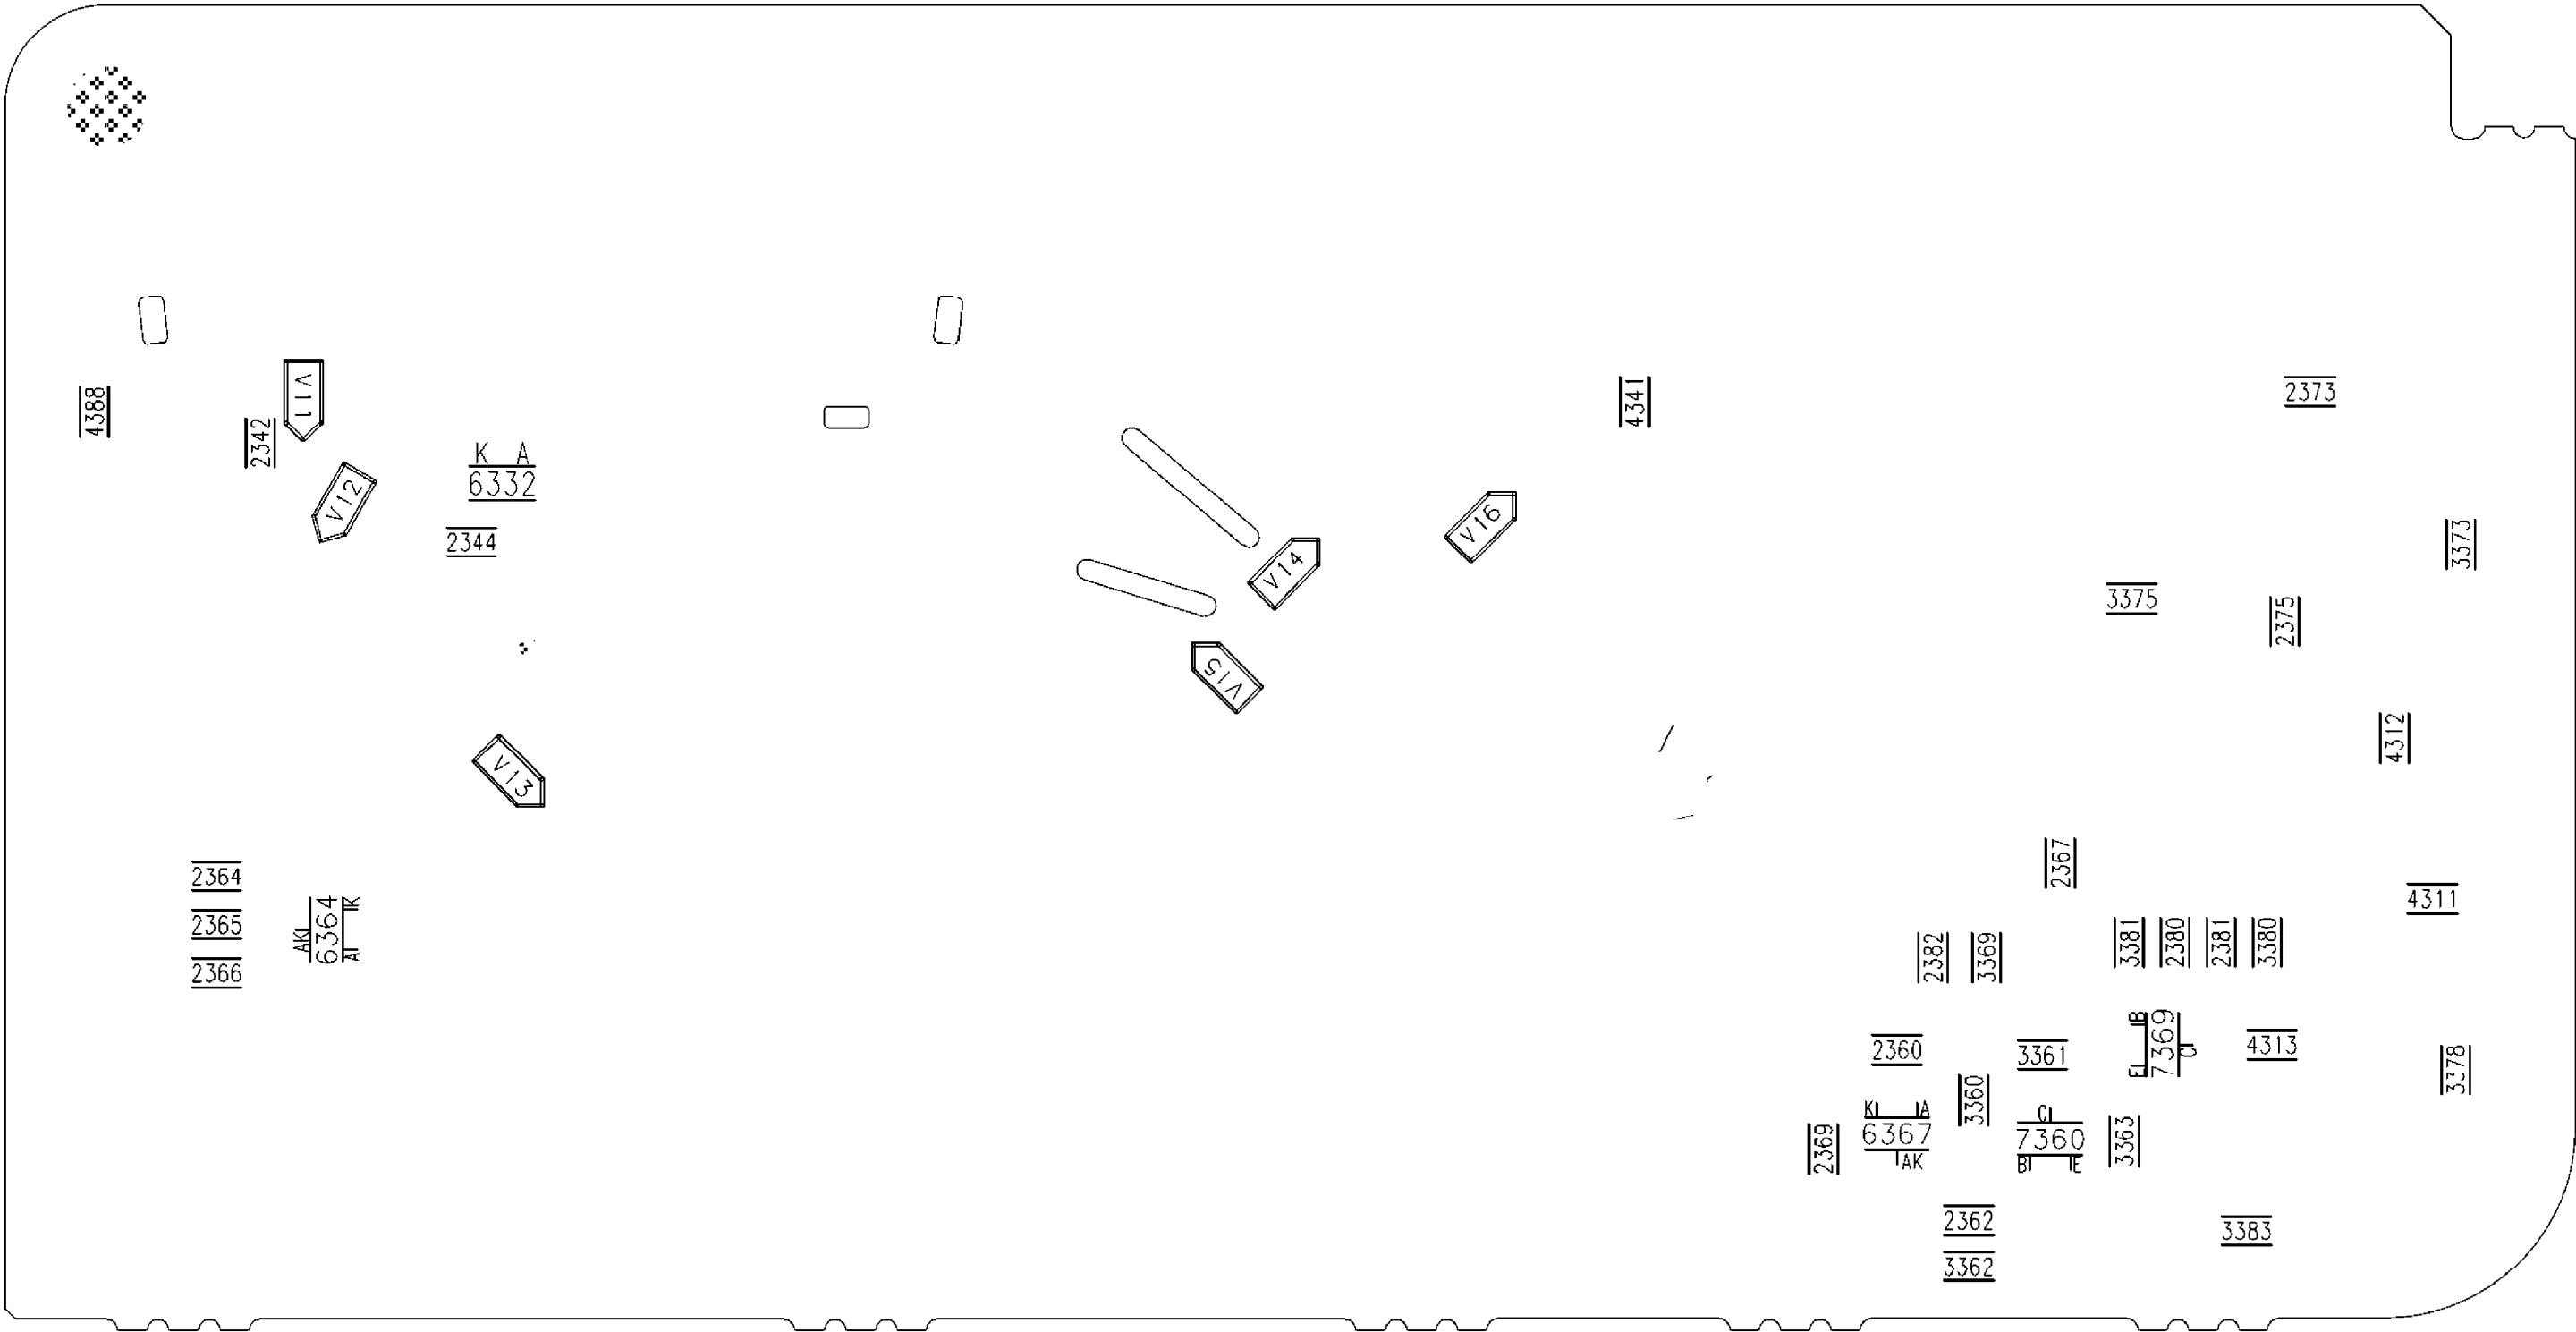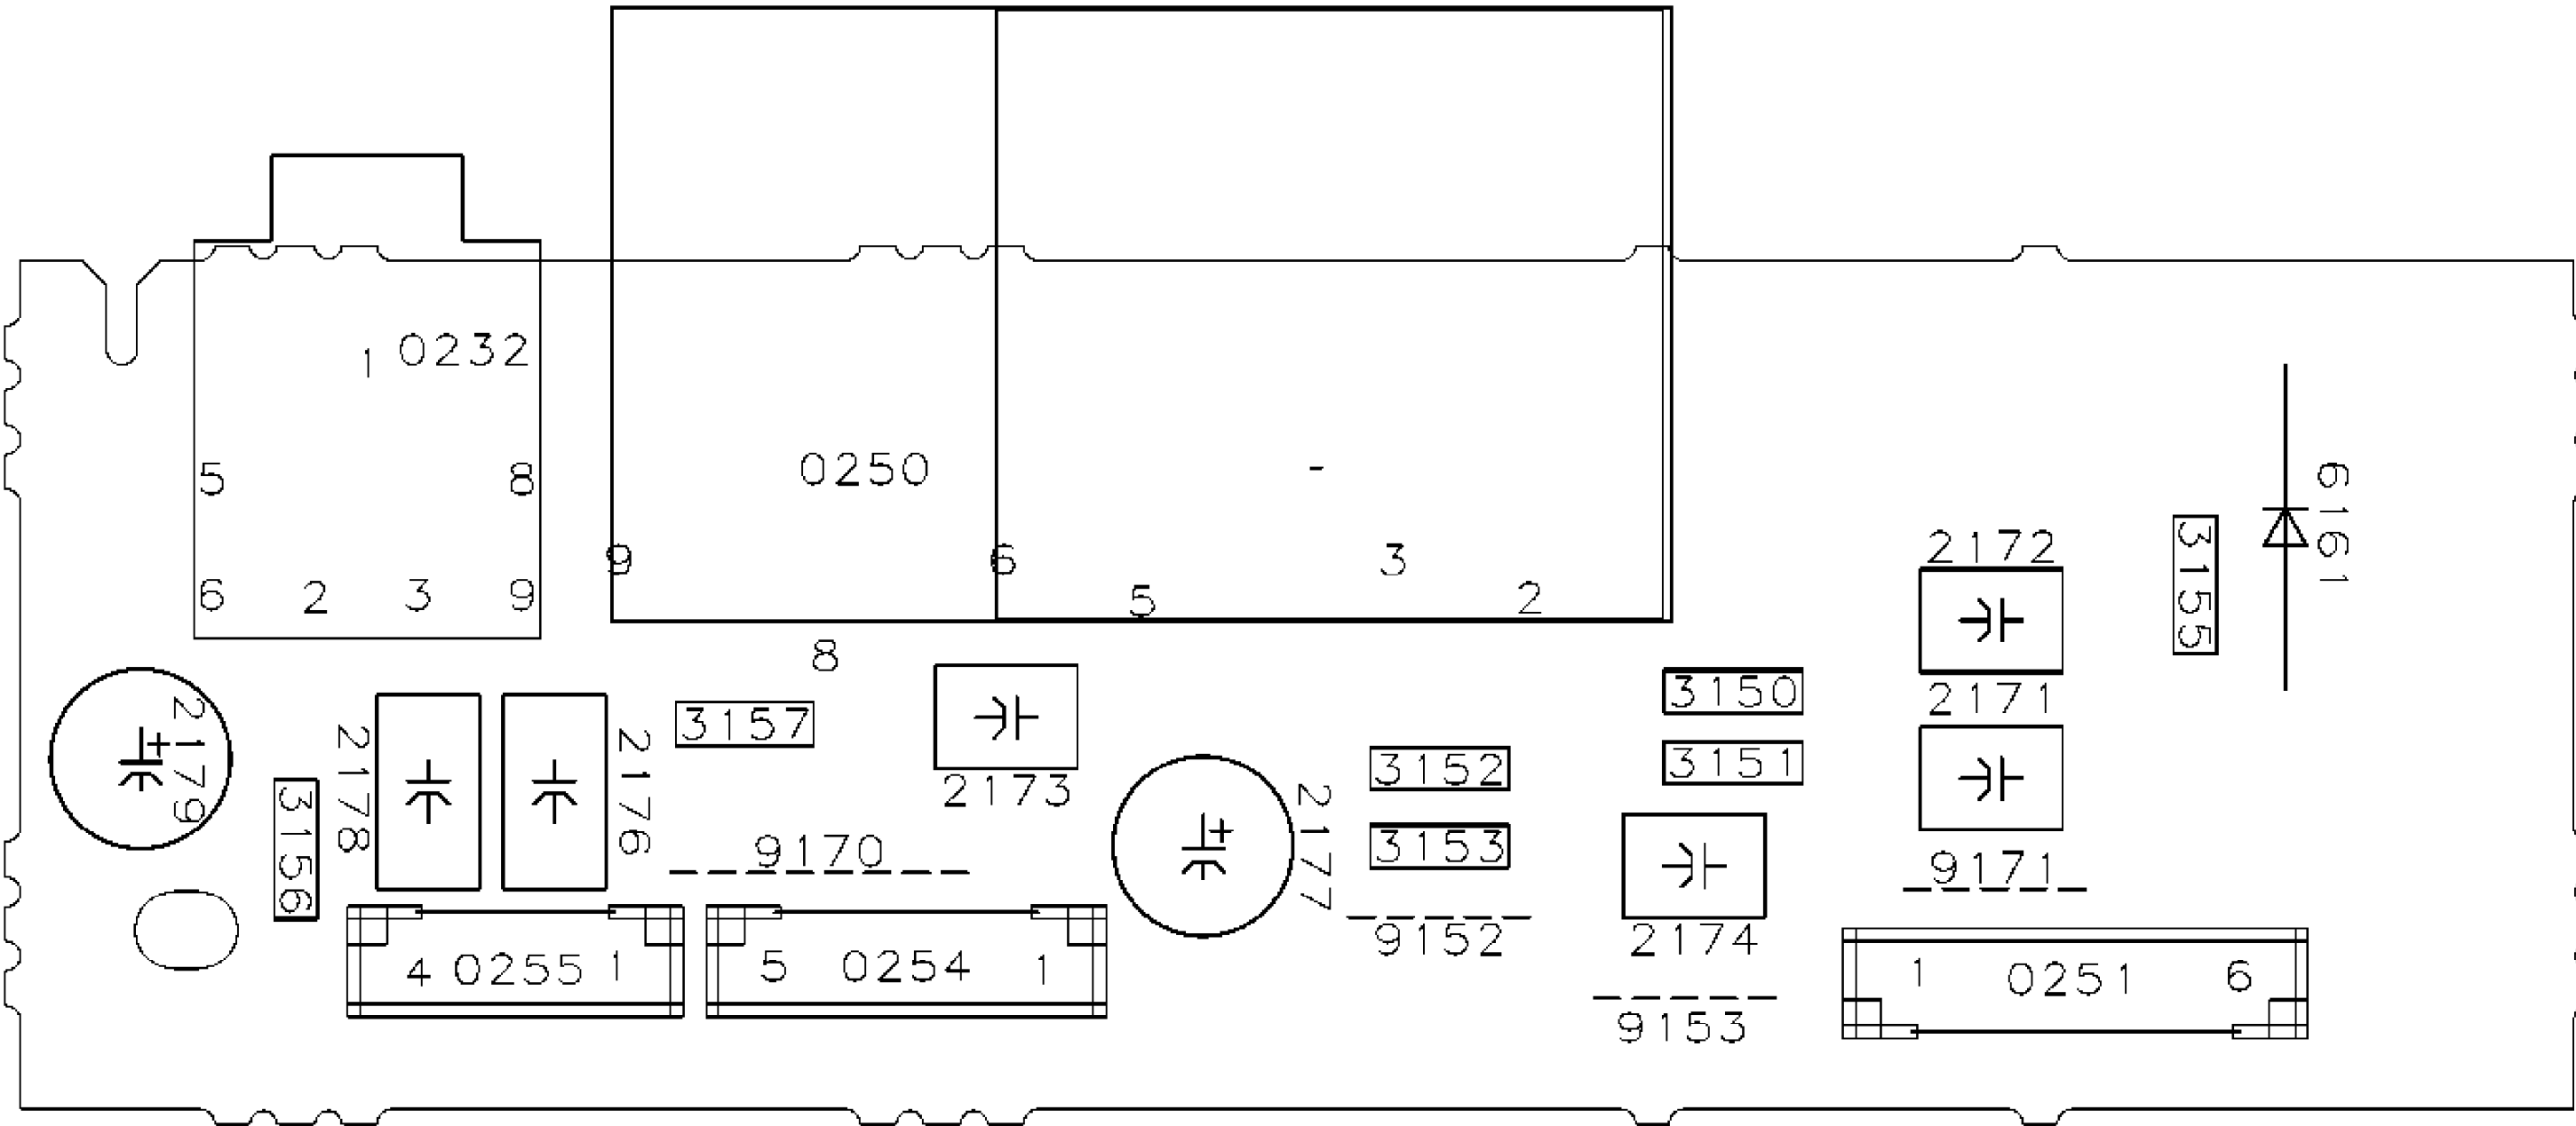
Parts Notice:
No component parts are available for this board assembly. Replace with the complete board assembly part number.
Type "CBA" (no quote marks) to access board assembly part numbers.














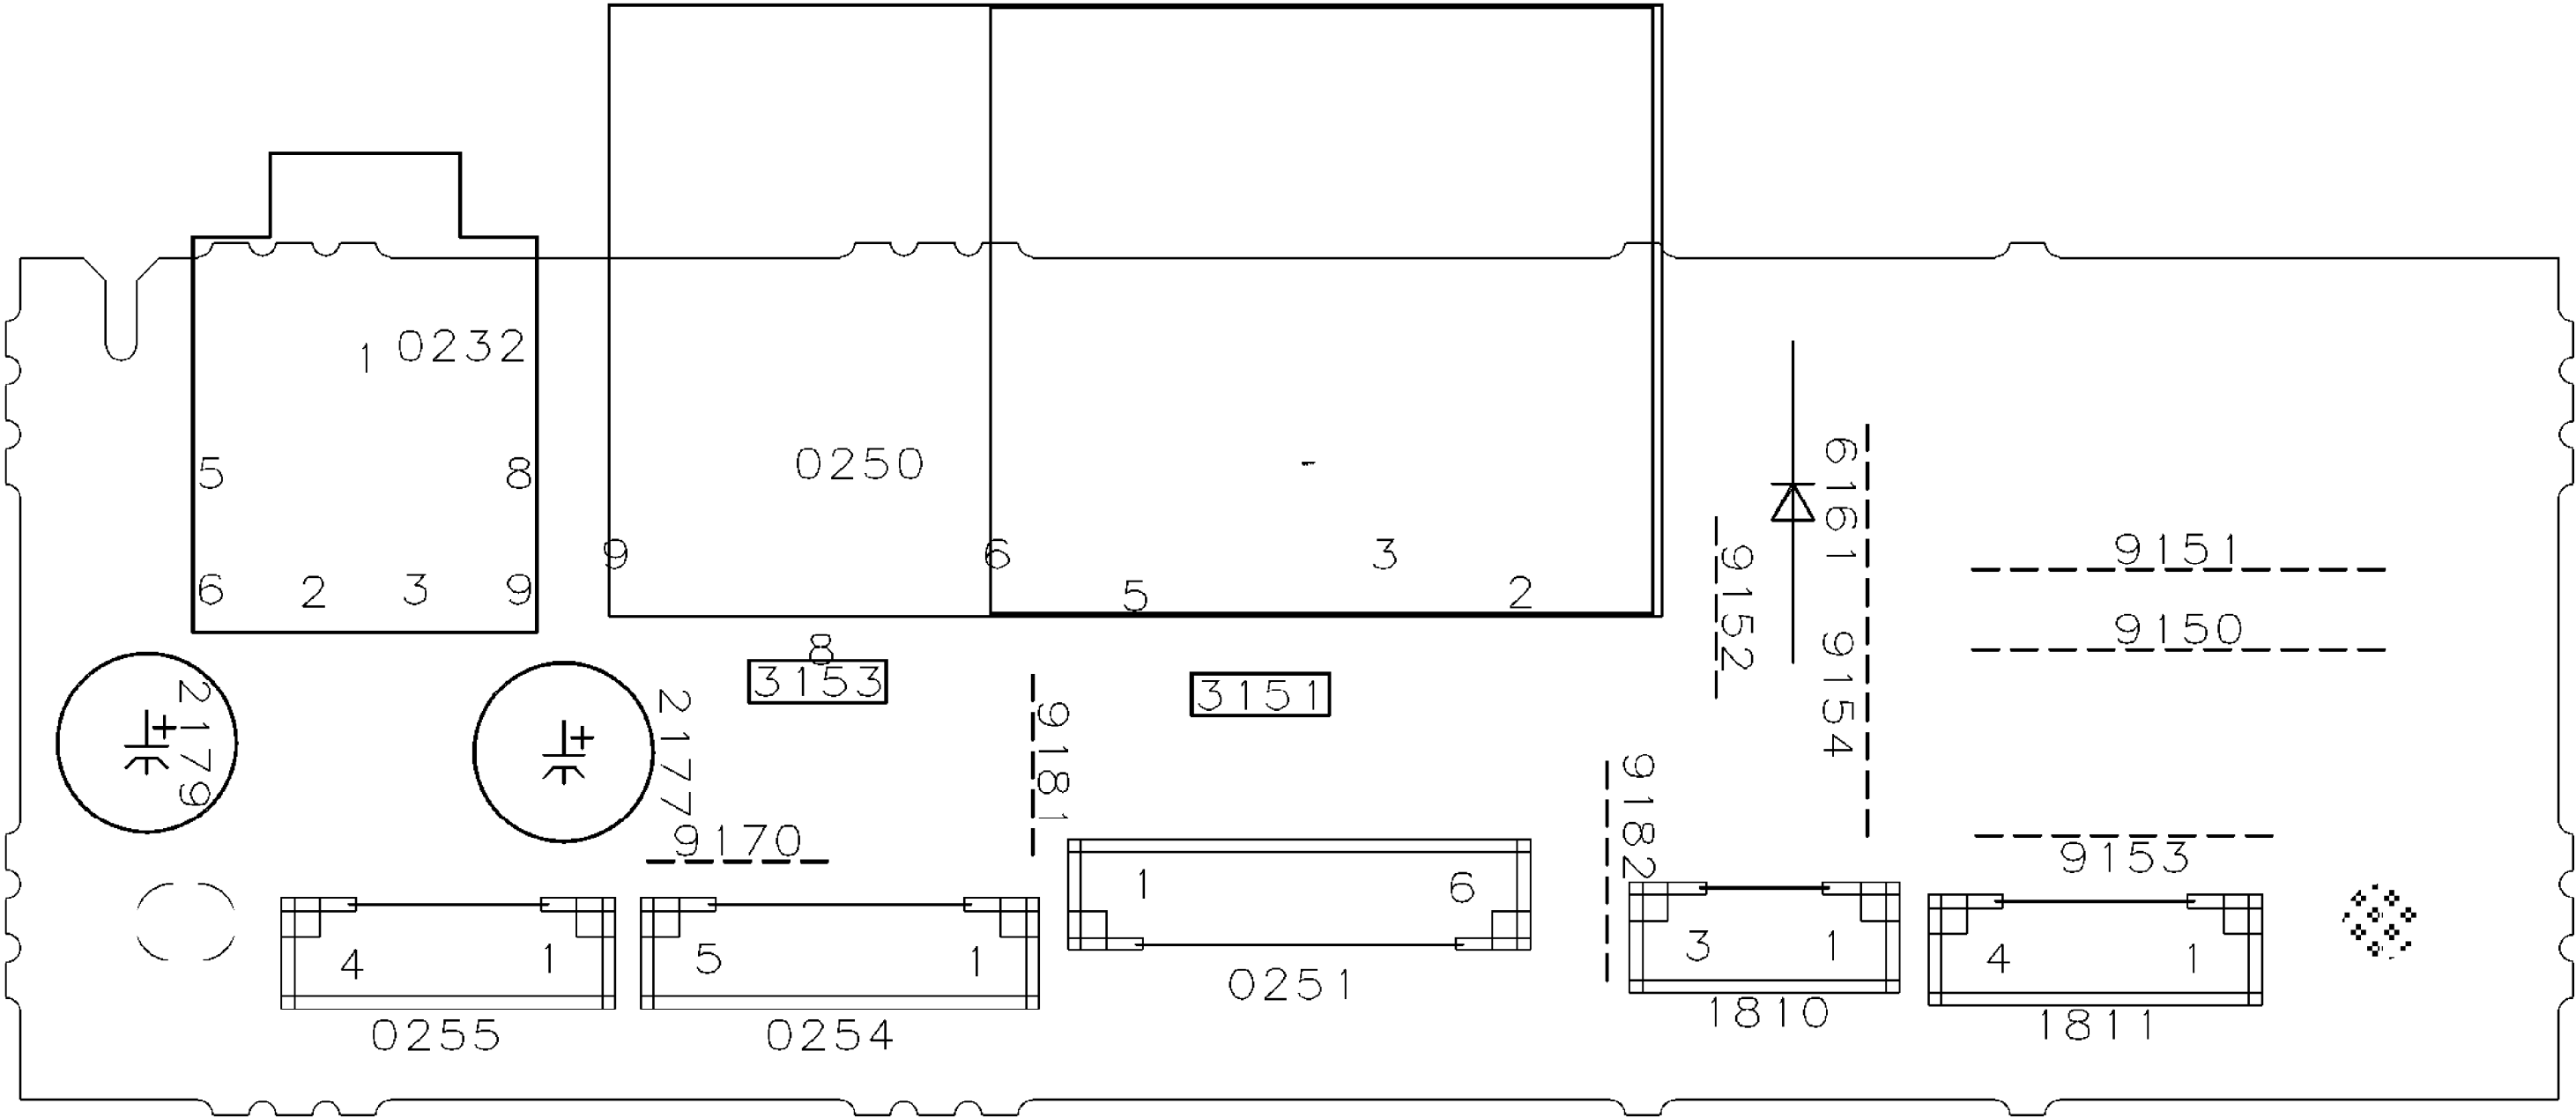
NOT USED IN MODELS: , 20DV6932/37R, 20DV693R02, 20DV693R01, 20MS334R/37, 20MS334R01, 20PT633R/37, 20PT643F/35R, 20PT643R01, 21PT6331/44R, 21PT633R85C (7638) - Side AV + HP Panel , Slim Profile (Com
21PT6431/44R, 21PT643R85C, 24PT633F/35R, 24PT633R37, 25LT220L/17, 25PT633R85C, 25ST220L/17, 27DV693R37A, 27LT220L/17, 27MS3404/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35, 27S




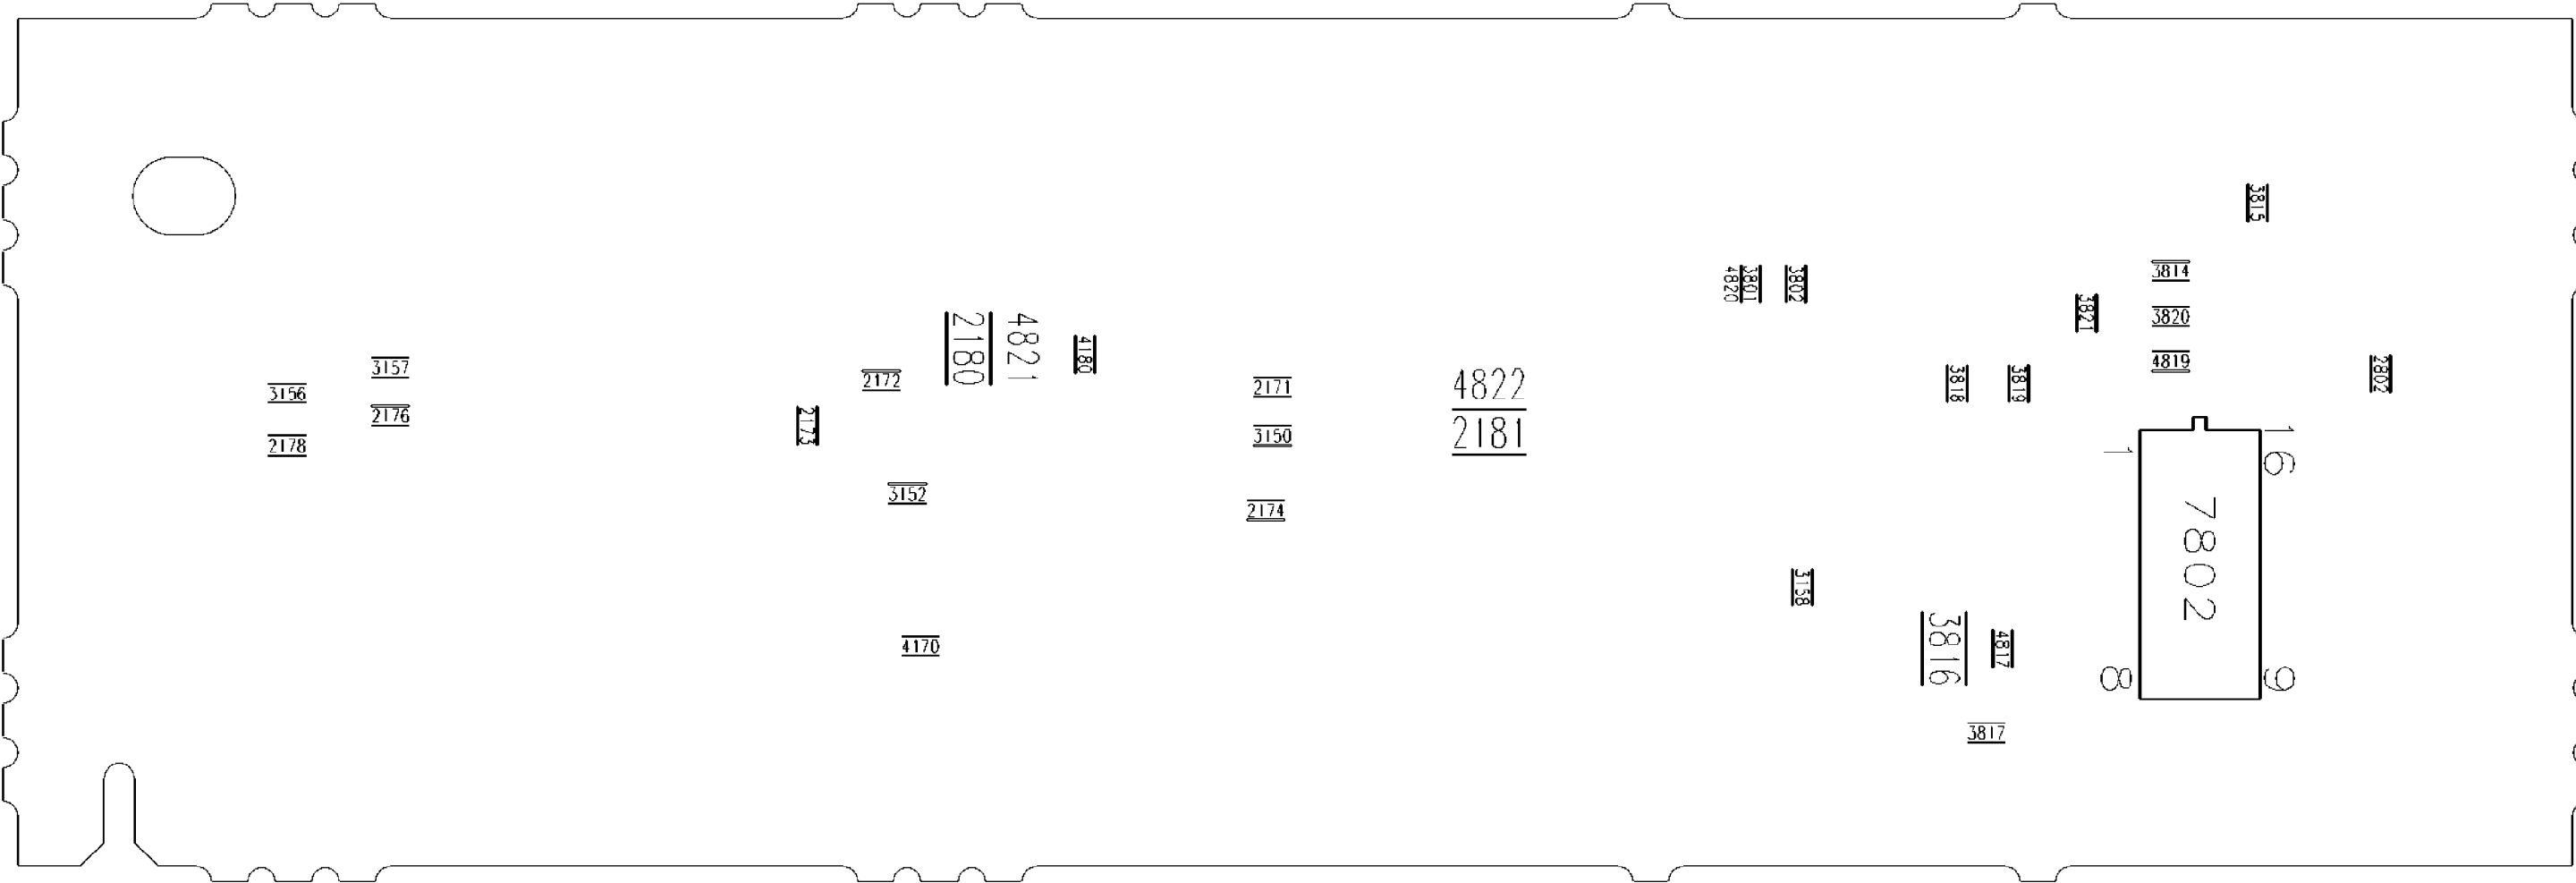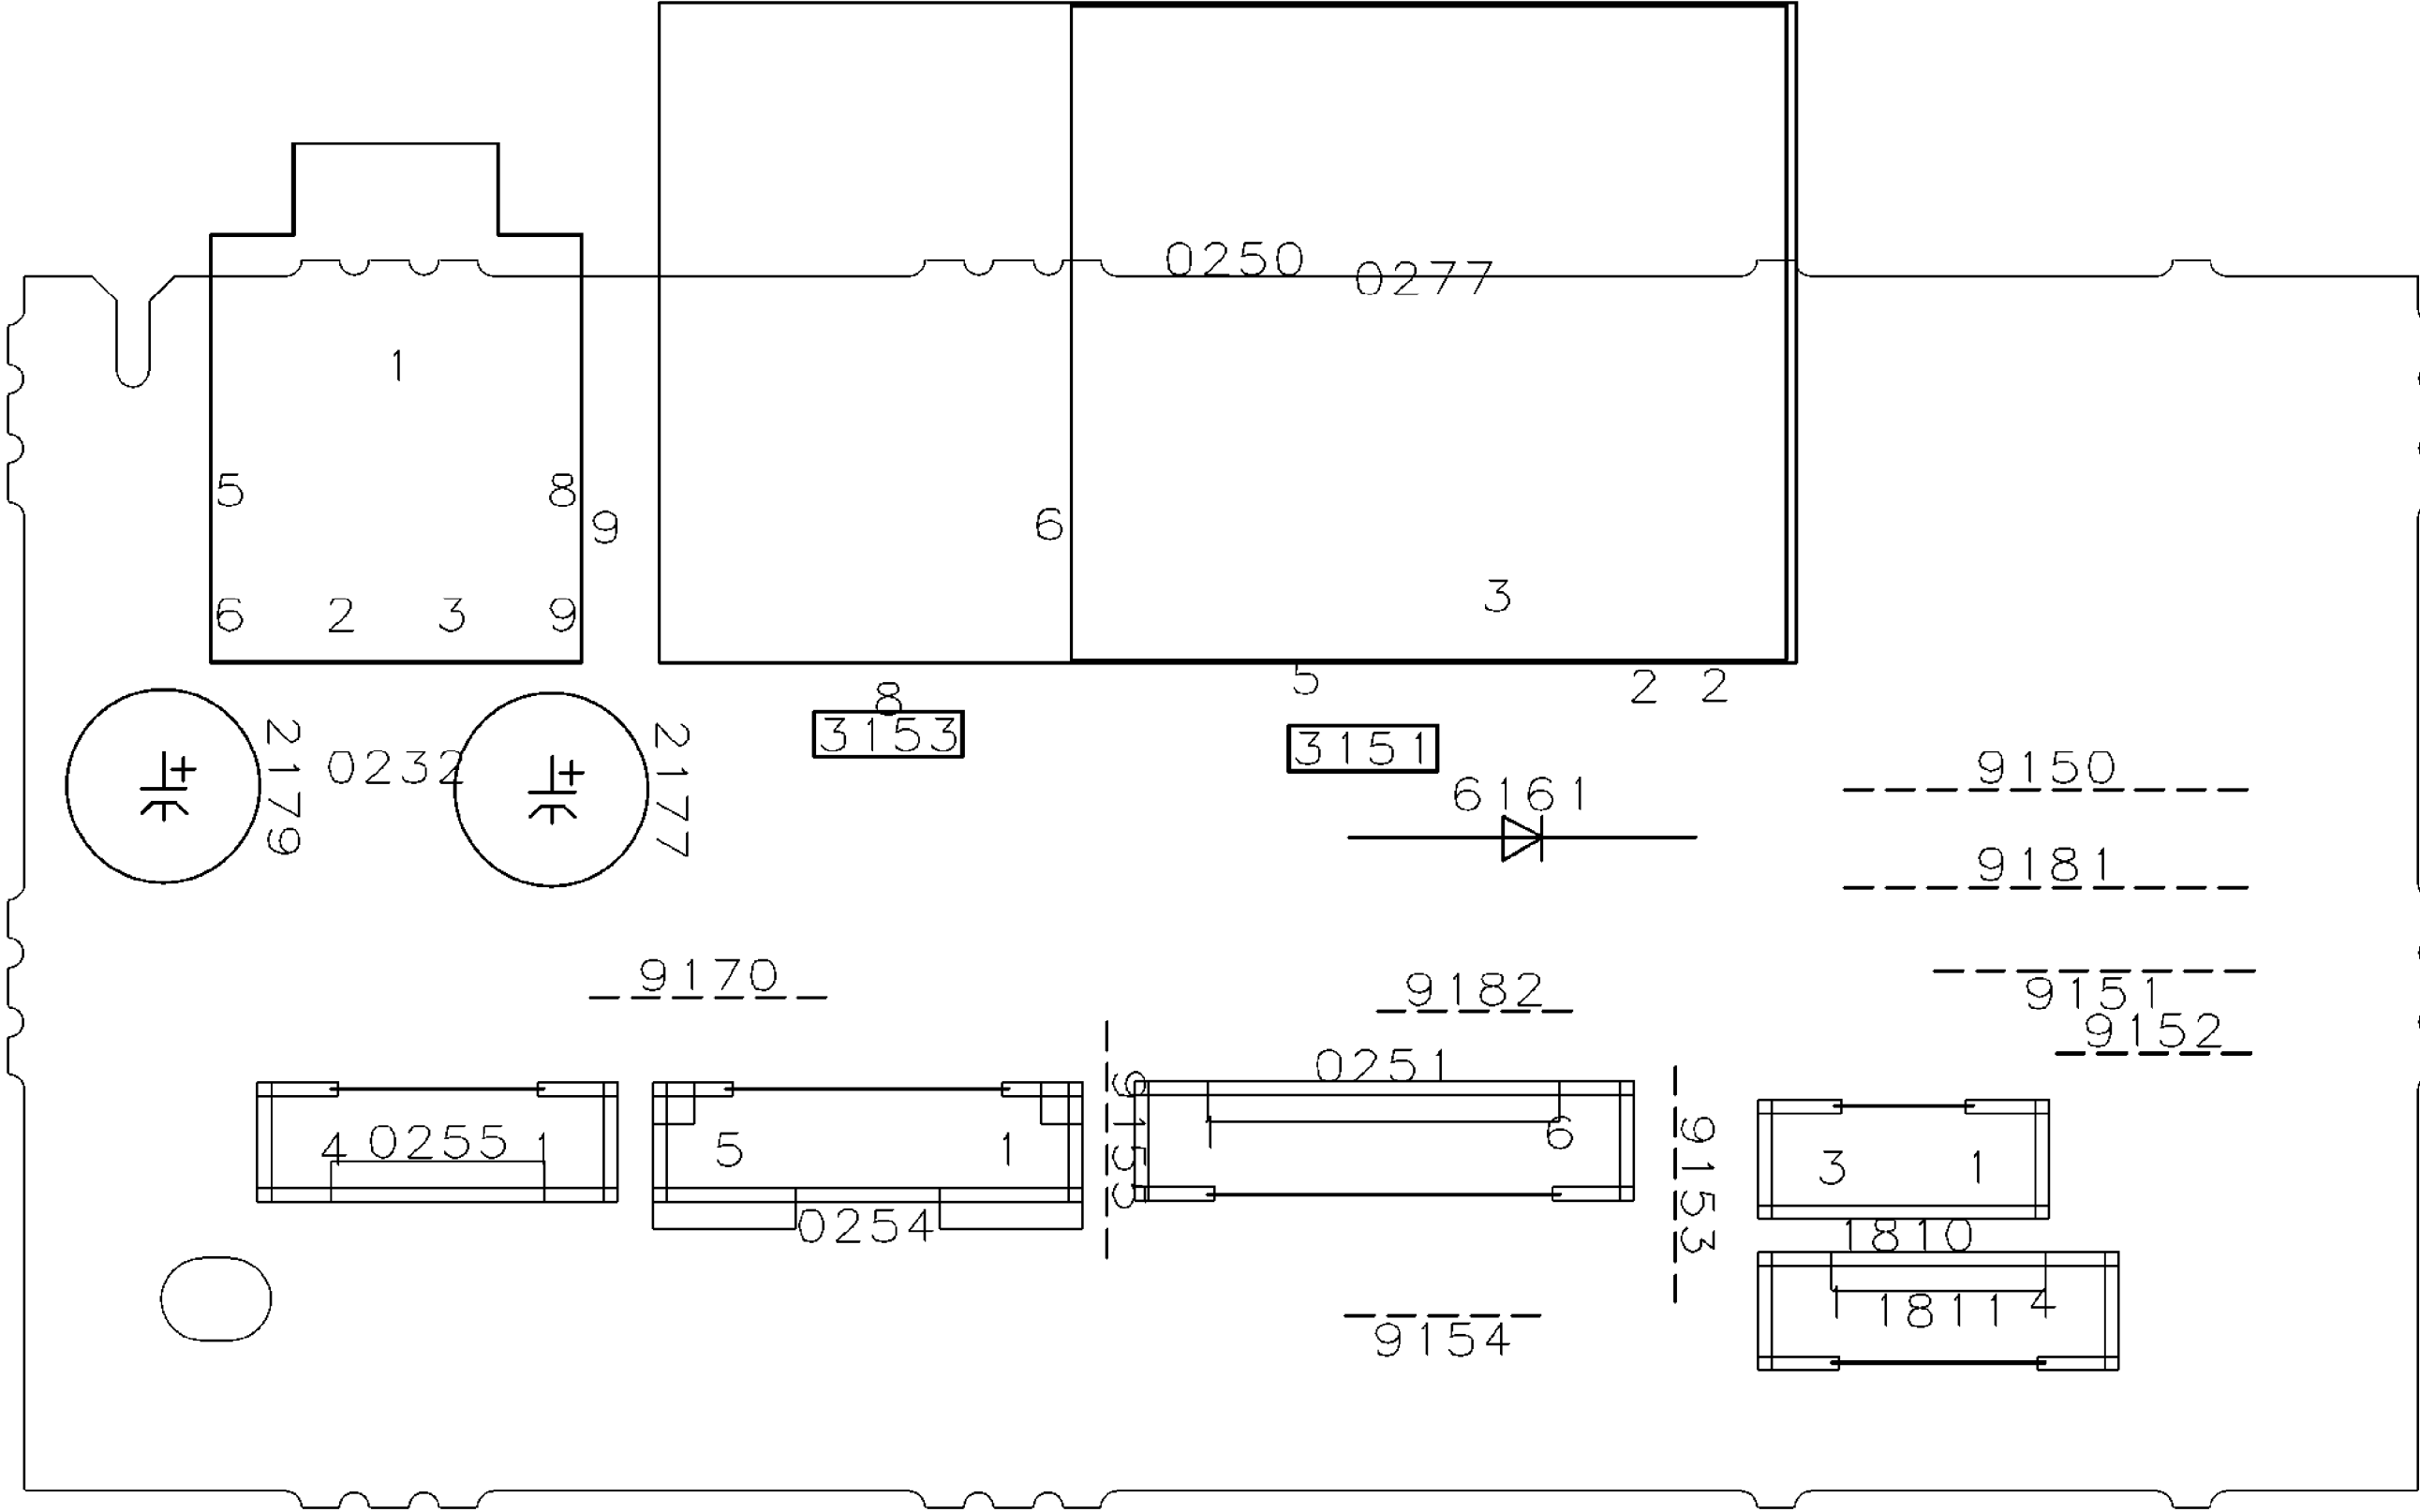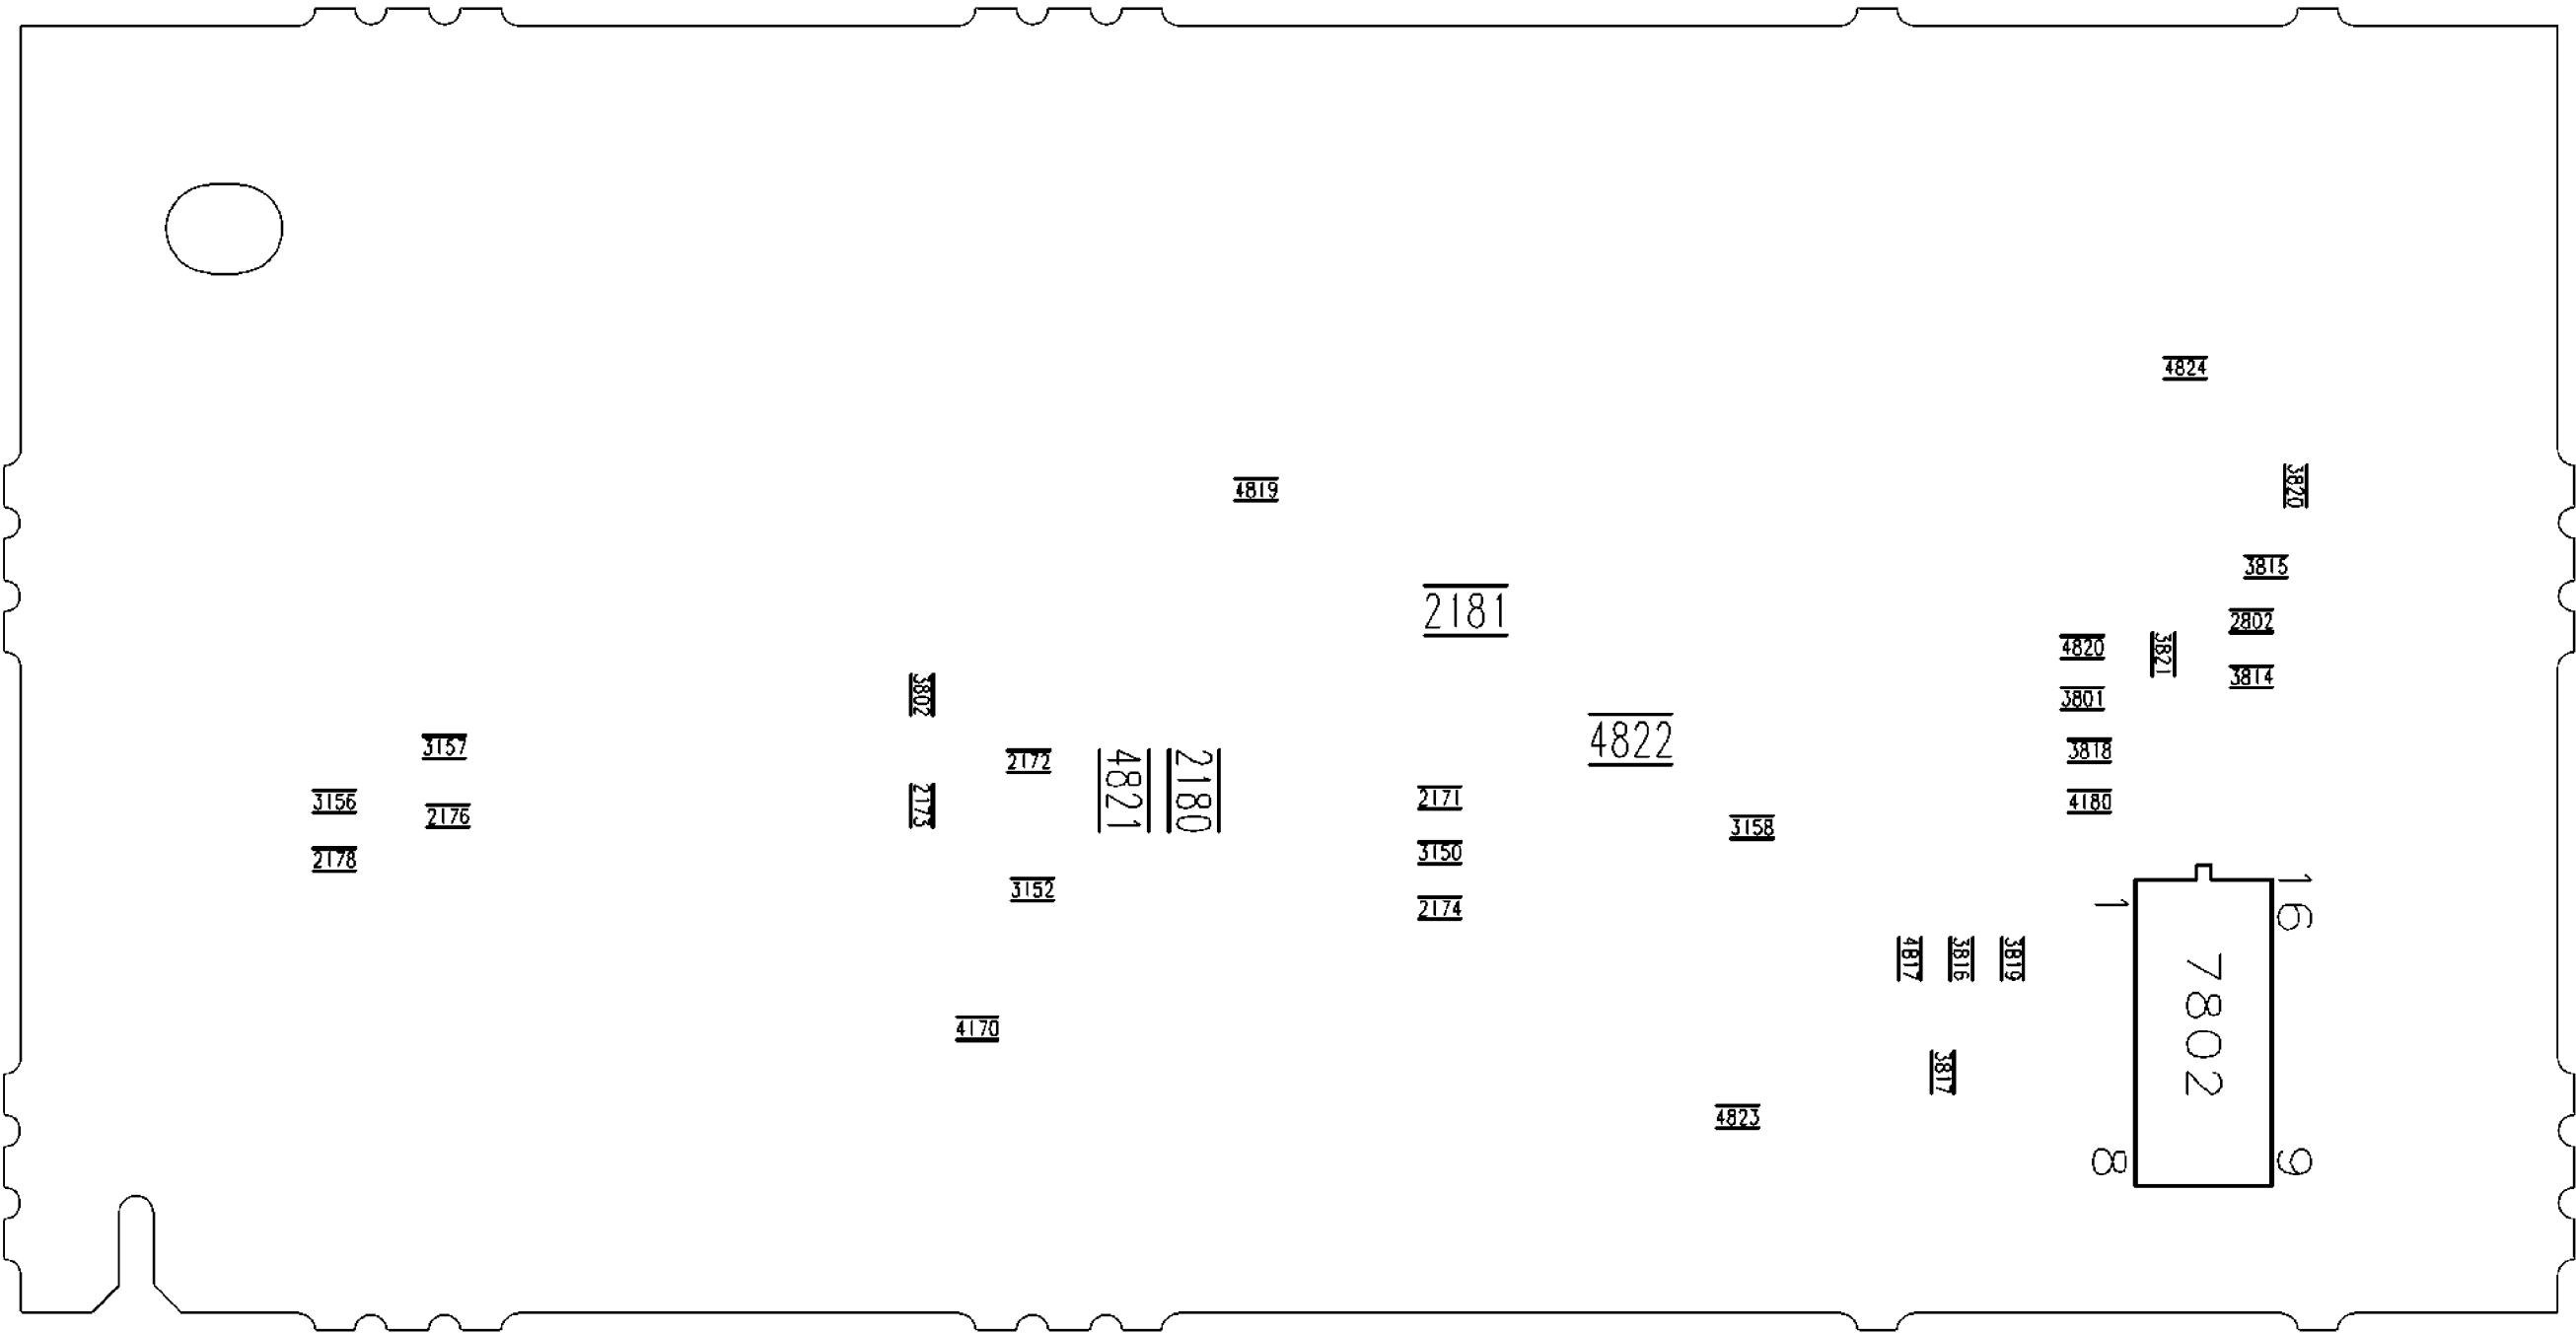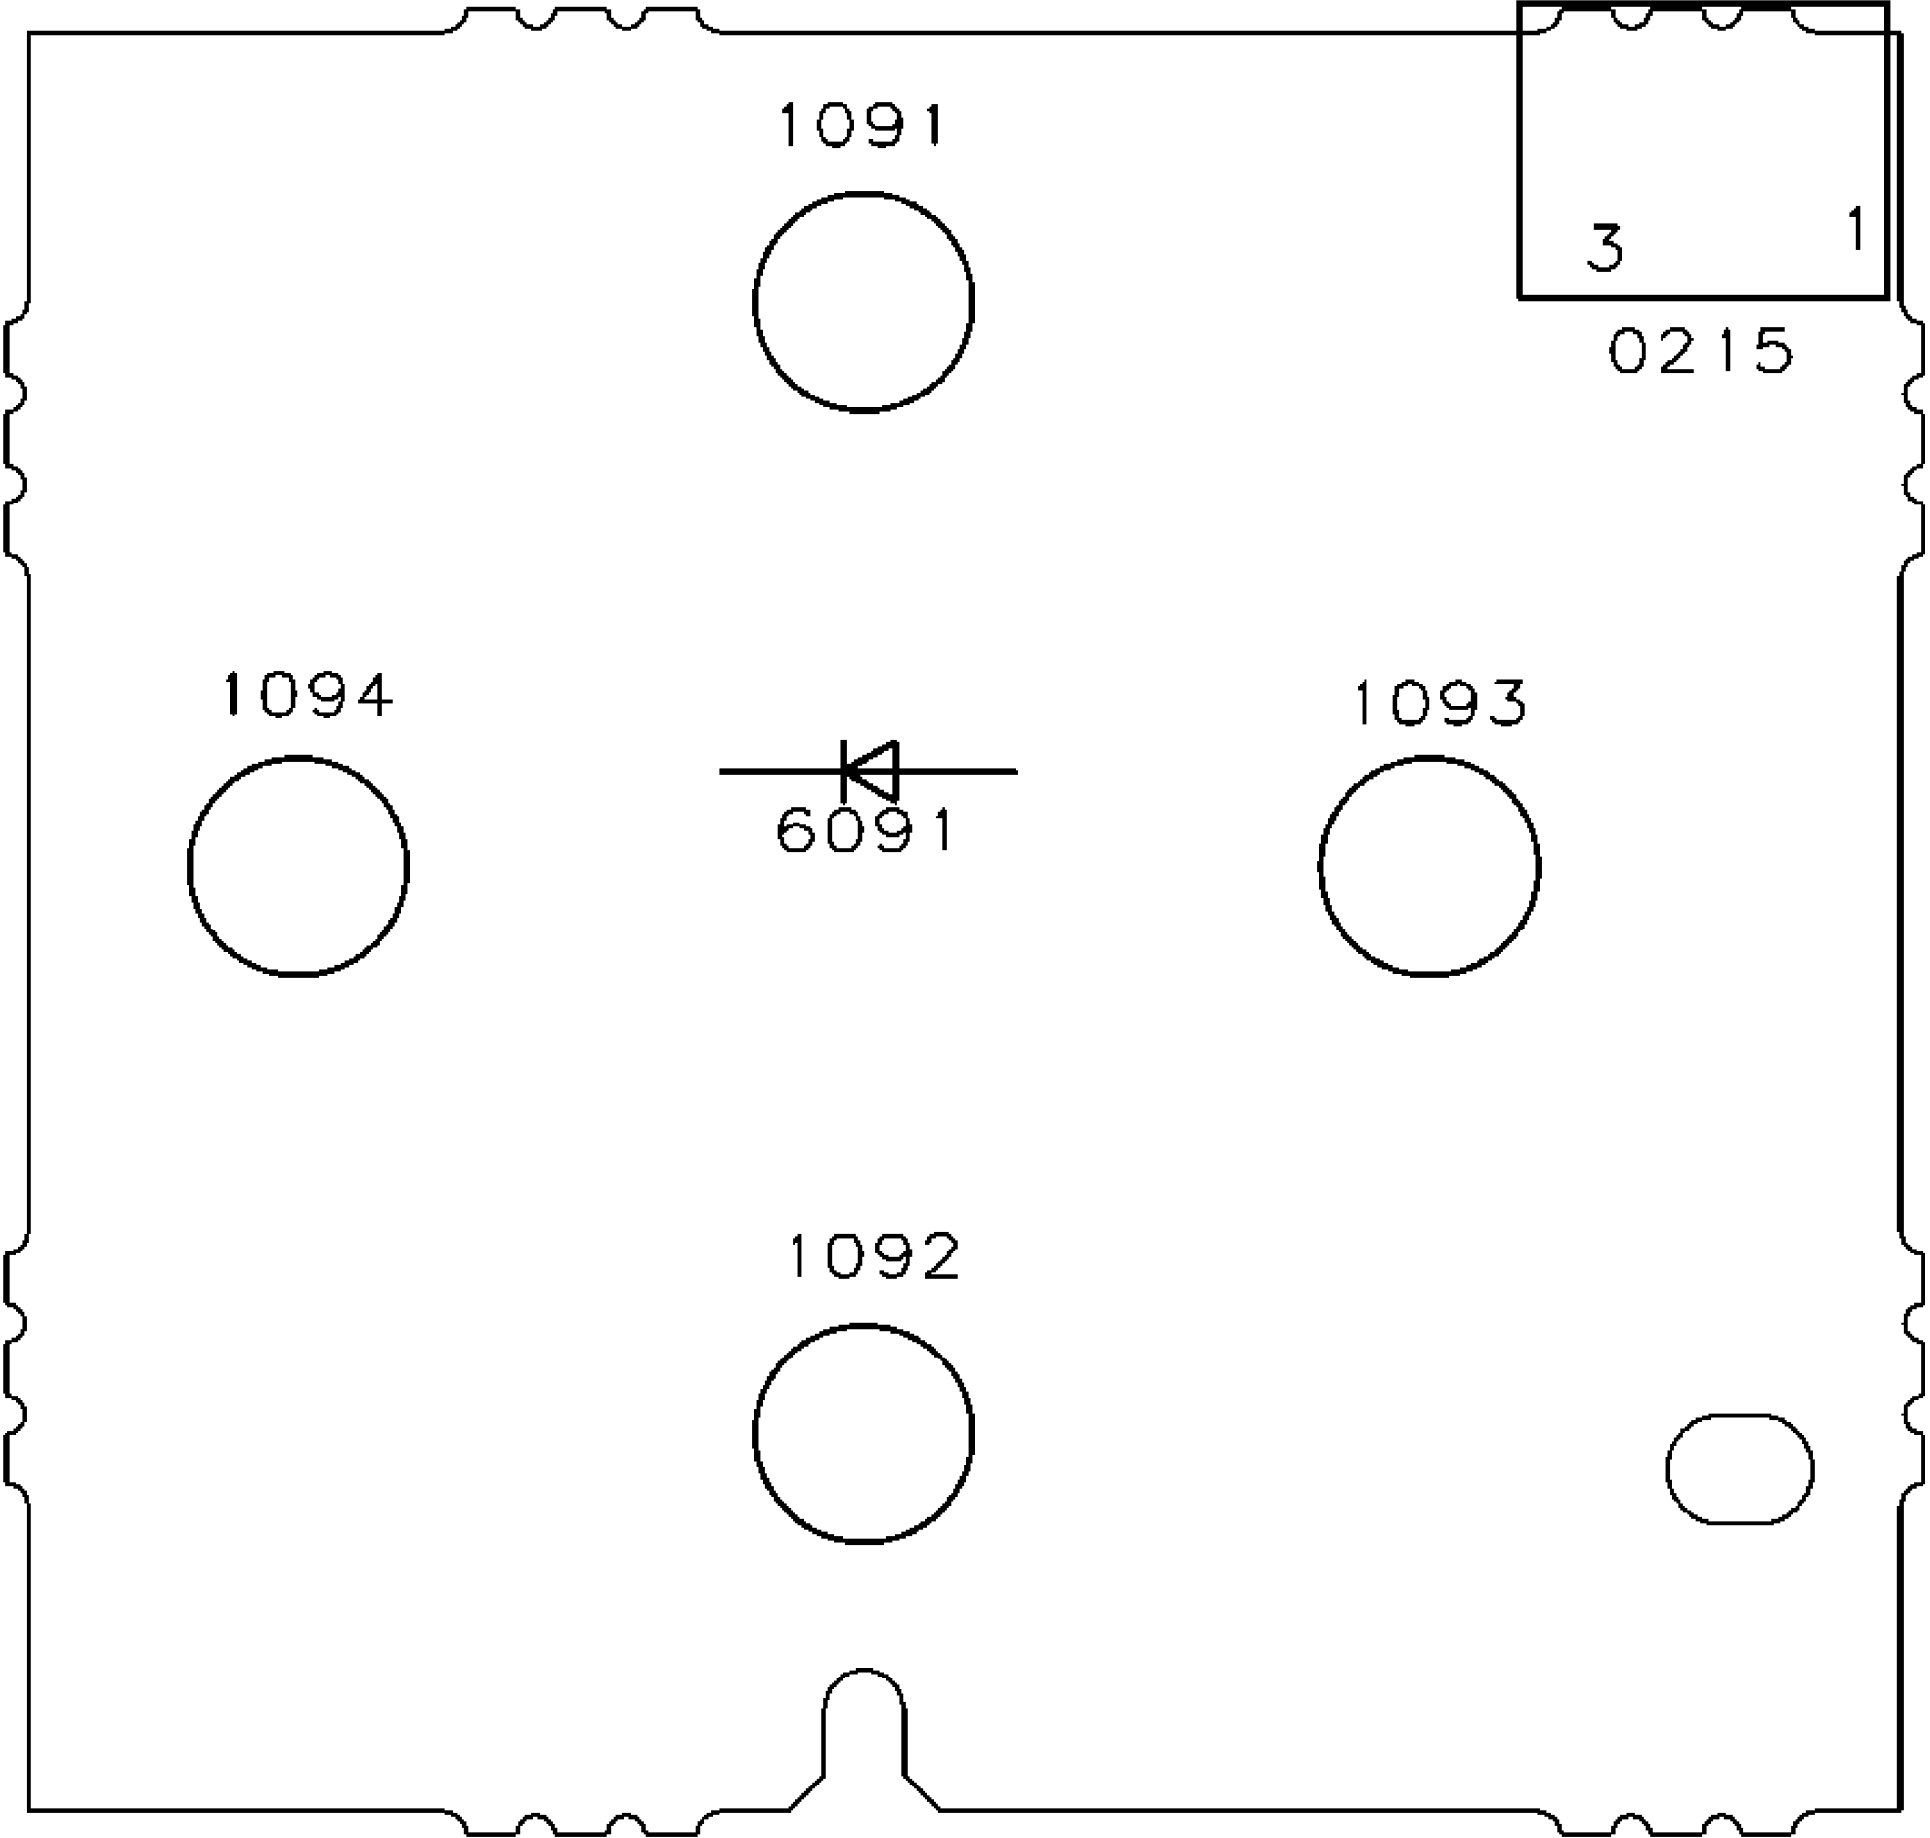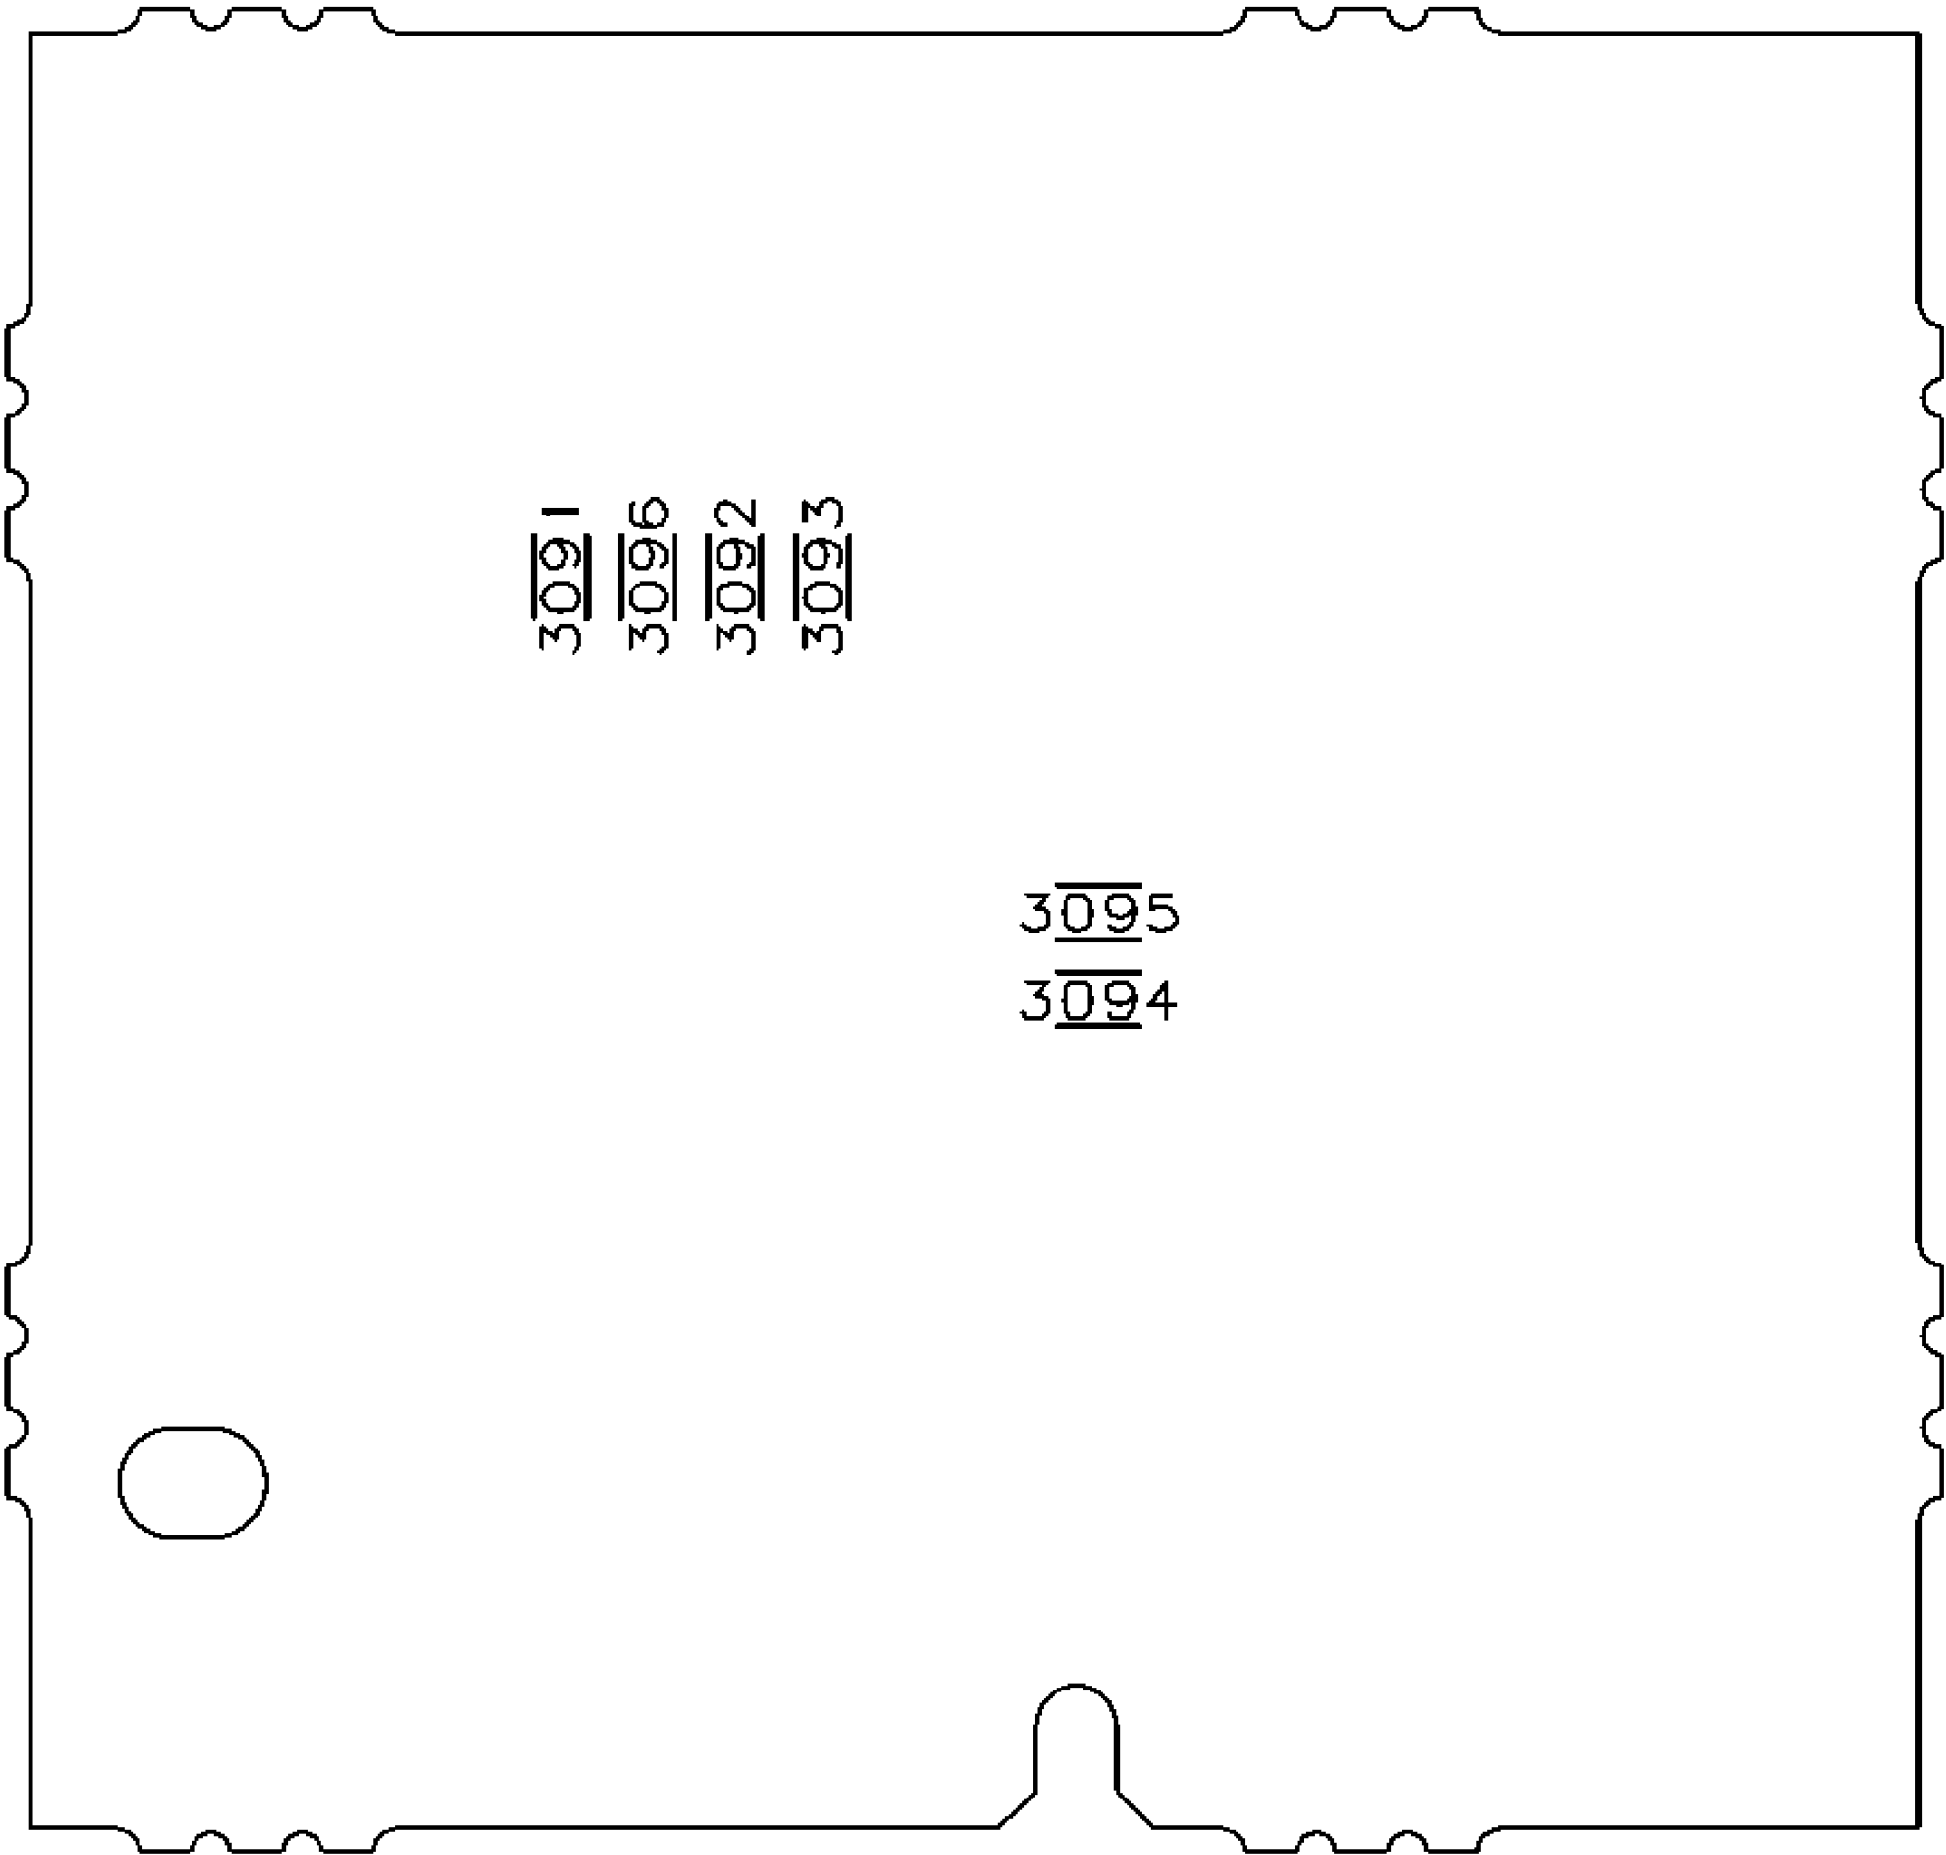
NOT USED IN MODELS: , 20DV6932/37R, 20DV693R02, 20DV693R01, 20MS334R/37, 20MS334R01, 20PT633R/37, 20PT643F/35R, 20PT643R01, 21PT6331/44R, 21PT633R85C (7638) - Side AV + HP Panel, Slim Profile (Copp
21PT6431/44R, 21PT643R85C, 24PT633F/35R, 24PT633R37, 25LT220L/17, 25PT633R85C, 25ST220L/17, 27DV693R37A, 27LT220L/17, 27MS3404/17, 27ST110P/35, 27ST220L/17, 27ST220L17, 27ST240P/35, 27ST230P/35, 27S

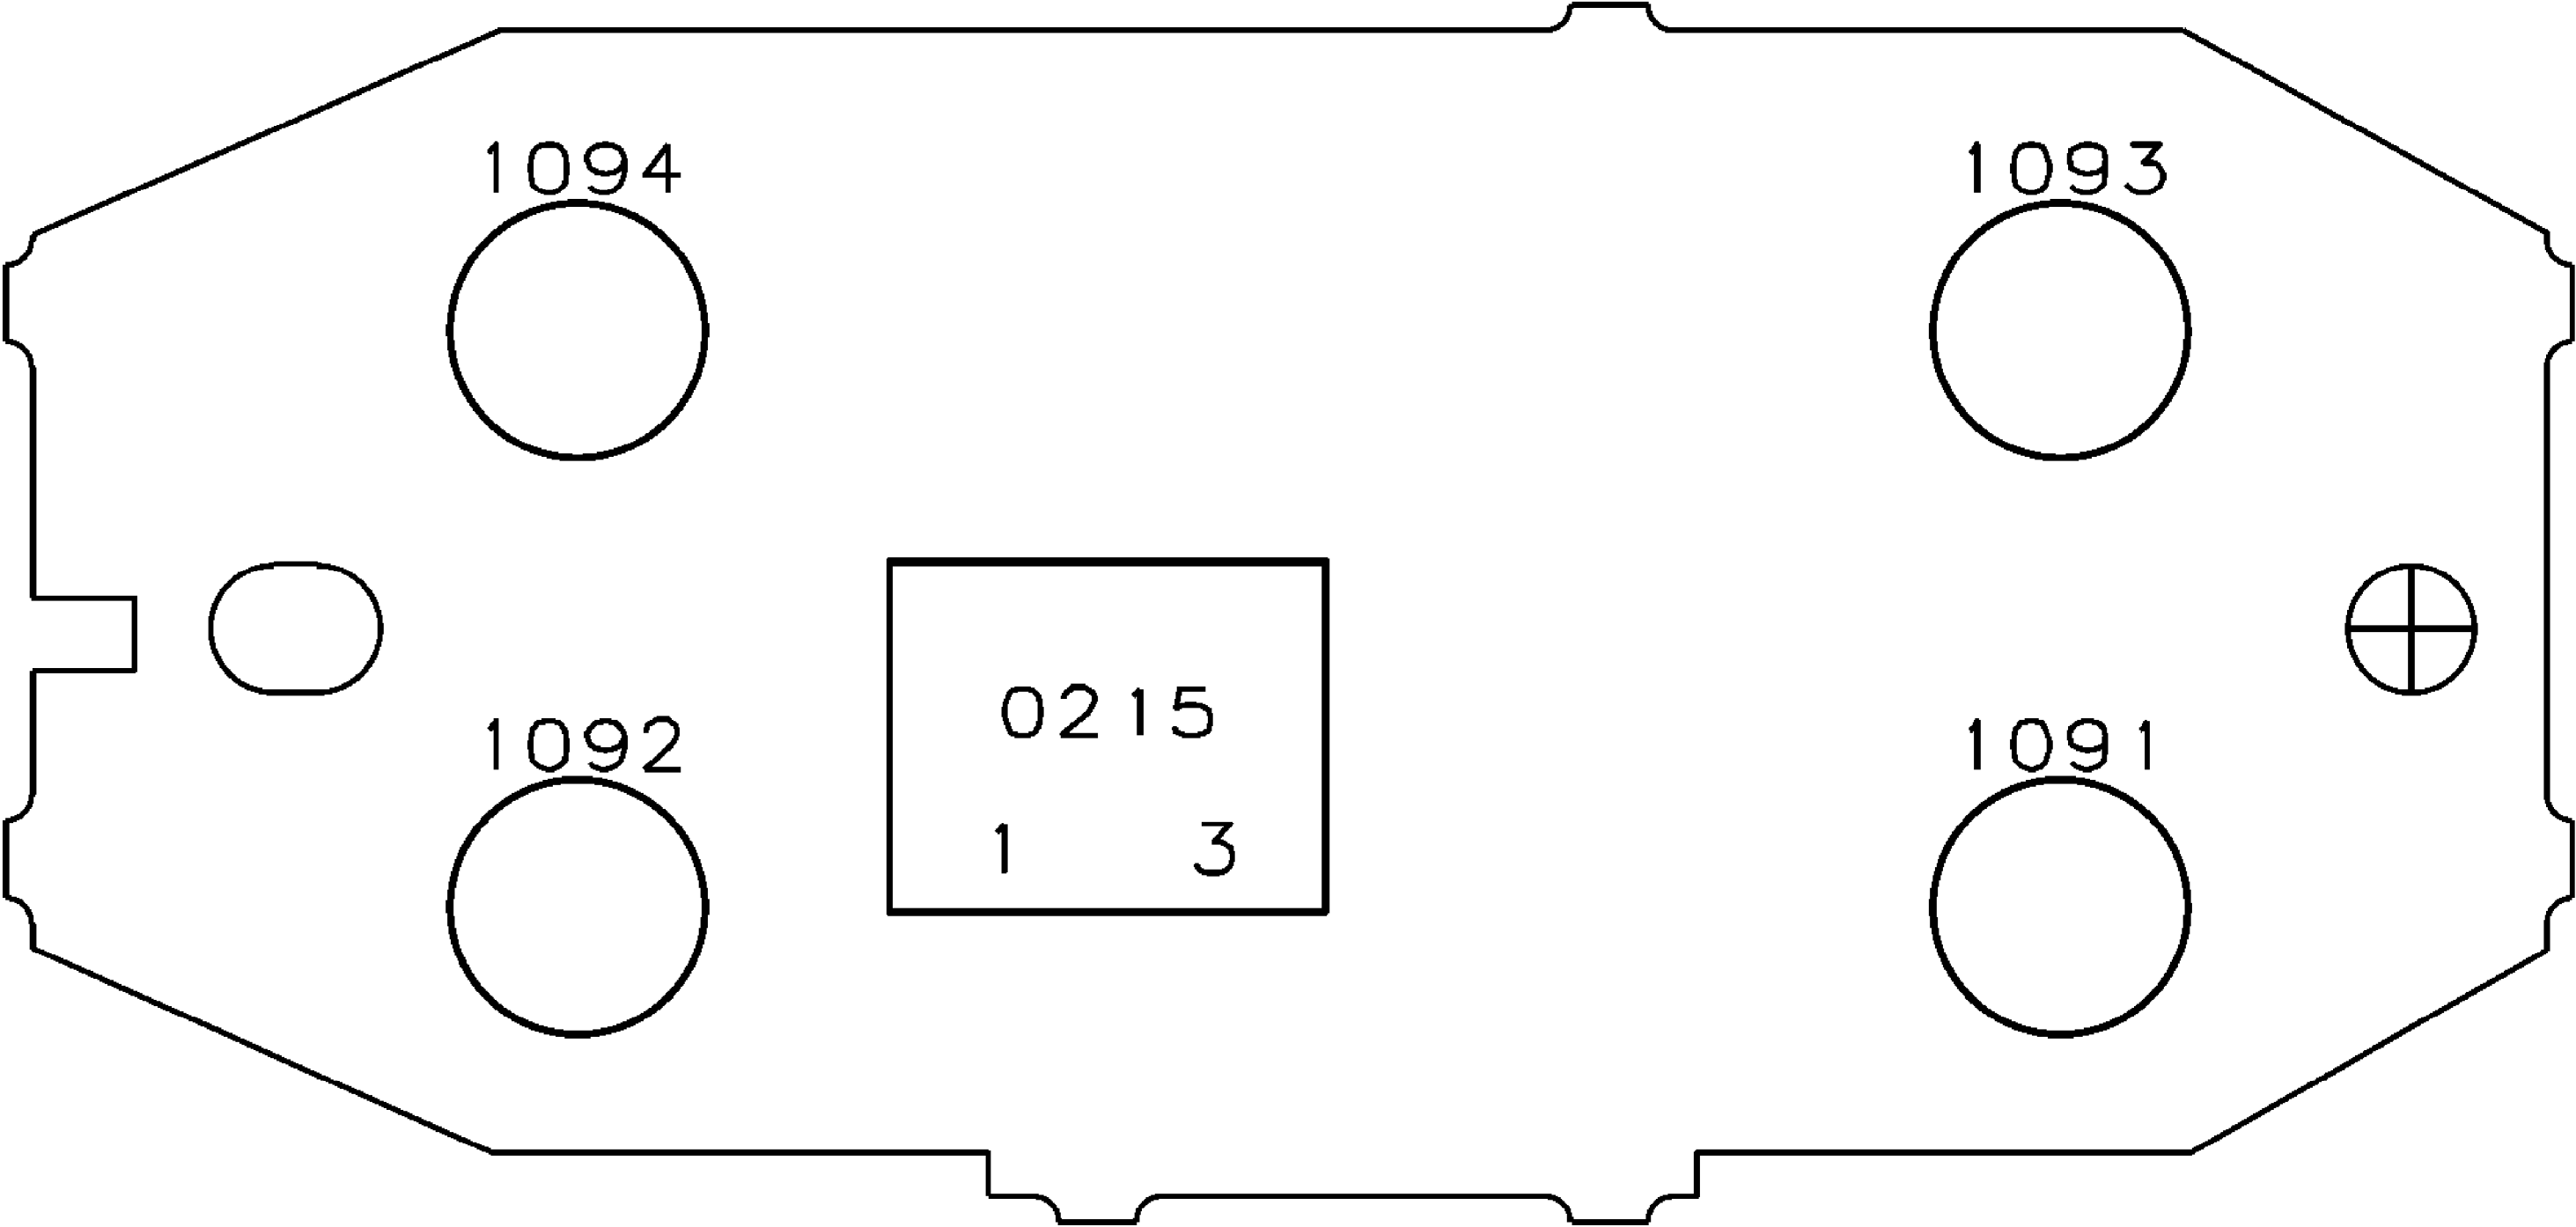


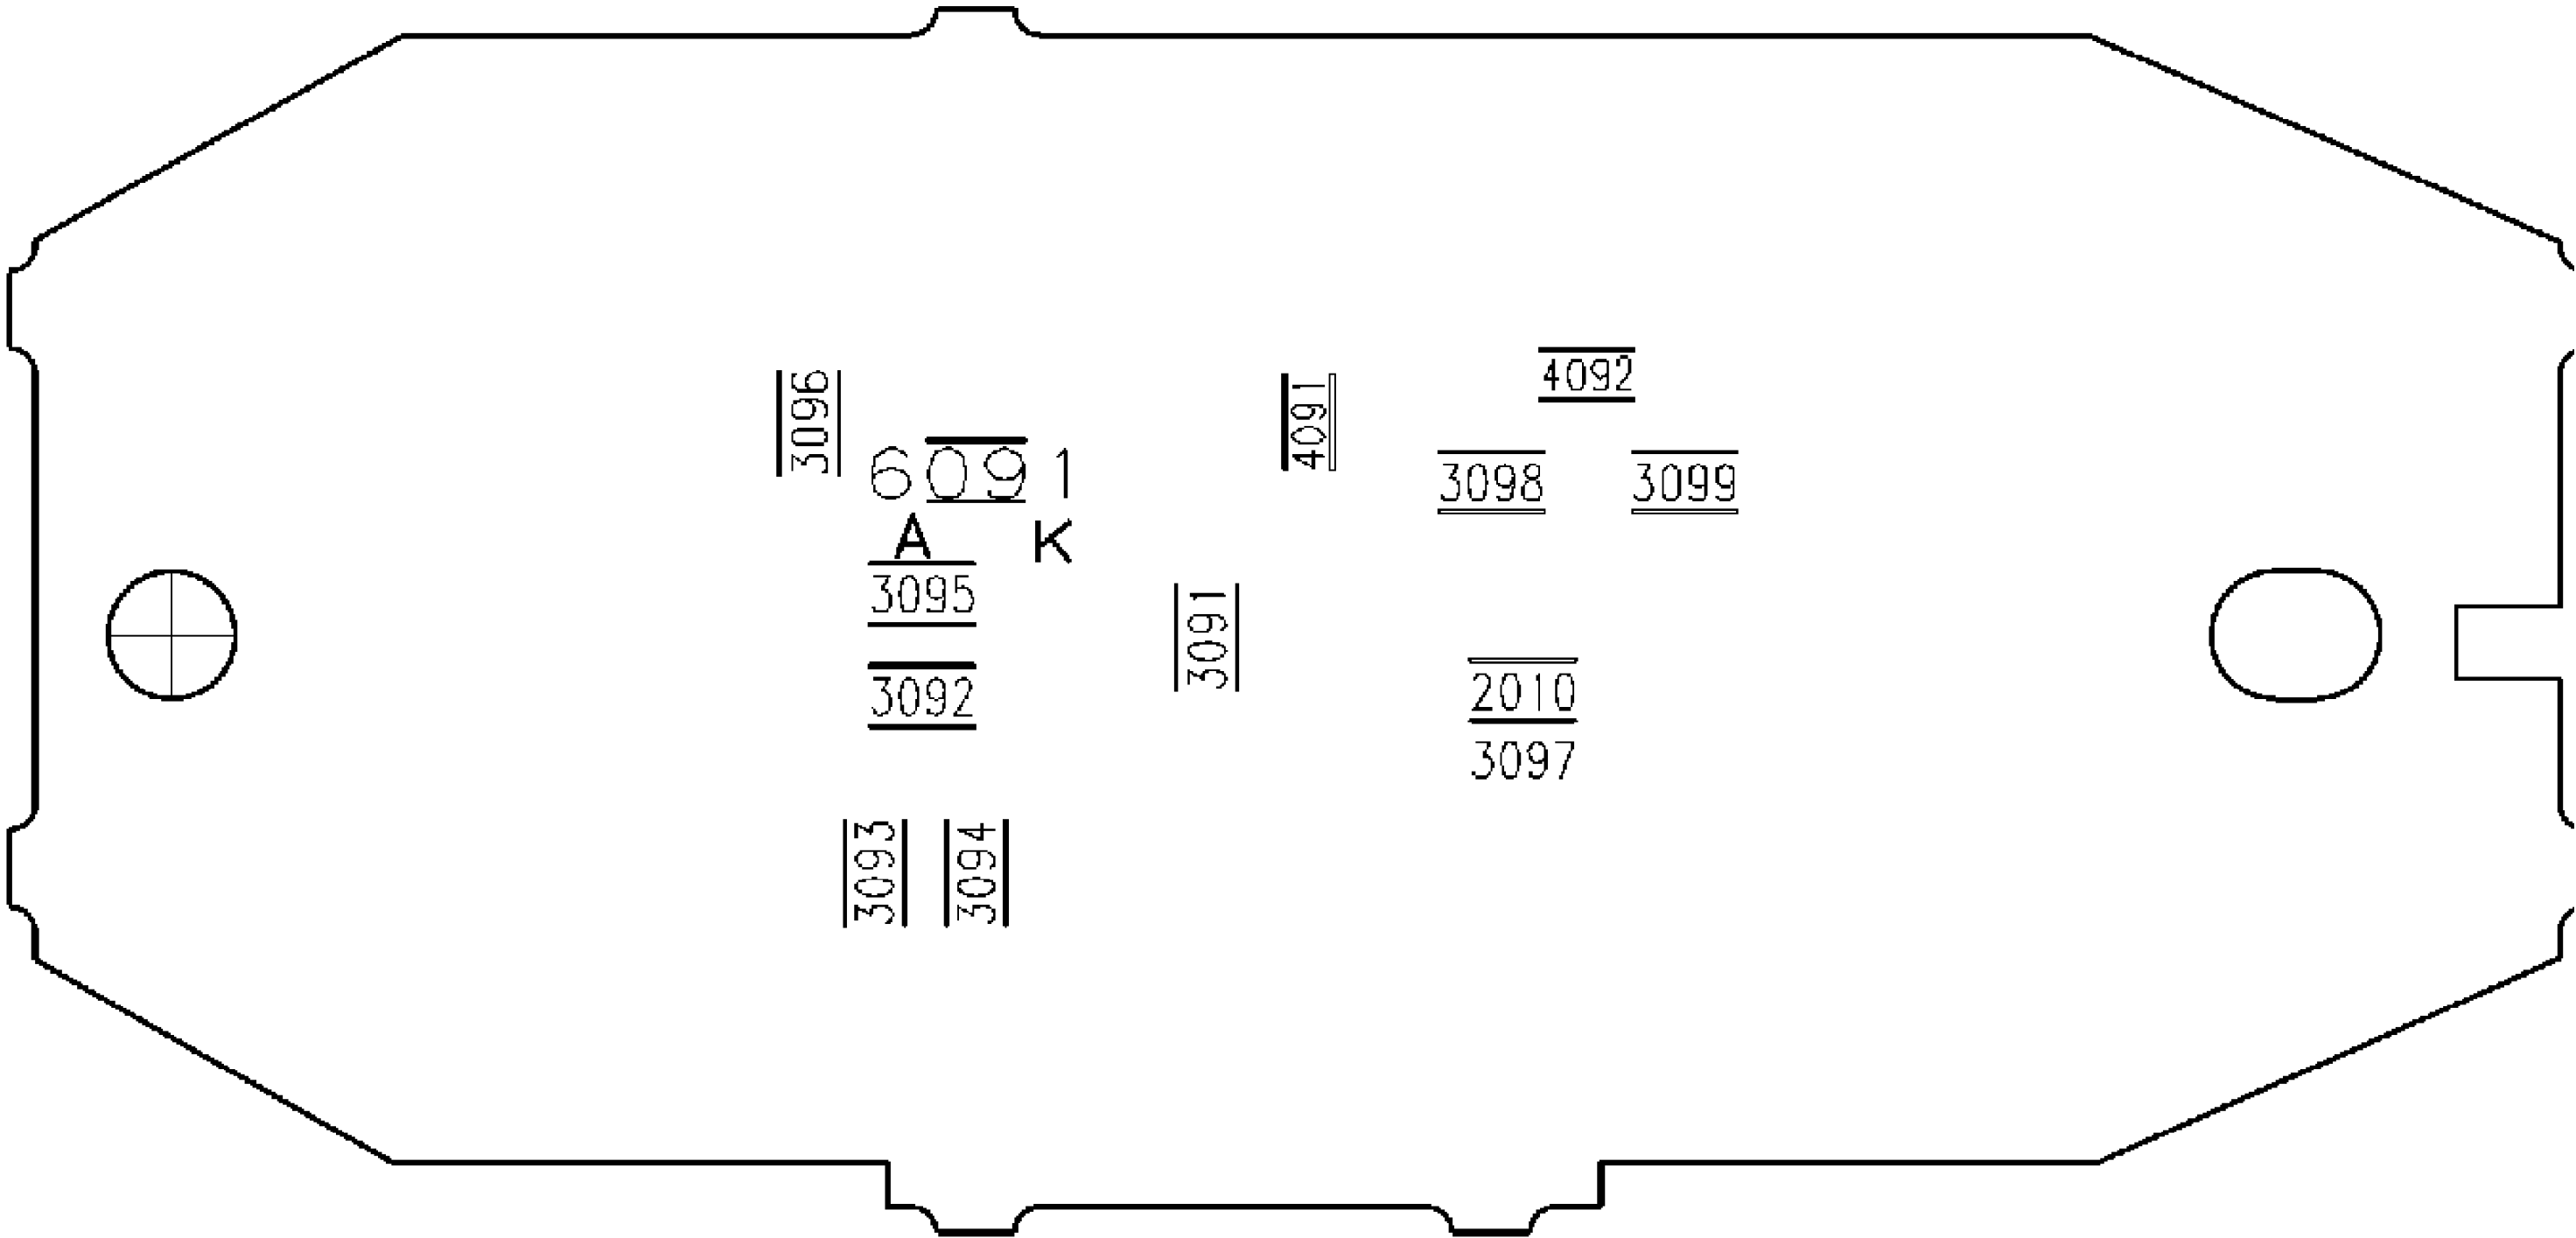















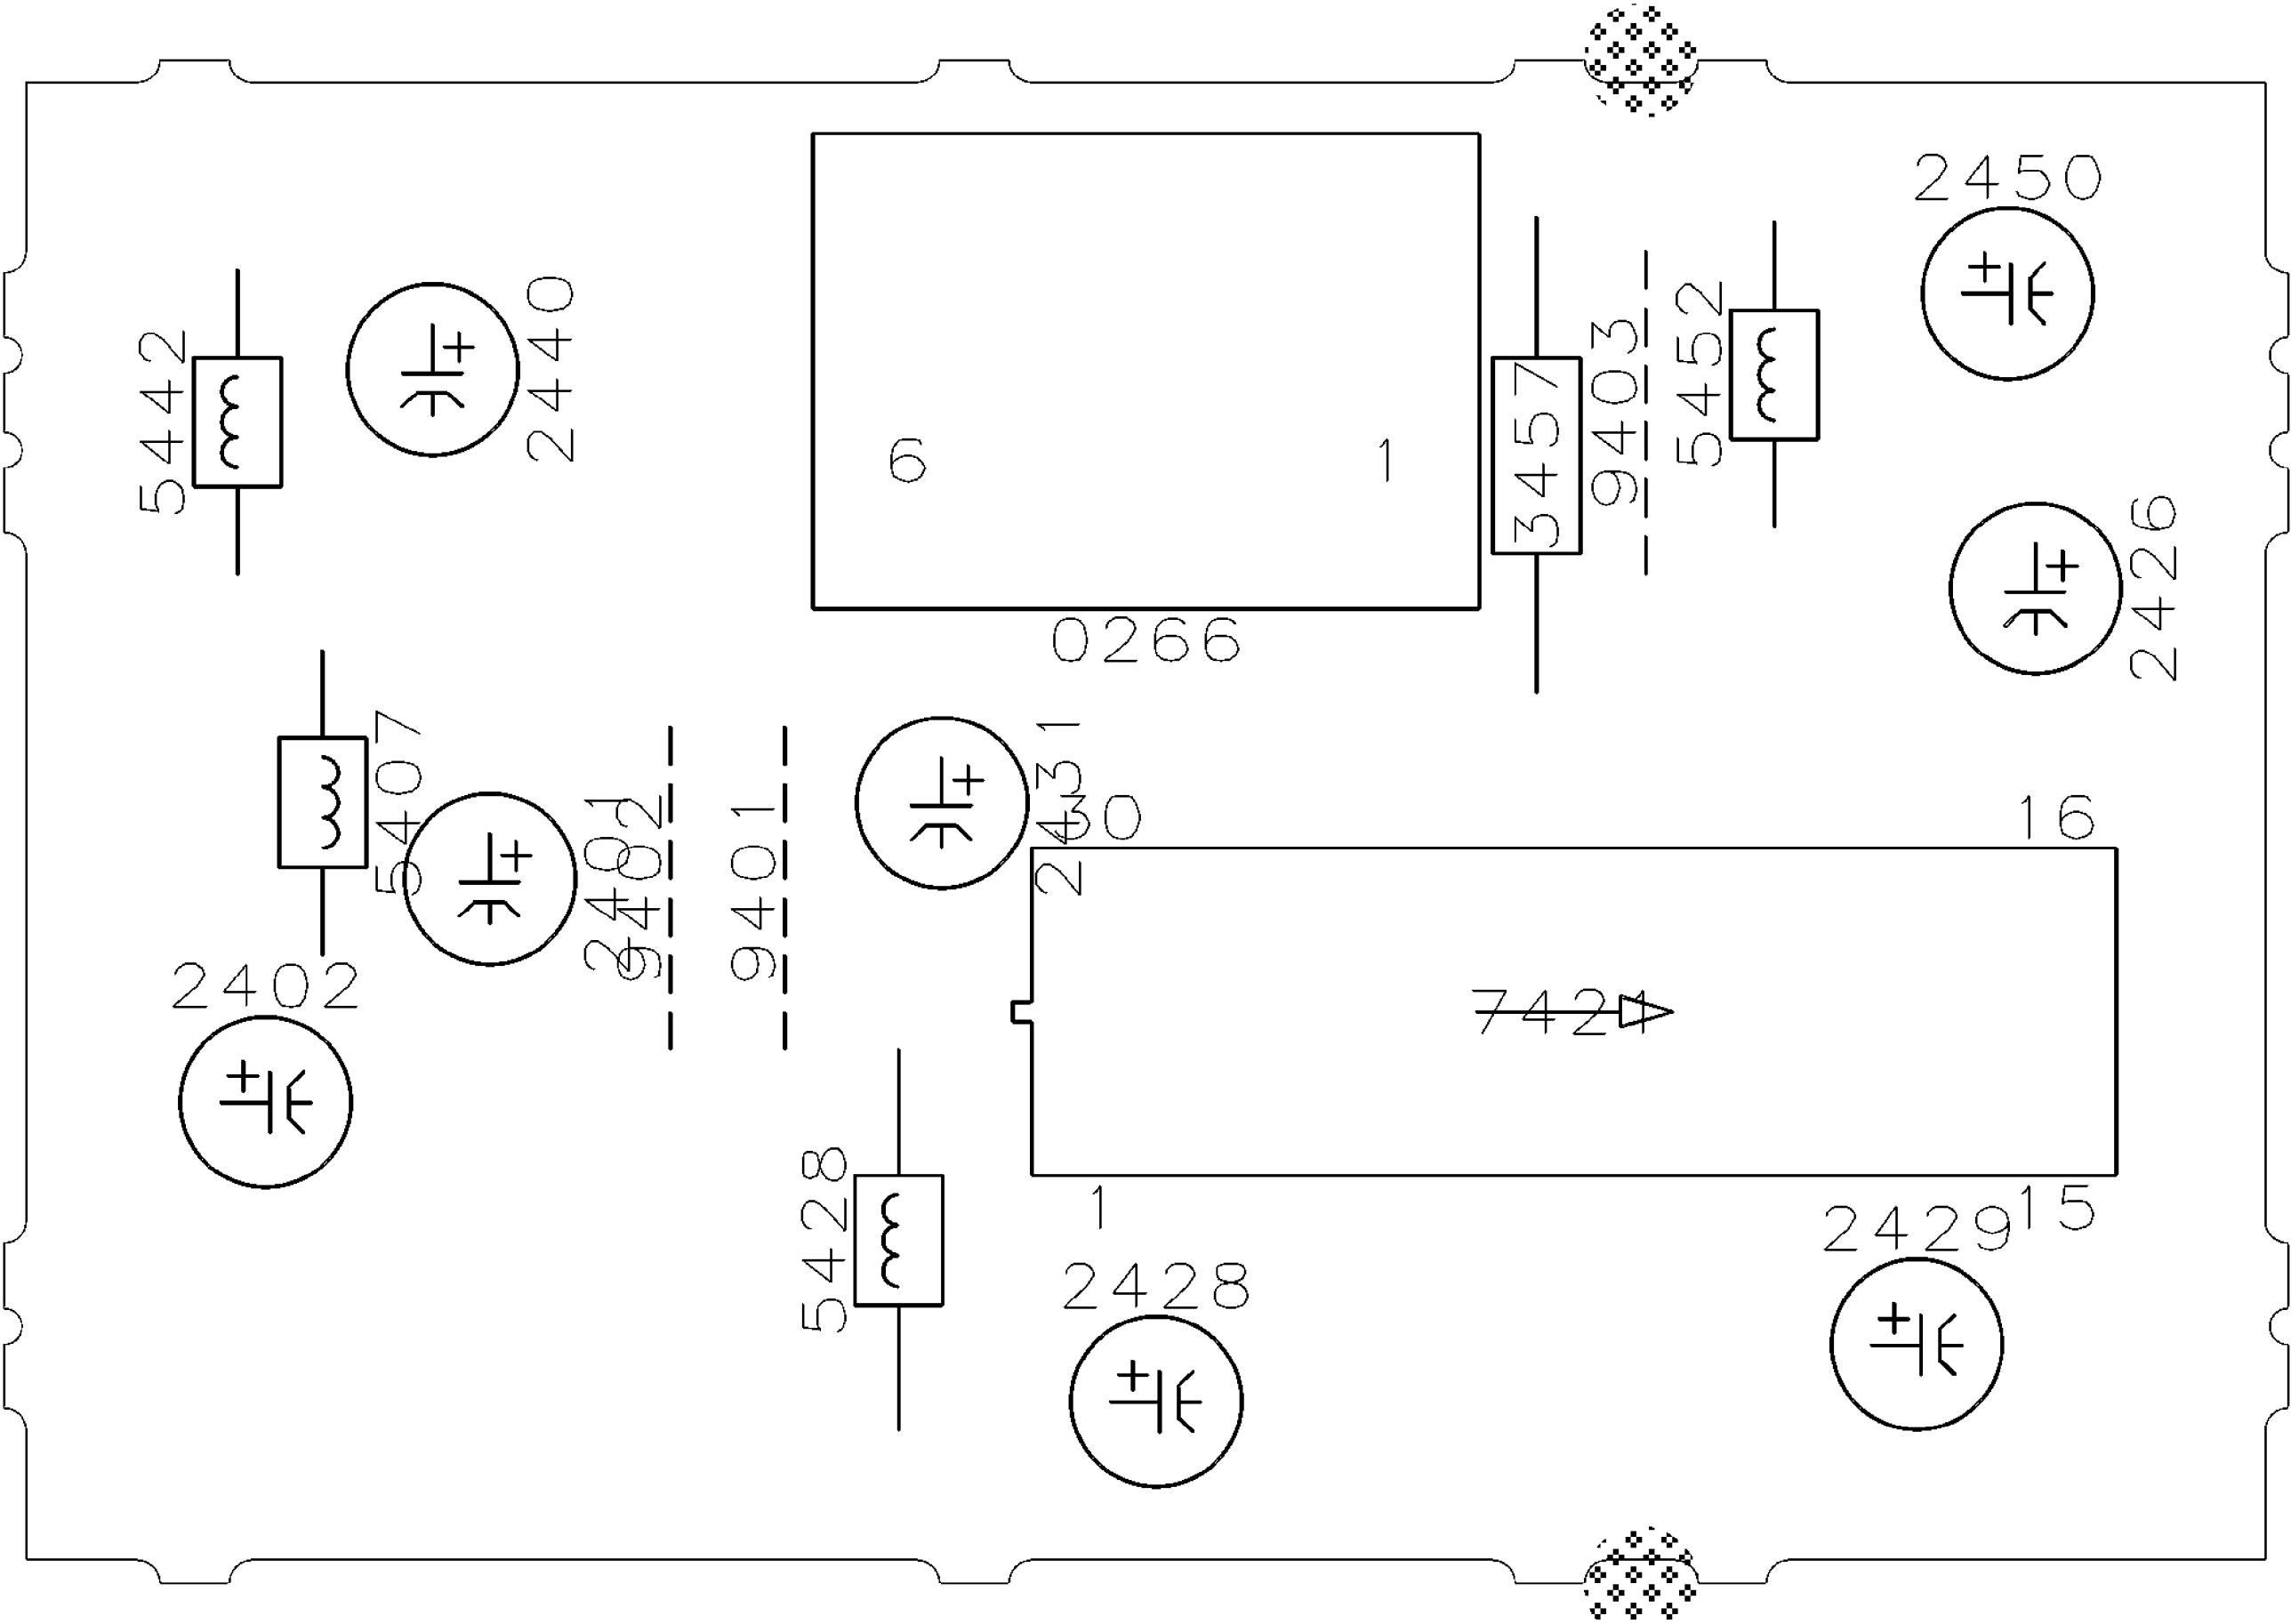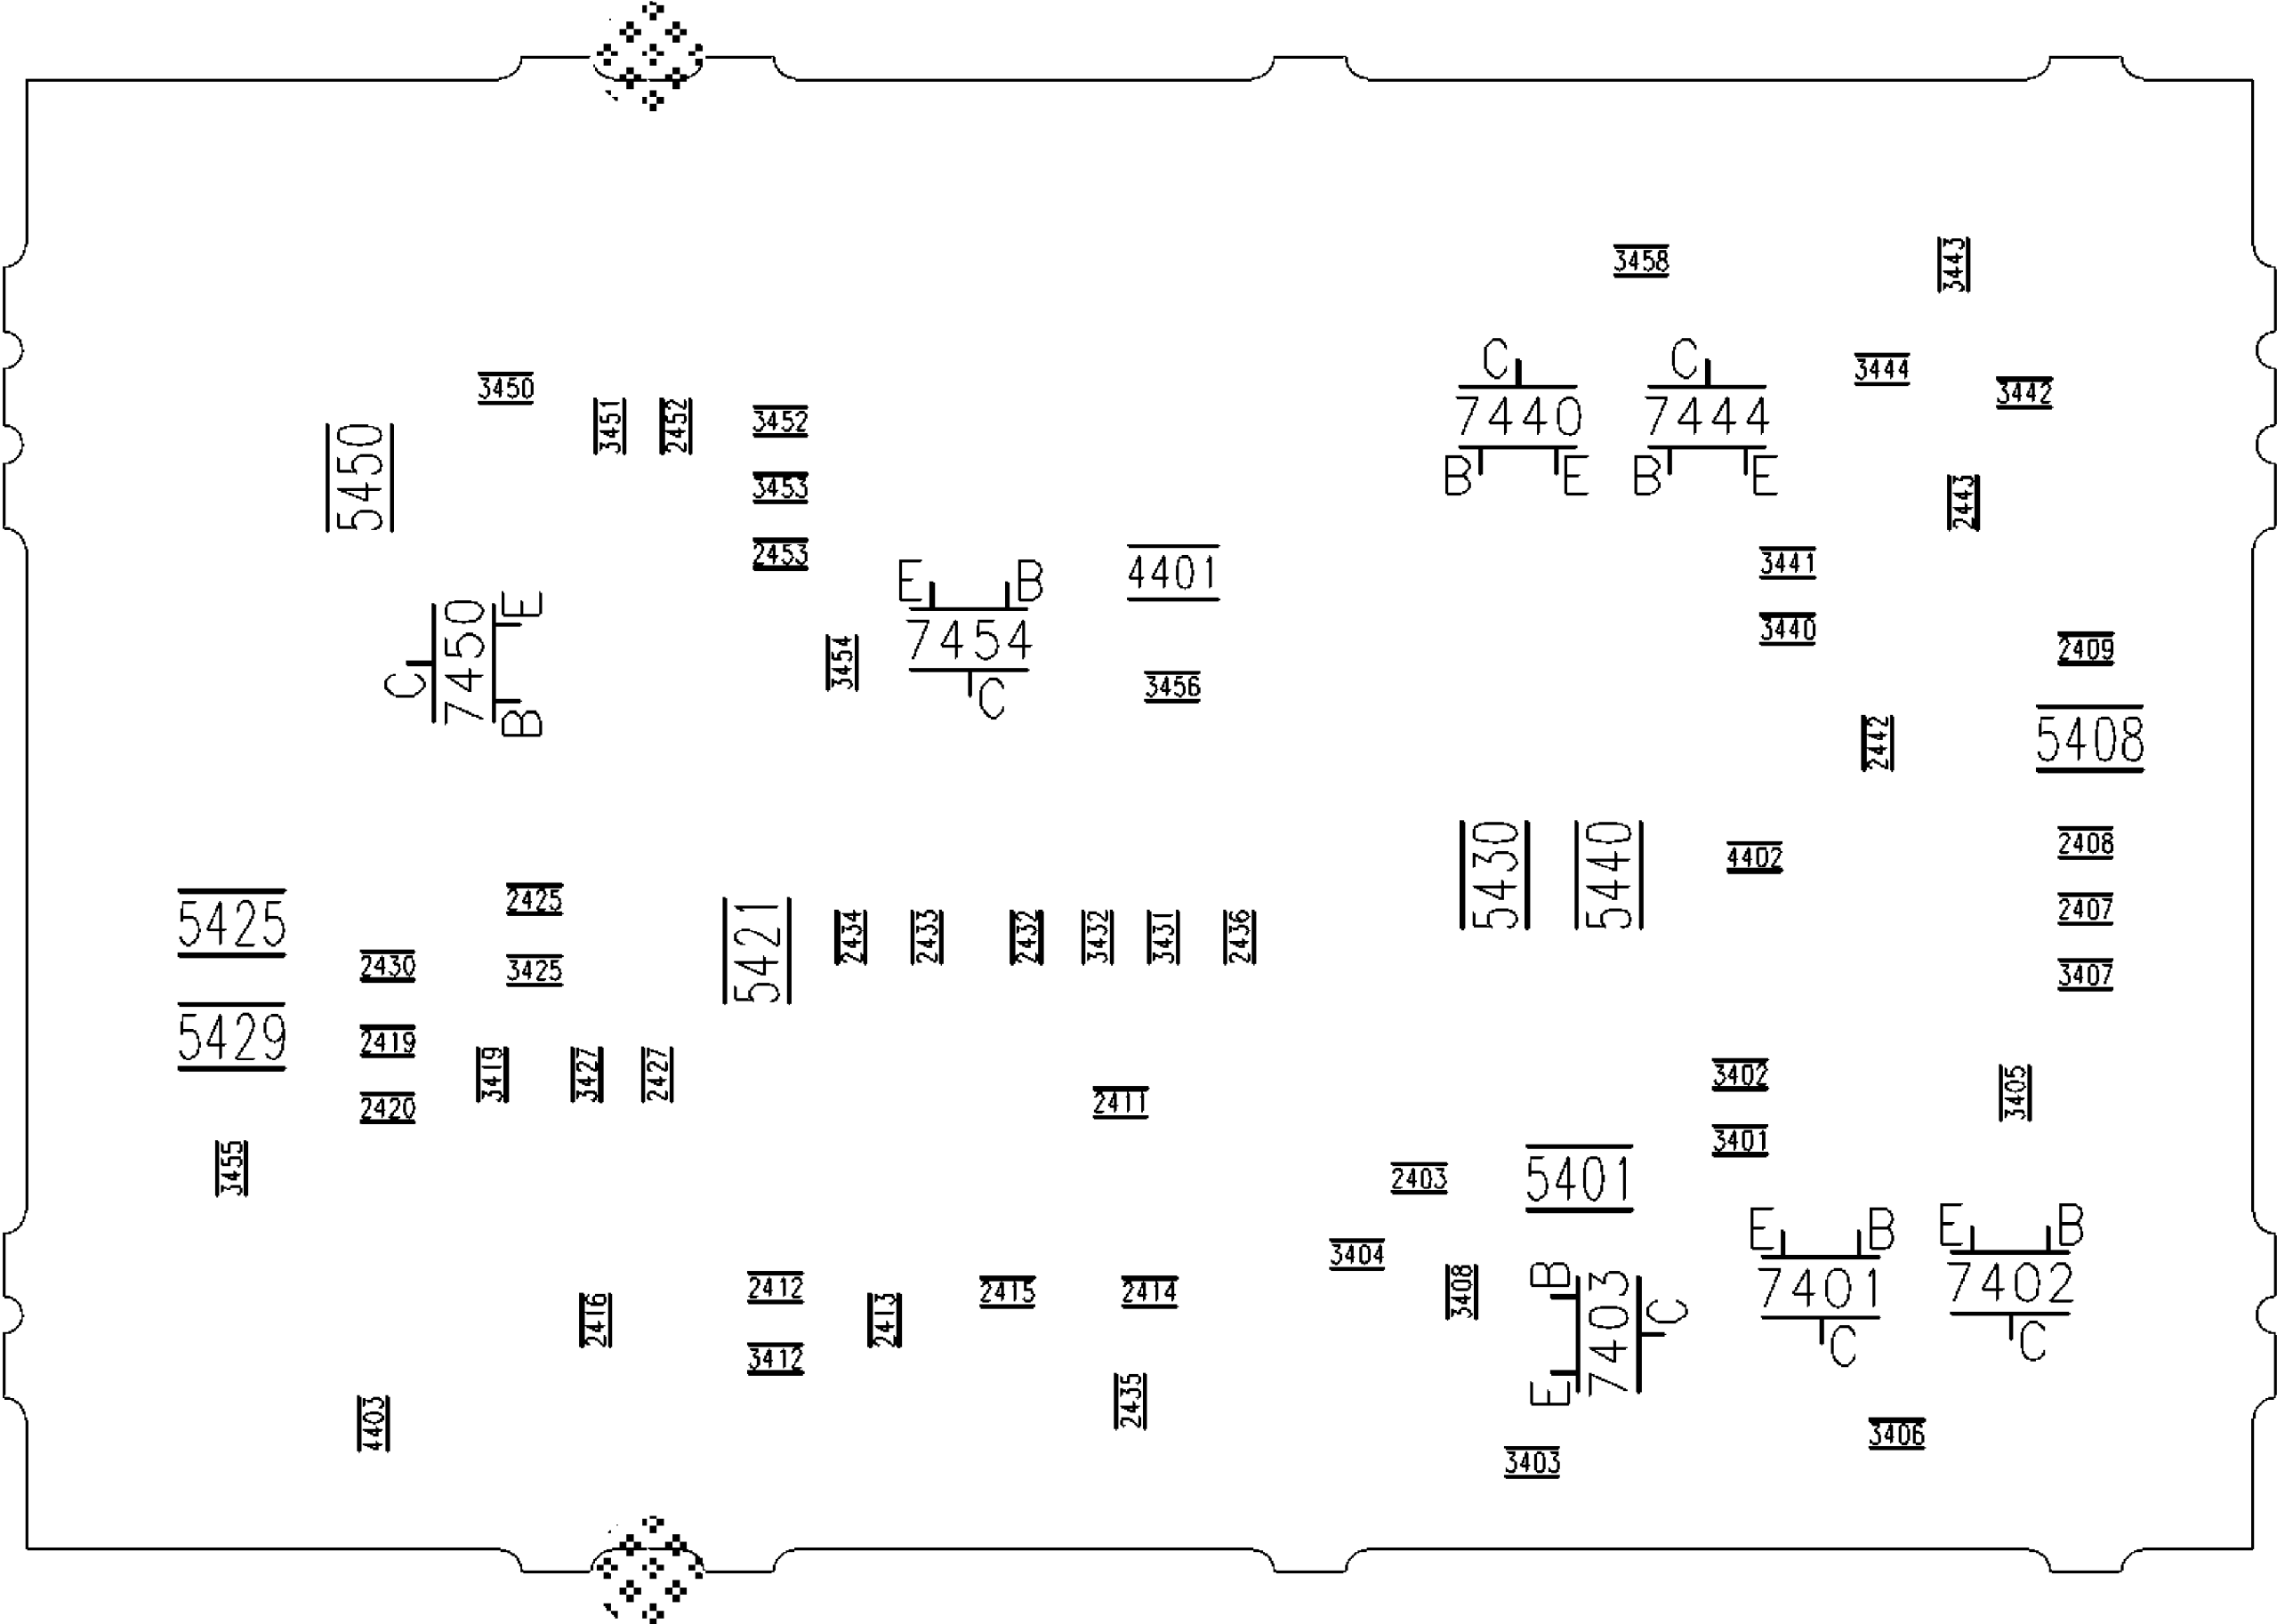
USED ONLY IN MODELS: 27PT663R37A, 27PT663R37C, 29PT563S85A, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 27PT563S37A, 30PW633F35A, 32LT621L/17 (7638) - 2D 3 Line Comb Filter (Component Side)
32PT563S37A, 32PT563S37G, 32PW633R85C, 29PT663S85A, 36ST220P/35, 36ST230P/35, 32ST230P/35, 32ST220P/17, 32PT563R85G, 29PT6631/44






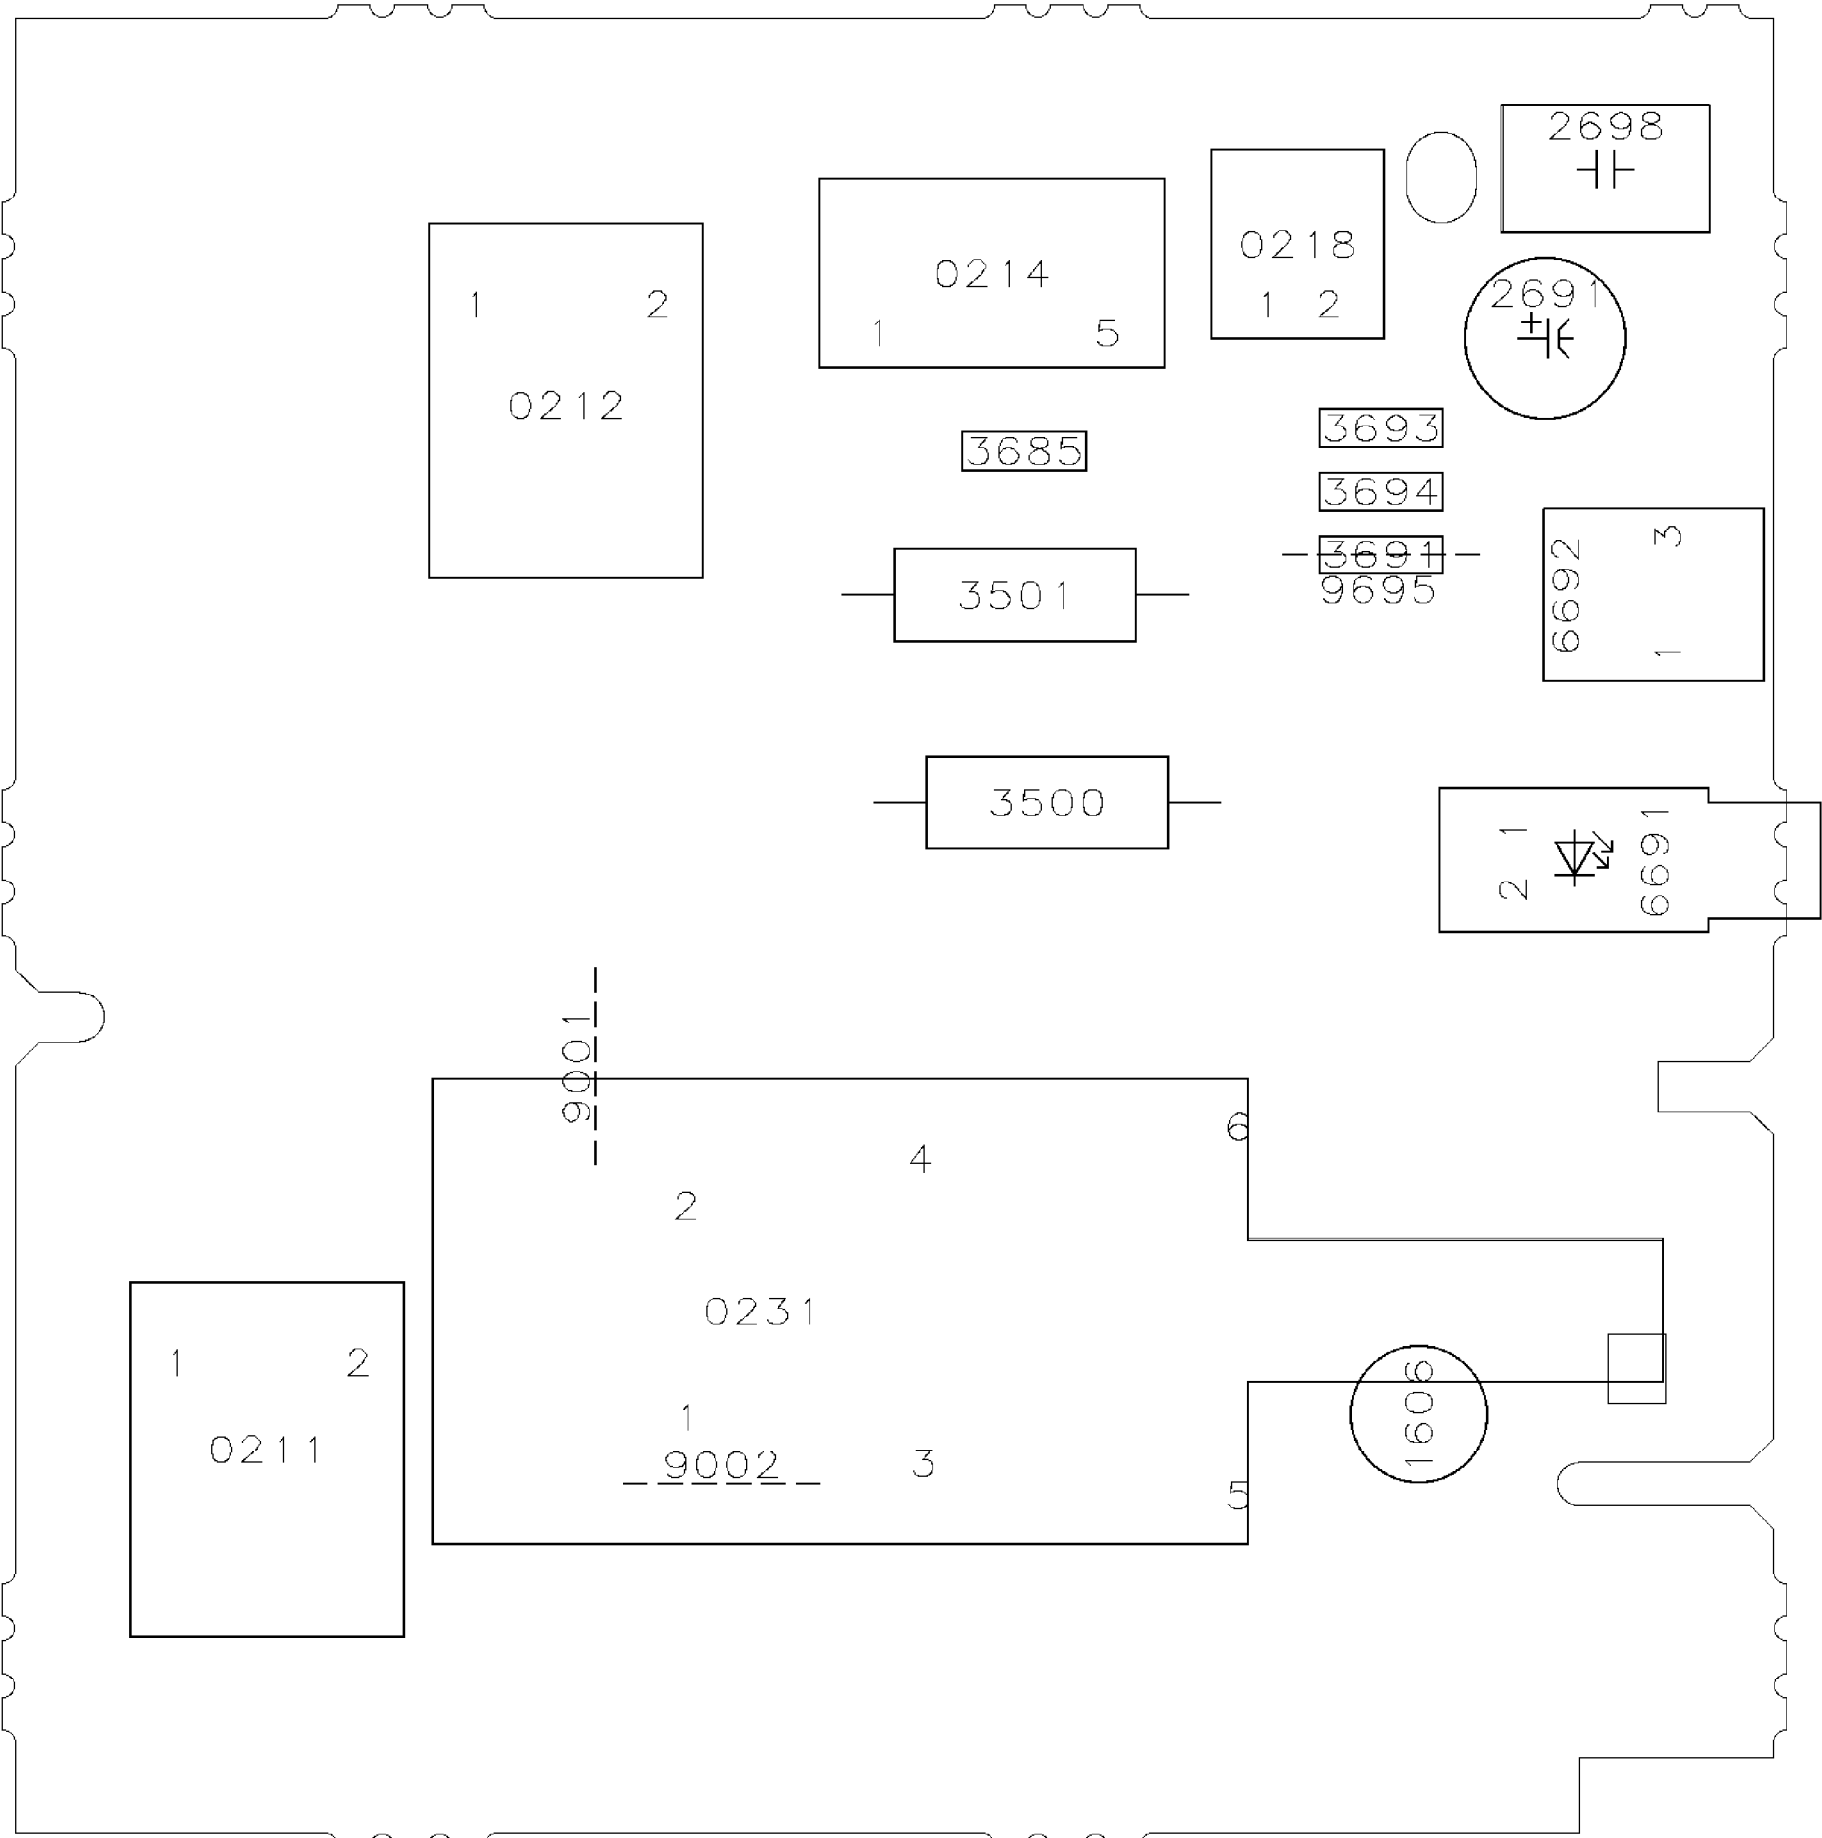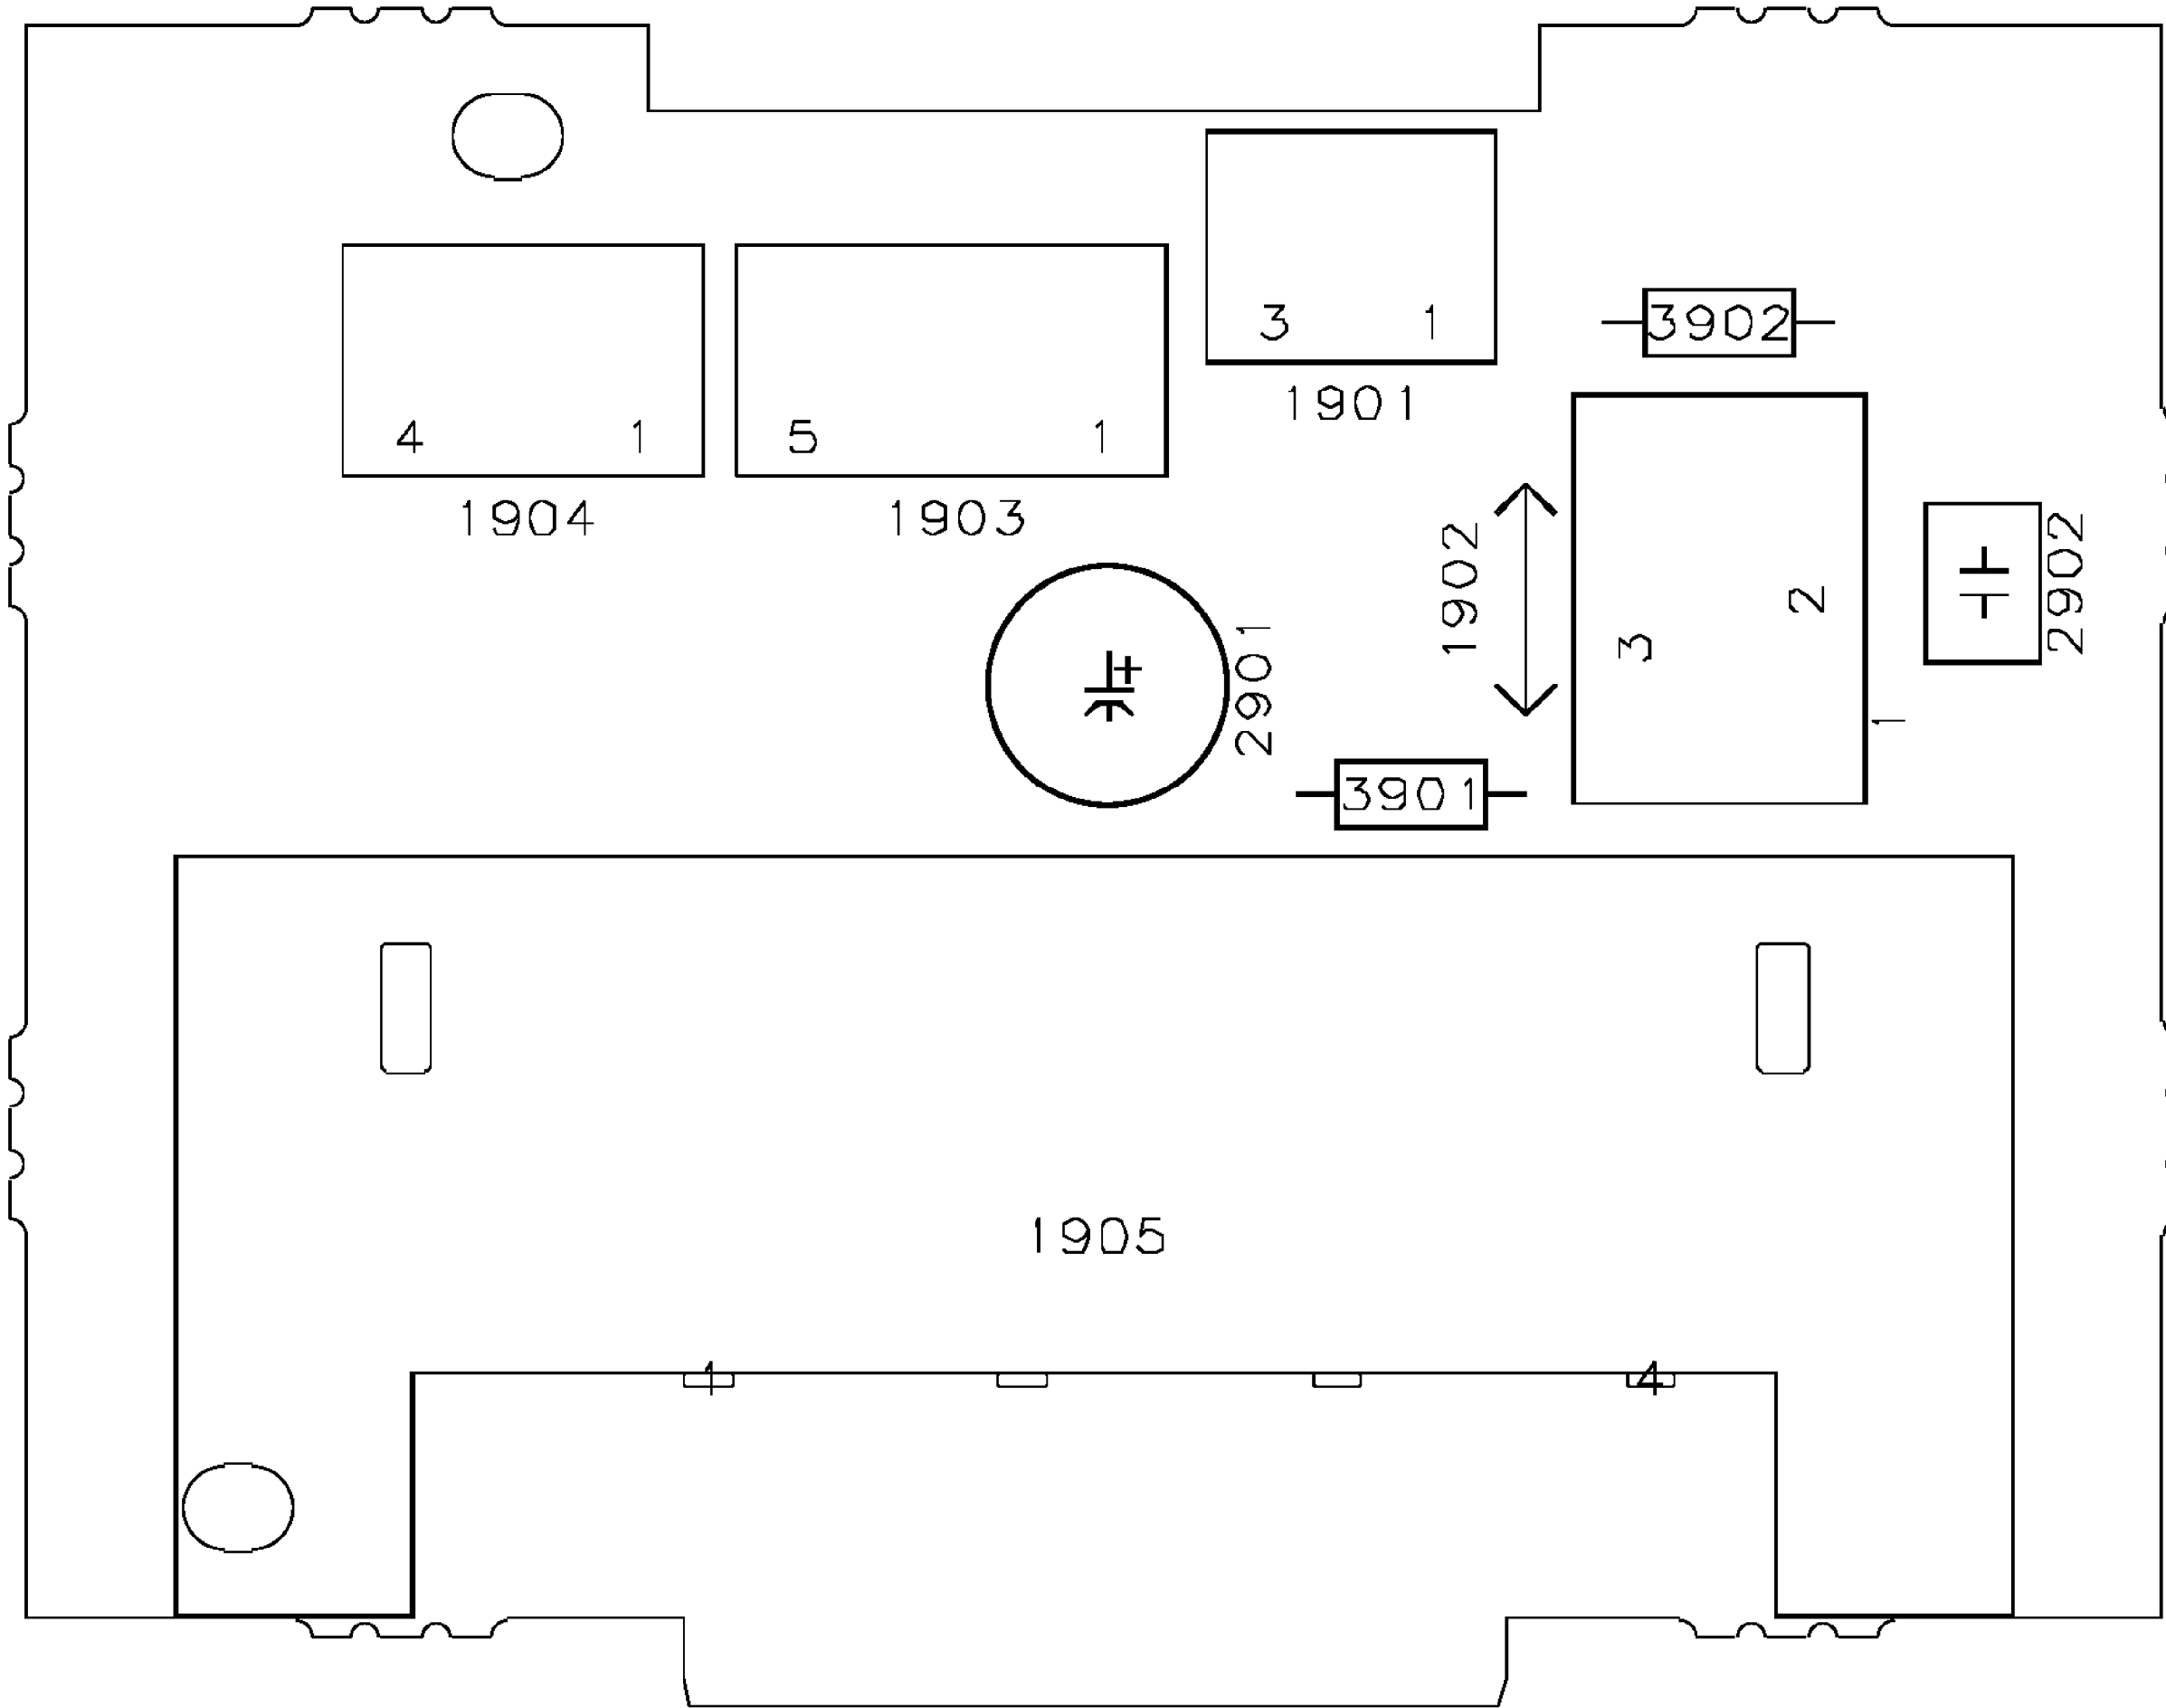USED ONLY IN MODELS: 27PT633R37C, 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT633R85A, 29PT633R85C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A (7638) - Front Interface Panel
20PT653R/37, 20DV6932/37R, 20DV693R02, 27DV693R37A, 27LT621L/17, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 32LT621L/17, 20DV693R01, 27PT643R/37C, 27PT643R/97A,






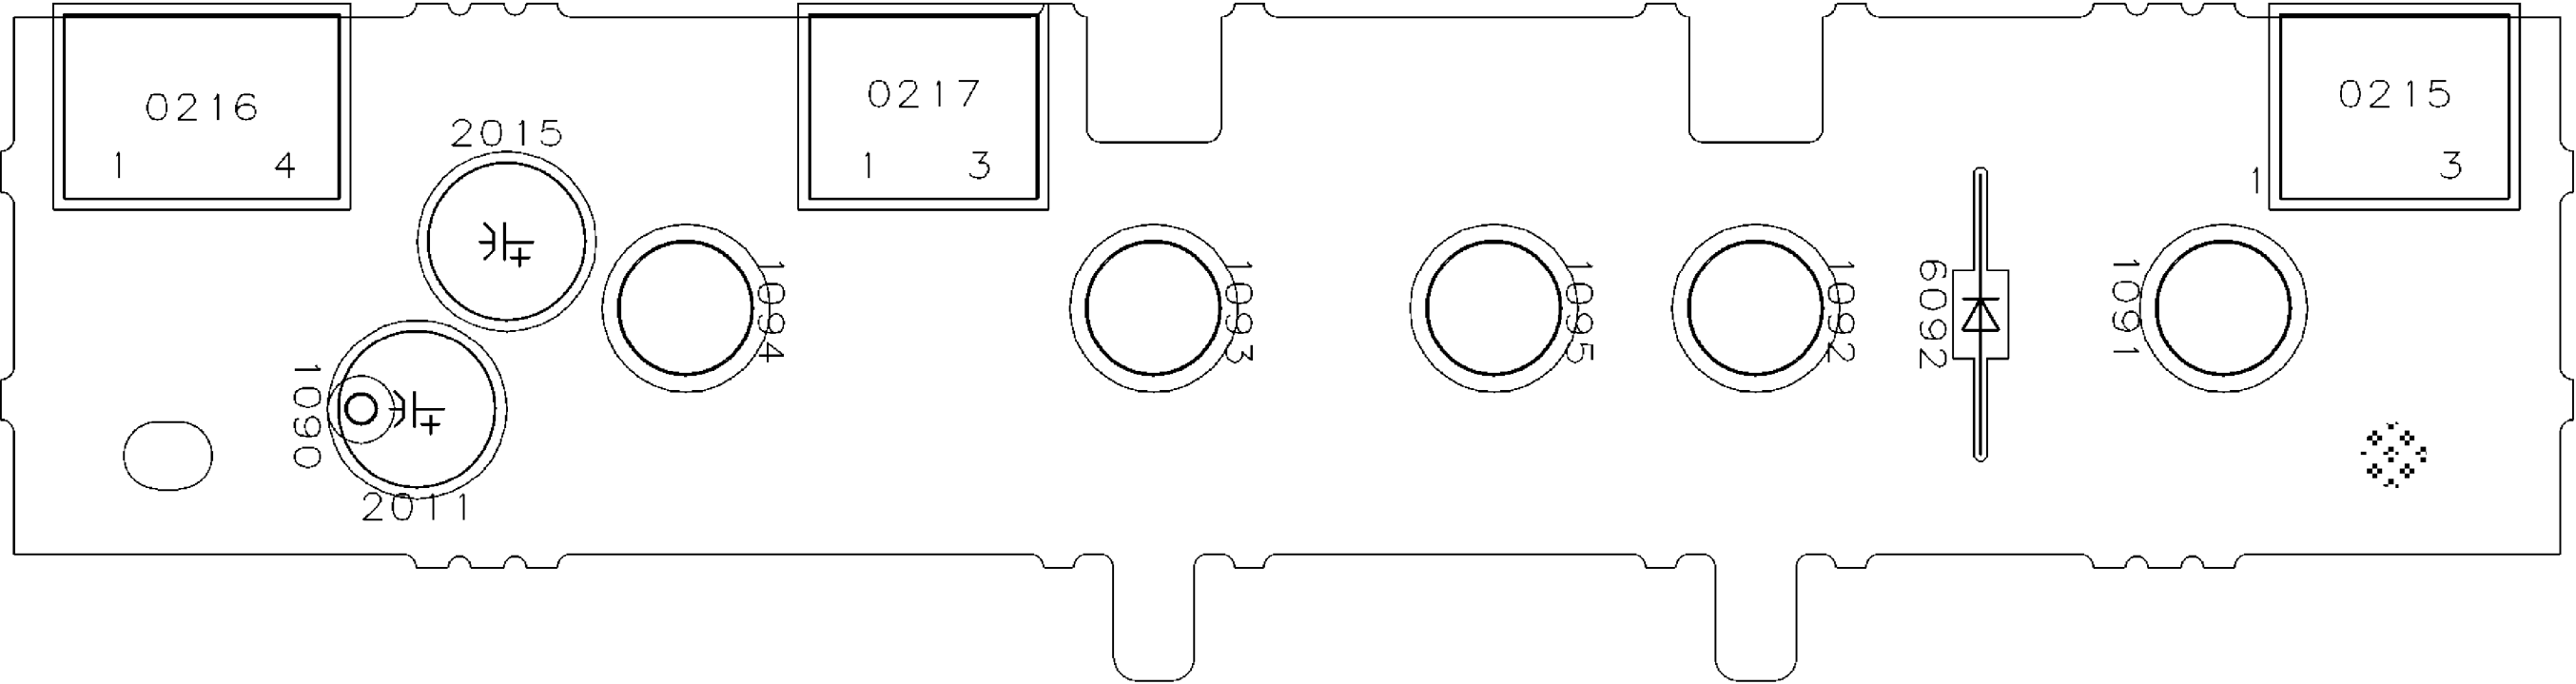
USED ONLY IN MODELS: 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 20PT653R/37, 20DV6932/37R, 20DV693R02 (7638) - Top Control Panel (Component Side)
27DV693R37A, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 20DV693R01, 27PT643R/37C, 27PT643R/97A, 28PW6532/85R, 32PW633R85C, 29PT663S85A, 29DV6931/85R, 29DV693R85A



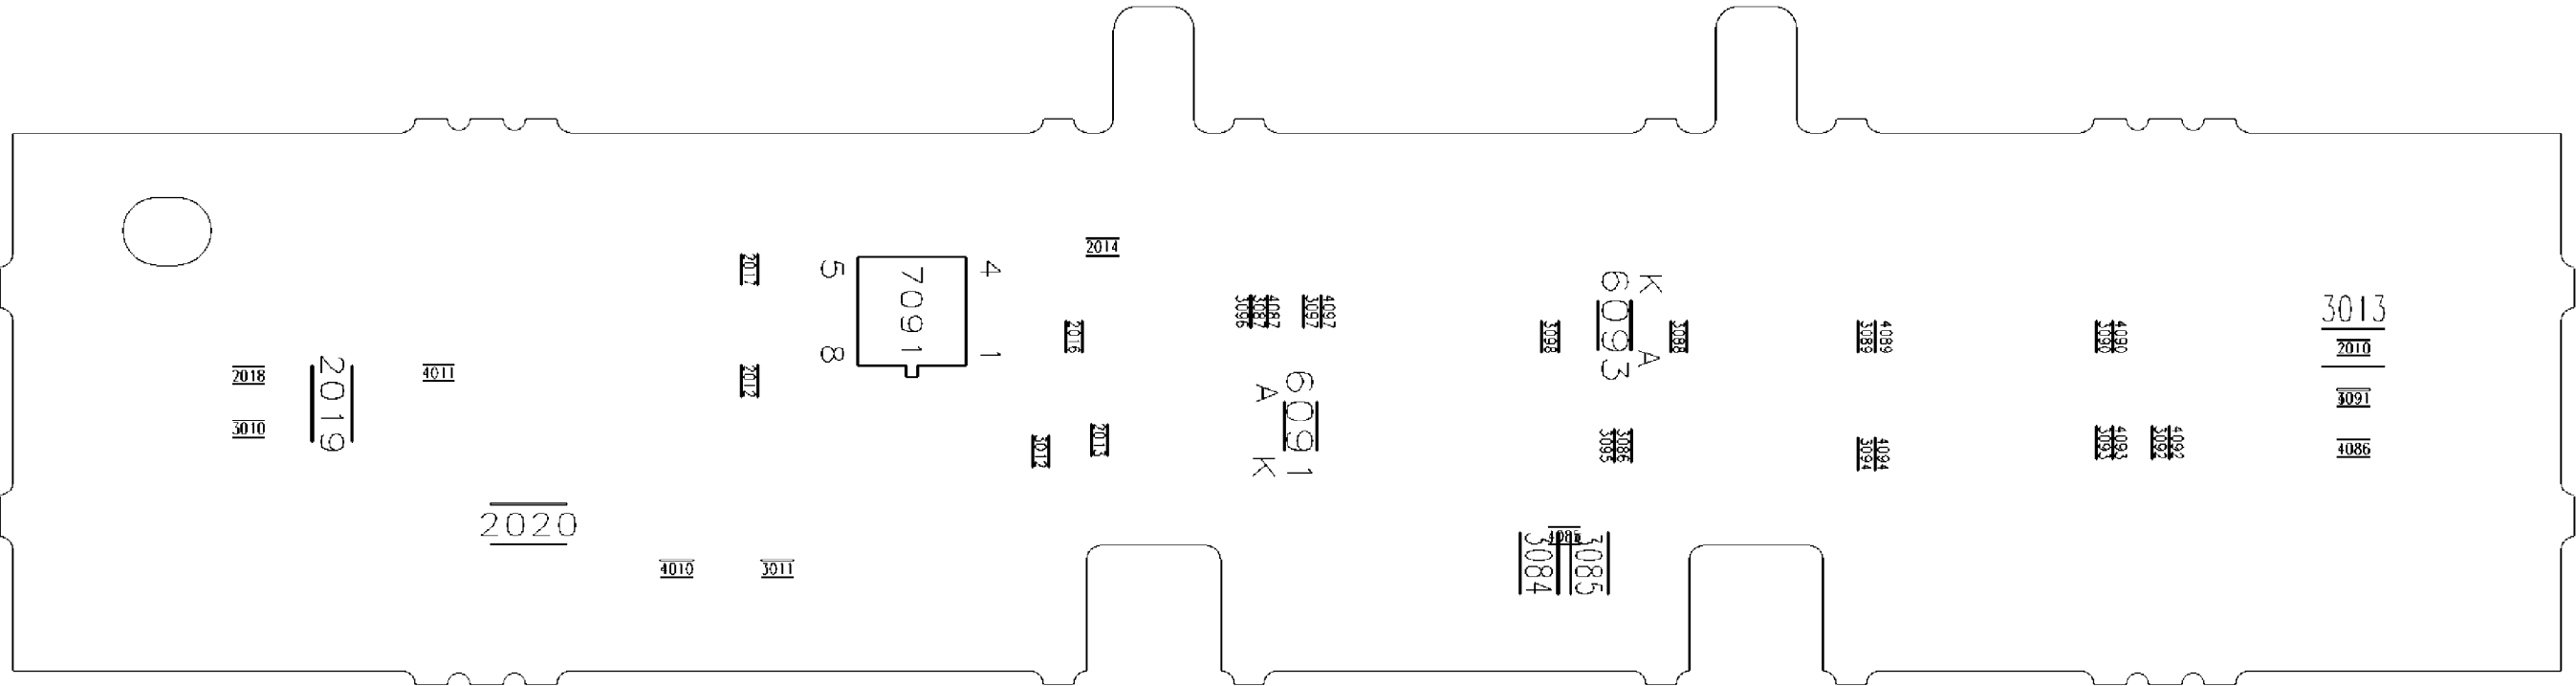
USED ONLY IN MODELS: 27PT643R37A, 27PT663R37A, 27PT663R37C, 29PT663R85A, 29PT663R85C, 32PT633R37D, 32PT663R37A, 20PT653R/37, 20DV6932/37R, 20DV693R02 (7638) - Top Control Panel (Copper Side)
27DV693R37A, 27PT643F35A, 29PT643R85A, 30DV693R37A, , 30PW633F35A, 30PW633R37A, 30PW633R37C, 20DV693R01, 27PT643R/37C, 27PT643R/97A, 28PW6532/85R, 32PW633R85C, 29PT663S85A, 29DV6931/85R, 29DV693R85A





2	2	1	0	1	C	2	3	1	1	4	B	1	3	3	4	1	A	7	3	1	1	A
2	1	0	3	1	D	1	1	1	1	5	B	2	3	3	4	2	B	7	3	1	2	B
2	1	0	4	0	B	1	1	1	2	6	B	2	3	3	4	3	B	7	3	1	3	B
2	1	1	0	1	B	A	1	1	2	7	C	2	3	3	5	1	D	7	3	1	4	D
2	1	1	1	2	B	A	2	1	2	8	C	1	3	3	6	0	B	7	3	1	5	B
2	1	1	2	3	B	1	2	2	2	9	C	2	3	3	7	1	B	7	3	1	6	D
2	1	1	3	4	B	1	2	2	3	0	C	3	3	3	8	2	B	7	3	1	7	D
2	1	1	4	5	B	1	2	2	4	1	C	3	3	3	9	3	A	7	3	1	8	D
2	1	1	5	6	B	1	2	2	5	2	C	1	3	3	0	4	B	7	3	1	9	D
2	1	1	6	7	B	1	2	2	6	3	C	2	3	3	1	5	A	7	3	1	0	D
2	1	1	7	8	B	1	2	2	7	4	C	3	3	3	2	6	A	7	3	1	1	D
2	1	1	8	9	B	1	2	2	8	5	C	1	3	3	3	7	A	7	3	1	2	D
2	1	2	0	0	C	2	2	2	9	6	C	2	3	3	4	8	A	7	3	1	3	D
2	1	2	1	1	C	2	2	2	0	7	C	3	3	3	5	9	A	7	3	1	4	D
2	1	2	2	2	C	2	2	2	1	8	C	1	3	3	6	0	A	7	3	1	5	D
2	1	2	3	3	C	2	2	2	2	9	C	2	3	3	7	1	A	7	3	1	6	D
2	1	2	4	4	C	2	2	2	3	0	C	3	3	3	8	2	A	7	3	1	7	D
2	1	2	5	5	C	2	2	2	4	1	C	1	3	3	9	3	A	7	3	1	8	D
2	1	2	6	6	C	2	2	2	5	2	C	2	3	3	0	4	A	7	3	1	9	D
2	1	2	7	7	C	2	2	2	6	3	C	3	3	3	1	5	A	7	3	1	0	D
2	1	2	8	8	C	2	2	2	7	4	C	1	3	3	2	6	A	7	3	1	1	D
2	1	2	9	9	C	2	2	2	8	5	C	2	3	3	3	7	A	7	3	1	2	D
2	1	3	0	0	D	2	2	2	9	6	C	3	3	3	4	8	A	7	3	1	3	D
2	1	3	1	1	D	2	2	2	0	7	C	1	3	3	5	9	A	7	3	1	4	D
2	1	3	2	2	D	2	2	2	1	8	C	2	3	3	6	0	A	7	3	1	5	D
2	1	3	3	3	D	2	2	2	2	9	C	3	3	3	7	1	A	7	3	1	6	D
2	1	3	4	4	D	2	2	2	3	0	C	1	3	3	8	2	A	7	3	1	7	D
2	1	3	5	5	D	2	2	2	4	1	C	2	3	3	9	3	A	7	3	1	8	D
2	1	3	6	6	D	2	2	2	5	2	C	3	3	3	0	4	A	7	3	1	9	D
2	1	3	7	7	D	2	2	2	6	3	C	1	3	3	1	5	A	7	3	1	0	D
2	1	4	0	0	A	4	3	3	0	8	B	5	4	4	6	6	A	7	3	1	1	D
2	1	4	1	1	A	4	3	3	1	9	B	5	5	5	7	7	A	7	3	1	2	D
2	1	4	2	2	C	5	4	4	0	0	B	5	6	6	8	8	A	7	3	1	3	D
2	1	4	3	3	C	6	5	5	1	1	B	5	7	7	9	9	A	7	3	1	4	D
2	1	4	4	4	C	5	6	6	2	2	B	6	8	8	0	0	A	7	3	1	5	D
2	1	4	5	5	B	4	7	7	3	3	B	6	9	9	1	1	A	7	3	1	6	D
2	1	4	6	6	B	5	8	8	4	4	A	5	0	0	2	2	A	7	3	1	7	D
2	1	4	7	7	B	5	9	9	5	5	A	5	1	1	3	3	A	7	3	1	8	D
2	1	4	8	8	A	4	0	0	6	6	A	4	2	2	4	4	A	7	3	1	9	D
2	1	4	9	9	A	4	1	1	7	7	A	4	3	3	5	5	A	7	3	1	0	D
2	1	5	0	0	A	4	2	2	8	8	A	4	4	4	6	6	A	7	3	1	1	D
2	1	5	1	1	A	4	3	3	9	9	A	4	5	5	7	7	A	7	3	1	2	D
2	1	5	2	2	A	4	4	4	0	0	A	4	6	6	8	8	A	7	3	1	3	D
2	1	5	3	3	A	1	5	5	1	1	A	4	7	7	9	9	A	7	3	1	4	D
2	1	5	4	4	A	1	6	6	2	2	A	4	8	8	0	0	A	7	3	1	5	D
2	1	5	5	5	A	1	7	7	3	3	A	4	9	9	1	1	A	7	3	1	6	D
2	1	5	6	6	A	1	8	8	4	4	A	4	0	0	2	2	A	7	3	1	7	D
2	1	5	7	7	A	1	9	9	5	5	A	4	1	1	3	3	A	7	3	1	8	D
2	1	6	0	0	A	1	0	0	6	6	A	4	2	2	4	4	A	7	3	1	9	D
2	1	6	1	1	A	1	1	1	7	7	A	4	3	3	5	5	A	7	3	1	0	D
2	1	6	2	2	A	1	2	2	8	8	A	4	4	4	6	6	A	7	3	1	1	D
2	1	6	3	3	A	1	3	3	9	9	A	4	5	5	7	7	A	7	3	1	2	D
2	1	6	4	4	A	1	4	4	0	0	A	4	6	6	8	8	A	7	3	1	3	D
2	1	6	5	5	A	1	5	5	1	1	A	4	7	7	9	9	A	7	3	1	4	D
2	1	6	6	6	A	1	6	6	2	2	A	4	8	8	0	0	A	7	3	1	5	D
2	1	6	7	7	A	1	7	7	3	3	A	4	9	9	1	1	A	7	3	1	6	D
2	1	7	0	0	D	2	2	2	8	8	A	1	0	0	2	2	A	7	3	1	7	D
2	1	7	1	1	D	2	2	2	9	9	A	1	1	1	3	3	A	7	3	1	8	D
2	1	7	2	2	D	2	2	2	0	0	A	1	2	2	4	4	A	7	3	1	9	D
2	1	7	3	3	D	2	2	2	1	1	C	3	3	3	5	5	A	7	3	1	0	D
2	1	7	4	4	D	2	2	2	2	2	C	4	3	3	6	6	A	7	3	1	1	D
2	1	7	5	5	D	2	2	2	3	3	C	4	4	3	7	7	A	7	3	1	2	D
2	1	7	6	6	D	2	2	2	4	4	C	4	4	4	8	8	A	7	3	1	3	D
2	1	7	7	7	D	2	2	2	5	5	C	4	4	5	9	9	A	7	3	1	4	D
2	1	8	0	0	A	1	3	3	6	6	C	4	4	6	0	0	A	7	3	1	5	D
2	1	8	1	1	A	1	4	4	7	7	C	4	4	7	1	1	A	7	3	1	6	D
2	1	8	2	2	A	1	5	5	8	8	C	4	4	8	2	2	A	7	3	1	7	D
2	1	8	3	3	A	1	6	6	9	9	C	4	4	9	3	3	A	7	3	1	8	D
2	1	8	4	4	A	1	7	7	0	0	C	4	4	0	4	4	A	7	3	1	9	D
2	1	8	5	5	A	1	8	8	1	1	C	4	4	1	5	5	A	7	3	1	0	D
2	1	8	6	6	A	1	9	9	2	2	C	4	4	2	6	6	A	7	3	1	1	D
2	1	8	7	7	A	1	0	0	3	3	C	4	4	3	7	7	A	7	3	1	2	D
2	1	9	0	0	C	3	3	3	6	6	C	4	4	4	8	8	A	7	3	1	3	D
2	1	9	1	1	C	3	3	3	7	7	C	4	4	5	9	9	A	7	3	1	4	D
2	1	9	2	2	A	2	3	3	8	8	C	4	4	6	0	0	A	7	3	1	5	D
2	1	9	3	3	A	2	3	3	9	9	C	4	4	7	1	1	A	7	3	1	6	D
2	1	9	4	4	A	2	4	4	0	0	C	4	4	8	2	2	A	7	3	1	7	D
2	1	9	5	5	A	2	5	5	1	1	C	4	4	9	3	3	A	7	3	1	8	D
2	1	9	6	6	A	2	6	6	2	2	C	4	4	0	4	4	A	7	3	1	9	D
2	1	9	7	7	A	2	7	7	3	3	C	4	4	1	5	5	A	7	3	1	0	D
2	1	0	0	0	A	3	3	3	6	6	C	4	4	2	6	6	A	7	3	1	1	D
2	1	0	1	1	A	3	3	3	7	7	C	4	4	3	7	7	A	7	3	1	2	D
2	1	0	2	2	A	3	3	3	8	8	C	4	4	4	8	8	A	7	3	1	3	D
2	1	0	3	3	A	3	3	3	9	9	C	4	4	5	9	9	A	7	3	1	4	D
2	1	0	4	4	A	3	4	4	0	0	D	6	4	6	0	0	A	7	3	1	5	D
2	1	0	5	5	A	3	4	4	1	1	D	6	5	7	1	1	A	7	3	1	6	D
2	1	0	6	6	A	3	5	5	2	2	D	6	6	8	2	2	A	7	3	1	7	D
2	1	0	7	7	A	3	5	5	3	3	D	6	7	9	3	3	A	7	3	1	8	D
2	1	0	8	8	A	3	6	6	4	4	D	6	8	0	4	4	A	7	3	1	9	D
2	1	0	9	9	A	3	7	7	5	5	D	6	9	1	5	5						

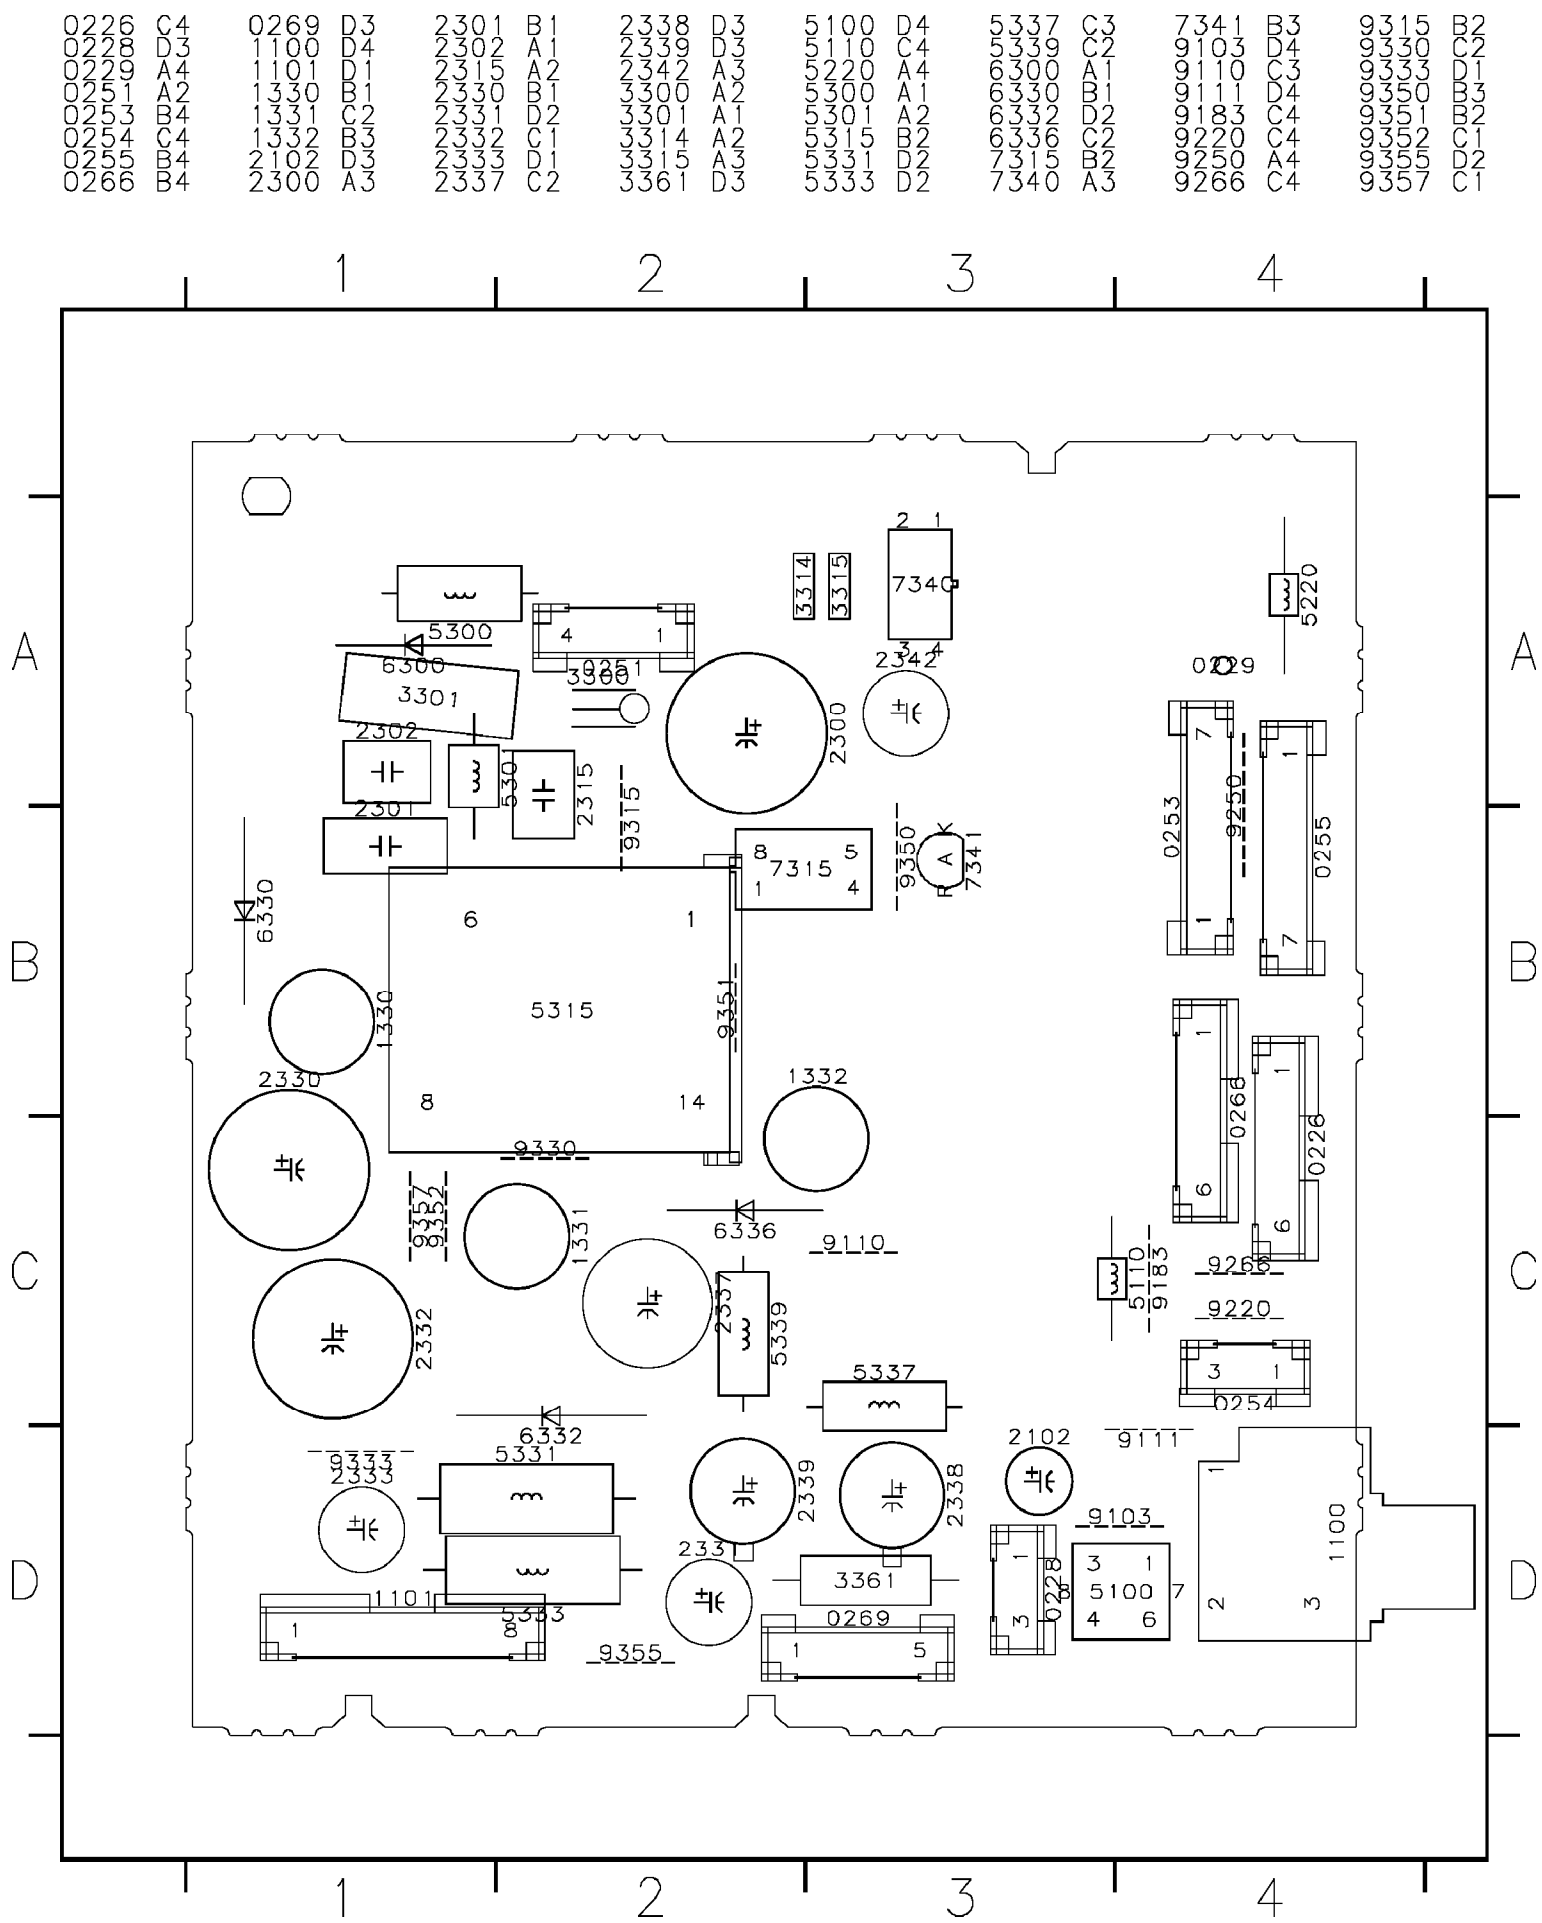


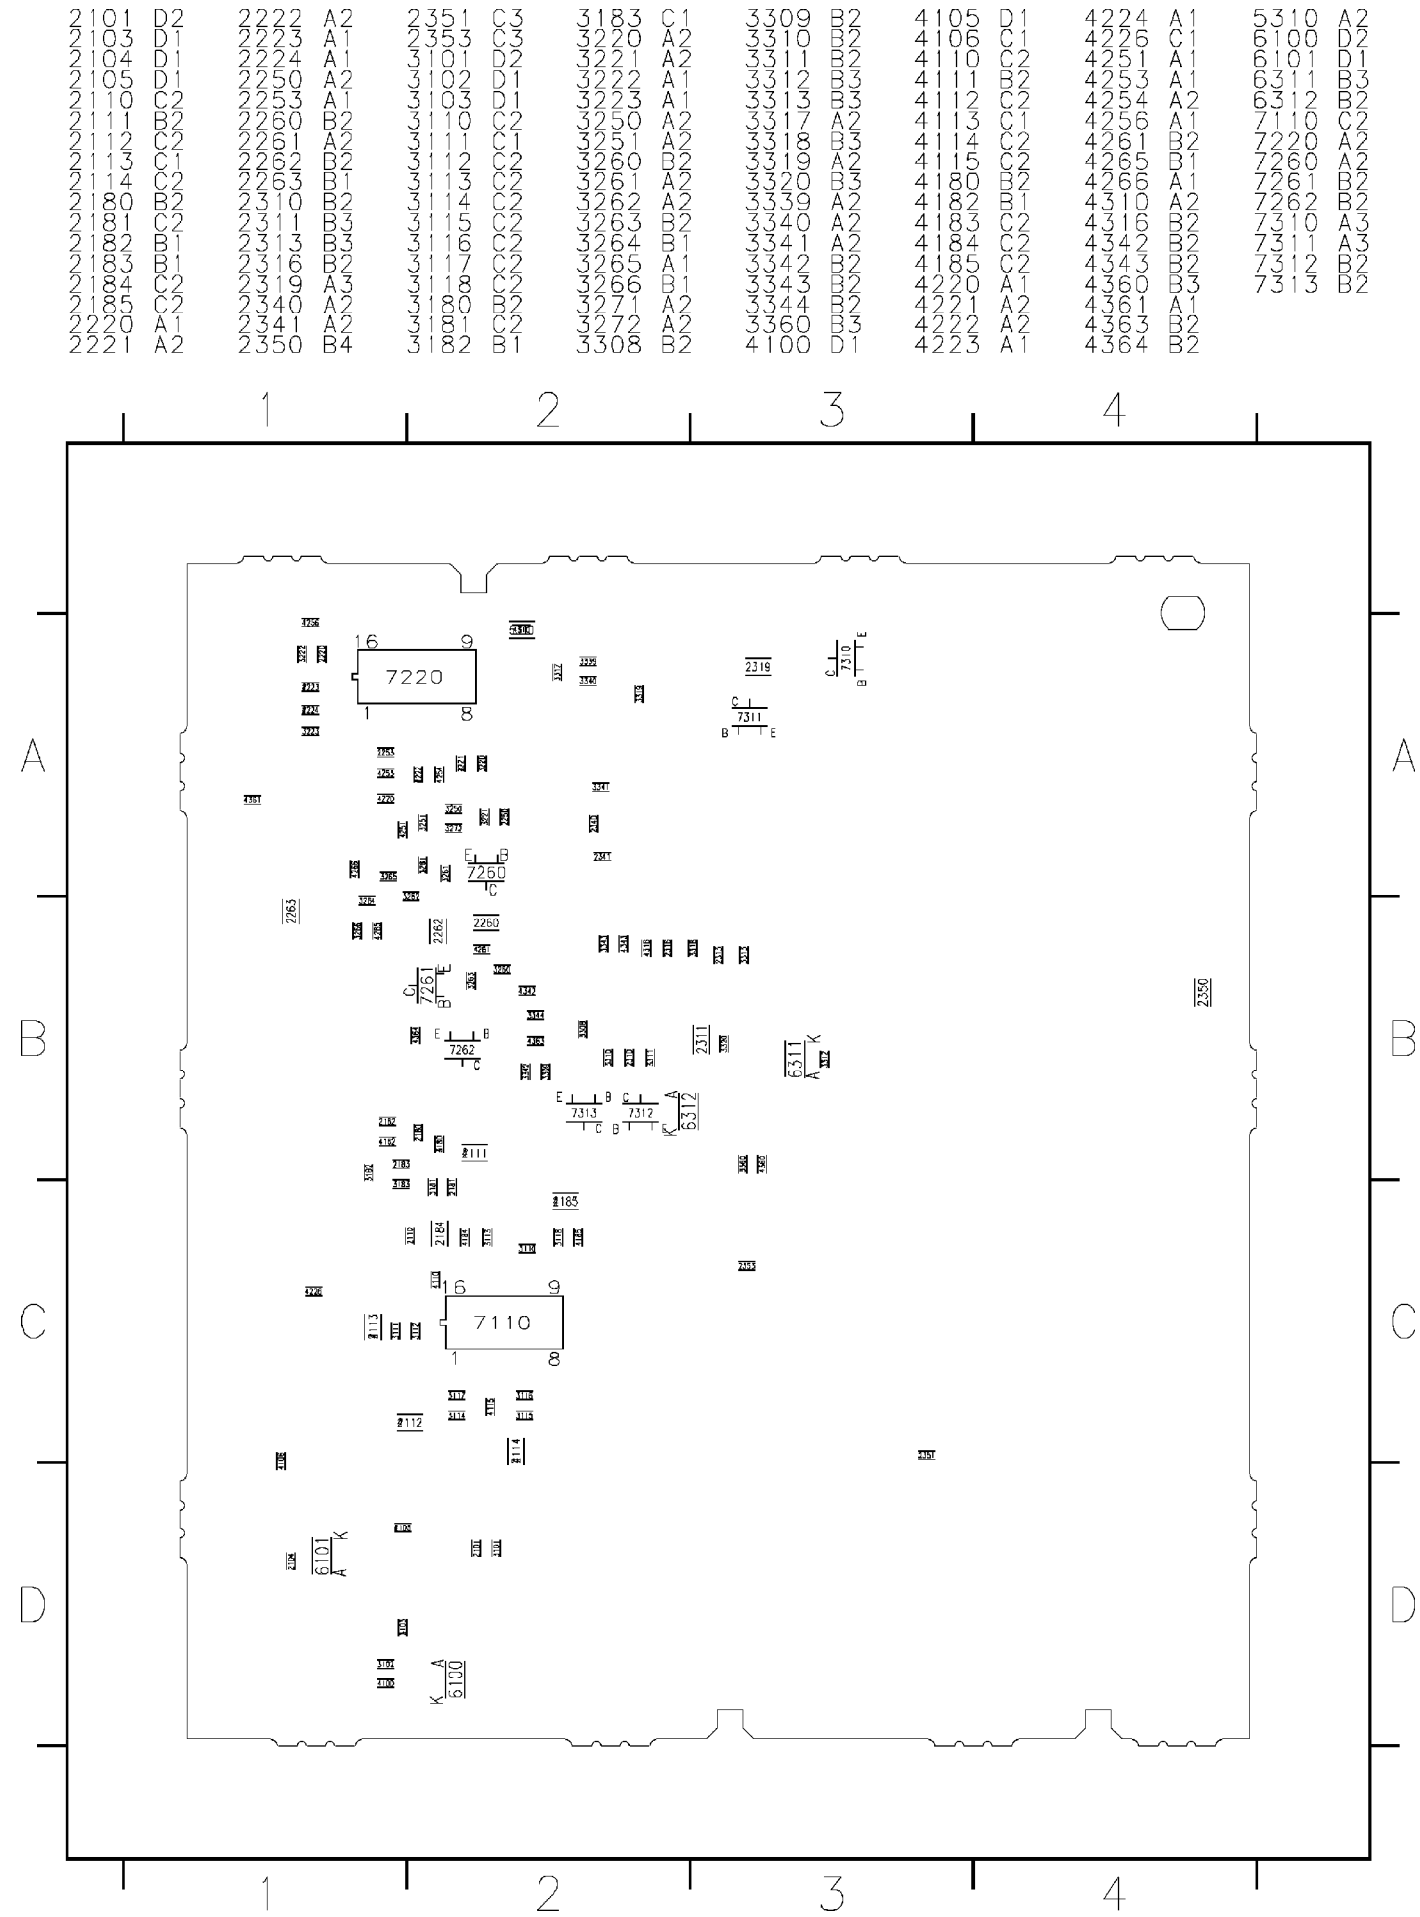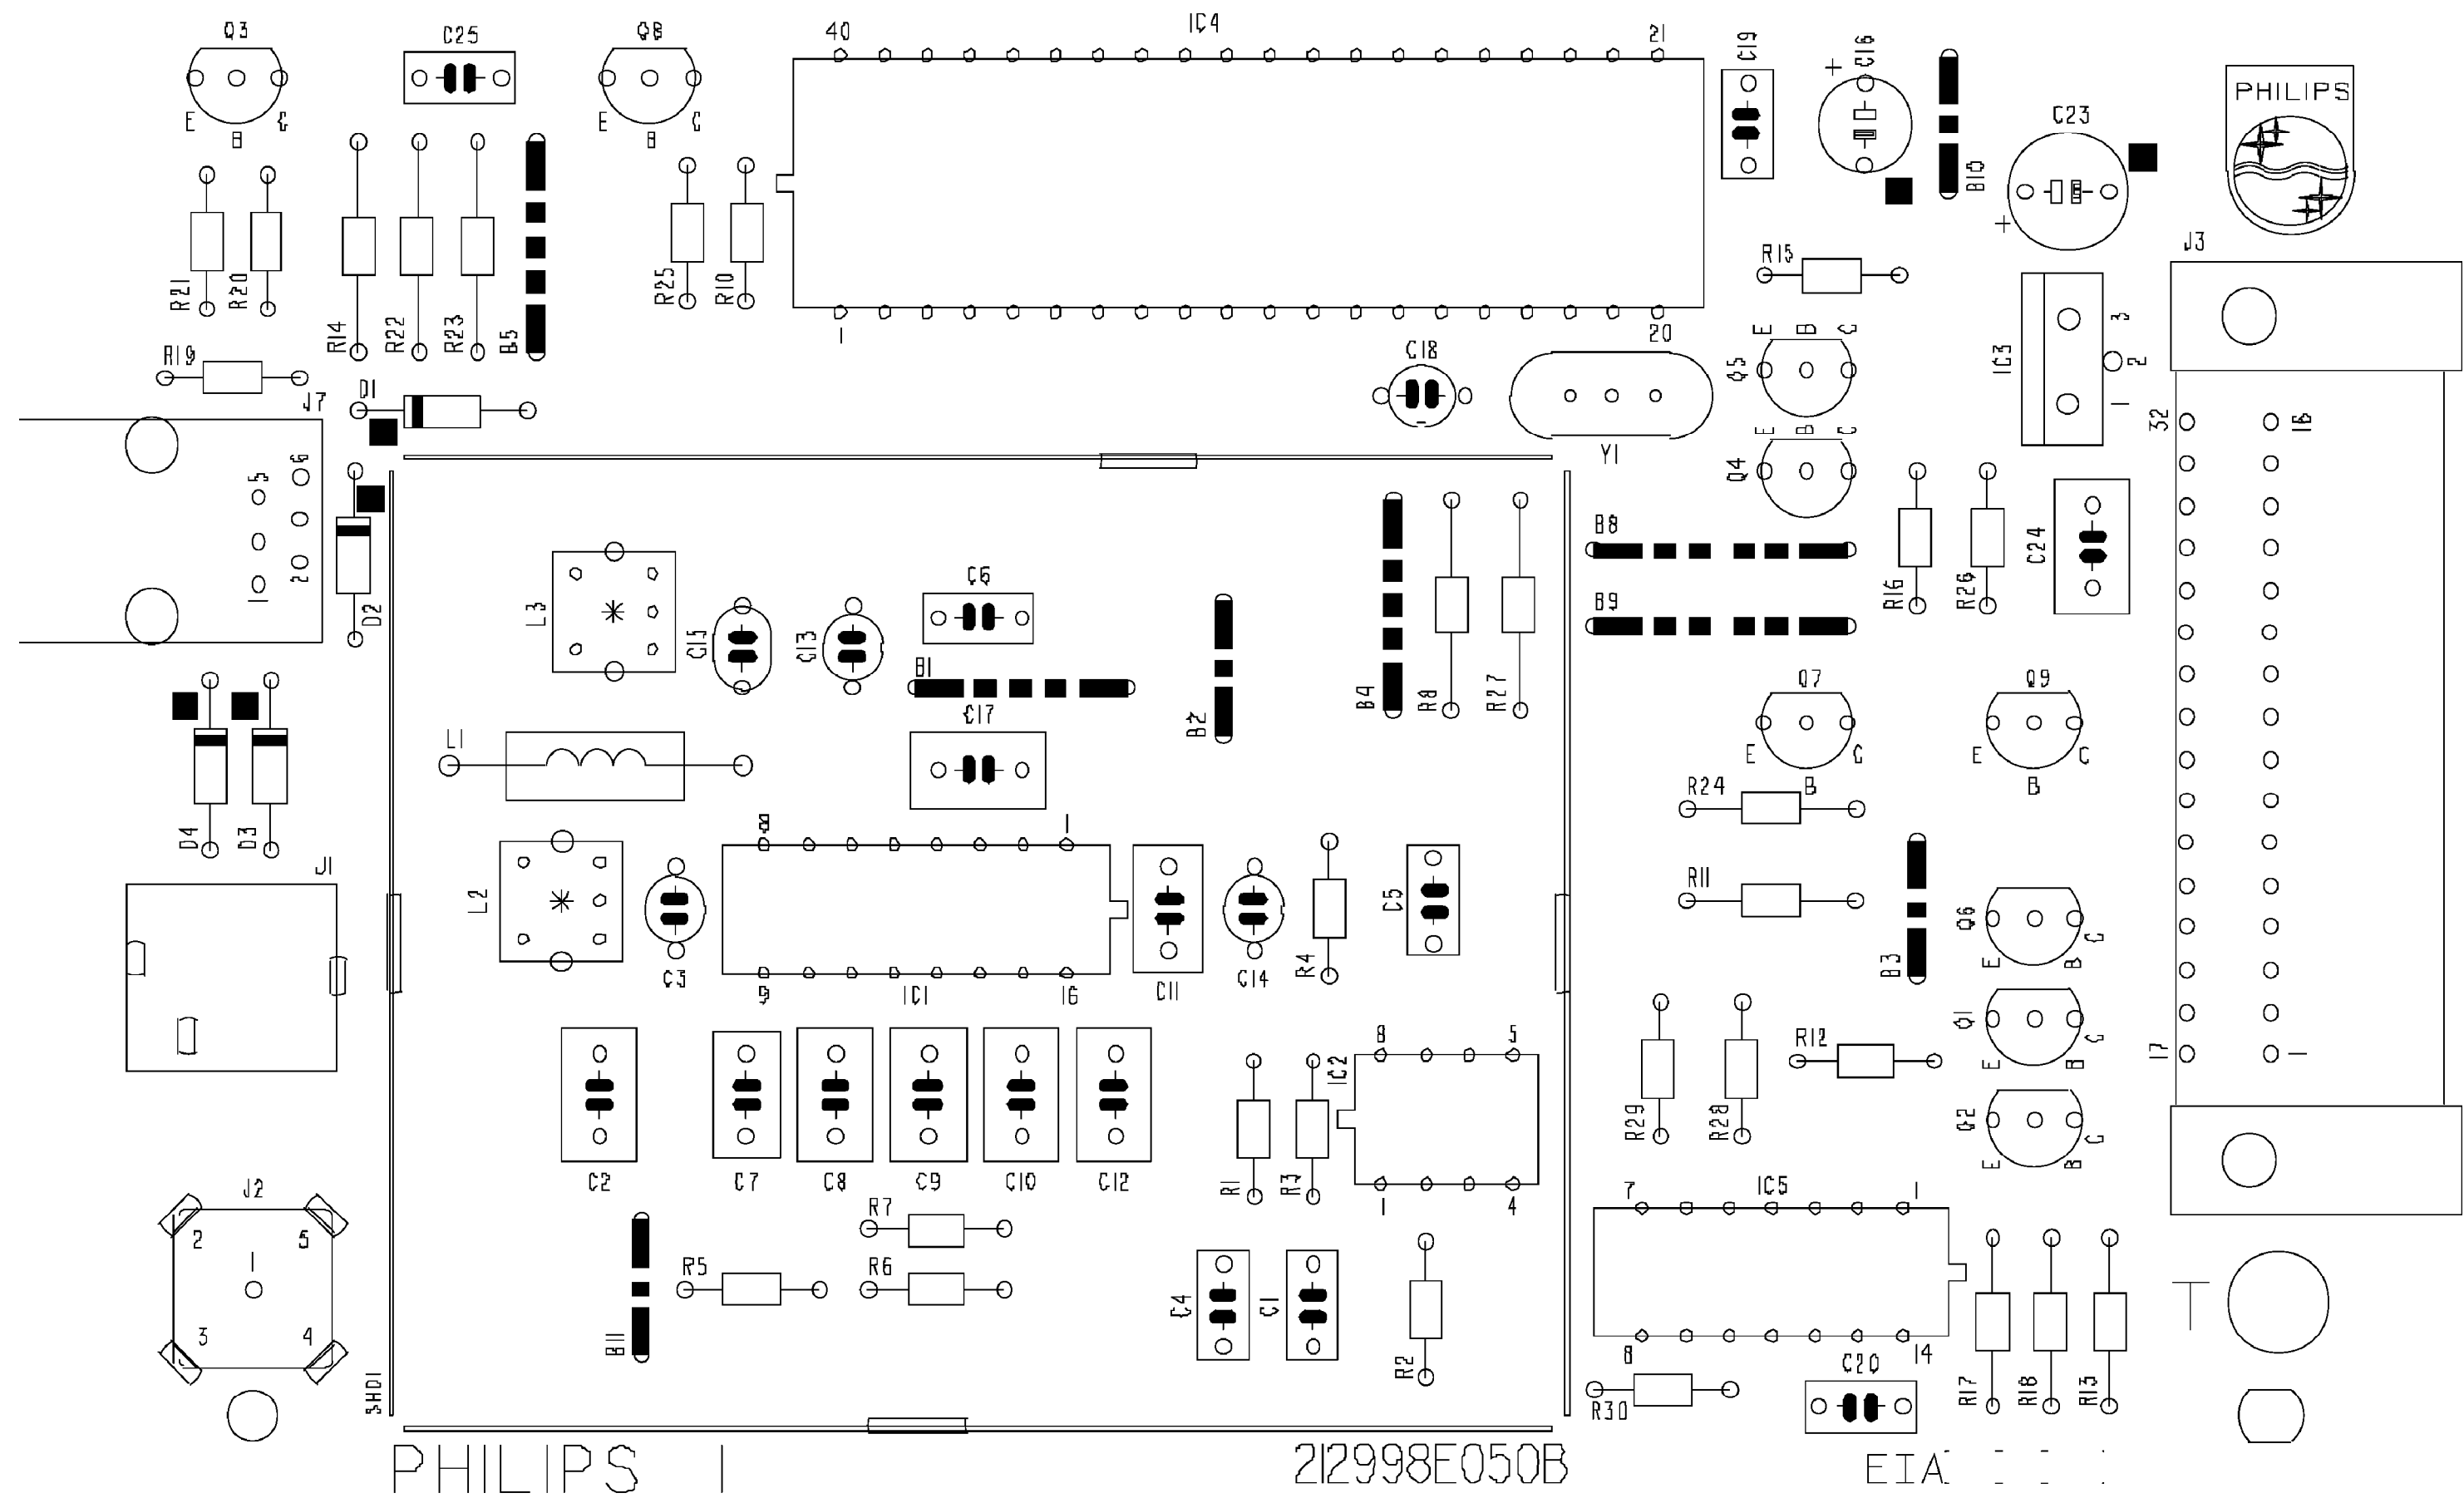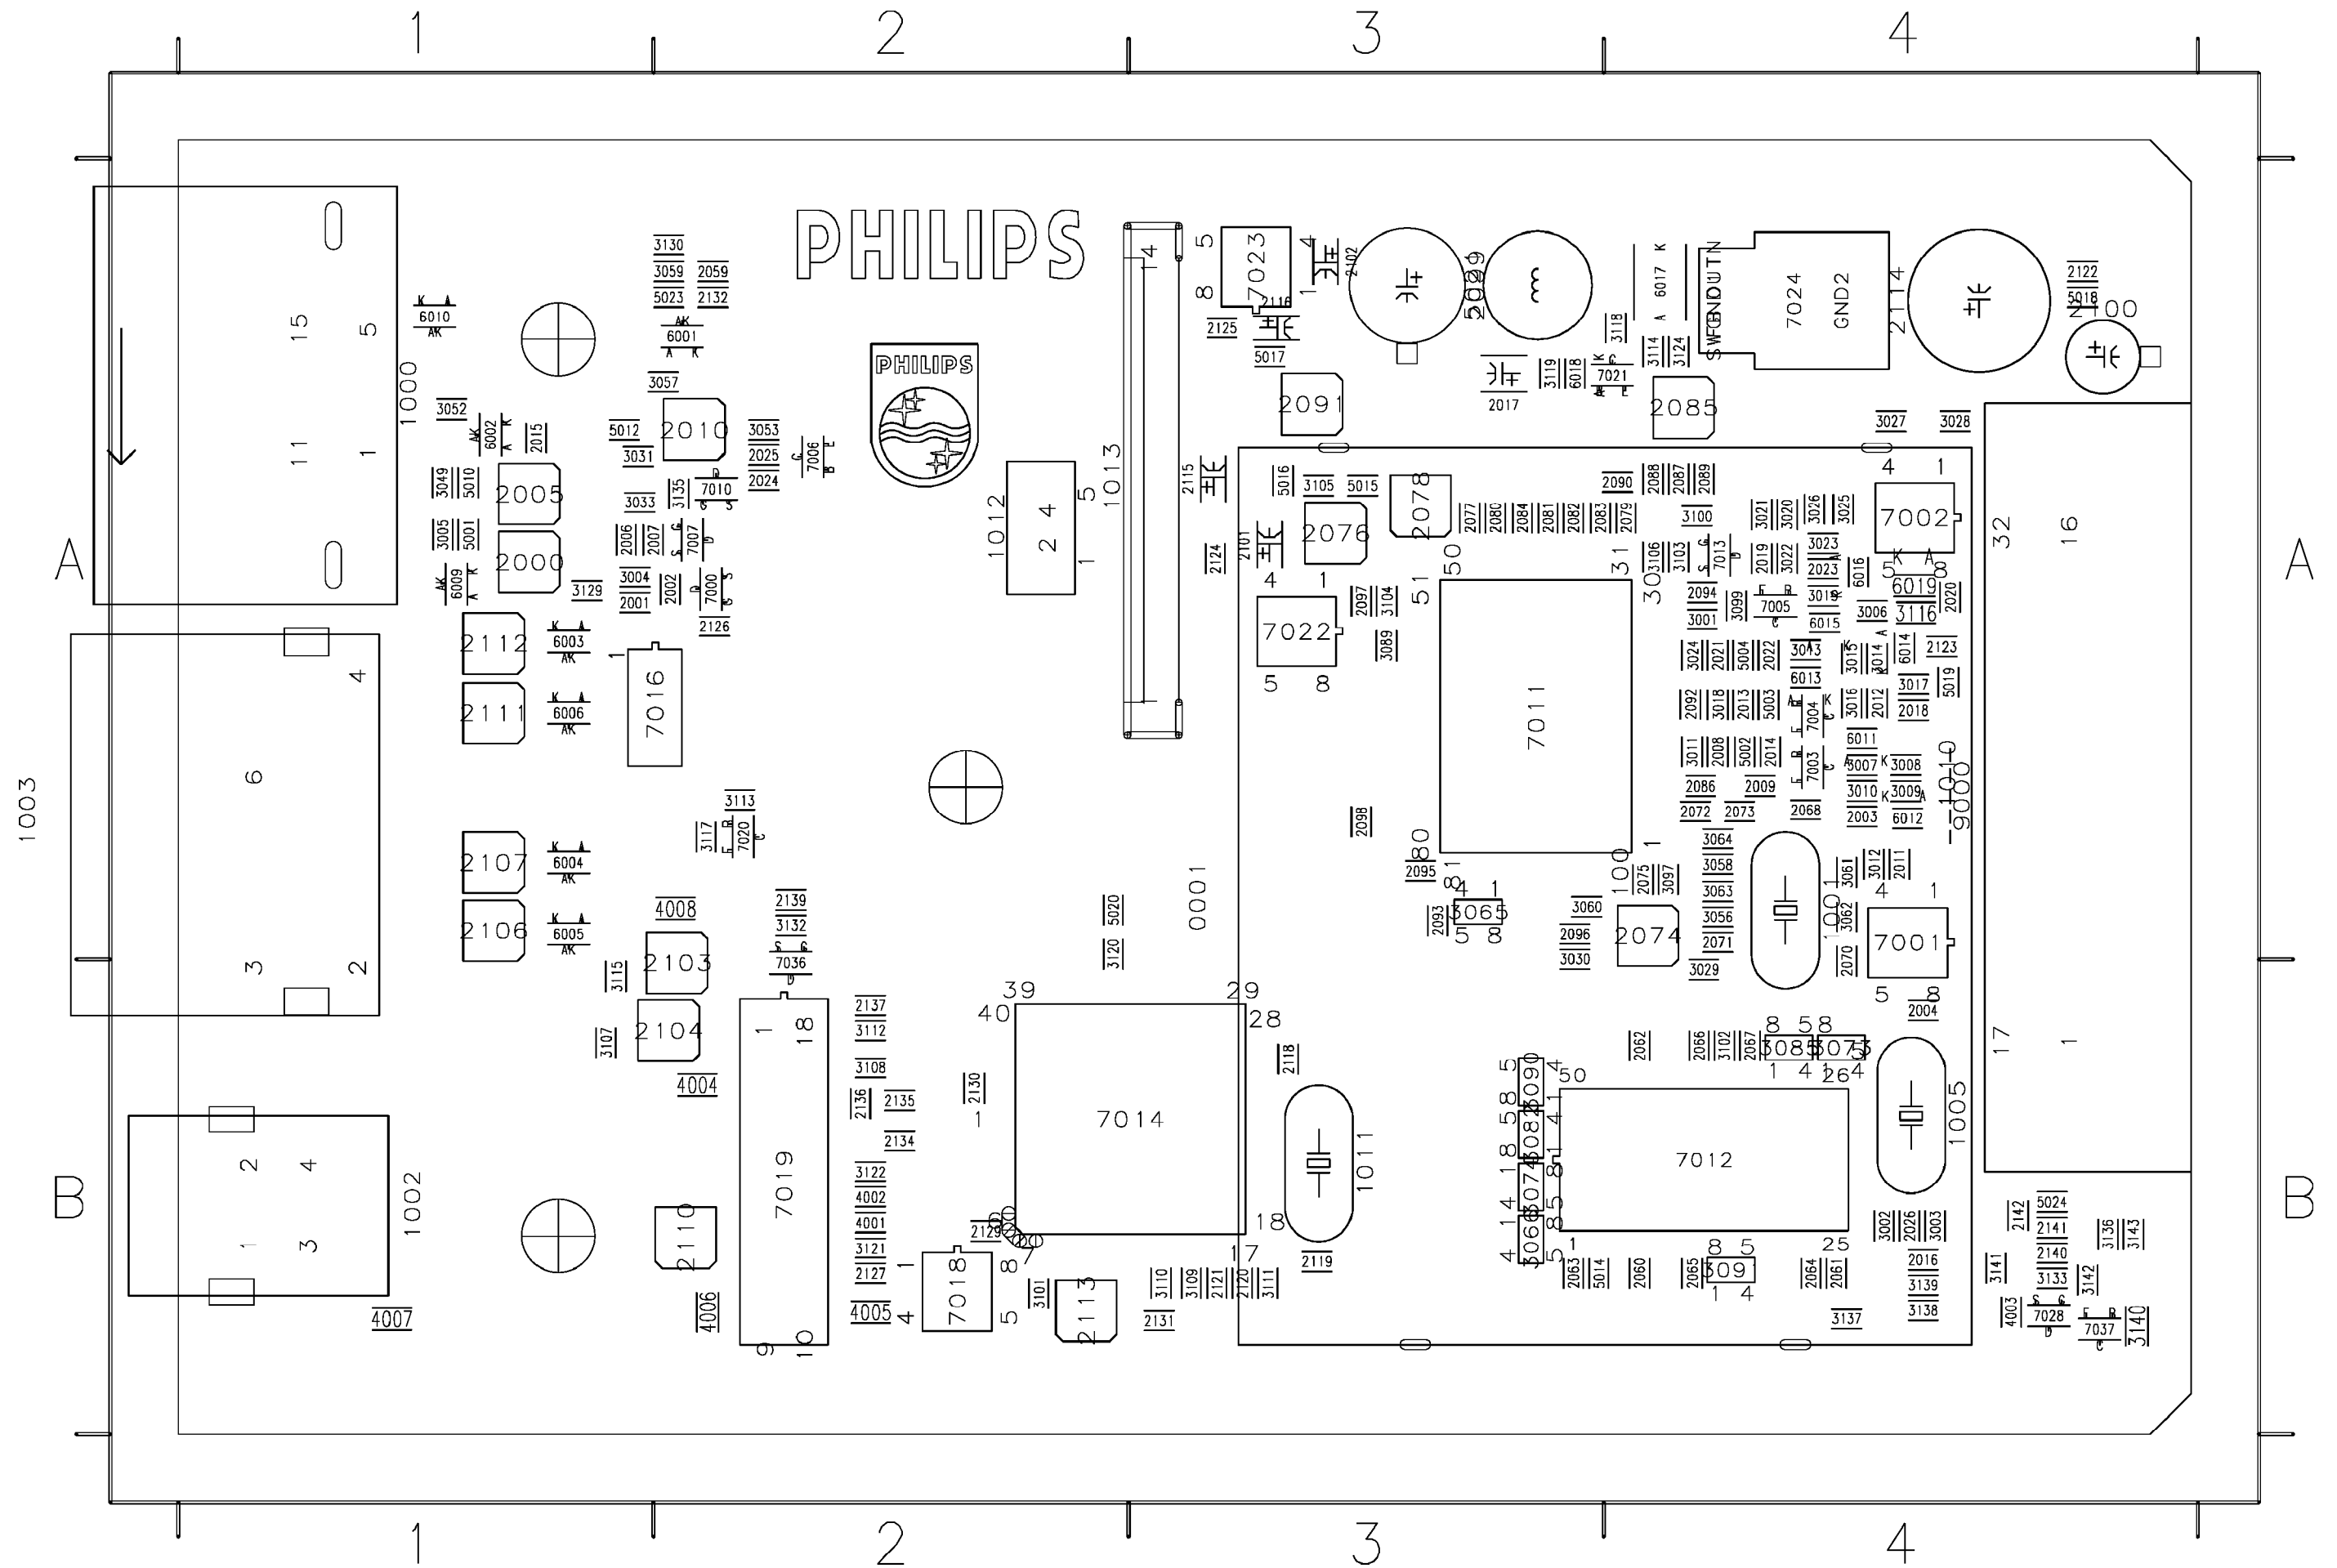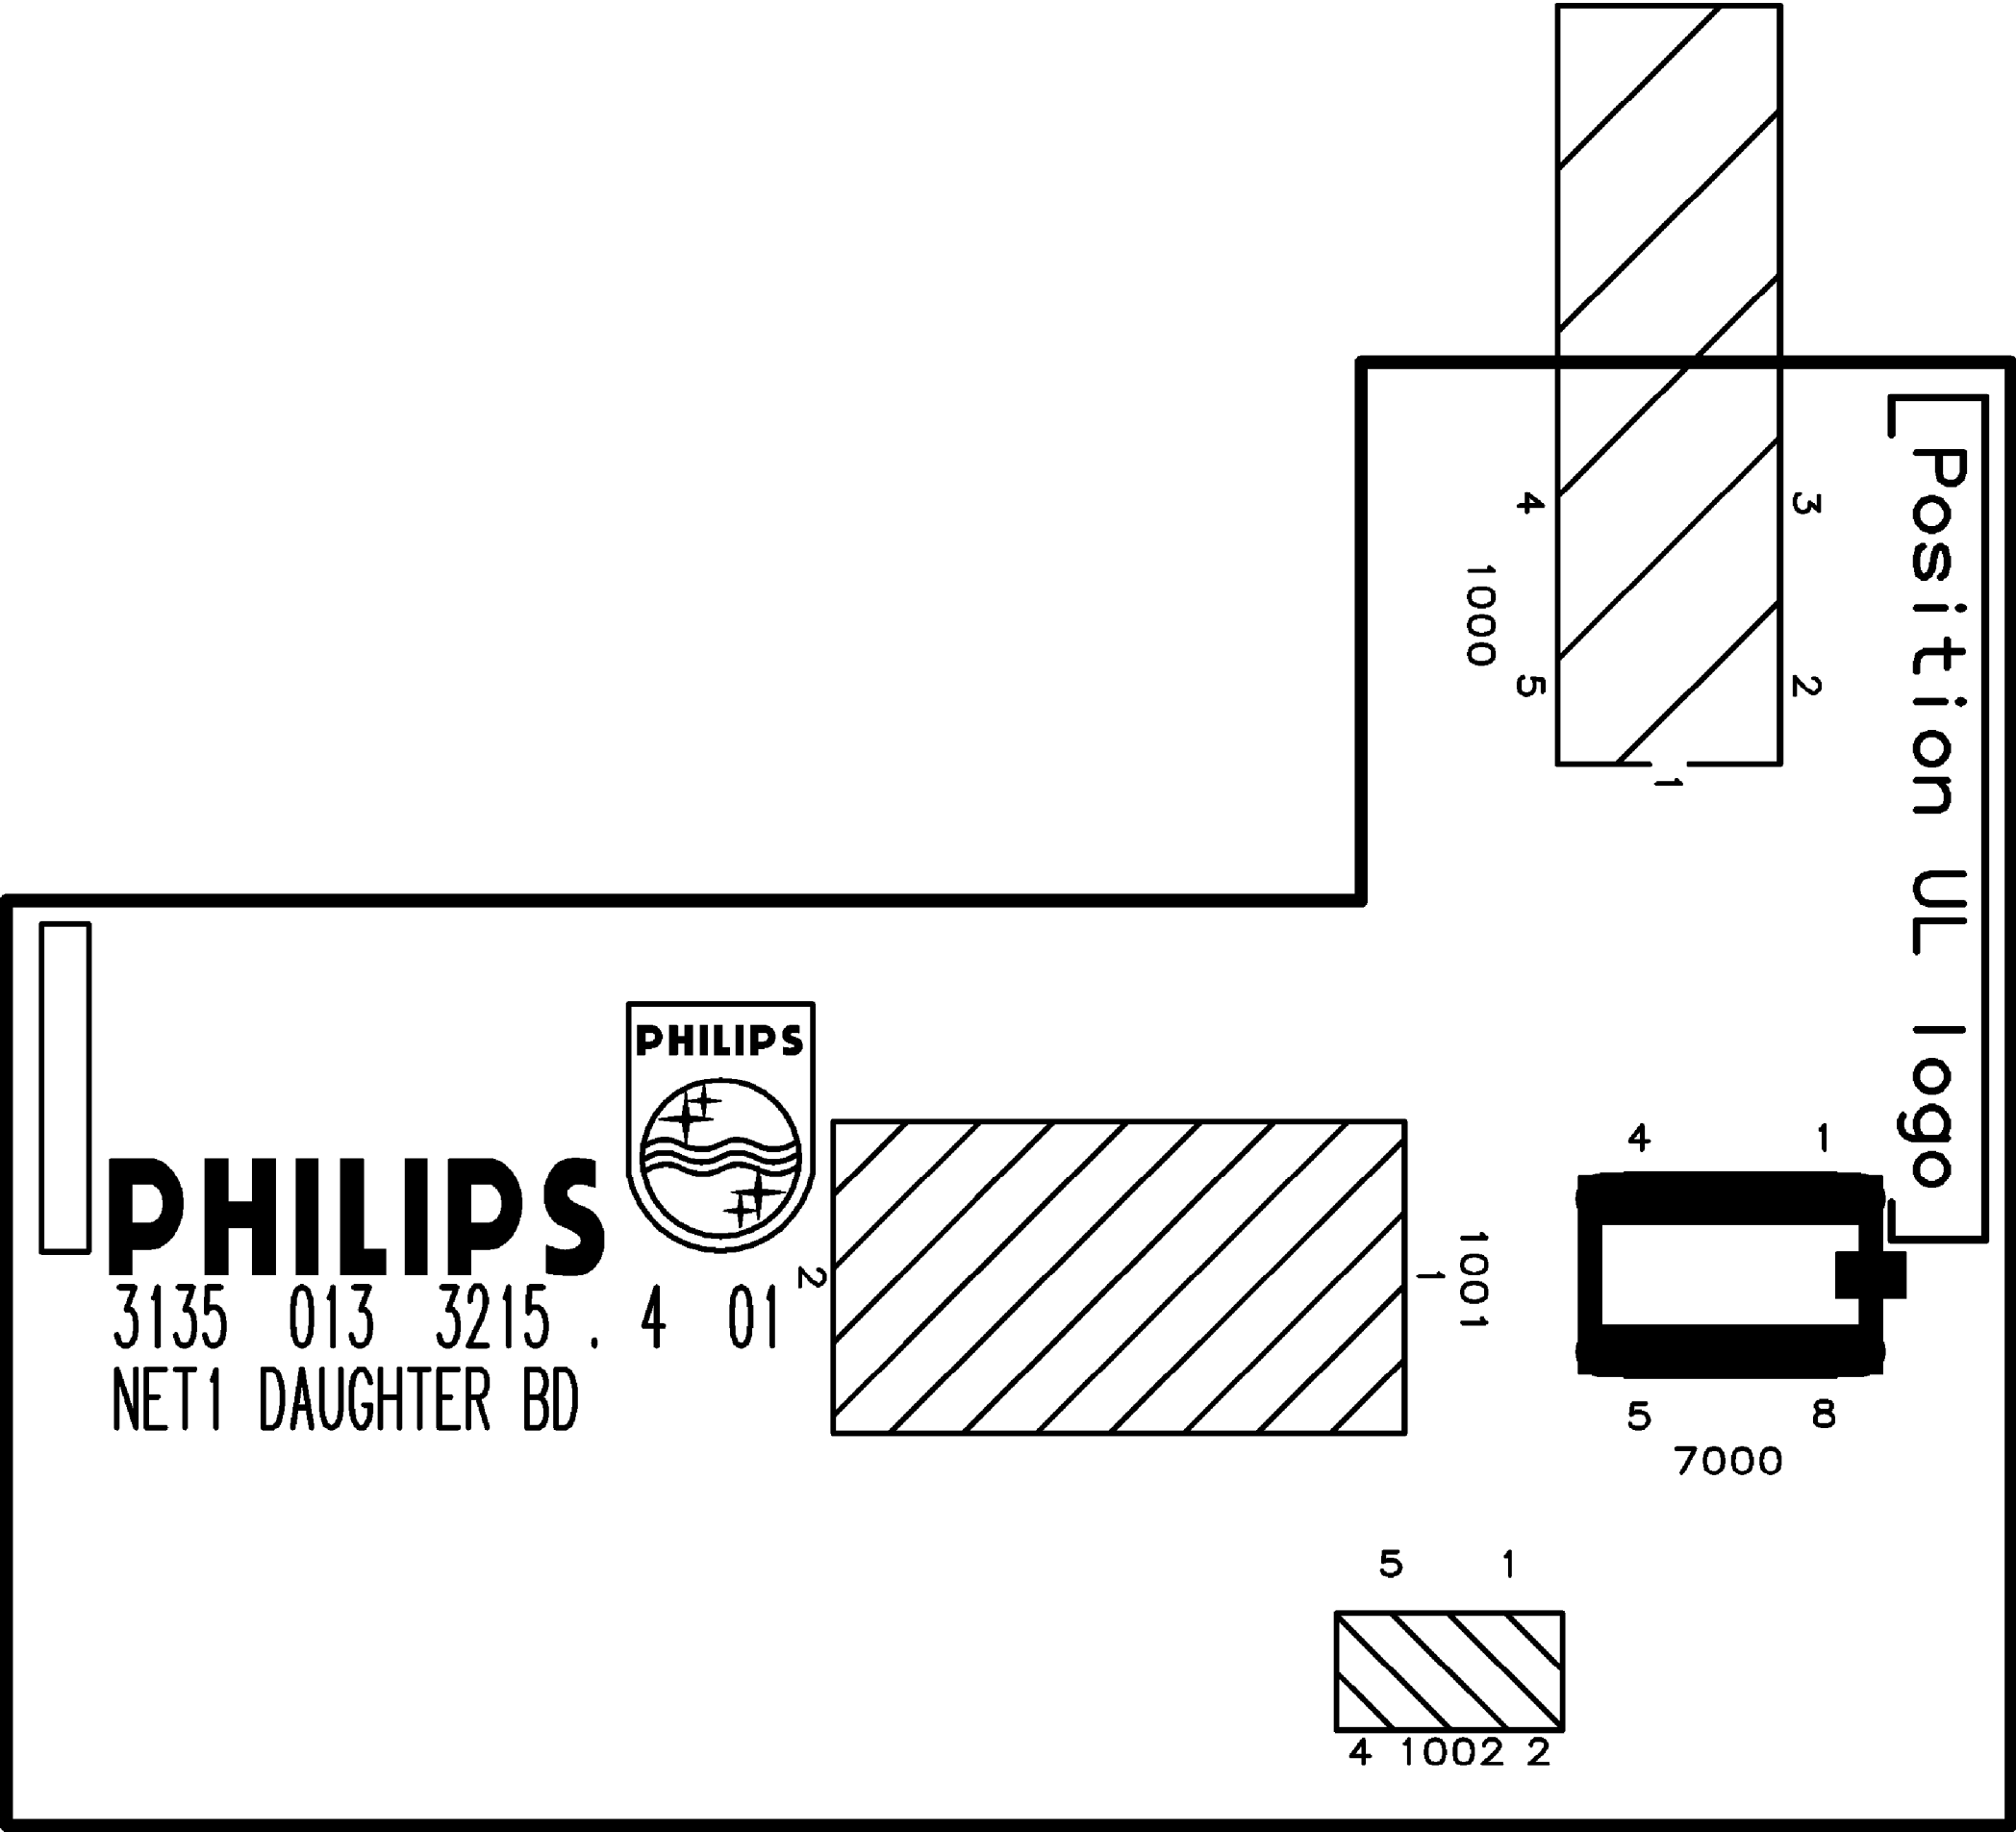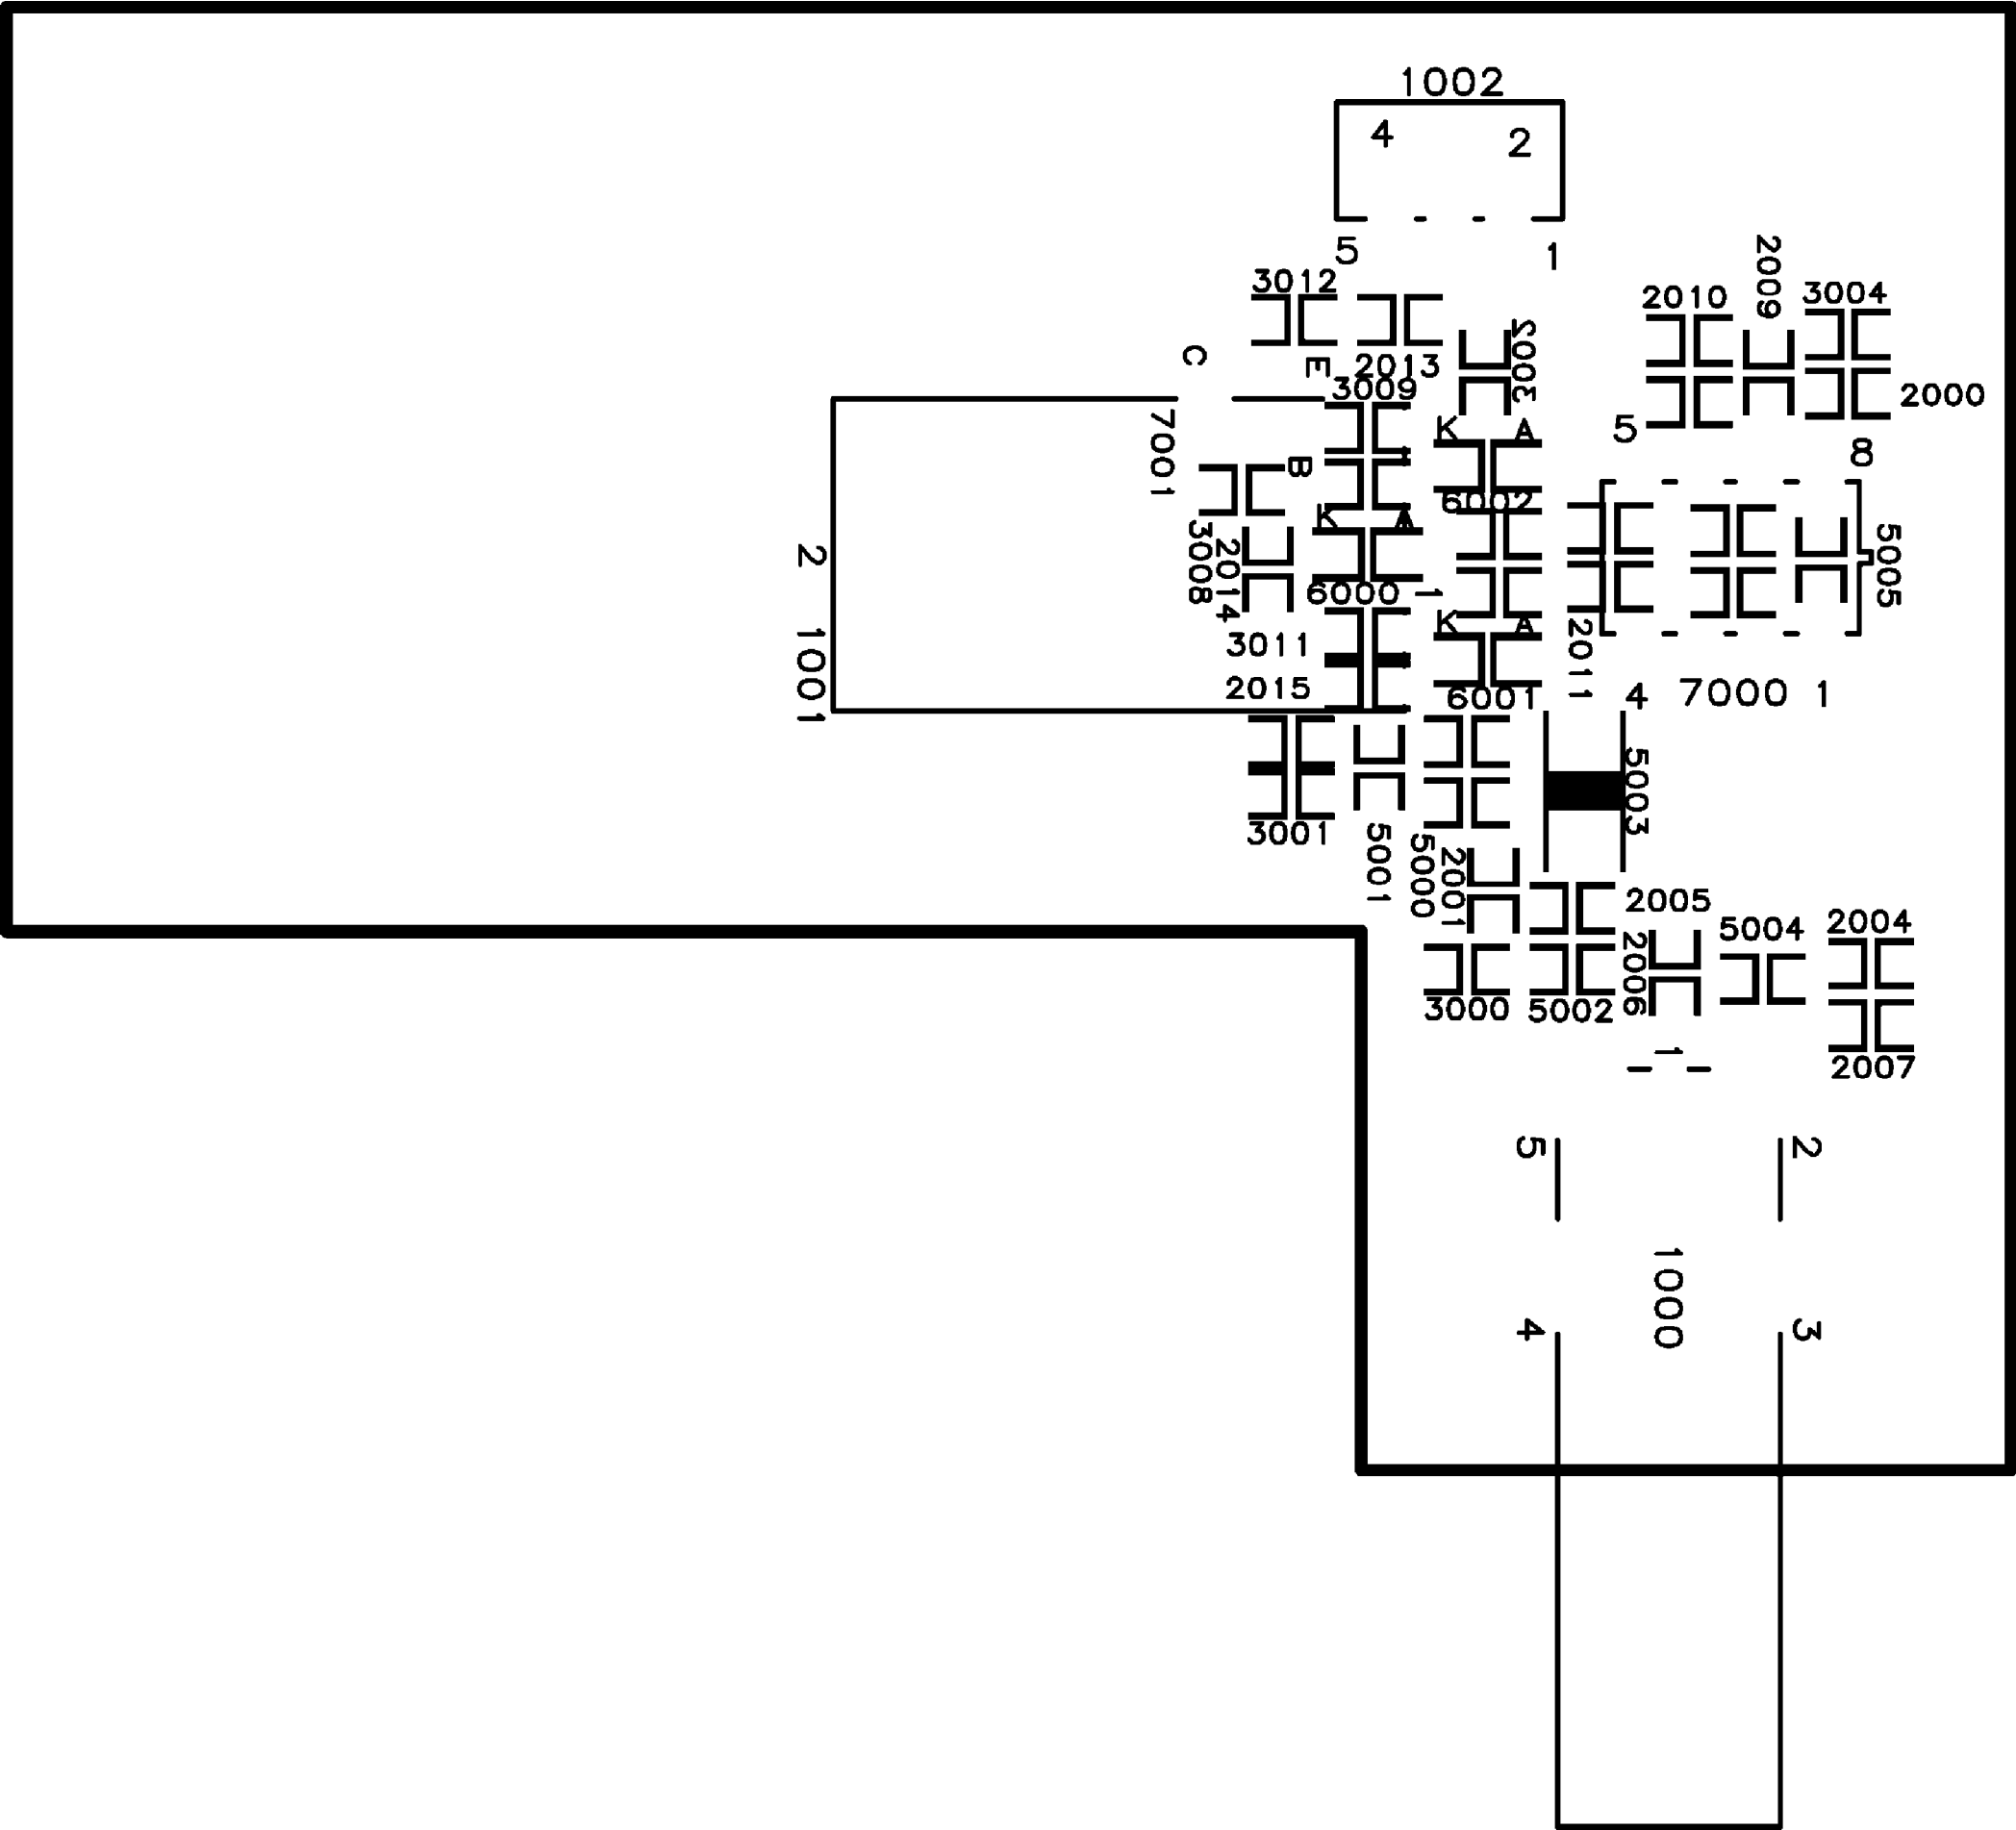
USED ONLY IN MODELS: 27DV693R37A, 30DV693R37A, , 20DV693R01, 29DV6931/85R, 29DV693R85A, 29DV693R85C (7638) - DVD Interface Panel, SD5.12 DVD Module (Copper Side)

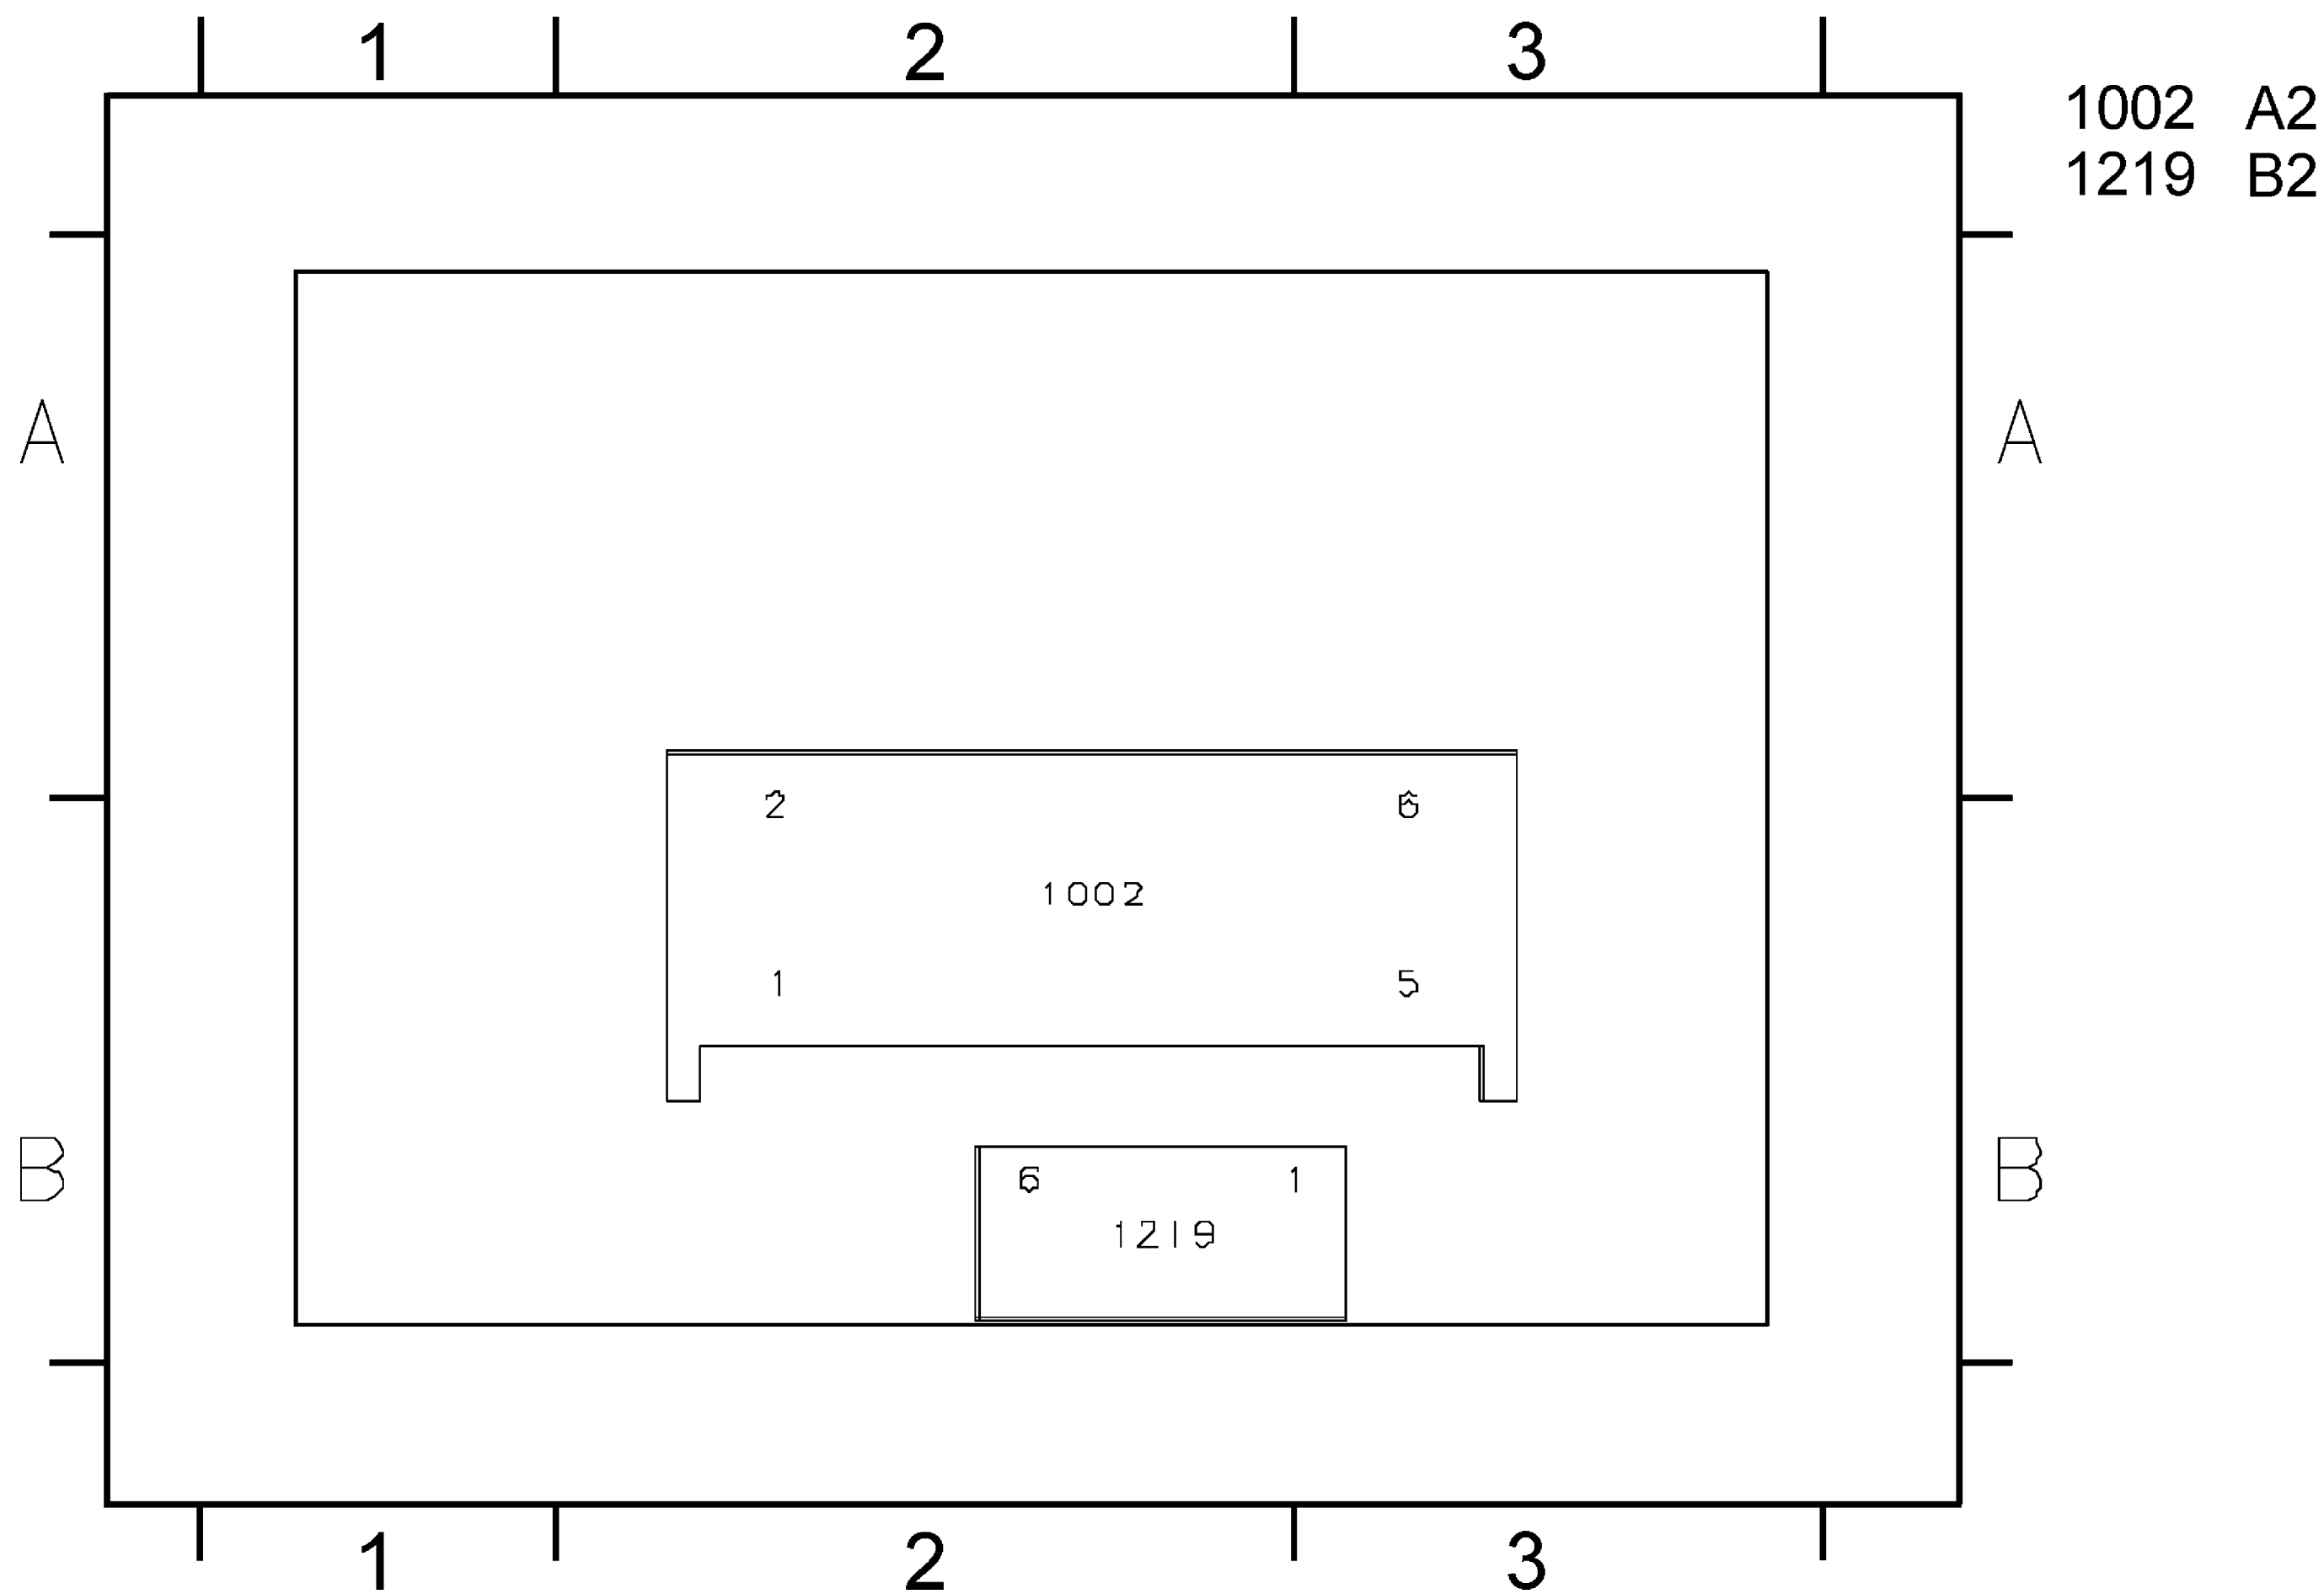


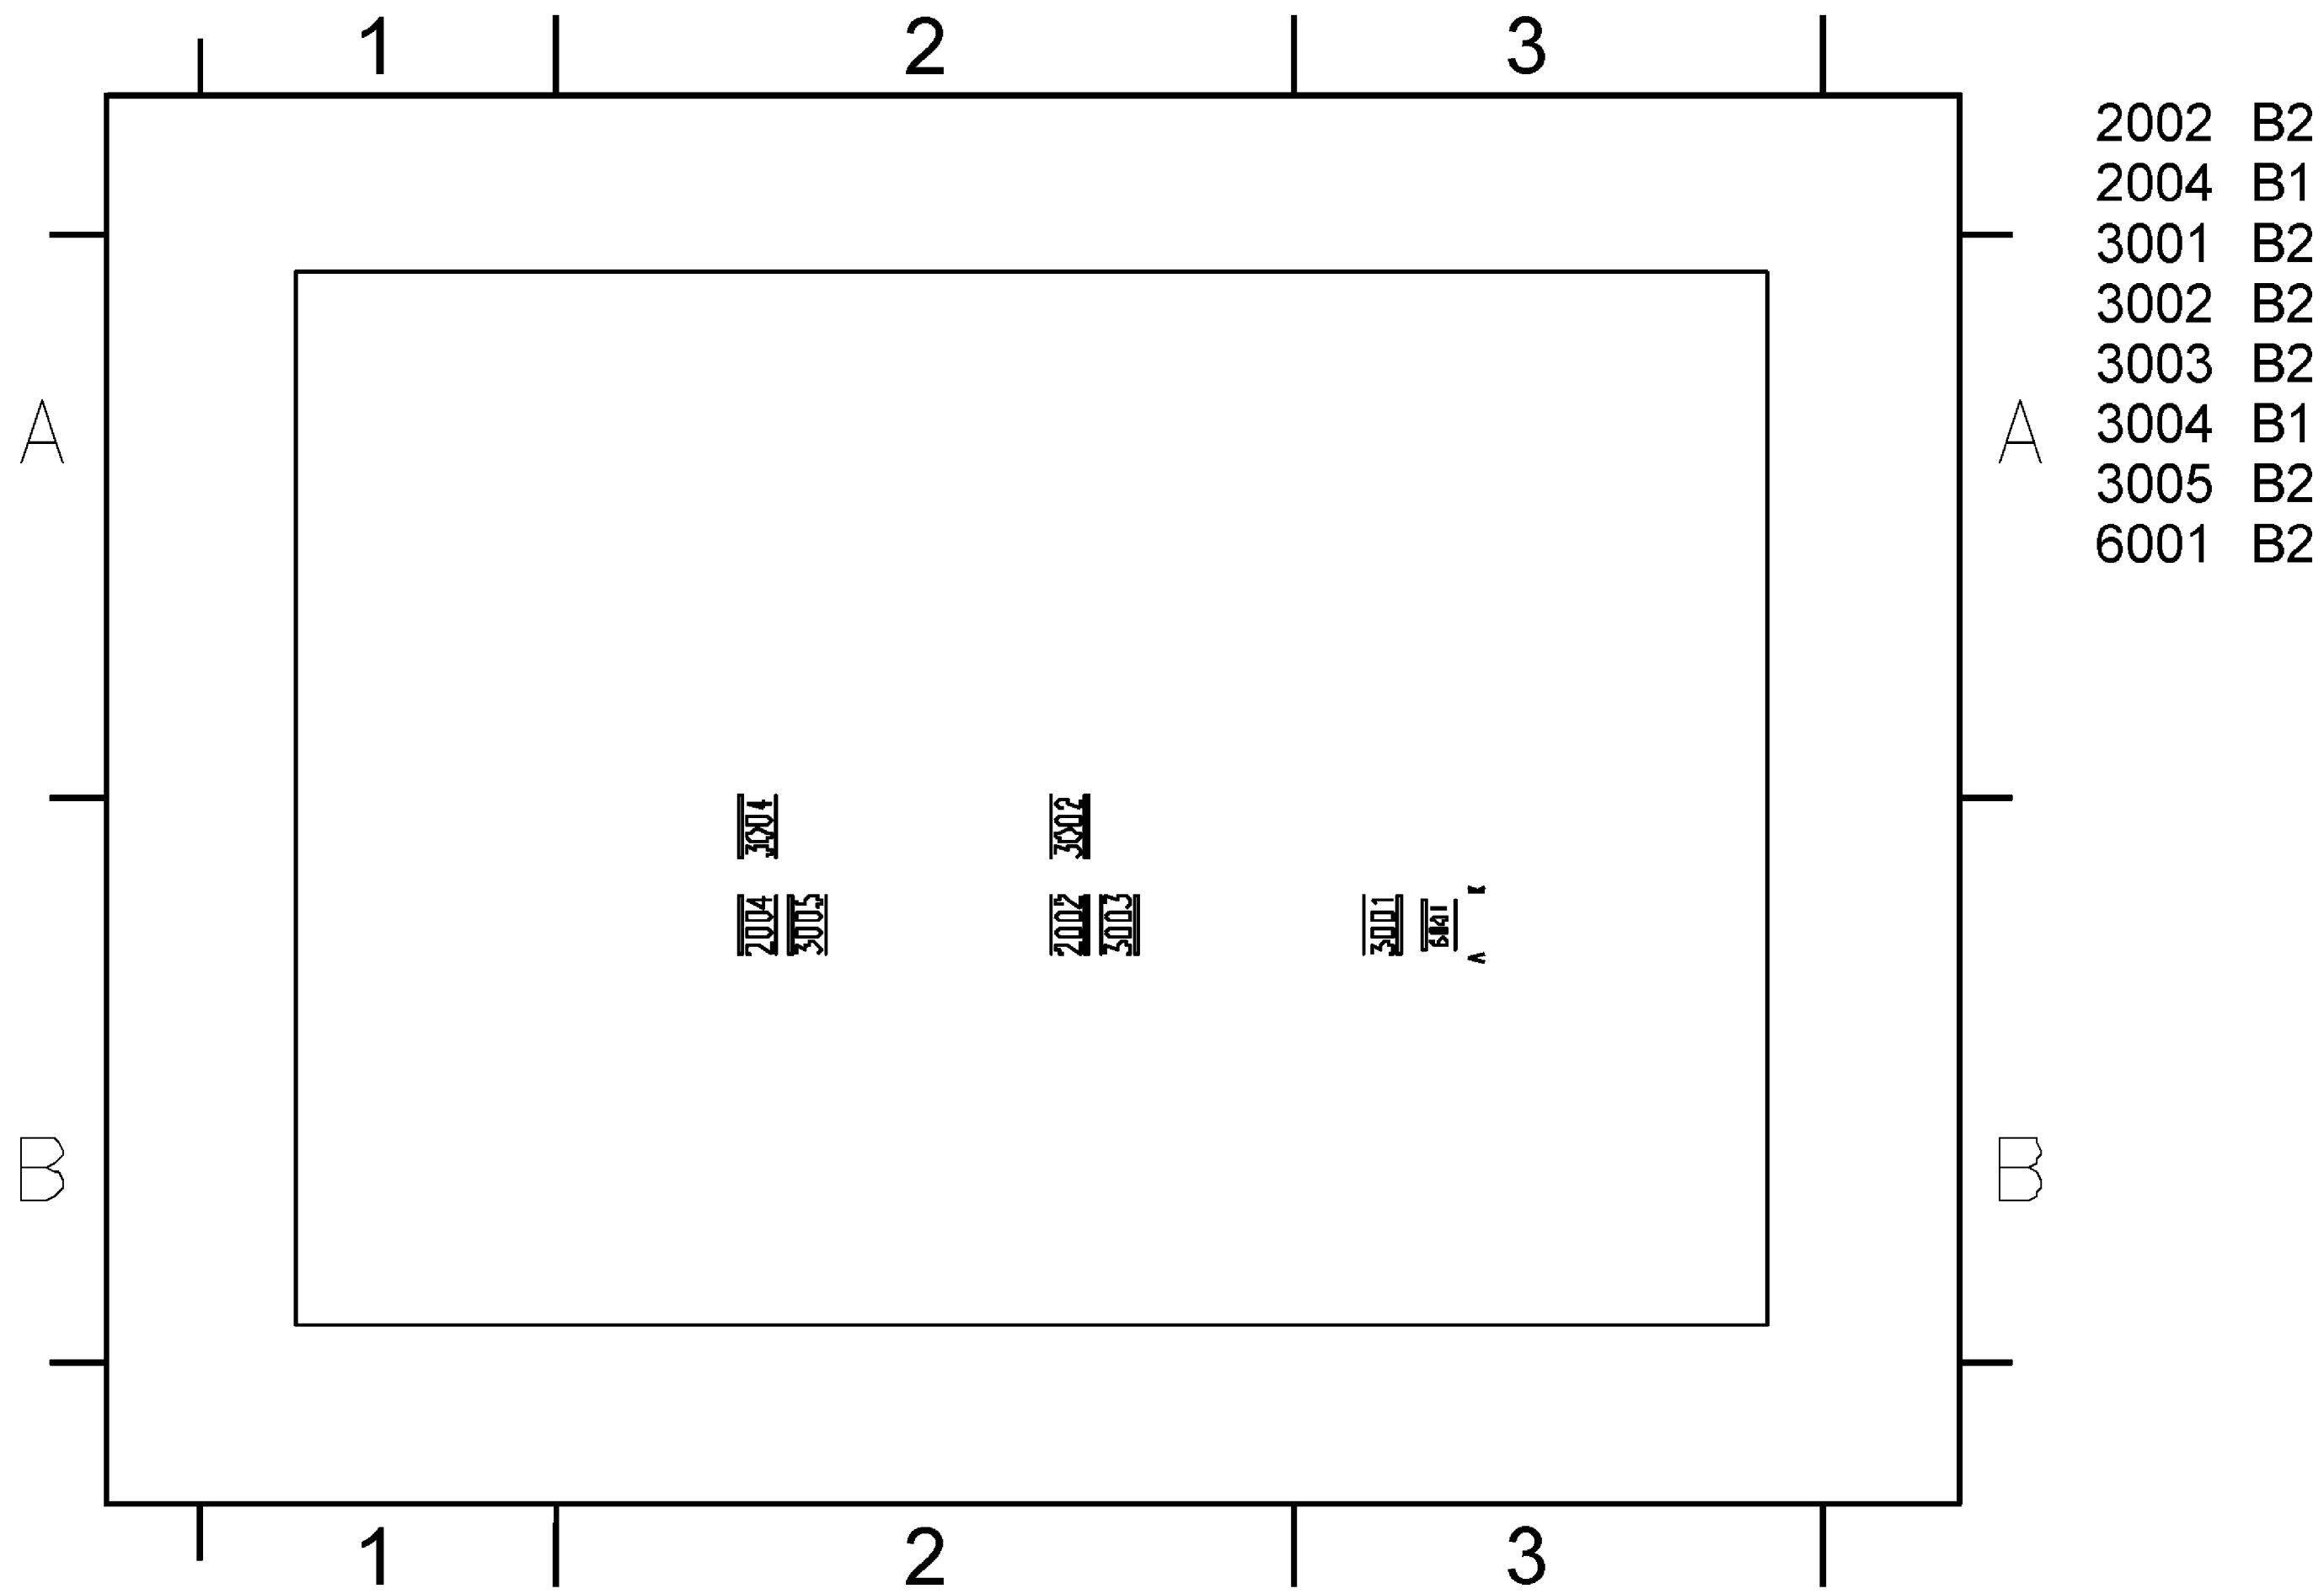















Pin	Description
1	+5 V Output
2	Ground
3	+12 V Output

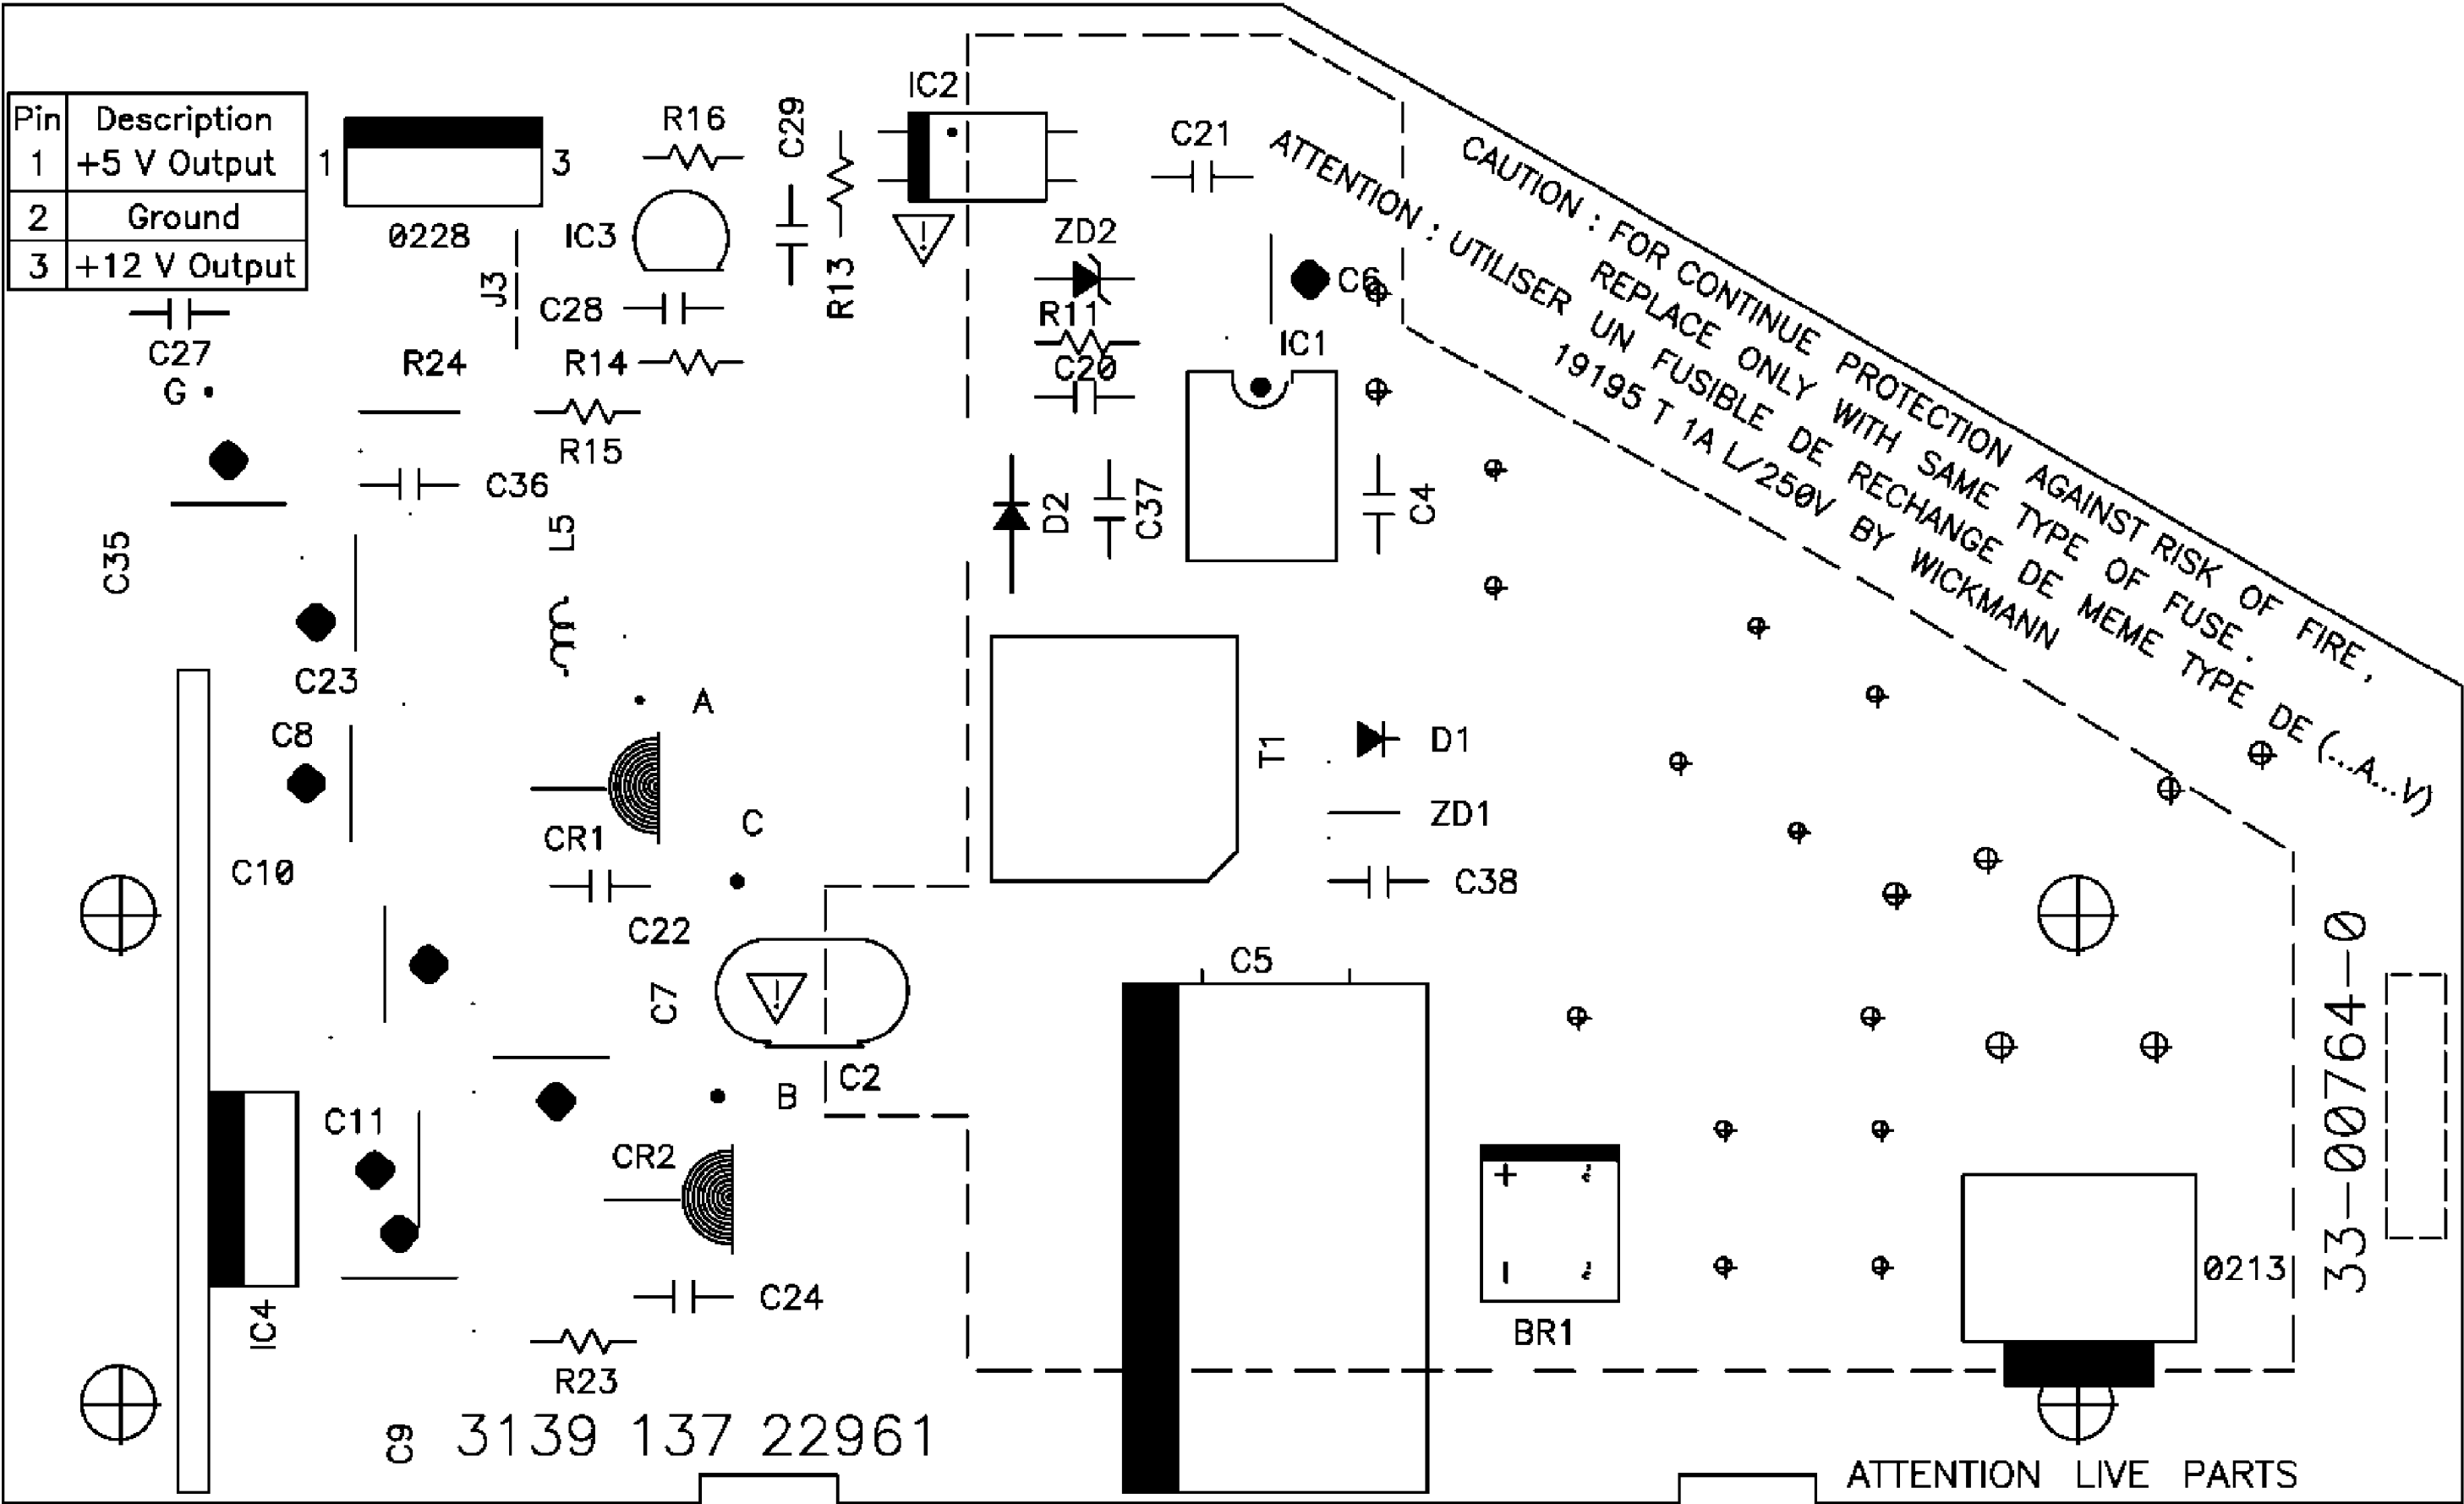

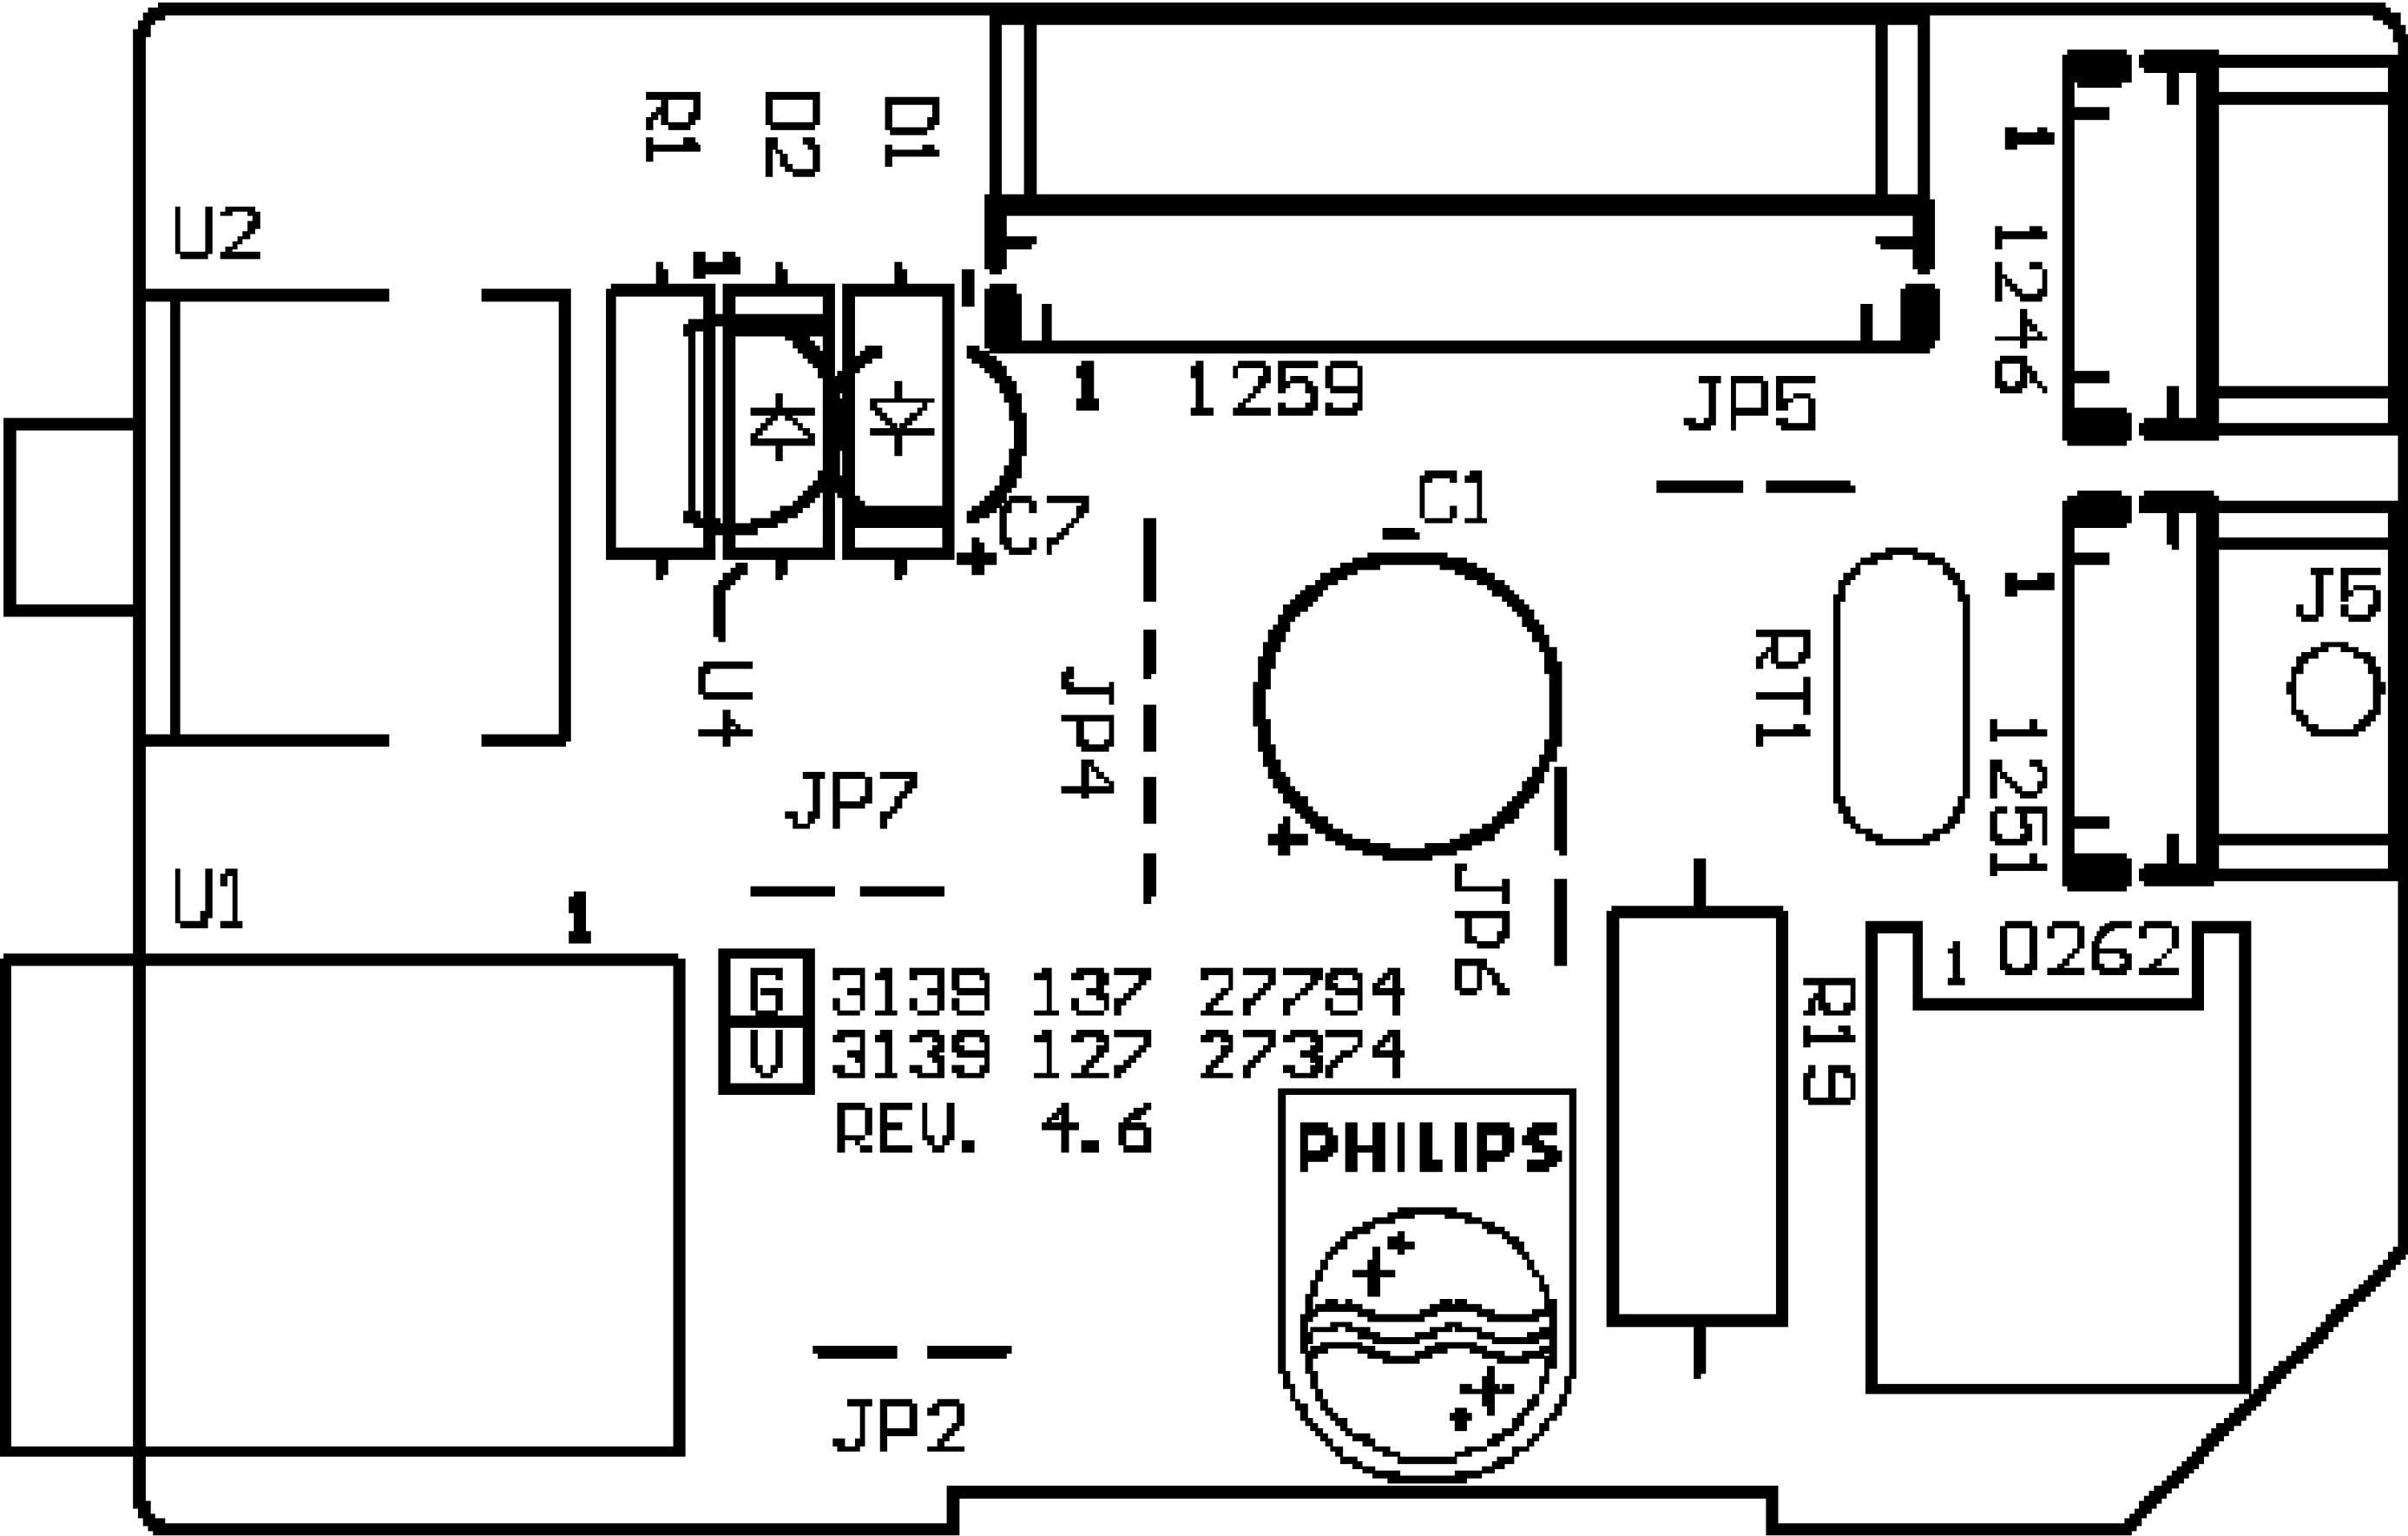


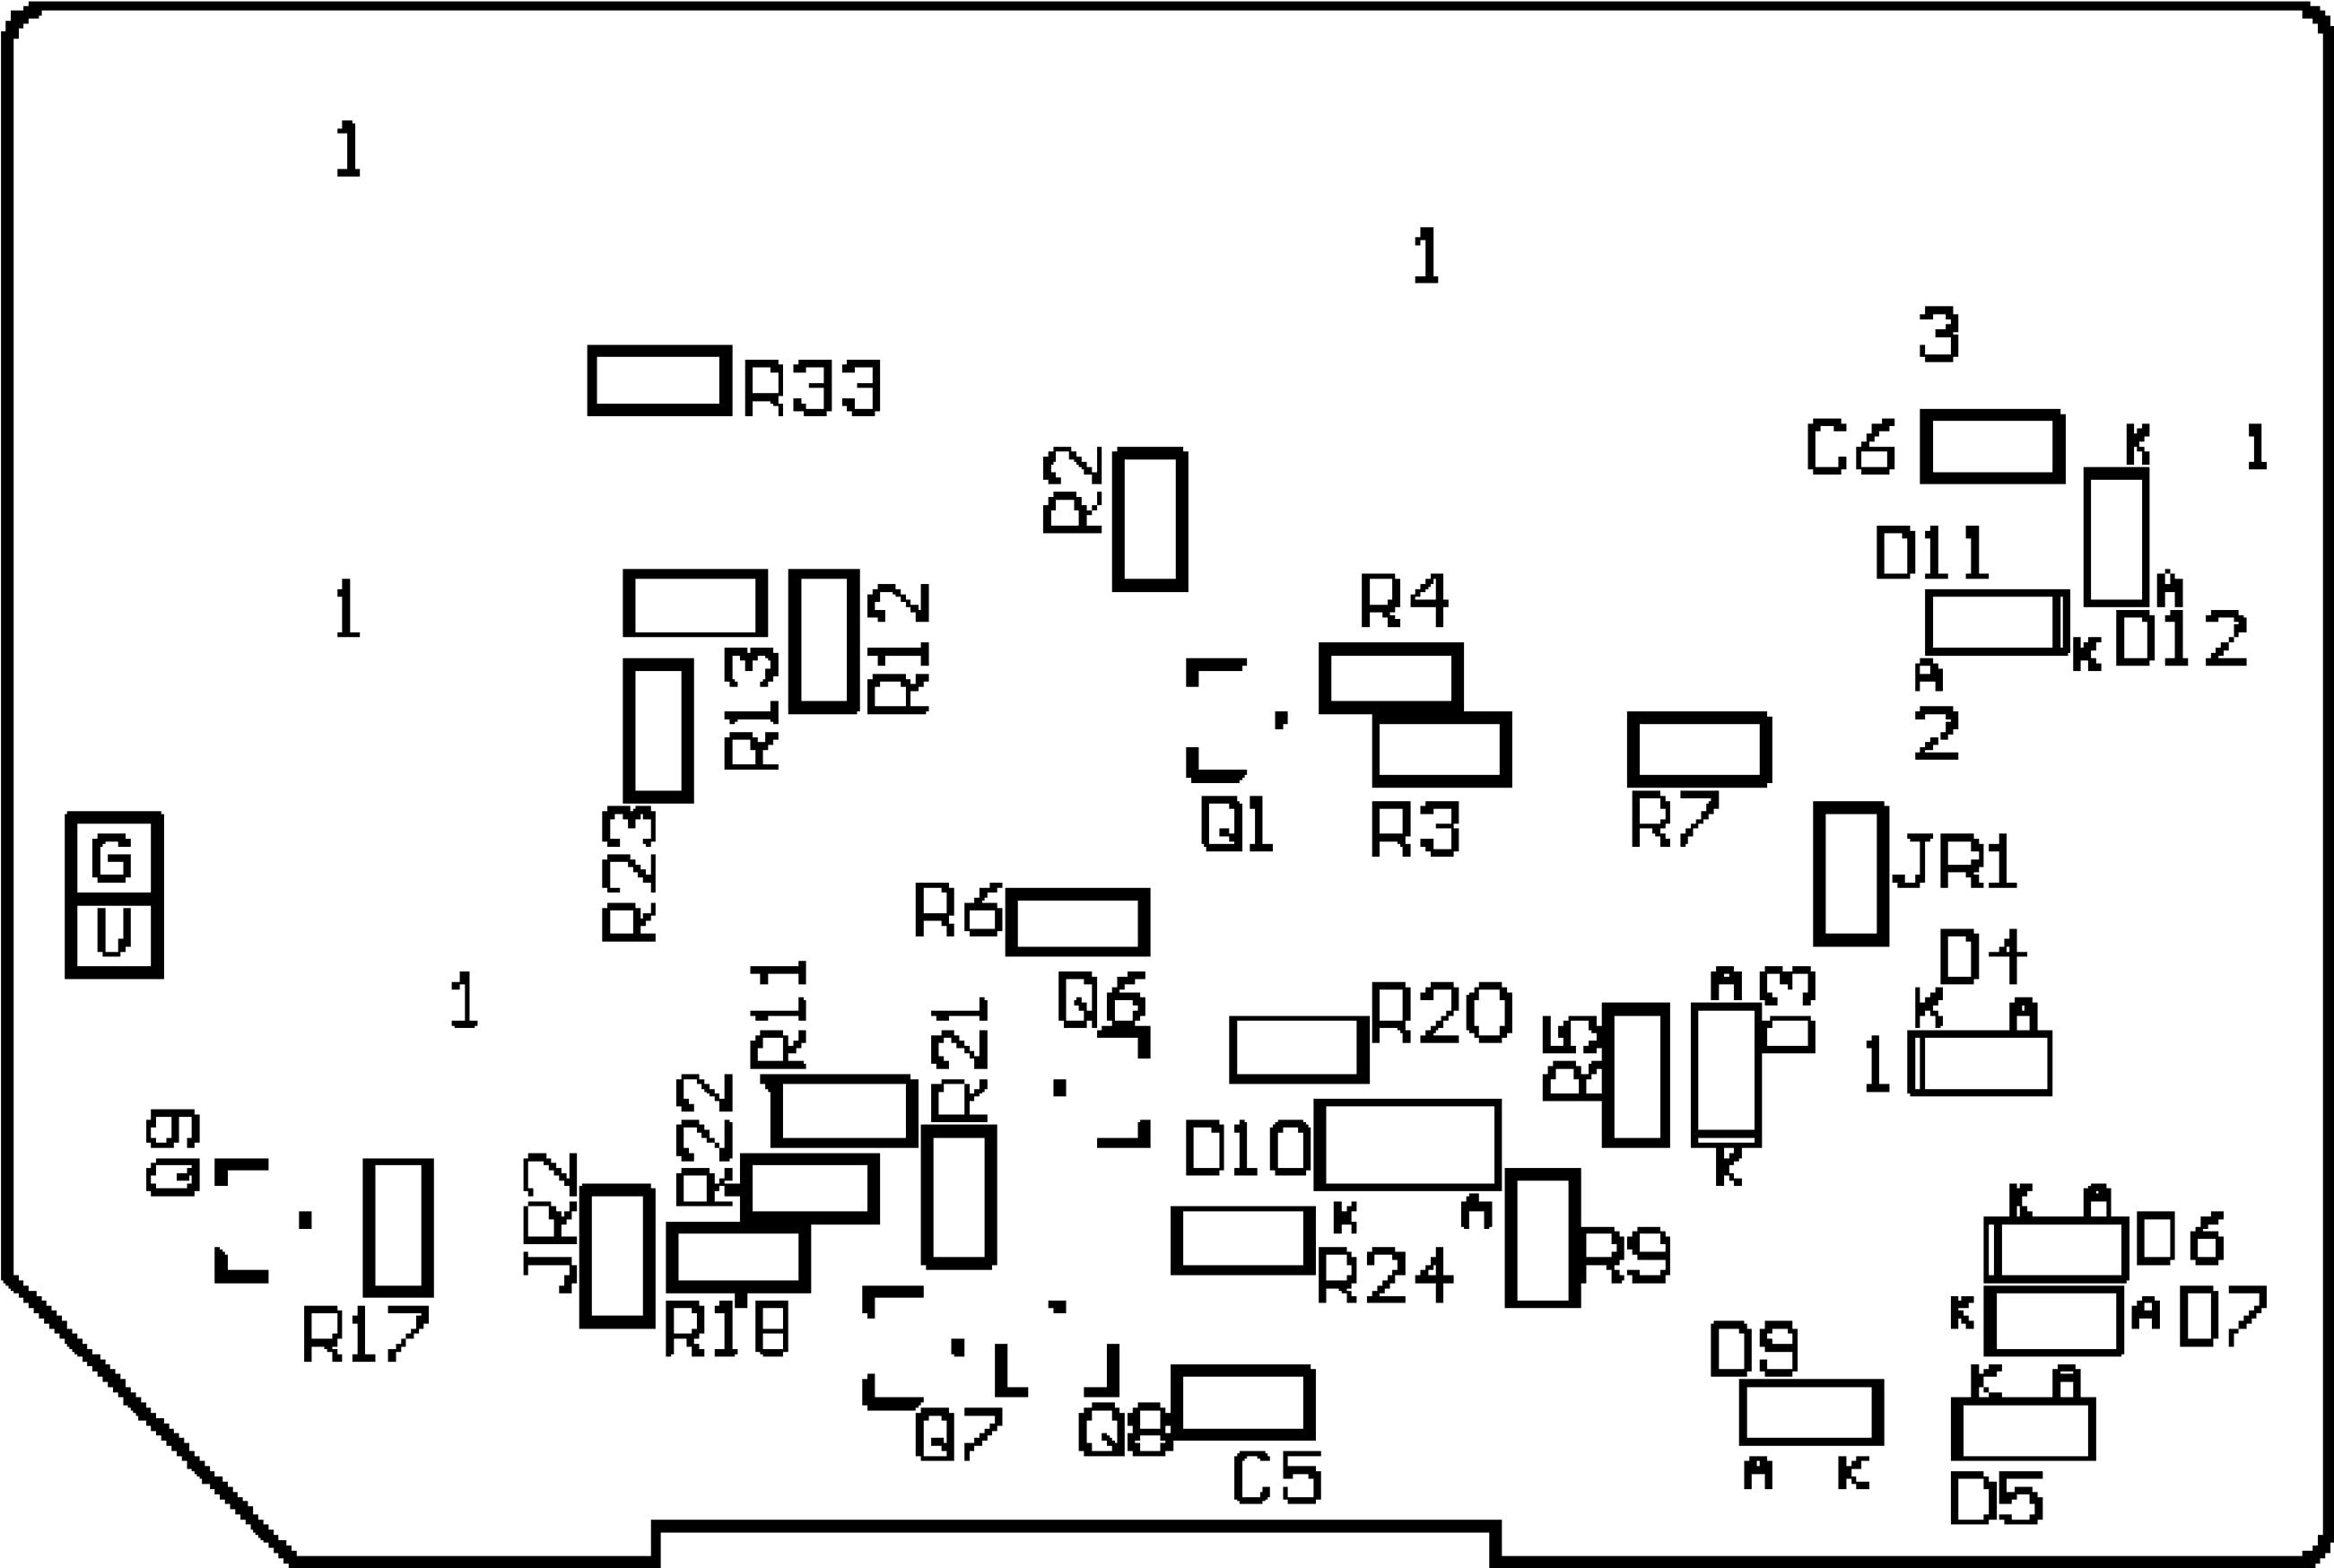

TYPICAL TABLE MODEL EXPLODED VIEW

AC01 AC Cord
 AC02 AC Cord Strain Relief (Not Shown)
 AC03 Anode Lead Spacer (Not Shown)
 AC04 Batteries for Remote Control
 AC05 Cabinet Back
 AC06 Cabinet Back Screw Cover (Not Shown)
 AC07 Canceller Coil (Not Shown)
 AC08 Chassis Tray
 AC09 CRT
 AC10 Customer Control Buttons
 AC11 DAF Panel Bracket (Not Shown)
 AC12 Degaussing Coil
 AC13 Front Interface Panel Bracket (Not Shown)
 AC14 Front Main PCB Bracket (Not Shown)
 AC15 Holder, Degaussing Coil (4 Used)
 AC16 Jack Panel Bracket
 AC17 Owner's Manual
 AC18 Quick Use Guide (Not Shown)
 AC19 Side Jack Panel Bracket
 AC20 Cabinet Front Assembly (Shown Exploded)
 AC20A Cabinet Front
 AC20B Chassis Guide
 AC20C Light Guide
 AC20D Nameplate
 AC20E Power Button
 AC20F Power Button Cover (Not Shown)
 AC20G Power Button Shaft (Not Shown)

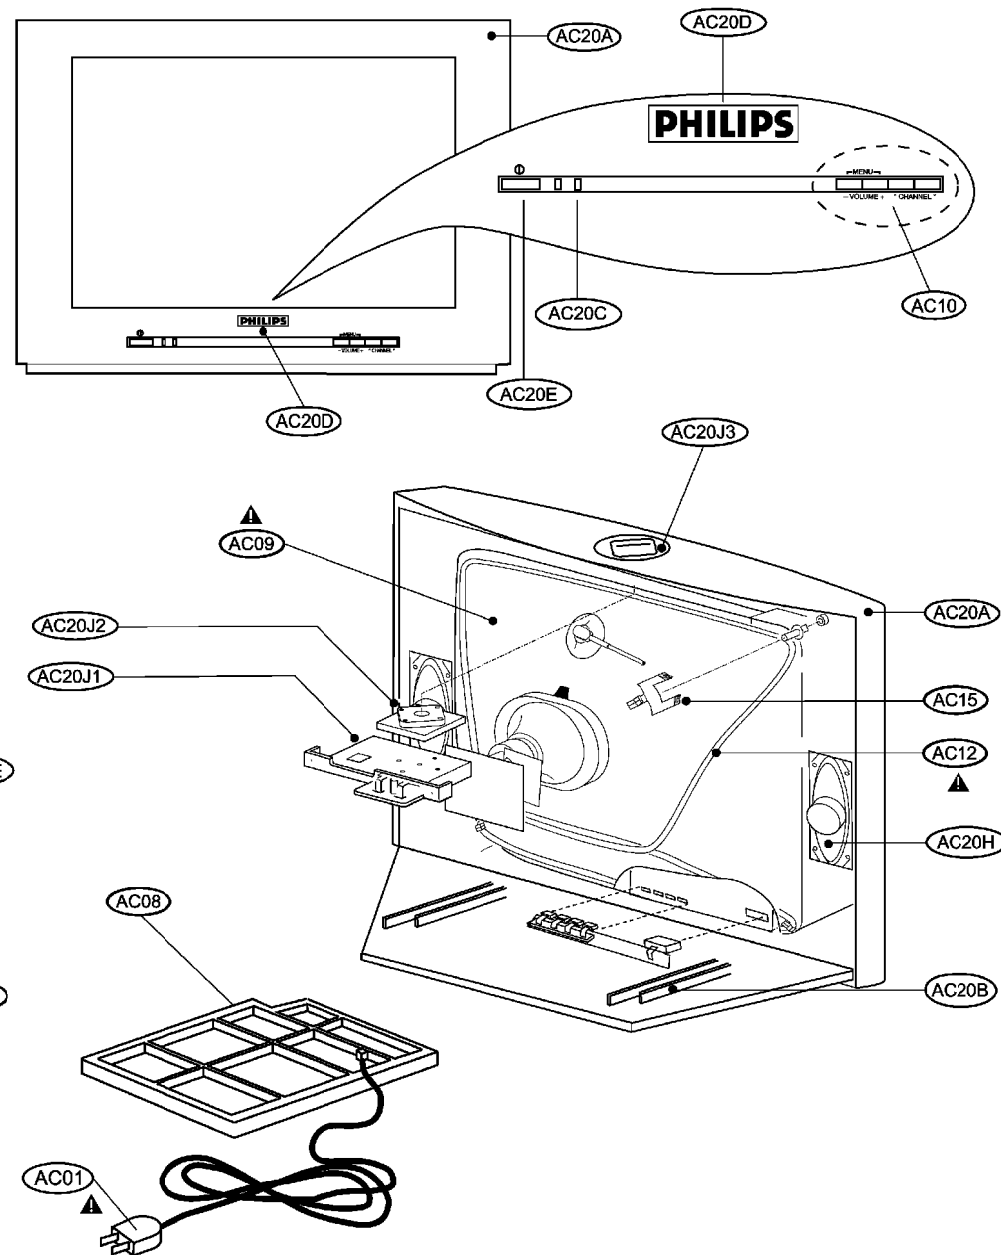AC20H Speaker (2 Used)
 AC20J Top Control Assembly (Shown Exploded)
 AC20J1 Top Control Bracket
 AC20J2 Top Control Buttons
 AC20J3 Top Control Cover
 AC20J4 Top Control Rubber (Not Shown)
 AC20J5 Top Control Button Assembly (Shown Exploded)
 AC21 Card Door (Not Shown)
 AC22 Cinch Cover (Not Shown)
 AC23 DVD Door (Not Shown)
 AC24 DVD Interface Panel Bracket (Not Shown)
 AC25 DVD PIP Bracket (Not Shown)
 AC26 EPS Bracket (Not Shown)
 AC27 ITV Card Bracket (Not Shown)
 AC28 ITV Card Slot Cover (Not Shown)
 AC29 Plastic Facade (Not Shown)
 AC30 Scan 3 VGA Adapter (Not Shown)
 AC31 Scan 4 Card Cover (Not Shown)
 AC32 Yoke Wedge (Not Shown)
 REMOTE Remote Control Transmitter



20DV6932/37R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16374
0212	2 Pin Connector.	2422	025 16375
0214	5 Pin Connector.	2422	025 12481
0217	3 Pin Connector.	2412	020 00725
0219	6 Pin Connector.	2422	025 12482
0220	5 Pin Connector.	2422	025 04853
0221	2 Pin Connector.	2422	025 15503
0222	2 Pin Connector.	2422	025 10646
0223	A/V Jack.	2422	026 05236
0225	SVHS Jack.	2422	026 04926
0227	3 Pin Connector.	2422	025 16382
0229	7 Pin Connector.	2422	025 11244
0239	3 Pin Connector.	2422	025 16382
0240	4 Pin Connector.	2422	025 12479
0243	6 Pin Connector.	2422	025 04854
0244	5 Pin Connector.	2422	025 04853
0245	6 Pin Connector.	2422	025 04854
0246	5 Pin Connector.	2422	025 12481
0251	4 Pin Connector.	2422	025 15847
S 0254	9 Pin CRT Socket.	2422	500 80076
0267	3 Pin Connector.	2412	020 00725
0269	Jack.	2422	026 05182
S 1000	Tuner, V+U, PLL.	2422	542 90108
1002	SAW Filter, 45.75MHz.	2422	549 44518
1200	Filter, Ceramic, 4MHz5.	2422	549 40807
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914
S 1515	Relay, 5 Amp, 12V.	2422	132 07467
1660	Crystal, 12MHz000.	2422	543 01203
1810	6 Pin Connector.	2422	025 15849
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422	543 00842
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020

S = Safety Part Be sure to use exact replacement part.

2254	Res, Zero ohm, "Chip" Jumper.	3198	021 90020
2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222	368 90177
2331	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic.	2022	031 00103
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2457	Cap, 270n, 5%, 250v, Metalized Polyprop ylene.	2222	479 90016
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022	031 00138
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
2463	Cap, 680p, 10%, 2000v, Ceramic.	2020	558 90485
2465	Cap, 9n1, 5%, 1600v, Polypropylene.	2222	375 90153
2467	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2468	Cap, 33n, 10%, 400v, Polyester.	2222	347 90227
2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic.	2038	035 13301
2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022	031 00137
2486	Cap, 470u, 20%, 16v, Electrolytic.	2022	031 00139
2487	Cap, 47u, 20%, 50v, Electrolytic.	2038	035 13508
2488	Cap, 1000u, 20%, 16v, Electrolytic.	2022	031 00144
2489	Cap, 470u, 20%, 16v, Electrolytic.	2022	031 00139
2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene.	2222	336 29148
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90626
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2831	Cap, 1p, 25%, 50v, Ceramic.	3198	016 31080
2832	Cap, 1p, 25%, 50v, Ceramic.	3198	016 31080
2833	Cap, 47p, 5%, 50v, Ceramic.	3198	016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090

20DV6932/37R (continued)

2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2843	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2844	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 013 01520
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3445	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08180
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2910	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06890
2911	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 3K6, 1%, 3/5W, Metal Film. . . .	2312 915 13602
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3453	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3454	Res, 1K5, 1%, 3/5W, Metal Film. . . .	2312 915 11502
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . .	3198 012 26880
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3456	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3457	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3458	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . .	3198 012 21530
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film. . . .	2312 915 12703
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3470	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R9, 1%, 3/5W, Metal Film. . . .	2312 915 13908
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3472	Res, 6R8, 1%, 3/5W, Metal Film. . . .	2312 915 16808
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 6R8, 1%, 3/5W, Metal Film. . . .	2312 915 16808
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film. . . .	2312 915 12202
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film. . . .	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 18K, 1%, 3/5W, Metal Film. . . .	2312 915 11803
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film. . . .	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film. . . .	2306 207 03478
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3491	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3141	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3493	Res, 6R8, 5%, 1/3W, Metal Film. . . .	2306 204 03688
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3494	Res, 4R7, 5%, 1/2W, Metal Film. . . .	2306 207 03478
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3495	Res, 22K, 5%, 1/10W, Metalized Glass. .	3198 021 52230
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3496	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198 021 51040
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3497	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198 021 51040
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3498	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3207	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film. . . .	3198 012 11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film. . . .	2306 204 03222
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3543	Res, 82K, 1%, 3/5W, Metal Film. . . .	2312 915 18203
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903	3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530
3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3552	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3247	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3563	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620

S = Safety Part Be sure to use exact replacement part.

20DV6932/37R (continued)

S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass..	3198 021 52240	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass..	3198 021 52240	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5001	Coil, 27u, 10%	3198 018 22790
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5201	Coil, 6u8, 5%	3198 018 16880
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5242	Coil, 10u, 5%	3198 018 11090
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5342	Coil, 22u.	2422 535 97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 5445	Transformer, LOT	2422 531 02519
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5453	Coil, 22u, 5%	3198 018 12290
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5457	Coil, Linear Correction, 82u	2422 536 00425
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5471	Coil, 6u8, 20%	3198 018 76880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5472	Coil, 3u3, 10%	3198 018 23380
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5480	Coil, 22u.	2422 535 97333
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5501	Mains Filter	2422 549 43432
3814	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3815	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3817	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3818	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5602	Coil, 5u6, 5%	3198 018 15680
3821	Res, 100K, 5%, 1/16W, Metalized Glass..	3198 021 31040	5603	Coil, 5u6, 5%	3198 018 15680
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5604	Coil, 5u6, 5%	3198 018 15680
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	5831	Coil, 6u8, 5%	3198 018 16880
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5832	Coil, 6u8, 5%	3198 018 16880
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5833	Coil, 6u8, 5%	3198 018 16880
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5835	Coil, 12u, 10%	3198 018 31290
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	6001	Zener Diode, 33 volt	3198 010 23390
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	6150	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	6201	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6206	Zener Diode, 6.8 volt.	3198 020 56880
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6331	Diode, Signal, BAV21.	3198 010 10070
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6332	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6333	Diode, Signal, BAV21.	3198 010 10070
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6335	Diode, Signal, BAV21.	3198 010 10070
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6453	Zener Diode, 5.6 volt.	3198 020 55680
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6460	Diode, Rect, BY228/24.	9340 559 50112
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6463	Zener Diode, 8.2 volt.	3198 020 58280
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21.	3198 010 10070
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21.	3198 010 10070
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6481	Zener Diode, 5.6 volt.	3198 010 25680
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6485	Diode, Rect, BYV95C.	9335 001 80133
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6UL-7002. . . .	9322 138 08667
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215

20DV6932/37R (continued)

6566	Diode, Signal, 1N4148.	3198	010	10010	2127	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
6569	Diode, Signal, BAS316.	3198	010	10630	2128	Cap, 10u, 20%, 50V, Electrolytic.	3198	025	51090
6570	Zener Diode, 6.8 volt.	3198	020	56880	2140	Cap, 100u, 20%, 16V, Electrolytic.	3198	029	21010
6580	Diode, Signal, BAS316.	3198	010	10630	2141	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
6831	Diode, Signal, 1N4148.	3198	010	10010	2142	Cap, 100u, 20%, 16V, Electrolytic.	3198	029	21010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	2143	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	2165	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	2169	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	2184	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	2185	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
7200	IC, TDA9569H/N1/4I/1161.	9352	733	51557	2200	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	2201	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	2211	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	2261	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7330	IC, TDA6107JF/N3	9352	713	37112	2262	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	2263	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	2264	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7450	Transistor, PNP, PDTA114ET	3198	010	44010	2265	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7460	Transistor, NPN, BU4508DX.	9340	550	92127	2266	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	2267	Cap, 10u, 20%, 50V, Electrolytic.	3198	025	51090
7462	Transistor, NPN, PDMC143ZT	9340	547	00215	2268	Cap, 10u, 20%, 50V, Electrolytic.	3198	025	51090
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	2280	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
7471	IC, TDA8359J/N2.	9352	701	64112	2281	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
7480	Transistor, NPN, BD135	3198	020	41010	2300	Cap, 10u, 20%, 250v, Electrolytic.	2020	012	93495
7482	Transistor, NPN, BD135	3198	020	41010	2301	Cap, 22n, 10%, 400v, Metalized Polyester	2222	365	55223
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	2302	Cap, 33p, 10%, 1KV, Ceramic.	3198	019	53310
7520	IC, TEA1507P/N1.	9352	673	56112	2310	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
7521	Power FET, FQPF9N50.	9322	187	16687	2311	Cap, 470n, 10%, 25v, Ceramic.	2020	552	96465
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	2315	Cap, 220p, 10%, 1KV, Ceramic.	3198	019	62210
7541	Transistor, NPN, PDMC114ET	9340	310	10215	2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
7542	Transistor, PNP, PDMC143ZT	3198	010	42150	2330	Cap, 2u2, 20%, 25v, Electrolytic.	3198	026	32220
7560	IC, L78L33ACZ.	9322	134	92676	2331	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
7561	Transistor, NPN, PDMC143ZT	9340	547	00215	2332	Cap, 2u2, 20%, 25v, Electrolytic.	3198	026	32220
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	2333	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
7602	IC, M24C08-WBN6.	9322	154	38682	2335	Cap, 220u, 20%, 25V, Electrolytic.	3198	025	32210
7802	IC, HEF4053BT.	9333	729	60653	2337	Cap, 1000u, 20%, 25v, Electrolytic.	3198	026	31020
7803	IC, HEF4053BT.	9333	729	60653	2338	Cap, 1000u, 20%, 25v, Electrolytic.	3198	026	31020
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682	2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
7901	IC, AN7522N PH	9322	181	41682	2350	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020
9611	Coil, 27u, 10%	3198	018	22790	2351	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020
9672	Coil, 22u, 10%	3198	018	22290	2353	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020
9678	Coil, 22u, 10%	3198	018	22290	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198	021	31010
CBA	Main Chassis Assembly.	3139	188	04071	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
CBA	DVD Module SD3.1	3139	248	71141	3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
Channel One Card Parts					3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
Channel One Card Parts					3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
2D 3 Line Comb Filter Parts					3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
2D 3 Line Comb Filter Parts					3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DAF Panel Parts					3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DAF Panel Parts					3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DVD Eject Panel Parts					3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DVD Eject Panel Parts					3120	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
0267	3 Pin Board Connector.	2422	025	09191	3121	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010
0361	Eject Button	3139	138	11271	3122	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
1110	Tact Switch.	2422	128	02742	3123	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
CBA	DVD Eject Panel Assembly	3139	188	03391	3124	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220
DVD Interface Panel Parts					3125	Res, 5K6, 5%, 1/16W, Metalized Glass	3198	021	35620
DVD Interface Panel Parts					3126	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
0226	Connector, 6 Pin	2422	025	12482	3130	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198	011	04790
0251	Connector, 4 Pin	2422	025	15847	3140	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
0253	Connector, 7 Pin	2422	025	11244	3141	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
0254	Connector, 22 Pin.	2422	025	16526	3142	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
0255	Connector, 16 Pin.	2422	025	16525	3143	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
0265	Connector, 12 Pin.	2422	025	08333	3145	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
0266	Connector, 6 Pin	2422	025	15849	3146	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
1100	Socket, Cinch, 1 Pin	2422	026	04425	3147	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
S 1330	Fuse, 2.5A, 250V	2422	086	10784	3148	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
S 1331	Fuse, 2.5A, 250V	2422	086	10784	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
S 1332	Fuse, 2A, 250V IEC	2422	086	10783	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
1619	Connector, 4 Pin	2422	025	15847	3200	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198	021	32710
2101	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	3201	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2102	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090	3202	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2103	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	3203	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820
2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3204	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3205	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720
2111	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3206	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198	021	36810
2112	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3207	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220
2113	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3208	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
2115	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3209	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
2120	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3210	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198	021	32710
2121	Cap, 47u, 20%, 25V, Electrolytic	3198	025	34790	3211	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2122	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3212	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2123	Cap, 10u, 20%, 50V, Electrolytic	3198	025	51090	3213	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820
2124	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030	3214	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
2125	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020	3215	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720
2126	Cap, 47u, 20%, 25V, Electrolytic	3198	025	34790	3216	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198	021	36810
S = Safety Part Be sure to use exact replacement part.					3217	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220
					3218	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
					3219	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
					3230	Res, 22K, 5%, 1/16W, Metalized Glass	3198	021	32230
					3231	Res, 24K, 1%, 1/16W, Metalized Glass	2322	704	62403

20DV6932/37R (continued)

3232	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3233	Res, 24K, 1%, 1/16W, Metalized Glass .	2322 704 62403
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3320	Res, 75K, 1%, 1/16W, Metalized Glass .	2322 704 67503
3330	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
S 3331	Res, 10 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 31090
3339	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3342	Res, 1K5, 1%, 1/16W, Metalized Glass .	2322 704 61502
3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
3350	Res, 18K, 5%, 1/6W, Carbon Film. . . .	3198 011 01830
3351	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198 021 34780
3406	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3466	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4142	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4150	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4162	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4336	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4463	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4466	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5100	Inductor, Variable, 100uH, 10%	2422 549 41663
5110	Coil, 220n	3198 018 12270
5120	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5140	Coil, 220n	3198 018 12270
5141	Coil, 220n	3198 018 12270
5200	Coil, 6u8.	3198 018 16880
5300	Coil, 56u.	3198 018 25690
S 5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S 5315	Transformer, SS25105-02.	2422 531 02521
5331	Coil, 10u, 5%.	2422 535 95363
5333	Coil, 10u, 5%.	2422 535 95363
5337	Coil, 10u.	2422 535 95363
6120	Diode, Signal, BAS316.	3198 010 10630
6300	Diode, Rect, BYD33J	9337 234 20133
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Zener Diode, 22 volt	3198 020 52290
6330	Diode, Rect, EGP20DL-5100	9322 164 42682
6332	Diode, Rect, SB340L-7024.	9322 161 76682
6334	Diode, Rect, BYD33D	9337 234 00133
6336	Diode, Rect, BYV27-200.	9335 526 80133
6350	Zener Diode, 12 volt	3198 020 51290
7110	IC, HEF4053BT.	9333 729 60653
7120	IC, UDA1334BT/N2	9352 703 94118
7140	Transistor, NPN, BC847B.	3198 010 42030
7142	Transistor, NPN, BC847B.	3198 010 42030
7200	Transistor, NPN, BC847B.	3198 010 42030
7201	Transistor, PNP, BC857B.	3198 010 42150
7202	Transistor, NPN, BC847B.	3198 010 42030
7210	Transistor, NPN, BC847B.	3198 010 42030
7211	Transistor, PNP, BC857B.	3198 010 42150
7212	Transistor, NPN, BC847B.	3198 010 42030
7262	Transistor, NPN, PDMC124ET	9340 310 20215
7280	IC, L78L08ACZ.	9322 130 67676
7310	Transistor, NPN, PDMC114ET	3198 010 44110
7311	Transistor, PNP, PDMC114ET	3198 010 44010
7312	Transistor, PNP, BC857B.	3198 010 42150
7313	Transistor, NPN, BC847B.	3198 010 42030
7315	IC, TEA1523P/N2.	9352 699 68112
S 7340	Optical Coupler, TCET1103(G)	9322 140 14667
7341	IC, TL431CLP	9337 711 00676
7350	Transistor, FET, ST2306DS.	9322 163 75685
7351	Transistor, NPN, PDMC144ET	3198 010 44130
CBA	DVD Interface Panel Assembly	3139 188 03291

Front Interface Panel Parts

Front Interface Panel Parts		
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730

2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 15849
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
6161	Zener Diode, 6.8 volt.	3198 010 26880
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 03831
AC04	Batteries for Remote Control Transmitter	9299 000 65263
AC05	Cabinet Back	3139 124 45831
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 42891
S AC09	CRT, A51ERF135X82.	9301 903 81343
S AC12	Degaussing Coil.	3141 058 20131
AC13	Front Interface Panel Bracket.	3139 124 32891
AC14	Front Main PCB Bracket	3139 124 45641
AC17	Owner's Manual	3139 125 31451
AC18	Quick Use Guide.	3141 055 52361
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20A	Cabinet Front.	3139 177 53981
AC20B	Chassis Guide.	3139 124 25893
AC20B	Chassis Guide.	3139 124 45661
AC20C	Light Guide.	3139 124 41421
AC20D	Nameplate.	3139 120 01371
AC20E	Power Button	3139 177 58491

20DV6932/37R (continued)

AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC20J	Top Control Assembly	3139	138	11451
AC23	DVD Door	3139	138	11281
AC25	DVD PIP Bracket	3139	124	35571
REMOTE	Remote Control Transmitter, RC19042007/				
	01.	3128	147	14521

20DV693R01 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Socket Fuse.	2422	088	00271	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
0127	NTC Holder.	3139	120	10151	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
0130	Bead, Ferrite, 100MHz.	2422	549	45808	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
0136	IC-Spring.	3104	301	22081	2247	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020
0137	Spring.	3139	121	24583	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0138	IC-Spring.	3104	301	22081	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0139	Spring for Bracket.	3122	121	24786	2250	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280
0141	IC-Spring.	3104	301	22081	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0152	Cable, DIPMate, 6 Pin.	3139	121	08841	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0153	Cable, DIPMate, 5 Pin, 480mm.	3139	121	07951	2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
0211	2 Pin Connector.	2422	025	16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er. 2222 368 90177
0212	2 Pin Connector.	2422	025	16375	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
0214	5 Pin Connector.	2422	025	12481	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0217	3 Pin Connector.	2412	020	00725	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0219	6 Pin Connector.	2422	025	12482	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0220	5 Pin Connector.	2422	025	04853	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0221	2 Pin Connector.	2422	025	15503	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
0222	2 Pin Connector.	2422	025	10646	2345	Cap, 10n, +80/-20%, 1000v, Ceramic. . .	2020 558 90445
0223	A/V Jack.	2422	026	05236	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0225	SVHS Jack.	2422	026	04926	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0229	7 Pin Connector.	2422	025	11244	2443	Cap, 47n, +80/-20%, 50v, Ceramic. . .	3198 017 24730
0239	3 Pin Connector.	2422	025	16382	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0240	4 Pin Connector.	2422	025	12479	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2022 031 00103
0243	6 Pin Connector.	2422	025	04854	2455	Cap, 47u, 20%, 25v, Electrolytic. . .	3198 025 34790
0244	5 Pin Connector.	2422	025	04853	2457	Cap, 270n, 5%, 250v, Metalized Polyprop	ylene. 2222 479 90016
0245	6 Pin Connector.	2422	025	04854	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2022 031 00138
0246	5 Pin Connector.	2422	025	12481	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
0251	4 Pin Connector.	2422	025	15847	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 0254	9 Pin CRT Socket.	2422	500	80076	2463	Cap, 680p, 10%, 2000v, Ceramic.	2020 558 90485
0267	3 Pin Connector.	2412	020	00725	2465	Cap, 9n1, 5%, 1600v, Polypropylene. . .	2222 375 90153
0269	Jack.	2422	026	05182	2467	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
S 1000	Tuner, V+U, PLL.	2422	542	90108	2468	Cap, 33n, 10%, 400v, Polyester.	2222 347 90227
1002	SAW Filter, 45.75MHz.	2422	549	44518	2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
1200	Filter, Ceramic, 4MHz5.	2422	549	40807	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
S 1500	Fuse, 4A, 250V, IEC.	2422	086	10914	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
S 1515	Relay, 5 Amp, 12V.	2422	132	07467	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1660	Crystal, 12MHz000.	2422	543	01203	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1810	6 Pin Connector.	2422	025	15849	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
1831	Crystal, Resonator, 18MHz432, 12 Pin, H	2422	543	00842	2480	Cap, 47u, 20%, 25v, Electrolytic.	2038 035 13301
	C49/U A.	2422	025	00842	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024	44730	2482	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2487	Cap, 47u, 20%, 50v, Electrolytic.	2038 035 13508
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2022 031 00144
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene. 2222 336 29148
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90626
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	S 2516	Cap, 470p, 20%, 50v, Ceramic.	2020 554 90148
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786	19852	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	023	41040	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025	54780	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026	21020	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014	04740	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017	31520	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050			

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2834	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2835	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2836	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2910	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2911	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322	730	61274	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198	021	51530	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198	021	51030	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4842	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198	021	51230	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198	021	55620	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198	021	52220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198	021	55620	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198	021	54730	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass . .	3198	021	52240	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass . .	3198	021	52240	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5001	Coil, 27u, 10%	3198	018	22790
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5002	Coil, 820n, 10%	3198	018	18270
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5201	Coil, 6u8, 5%	3198	018	16880
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5242	Coil, 10u, 5%	3198	018	11090
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5342	Coil, 22u.	2422	535	97333
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	S 5445	Transformer, LOT	2422	531	02519
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5453	Coil, 22u, 5%	3198	018	12290
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	5457	Coil, Linear Correction, 82u	2422	536	00425
3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5471	Coil, 6u8, 20%	3198	018	76880
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5472	Coil, 3u3, 10%	3198	018	23380
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5480	Coil, 22u.	2422	535	97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3815	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5520	Transformer, SS39009-04.	2422	531	02459
3816	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5521	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3817	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5560	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3818	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5561	Coil, 27u, 5%	2422	535	95366
3819	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5562	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5564	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3821	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5602	Coil, 5u6, 5%	3198	018	15680
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5603	Coil, 5u6, 5%	3198	018	15680
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5604	Coil, 5u6, 5%	3198	018	15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5831	Coil, 6u8, 5%	3198	018	16880
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5832	Coil, 6u8, 5%	3198	018	16880
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5833	Coil, 6u8, 5%	3198	018	16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5835	Coil, 12u, 10%	3198	018	31290
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	6001	Zener Diode, 33 volt	3198	010	23390
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	6150	Diode, Signal, BAS316.	3198	010	10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198	021	33320	6202	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	6206	Zener Diode, 6.8 volt.	3198	020	56880
3905	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198	021	33320	6331	Diode, Signal, BAV21.	3198	010	10070
3906	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	6332	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198	021	38220	6333	Diode, Signal, BAV21.	3198	010	10070
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6449	Diode, Signal, BAV99	3198	010	10620
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6453	Zener Diode, 5.6 volt.	3198	020	55680
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6460	Diode, Rect, BY228/24.	9340	559	50112
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6463	Zener Diode, 8.2 volt.	3198	020	58280
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21.	3198	010	10070
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21.	3198	010	10070
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6467	Diode, Signal, BAS316.	3198	010	10630
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6468	Diode, Signal, BAS316.	3198	010	10630
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6470	Diode, Signal, BAV99	3198	010	10620
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6476	Zener Diode, 15 volt	3198	010	21590
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6481	Zener Diode, 5.6 volt.	3198	010	25680
4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6482	Zener Diode, 9.1 volt.	9331	177	80133
4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6483	Zener Diode, 33 volt	3198	010	23390
4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6485	Diode, Rect, BYV95C.	9335	001	80133
4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6486	Diode, Rect, EGP20DL-5100.	9322	164	42682
4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6487	Diode, Rect, BYV95A.	9335	000	90133
4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6488	Diode, Rect, EGP20DL-5100.	9322	164	42682
4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322	138	08667

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

6520	Diode, Rect, BYV95A.	9335 000 90133	2103	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
6523	Diode, Signal, 1N4148.	3198 010 10010	2104	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
6524	Diode, Rect, 1N5062.	3198 010 10120	2110	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
6525	Diode, Rect, 1N5062.	3198 010 10120	2111	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
6526	Zener Diode, 22 volt	3198 020 52290	2112	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
6540	Zener Diode, 6.2 volt.	9331 668 30133	2113	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
6541	Zener Diode, 10 volt	3198 020 51090	2114	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
6560	Diode, Rect, BYV29X-500.	9340 555 59127	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	2185	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
6563	Diode, Signal, BAS316.	3198 010 10630	2263	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040
6565	Diode, Signal, BAV70	9331 849 10215	2300	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
6566	Diode, Signal, 1N4148.	3198 010 10010	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222 365 55223
6569	Diode, Signal, BAS316.	3198 010 10630	2302	Cap, 100p, 10%, 1KV, Ceramic	3198 019 51010
6570	Zener Diode, 6.8 volt.	3198 020 56880	2310	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
6580	Diode, Signal, BAS316.	3198 010 10630	2311	Cap, 470n, 10%, 25v, Ceramic	2020 552 96465
6831	Diode, Signal, 1N4148.	3198 010 10010	2313	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2315	Cap, 220p, 10%, 1KV, Ceramic	3198 019 62210
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2316	Cap, 33n, 10%, 16v, Ceramic.	3198 017 33330
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	2319	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	2330	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198 026 32220
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	2331	Cap, 470u, 20%, 10v, Electrolytic. . .	3198 025 14710
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557	2332	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198 026 32220
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	2333	Cap, 1000u, 20%, 10v, Electrolytic . .	2020 021 91631
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	2337	Cap, 1000u, 20%, 25v, Electrolytic . .	3198 026 31020
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	2338	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
7330	IC, TDA6107JF/N3	9352 713 37112	2339	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	2341	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	2342	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
7450	Transistor, PNP, PBT114ET	3198 010 44010	2350	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
7460	Transistor, NPN, BU4508DX.	9340 550 92127	2351	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	2353	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
7471	IC, TDA8359J/N2.	9352 701 64112	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7480	Transistor, NPN, BD135	3198 020 41010	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7482	Transistor, NPN, BD135	3198 020 41010	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7520	IC, TEA1507P/N1.	9352 673 56112	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7521	Power FET, FQPF9N50.	9322 187 16687	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
7541	Transistor, NPN, PPTC114ET	9340 310 10215	3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
7560	IC, L78L33ACZ.	9322 134 92676	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	3266	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
7602	IC, M24C08-WBN6.	9322 154 38682	S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
7802	IC, HEF4053BT.	9333 729 60653	S 3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
7803	IC, HEF4053BT.	9333 729 60653	3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
7901	IC, AN7522N PH	9322 181 41682	3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9611	Coil, 27u, 10%	3198 018 22790	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
9672	Coil, 22u, 10%	3198 018 22290	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
9678	Coil, 22u, 10%	3198 018 22290	3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
CBA	Main Chassis Assembly.	3139 187 21771	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
CBA	DVD Loader SD5.12.	3139 188 55471	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
CBA	DVD MPEG Assembly SD5.12	3139 188 55481	3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835 310 57599	3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
			3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
			3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322 704 61004
			3339	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
			3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
			3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
			3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
			3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198 021 34780
			3361	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
			4105	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4106	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4226	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4261	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4265	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
			4266	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4316	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4342	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4343	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4361	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4363	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			4364	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
			5100	Inductor, Variable, 100uH, 10%	2422 549 41663
			5110	Coil, 220n	3198 018 12270
			5300	Coil, 27u.	3198 018 22790
			5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
			S 5315	Transformer, SS25113-00.	2422 531 02596
			5331	Coil, 10u, 5%.	2422 535 95363
			5333	Coil, 10u, 5%.	2422 535 95363
			5337	Coil, 10u, 10%	2422 535 97328
			5339	Coil, 10u, 10%	2422 535 97328
			6100	Diode, Signal, BAS316.	3198 010 10630
			6101	Diode, Signal, BAS316.	3198 010 10630
			6300	Diode, Rect, BYD33J	9337 234 20133
			6311	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

20DV693R01 (continued)

6312	Zener Diode, 22 volt	3198	020	52290
6330	Diode, Rect, EGP20DL-5100	9322	164	42682
6332	Diode, Rect, SB340L-7024	9322	161	76682
6336	Diode, Rect, BYV27-200	9335	526	80133
7110	IC, HEF4053BT	9333	729	60653
7262	Transistor, NPN, PDTCl24ET	9340	310	20215
7310	Transistor, NPN, PDTCl14ET	3198	010	44110
7311	Transistor, PNP, PDTA114ET	3198	010	44010
7312	Transistor, PNP, BC857B	3198	010	42150
7313	Transistor, NPN, BC847B	3198	010	42030
7315	IC, TEA1523P/N2	9352	699	68112
S 7340	Optical Coupler, TCET1103(G)	9322	140	14667
7341	IC, TL431CLP	9337	711	00676
9110	Wire Jumper	3198	036	90010
9111	Wire Jumper	3198	036	90010
9183	Wire Jumper	3198	036	90010
9266	Wire Jumper	3198	036	90010
9315	Wire Jumper	3198	036	90010
9350	Wire Jumper	3198	036	90010
9351	Wire Jumper	3198	036	90010
9352	Wire Jumper	3198	036	90010
9355	Wire Jumper	3198	036	90010
9357	Wire Jumper	3198	036	90010
CBA	DVD Interface Panel Assembly	3139	187	20761

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector	2422	025	16268
S 0212	2 Pin Connector	2422	025	16559
0214	5 Pin Connector	2422	025	06353
1606	Tact Switch	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V	9322	127	54667
9001	Wire Jumper	3198	036	90010
9002	Wire Jumper	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts				
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector	2422	025	15849
0254	5 Pin Connector	2422	025	12481
0255	4 Pin Connector	2422	025	12479
2171	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2172	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2173	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2174	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2176	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film	3198	011	01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film	3198	011	01210
6161	Zener Diode, 6.8 volt	3198	010	26880
9153	Wire Jumper	3198	036	90010
9170	Wire Jumper	3198	036	90010
9171	Wire Jumper	3198	036	90010
CBA	Side Jack Panel Assembly	3139	188	03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector	2422	025	16601

S = Safety Part Be sure to use exact replacement part.

1091	Tact Switch	2422	128	02742
1092	Tact Switch	2422	128	02742
1093	Tact Switch	2422	128	02742
1094	Tact Switch	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord	3139	177	25821
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	45831
AC06	Cabinet Back Screw Cover (2 Used)	3139	124	42891
S AC09	CRT, A51ERF135X82	9301	903	81343
S AC12	Degaussing Coil	3141	058	20131
AC13	Front Interface Panel Bracket	3139	124	32891
AC14	Front Main PCB Bracket	3139	124	45641
AC17	Owner's Manual	3141	055	22221
AC17	Owner's Manual, French	3141	055	22251
AC19	Side Jack Panel Bracket	3139	124	37061
AC20A	Cabinet Front	3139	177	53981
AC20B	Chassis Guide	3139	124	25893
AC20B	Chassis Guide	3139	124	45661
AC20C	Light Guide	3139	124	41421
AC20D	Nameplate	3139	120	01371
AC20E	Power Button	3139	177	58491
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC20J	Top Control Assembly	3139	177	56381
AC20J1	Top Control Bracket	3139	124	39172
AC20J2	Top Control Buttons	3139	124	39182
AC23	DVD Door	3139	177	63441
AC24	DVD Interface Panel Bracket	3139	124	43291
REMOTE	Remote Control Transmitter, RC19042007/01	3128	147	14521

20DV693R02 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0211	2 Pin Connector.	2422 025 16374	
0212	2 Pin Connector.	2422 025 16375	
0214	5 Pin Connector.	2422 025 12481	
0217	3 Pin Connector.	2412 020 00725	
0219	6 Pin Connector.	2422 025 12482	
0220	5 Pin Connector.	2422 025 04853	
0221	2 Pin Connector.	2422 025 15503	
0222	2 Pin Connector.	2422 025 10646	
0223	A/V Jack.	2422 026 05236	
0225	SVHS Jack.	2422 026 04926	
0227	3 Pin Connector.	2422 025 16382	
0229	7 Pin Connector.	2422 025 11244	
0239	3 Pin Connector.	2422 025 16382	
0240	4 Pin Connector.	2422 025 12479	
0243	6 Pin Connector.	2422 025 04854	
0244	5 Pin Connector.	2422 025 04853	
0245	6 Pin Connector.	2422 025 04854	
0246	5 Pin Connector.	2422 025 12481	
0251	4 Pin Connector.	2422 025 15847	
S 0254	9 Pin CRT Socket.	2422 500 80076	
0267	3 Pin Connector.	2412 020 00725	
0269	Jack.	2422 026 05182	
S 1000	Tuner, V+U, PLL.	2422 542 90108	
1002	SAW Filter, 45.75MHz.	2422 549 44518	
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	
S 1515	Relay, 5 Amp, 12V.	2422 132 07467	
1660	Crystal, 12MHz000.	2422 543 01203	
1810	6 Pin Connector.	2422 025 15849	
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	

S = Safety Part Be sure to use exact replacement part.

2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
2330	Cap, 100n, 10%, 250v, Metalized Polyest er.	2222 368 90177
2331	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2457	Cap, 270n, 5%, 250v, Metalized Polyprop ylene.	2222 479 90016
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138
2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2463	Cap, 680p, 10%, 2000v, Ceramic.	2020 558 90485
2465	Cap, 9n1, 5%, 1600v, Polypropylene.	2222 375 90153
2467	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
2468	Cap, 33n, 10%, 400v, Polyester.	2222 347 90227
2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic.	2038 035 13301
2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2482	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137
2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
2487	Cap, 47u, 20%, 50v, Electrolytic.	2038 035 13508
2488	Cap, 1000u, 20%, 16v, Electrolytic.	2022 031 00144
2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139
2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene.	2222 336 29148
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90626
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090

20DV693R02 (continued)

2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2843	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2844	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 013 01520
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3445	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08180
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2910	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06890
2911	Cap, 3n3, 10%, 63v, Ceramic.	3198 017 03320	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 3K6, 1%, 3/5W, Metal Film. . . .	2312 915 13602
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3453	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3454	Res, 1K5, 1%, 3/5W, Metal Film. . . .	2312 915 11502
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . .	3198 012 26880
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3456	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3457	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3458	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . .	3198 012 21530
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film. . . .	2312 915 12703
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3470	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R9, 1%, 3/5W, Metal Film. . . .	2312 915 13908
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3472	Res, 6R8, 1%, 3/5W, Metal Film. . . .	2312 915 16808
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 6R8, 1%, 3/5W, Metal Film. . . .	2312 915 16808
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film. . . .	2312 915 12202
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film. . . .	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 18K, 1%, 3/5W, Metal Film. . . .	2312 915 11803
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film. . . .	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film. . . .	2306 207 03478
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3491	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3141	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3493	Res, 6R8, 5%, 1/3W, Metal Film. . . .	2306 204 03688
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3494	Res, 4R7, 5%, 1/2W, Metal Film. . . .	2306 207 03478
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3495	Res, 22K, 5%, 1/10W, Metalized Glass. .	3198 021 52230
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3496	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198 021 51040
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3497	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198 021 51040
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3498	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3207	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198 021 32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film. . . .	3198 012 11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film. . . .	2306 204 03222
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glass	3198 021 54710
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3543	Res, 82K, 1%, 3/5W, Metal Film. . . .	2312 915 18203
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903	3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530
3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3552	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3247	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3563	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620

20DV693R02 (continued)

S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5001	Coil, 27u, 10%	3198 018 22790
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5201	Coil, 6u8, 5%	3198 018 16880
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5242	Coil, 10u, 5%	3198 018 11090
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5342	Coil, 22u.	2422 535 97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 5445	Transformer, LOT	2422 531 02519
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5453	Coil, 22u, 5%	3198 018 12290
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5457	Coil, Linear Correction, 82u	2422 536 00425
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5471	Coil, 6u8, 20%	3198 018 76880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5472	Coil, 3u3, 10%	3198 018 23380
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5480	Coil, 22u.	2422 535 97333
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5501	Mains Filter	2422 549 43432
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5602	Coil, 5u6, 5%	3198 018 15680
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5603	Coil, 5u6, 5%	3198 018 15680
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5604	Coil, 5u6, 5%	3198 018 15680
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	5831	Coil, 6u8, 5%	3198 018 16880
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5832	Coil, 6u8, 5%	3198 018 16880
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5833	Coil, 6u8, 5%	3198 018 16880
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5835	Coil, 12u, 10%	3198 018 31290
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	6001	Zener Diode, 33 volt	3198 010 23390
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	6150	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	6201	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6206	Zener Diode, 6.8 volt.	3198 020 56880
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6331	Diode, Signal, BAV21.	3198 010 10070
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6332	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6333	Diode, Signal, BAV21.	3198 010 10070
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6335	Diode, Signal, BAV21.	3198 010 10070
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6453	Zener Diode, 5.6 volt.	3198 020 55680
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6460	Diode, Rect, BY228/24.	9340 559 50112
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6463	Zener Diode, 8.2 volt.	3198 020 58280
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21.	3198 010 10070
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21.	3198 010 10070
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6481	Zener Diode, 5.6 volt.	3198 010 25680
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6485	Diode, Rect, BYV95C.	9335 001 80133
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6UL-7002. . . .	9322 138 08667
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215

S = Safety Part Be sure to use exact replacement part.

20DV693R02 (continued)

6566	Diode, Signal, 1N4148.	3198	010	10010	2127	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
6569	Diode, Signal, BAS316.	3198	010	10630	2128	Cap, 10u, 20%, 50V, Electrolytic.	3198	025	51090
6570	Zener Diode, 6.8 volt.	3198	020	56880	2140	Cap, 100u, 20%, 16V, Electrolytic.	3198	029	21010
6580	Diode, Signal, BAS316.	3198	010	10630	2141	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
6831	Diode, Signal, 1N4148.	3198	010	10010	2142	Cap, 100u, 20%, 16V, Electrolytic.	3198	029	21010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	2143	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	2165	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	2169	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	2184	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	2185	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050
7200	IC, TDA9569H/N1/4I/1161.	9352	733	51557	2200	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	2201	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	2211	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	2261	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7330	IC, TDA6107JF/N3	9352	713	37112	2262	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	2263	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	2264	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7450	Transistor, PNP, PDTA114ET	3198	010	44010	2265	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
7460	Transistor, NPN, BU4508DX.	9340	550	92127	2266	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	2267	Cap, 10u, 20%, 50V, Electrolytic.	3198	025	51090
7462	Transistor, NPN, PDMC143ZT	9340	547	00215	2268	Cap, 10u, 20%, 50V, Electrolytic.	3198	025	51090
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	2280	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
7471	IC, TDA8359J/N2.	9352	701	64112	2281	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
7480	Transistor, NPN, BD135	3198	020	41010	2300	Cap, 10u, 20%, 250v, Electrolytic.	2020	012	93495
7482	Transistor, NPN, BD135	3198	020	41010	2301	Cap, 22n, 10%, 400v, Metalized Polyester	2222	365	55223
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	2302	Cap, 33p, 10%, 1KV, Ceramic.	3198	019	53310
7520	IC, TEA1507P/N1.	9352	673	56112	2310	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
7521	Power FET, FQPF9N50.	9322	187	16687	2311	Cap, 470n, 10%, 25v, Ceramic.	2020	552	96465
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	2315	Cap, 220p, 10%, 1KV, Ceramic.	3198	019	62210
7541	Transistor, NPN, PDMC114ET	9340	310	10215	2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
7542	Transistor, PNP, PDMC143ZT	3198	010	42150	2330	Cap, 2u2, 20%, 25v, Electrolytic.	3198	026	32220
7560	IC, L78L33ACZ.	9322	134	92676	2331	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
7561	Transistor, NPN, PDMC143ZT	9340	547	00215	2332	Cap, 2u2, 20%, 25v, Electrolytic.	3198	026	32220
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	2333	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
7602	IC, M24C08-WBN6.	9322	154	38682	2335	Cap, 220u, 20%, 25V, Electrolytic.	3198	025	32210
7802	IC, HEF4053BT.	9333	729	60653	2337	Cap, 1000u, 20%, 25v, Electrolytic.	3198	026	31020
7803	IC, HEF4053BT.	9333	729	60653	2338	Cap, 1000u, 20%, 25v, Electrolytic.	3198	026	31020
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682	2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
7901	IC, AN7522N PH	9322	181	41682	2350	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020
9611	Coil, 27u, 10%	3198	018	22790	2351	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020
9672	Coil, 22u, 10%	3198	018	22290	2353	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020
9678	Coil, 22u, 10%	3198	018	22290	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198	021	31010
CBA	Main Chassis Assembly.	3139	188	04071	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
CBA	DVD Module SD3.1	3139	248	71141	3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
Channel One Card Parts					3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
Channel One Card Parts					3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
2D 3 Line Comb Filter Parts					3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
2D 3 Line Comb Filter Parts					3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DAF Panel Parts					3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DAF Panel Parts					3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DVD Eject Panel Parts					3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
DVD Eject Panel Parts					3120	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
0267	3 Pin Board Connector.	2422	025	09191	3121	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010
0361	Eject Button	3139	138	11271	3122	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
1110	Tact Switch.	2422	128	02742	3123	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
CBA	DVD Eject Panel Assembly	3139	188	03391	3124	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220
DVD Interface Panel Parts					3125	Res, 5K6, 5%, 1/16W, Metalized Glass	3198	021	35620
DVD Interface Panel Parts					3126	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
0226	Connector, 6 Pin	2422	025	12482	3130	Res, 47 ohm, 5%, 1/6W, Carbon Film	3198	011	04790
0251	Connector, 4 Pin	2422	025	15847	3140	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
0253	Connector, 7 Pin	2422	025	11244	3141	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
0254	Connector, 22 Pin.	2422	025	16526	3142	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
0255	Connector, 16 Pin.	2422	025	16525	3143	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
0265	Connector, 12 Pin.	2422	025	08333	3145	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
0266	Connector, 6 Pin	2422	025	15849	3146	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
1100	Socket, Cinch, 1 Pin	2422	026	04425	3147	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
S 1330	Fuse, 2.5A, 250V	2422	086	10784	3148	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
S 1331	Fuse, 2.5A, 250V	2422	086	10784	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
S 1332	Fuse, 2A, 250V IEC	2422	086	10783	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
1619	Connector, 4 Pin	2422	025	15847	3200	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198	021	32710
2101	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	3201	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2102	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090	3202	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2103	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	3203	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820
2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3204	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3205	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720
2111	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3206	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198	021	36810
2112	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3207	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220
2113	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3208	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
2115	Cap, 1u, +80/-20%, 10V, Ceramic.	3198	017	41050	3209	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
2120	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3210	Res, 270 ohm, 5%, 1/16W, Metalized Glas	3198	021	32710
2121	Cap, 47u, 20%, 25V, Electrolytic	3198	025	34790	3211	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2122	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	3212	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2123	Cap, 10u, 20%, 50V, Electrolytic	3198	025	51090	3213	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820
2124	Cap, 10n, 10%, 50V, Ceramic.	3198	017	31030	3214	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
2125	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020	3215	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720
2126	Cap, 47u, 20%, 25V, Electrolytic	3198	025	34790	3216	Res, 680 ohm, 5%, 1/16W, Metalized Glas	3198	021	36810
S = Safety Part Be sure to use exact replacement part.					3217	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220
					3218	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
					3219	Res, 75 ohm, 5%, 1/16W, Metalized Glas	3198	021	37590
					3230	Res, 22K, 5%, 1/16W, Metalized Glass	3198	021	32230
					3231	Res, 24K, 1%, 1/16W, Metalized Glass	2322	704	62403

20DV693R02 (continued)

3232	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3233	Res, 24K, 1%, 1/16W, Metalized Glass .	2322 704 62403
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
S 3301	Power Resistor, 68K, 5%, 2W.	3198 012 26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198 021 31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198 021 31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3320	Res, 75K, 1%, 1/16W, Metalized Glass .	2322 704 67503
3330	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
S 3331	Res, 10 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 31090
3339	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3342	Res, 1K5, 1%, 1/16W, Metalized Glass .	2322 704 61502
3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322 704 64702
3350	Res, 18K, 5%, 1/6W, Carbon Film. . . .	3198 011 01830
3351	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198 021 34780
3406	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3466	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
4100	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4102	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4103	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4142	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4150	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4162	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4185	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4336	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4407	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4463	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
4466	Res, Zero ohm, 'Chip' Jumper	3198 021 90030
5100	Inductor, Variable, 100uH, 10%	2422 549 41663
5110	Coil, 220n	3198 018 12270
5120	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5140	Coil, 220n	3198 018 12270
5141	Coil, 220n	3198 018 12270
5200	Coil, 6u8.	3198 018 16880
5300	Coil, 56u.	3198 018 25690
S 5301	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
S 5315	Transformer, SS25105-02.	2422 531 02521
5331	Coil, 10u, 5%.	2422 535 95363
5333	Coil, 10u, 5%.	2422 535 95363
5337	Coil, 10u.	2422 535 95363
6120	Diode, Signal, BAS316.	3198 010 10630
6300	Diode, Rect, BYD33J	9337 234 20133
6311	Diode, Signal, BAS316.	3198 010 10630
6312	Zener Diode, 22 volt	3198 020 52290
6330	Diode, Rect, EGP20DL-5100	9322 164 42682
6332	Diode, Rect, SB340L-7024.	9322 161 76682
6334	Diode, Rect, BYD33D	9337 234 00133
6336	Diode, Rect, BYV27-200.	9335 526 80133
6350	Zener Diode, 12 volt	3198 020 51290
7110	IC, HEF4053BT.	9333 729 60653
7120	IC, UDA1334BT/N2	9352 703 94118
7140	Transistor, NPN, BC847B.	3198 010 42030
7142	Transistor, NPN, BC847B.	3198 010 42030
7200	Transistor, NPN, BC847B.	3198 010 42030
7201	Transistor, PNP, BC857B.	3198 010 42150
7202	Transistor, NPN, BC847B.	3198 010 42030
7210	Transistor, NPN, BC847B.	3198 010 42030
7211	Transistor, PNP, BC857B.	3198 010 42150
7212	Transistor, NPN, BC847B.	3198 010 42030
7262	Transistor, NPN, PDTCL14ET	9340 310 20215
7280	IC, L78L08ACZ.	9322 130 67676
7310	Transistor, NPN, PDTCL14ET	3198 010 44110
7311	Transistor, PNP, PDA114ET	3198 010 44010
7312	Transistor, PNP, BC857B.	3198 010 42150
7313	Transistor, NPN, BC847B.	3198 010 42030
7315	IC, TEA1523P/N2.	9352 699 68112
S 7340	Optical Coupler, TCET1103(G)	9322 140 14667
7341	IC, TL431CLP	9337 711 00676
7350	Transistor, FET, ST2306DS.	9322 163 75685
7351	Transistor, NPN, PDTCL14ET	3198 010 44130
CBA	DVD Interface Panel Assembly	3139 188 03291

Front Interface Panel Parts

Front Interface Panel Parts		
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730

2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667
9001	Wire Jumper.	3198 036 90010
9002	Wire Jumper.	3198 036 90010
CBA	Front Interface Panel Assembly	3139 177 26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 15849
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 019 14710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198 011 04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210
6161	Zener Diode, 6.8 volt.	3198 010 26880
9153	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly	3139 188 03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422 025 16601
1091	Tact Switch.	2422 128 02742
1092	Tact Switch.	2422 128 02742
1093	Tact Switch.	2422 128 02742
1094	Tact Switch.	2422 128 02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198 021 35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
4085	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4089	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4090	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6091	Diode, Signal.	9340 453 90115
CBA	Top Control Panel Assembly	3139 187 15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135 010 03831
AC04	Batteries for Remote Control Transmitter	9299 000 65263
AC05	Cabinet Back	3139 124 45831
AC06	Cabinet Back Screw Cover (2 Used). . .	3139 124 42891
S AC09	CRT, A51ERF135X82.	9301 903 81343
S AC12	Degaussing Coil.	3141 058 20131
AC13	Front Interface Panel Bracket.	3139 124 32891
AC14	Front Main PCB Bracket	3139 124 45641
AC17	Owner's Manual	3139 125 31451
AC18	Quick Use Guide.	3141 055 52361
AC19	Side Jack Panel Bracket.	3139 124 37061
AC20A	Cabinet Front.	3139 177 53981
AC20B	Chassis Guide.	3139 124 25893
AC20B	Chassis Guide.	3139 124 45661
AC20C	Light Guide.	3139 124 41421
AC20D	Nameplate.	3139 120 01371
AC20E	Power Button	3139 177 58491

20DV693R02 (continued)

AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC20J	Top Control Assembly	3139	138	11451
AC23	DVD Door	3139	138	11281
AC25	DVD PIP Bracket	3139	124	35571
REMOTE	Remote Control Transmitter, RC19042007/				
	01.	3128	147	14521

20MS334R/37 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0212	2 Pin Connector.	2422	025 16375	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0218	A/V Jack	2422	026 04742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
0220	5 Pin Connector.	2422	025 04853	2480	Cap, 47u, 20%, 25v, Electrolytic.	2038	035 13301
0221	2 Pin Connector.	2422	025 15503	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0222	2 Pin Connector.	2422	025 10646	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
0232	Headphone Jack	2422	026 04747	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022	031 00137
0243	6 Pin Connector.	2422	025 04854	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022	031 00139
0244	5 Pin Connector.	2422	025 04853	2487	Cap, 47u, 20%, 50v, Electrolytic.	2038	035 13508
0245	6 Pin Connector.	2422	025 04854	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2022	031 00144
S 0254	9 Pin CRT Socket	2422	500 80076	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022	031 00139
0267	3 Pin Connector.	2412	020 00725	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
0280	4 Pin Connector.	2422	025 12479	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2222	336 29148
S 1000	Tuner, V+U, PLL	2422	542 90108	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1002	SAW Filter, 45.75MHz	2422	549 44518	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90626
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
S 1515	Relay, 5 Amp, 12V.	2422	132 07467	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
1600	Tact Switch.	2422	128 02742	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
1601	Tact Switch.	2422	128 02742	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
1602	Tact Switch.	2422	128 02742	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
1603	Tact Switch.	2422	128 02742	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
1606	Tact Switch.	2422	128 02742	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
1660	Crystal, 12MHz000	2422	543 01203	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2181	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2182	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2183	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2864	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2868	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2869	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2870	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2330	Cap, 100n, 10%, 250v, Metalized Polyest			2871	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
	er.	2222	368 90177	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445	2873	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610	2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559	2877	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040	2878	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210	2880	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2883	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730	2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2885	Cap, 220n, 10%, 50v, Polyester.	3198	014 02240
2450	Cap, 47u, 20%, 160v, Electrolytic.	2022	031 00103	2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790	2902	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222	479 90016	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022	031 00138	2904	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238	580 15624
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010	2906	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2463	Cap, 680p, 10%, 2000v, Ceramic.	2020	558 90485	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238	580 15624
2465	Cap, 9n1, 5%, 1600v, Polypropylene.	2222	375 90153	2908	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2467	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234	2910	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2468	Cap, 33n, 10%, 400v, Polyester.	2222	347 90227	2911	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040	2950	Cap, 330p, 5%, 50v, Ceramic.	3198	016 33310
2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154	2981	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104	2982	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710
				2983	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2984	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710

S = Safety Part Be sure to use exact replacement part.

20MS334R/37 (continued)

3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3498	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3184	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3186	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	3507	Surge Protector.	2422 549 43073
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3443	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109	3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220
3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3470	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3491	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220
3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210

S = Safety Part Be sure to use exact replacement part.

20MS334R/37 (continued)

3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210	6482	Zener Diode, 9.1 volt.	9331 177 80133
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYV95C.	9335 001 80133
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6520	Diode, Rect, BYV95A.	9335 000 90133
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6523	Diode, Signal, 1N4148.	3198 010 10010
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6563	Diode, Signal, BAS316.	3198 010 10630
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6569	Diode, Signal, BAS316.	3198 010 10630
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6570	Zener Diode, 6.8 volt.	3198 020 56880
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6580	Diode, Signal, BAS316.	3198 010 10630
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6681	Diode, Signal, BAT85	9336 247 60133
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6691	LED, LTL-10234WHCR	9322 185 69682
4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6692	IR Receiver.	9322 127 54667
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7200	IC, TDA9587H/N1/3I/1136.	9352 731 64557
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7330	IC, TDA6107JF/N3	9352 713 37112
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7450	Transistor, PNP, PDA114ET	3198 010 44010
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7460	Transistor, NPN, BU4508DX.	9340 550 92127
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7462	Transistor, NPN, PUTC143ZT	9340 547 00215
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7471	IC, TDA8359J/N2.	9352 701 64112
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7480	Transistor, NPN, BD135	3198 020 41010
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7482	Transistor, NPN, BD135	3198 020 41010
5001	Coil, 27u, 10%	3198 018 22790	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
5002	Coil, 820n, 10%	3198 018 18270	7520	IC, TEA1507P/N1.	9352 673 56112
5201	Coil, 6u8, 5%	3198 018 16880	7521	Power FET, FQPF9N50.	9322 187 16687
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7541	Transistor, NPN, PUTC114ET	9340 310 10215
5242	Coil, 10u, 5%	3198 018 11090	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5342	Coil, 22u.	2422 535 97333	7560	IC, L78L33ACZ.	9322 134 92676
S 5445	Transformer, LOT	2422 531 02519	7561	Transistor, NPN, PUTC143ZT	9340 547 00215
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
5453	Coil, 22u, 5%	3198 018 12290	7602	IC, M24C08-WBN6.	9322 154 38682
5457	Coil, Linear Correction, 82u	2422 536 00425	7861	IC, TDA9853H/V1.	9352 671 19557
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465	7901	IC, AN7522N PH	9322 181 41682
5471	Coil, 6u8, 20%	3198 018 76880	9611	Coil, 27u, 10%	3198 018 22790
5472	Coil, 3u3, 10%	3198 018 23380	9672	Coil, 22u, 10%	3198 018 22290
5480	Coil, 22u.	2422 535 97333	9678	Coil, 22u, 10%	3198 018 22290
S 5501	Mains Filter	2422 549 43432	CBA	Main Chassis Assembly.	3141 058 59121
S 5520	Transformer, SS39009-04.	2422 531 02459			
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5561	Coil, 27u, 5%	2422 535 95366			
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5602	Coil, 5u6, 5%	3198 018 15680			
5603	Coil, 5u6, 5%	3198 018 15680			
5604	Coil, 5u6, 5%	3198 018 15680			
5861	Coil, 10u, 5%	3198 018 11090			
6001	Zener Diode, 33 volt	3198 010 23390			
6181	Zener Diode, 6.8 volt.	3198 020 56880			
6201	Diode, Signal, BAS316.	3198 010 10630			
6202	Diode, Signal, BAS316.	3198 010 10630			
6206	Zener Diode, 6.8 volt.	3198 020 56880			
6331	Diode, Signal, BAV21	3198 010 10070			
6332	Diode, Signal, BAS316.	3198 010 10630			
6333	Diode, Signal, BAV21	3198 010 10070			
6335	Diode, Signal, BAV21	3198 010 10070			
6445	Zener Diode, 10 volt	3198 020 51090			
6447	Diode, Signal, 1N4148.	3198 010 10010			
6448	Zener Diode, 6.2 volt.	9331 668 30133			
6449	Diode, Signal, BAV99	3198 010 10620			
6453	Zener Diode, 5.6 volt.	3198 020 55680			
6460	Diode, Rect, BY228/24.	9340 559 50112			
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682			
6463	Zener Diode, 8.2 volt.	3198 020 58280			
6465	Diode, Signal, BAV21	3198 010 10070			
6466	Diode, Signal, BAV21	3198 010 10070			
6467	Diode, Signal, BAS316.	3198 010 10630			
6468	Diode, Signal, BAS316.	3198 010 10630			
6470	Diode, Signal, BAV99	3198 010 10620			
6476	Zener Diode, 15 volt	3198 010 21590			
6481	Zener Diode, 5.6 volt.	3198 010 25680			

20MS334R/37 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3139	128	76161
	AC04	Batteries for Remote Control Transmitter	9082	100	90002
	AC05	Cabinet Back	3139	124	46481
S	AC09	CRT, A51ERF135X82.	9301	903	81343
	AC10	Customer Control Buttons	3139	137	94241
S	AC12	Degaussing Coil.	3141	058	20131
	AC17	Owner's Manual	3141	055	21471
	AC20A	Cabinet Front.	3139	177	67451
	AC20B	Chassis Guide.	3139	124	30812
	AC20C	Light Guide.	3139	124	32221
	AC20D	Nameplate.	3141	050	00331
	AC20E	Power Button	3139	137	94231
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
	AC22	Cinch Cover.	3139	124	25551
REMOTE		Remote Control Transmitter, RC1112917/1			
	7A.	3139	238	04701

20MS334R01 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16269	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0212	2 Pin Connector.	2422	025 16375	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0218	A/V Jack	2422	026 04742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
0220	5 Pin Connector.	2422	025 04853	2480	Cap, 47u, 20%, 25v, Electrolytic.	2038	035 13301
0221	2 Pin Connector.	2422	025 15503	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0222	2 Pin Connector.	2422	025 10646	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
0232	Headphone Jack	2422	026 04747	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022	031 00137
0243	6 Pin Connector.	2422	025 04854	2486	Cap, 470u, 20%, 16v, Electrolytic.	2022	031 00139
0244	5 Pin Connector.	2422	025 04853	2487	Cap, 47u, 20%, 50v, Electrolytic.	2038	035 13508
0245	6 Pin Connector.	2422	025 04854	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2022	031 00144
S 0254	9 Pin CRT Socket	2422	500 80076	2489	Cap, 470u, 20%, 16v, Electrolytic.	2022	031 00139
0267	3 Pin Connector.	2412	020 00725	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
0280	4 Pin Connector.	2422	025 12479	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2222	336 29148
S 1000	Tuner, V+U, PLL	2422	542 90108	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1002	SAW Filter, 45.75MHz	2422	549 44518	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90626
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
S 1515	Relay, 5 Amp, 12V.	2422	132 07467	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
1600	Tact Switch.	2422	128 02742	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
1601	Tact Switch.	2422	128 02742	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
1602	Tact Switch.	2422	128 02742	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
1603	Tact Switch.	2422	128 02742	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
1606	Tact Switch.	2422	128 02742	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
1660	Crystal, 12MHz000	2422	543 01203	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2181	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2182	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2183	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2864	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2868	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2869	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2870	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222	368 90177	2871	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495	2873	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559	2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040	2877	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445	2878	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2880	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730	2883	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2450	Cap, 47u, 20%, 160v, Electrolytic.	2022	031 00103	2885	Cap, 220n, 10%, 50v, Polyester.	3198	014 02240
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790	2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222	479 90016	2902	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022	031 00138	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810	2904	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238	580 15624
2463	Cap, 680p, 10%, 2000v, Ceramic.	2020	558 90485	2906	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2465	Cap, 9n1, 5%, 1600v, Polypropylene.	2222	375 90153	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238	580 15624
2467	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234	2908	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2468	Cap, 33n, 10%, 400v, Polyester.	2222	347 90227	2910	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040	2911	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154	2950	Cap, 330p, 5%, 50v, Ceramic.	3198	016 33310
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104	2981	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2982	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710
				2983	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2984	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710

S = Safety Part Be sure to use exact replacement part.

20MS334R01 (continued)

3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306	204	03688
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306	207	03478
3002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730	3500	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322	242	13335
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3501	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322	242	13335
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730	S 3504	Res, PTC, 3 ohm, 144V.	2122	663	00019
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322	242	13155
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03910	3507	Surge Protector.	2422	549	43073
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198	013	02210
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02710
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198	011	02230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198	021	51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198	021	33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198	011	04780
3207	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306	204	03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198	021	55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198	021	33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198	012	13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198	021	38230	3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198	021	32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198	021	32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322	704	63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322	702	60274	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198	021	33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198	021	31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198	021	34740	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306	207	03109	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198	013	01520	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710
S 3345	Varactor, 1MA/50V, Max 115V.	2322	593	13507	3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3442	Res, Zero ohm, "Chip" Jumper	3198	021	90020	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198	021	51050	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198	011	01530	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198	011	05620	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01810	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	06890	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03109	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220
3452	Res, 3K6, 1%, 3/5W, Metal Film	2312	915	13602	3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3453	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020
3454	Res, 1K5, 1%, 3/5W, Metal Film	2312	915	11502	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198	012	26880	3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90020	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220
3457	Res, Zero ohm, "Chip" Jumper	3198	021	90020	3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910
3458	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198	012	21530	3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198	011	03920	3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610
3465	Res, 27K, 1%, 3/5W, Metal Film	2312	915	12703	3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198	011	03320	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312	915	13908	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312	915	16808	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3473	Res, 6R8, 1%, 3/5W, Metal Film	2312	915	16808	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312	915	12202	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312	915	12202	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198	021	52720	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122	101	02083	3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020
3481	Res, 18K, 1%, 3/5W, Metal Film	2312	915	11803	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3482	Res, 12K, 1%, 3/5W, Metal Film	2312	915	11203	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198	011	03920	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306	207	03478	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	3981	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210

S = Safety Part Be sure to use exact replacement part.

20MS334R01 (continued)

3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210	6482	Zener Diode, 9.1 volt.	9331 177 80133
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYV95C.	9335 001 80133
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6520	Diode, Rect, BYV95A.	9335 000 90133
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6523	Diode, Signal, 1N4148.	3198 010 10010
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6563	Diode, Signal, BAS316.	3198 010 10630
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6569	Diode, Signal, BAS316.	3198 010 10630
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6570	Zener Diode, 6.8 volt.	3198 020 56880
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6580	Diode, Signal, BAS316.	3198 010 10630
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6681	Diode, Signal, BAT85	9336 247 60133
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6691	LED, LTL-10234WHCR	9322 185 69682
4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6692	IR Receiver.	9322 127 54667
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7200	IC, TDA9587H/N1/31/1136.	9352 731 64557
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7330	IC, TDA6107JF/N3	9352 713 37112
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7450	Transistor, PNP, PDTA114ET	3198 010 44010
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7460	Transistor, NPN, BU4508DX.	9340 550 92127
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7462	Transistor, NPN, PDTCL143ZT	9340 547 00215
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7471	IC, TDA8359J/N2.	9352 701 64112
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7480	Transistor, NPN, BD135	3198 020 41010
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7482	Transistor, NPN, BD135	3198 020 41010
5001	Coil, 27u, 10%	3198 018 22790	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
5002	Coil, 820n, 10%	3198 018 18270	7520	IC, TEA1507P/N1.	9352 673 56112
5201	Coil, 6u8, 5%	3198 018 16880	7521	Power FET, FQFP9N50.	9322 187 16687
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7541	Transistor, NPN, PDTCL14ET	9340 310 10215
5242	Coil, 10u, 5%	3198 018 11090	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5342	Coil, 22u.	2422 535 97333	7560	IC, L78L33ACZ.	9322 134 92676
S 5445	Transformer, LOT	2422 531 02519	7561	Transistor, NPN, PDTCL143ZT	9340 547 00215
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
5453	Coil, 22u, 5%	3198 018 12290	7602	IC, M24C08-WBN6.	9322 154 38682
5457	Coil, Linear Correction, 82u	2422 536 00425	7861	IC, TDA9853H/V1.	9352 671 19557
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465	7901	IC, AN7522N PH	9322 181 41682
5471	Coil, 6u8, 20%	3198 018 76880	9611	Coil, 27u, 10%	3198 018 22790
5472	Coil, 3u3, 10%	3198 018 23380	9672	Coil, 22u, 10%	3198 018 22290
5480	Coil, 22u.	2422 535 97333	9678	Coil, 22u, 10%	3198 018 22290
S 5501	Mains Filter	2422 549 43432	CBA	Main Chassis Assembly.	3141 058 59121
S 5520	Transformer, SS39009-04.	2422 531 02459			
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5561	Coil, 27u, 5%	2422 535 95366			
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5602	Coil, 5u6, 5%	3198 018 15680			
5603	Coil, 5u6, 5%	3198 018 15680			
5604	Coil, 5u6, 5%	3198 018 15680			
5861	Coil, 10u, 5%	3198 018 11090			
6001	Zener Diode, 33 volt	3198 010 23390			
6181	Zener Diode, 6.8 volt.	3198 020 56880			
6201	Diode, Signal, BAS316.	3198 010 10630			
6202	Diode, Signal, BAS316.	3198 010 10630			
6206	Zener Diode, 6.8 volt.	3198 020 56880			
6331	Diode, Signal, BAV21	3198 010 10070			
6332	Diode, Signal, BAS316.	3198 010 10630			
6333	Diode, Signal, BAV21	3198 010 10070			
6335	Diode, Signal, BAV21	3198 010 10070			
6445	Zener Diode, 10 volt	3198 020 51090			
6447	Diode, Signal, 1N4148.	3198 010 10010			
6448	Zener Diode, 6.2 volt.	9331 668 30133			
6449	Diode, Signal, BAV99	3198 010 10620			
6453	Zener Diode, 5.6 volt.	3198 020 55680			
6460	Diode, Rect, BY228/24.	9340 559 50112			
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682			
6463	Zener Diode, 8.2 volt.	3198 020 58280			
6465	Diode, Signal, BAV21	3198 010 10070			
6466	Diode, Signal, BAV21	3198 010 10070			
6467	Diode, Signal, BAS316.	3198 010 10630			
6468	Diode, Signal, BAS316.	3198 010 10630			
6470	Diode, Signal, BAV99	3198 010 10620			
6476	Zener Diode, 15 volt	3198 010 21590			
6481	Zener Diode, 5.6 volt.	3198 010 25680			

20MS334R01 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S	AC01	AC Cord.	3139	128 76161
	AC04	Batteries for Remote Control Transmitter	9082	100 90002
	AC05	Cabinet Back	3139	124 46481
S	AC09	CRT, A51ERF135X82.	9301	903 81343
	AC10	Customer Control Buttons	3139	137 94241
S	AC12	Degaussing Coil.	3141	058 20131
	AC17	Owner's Manual	3141	055 21471
	AC20A	Cabinet Front.	3139	177 67451
	AC20B	Chassis Guide.	3139	124 30812
	AC20C	Light Guide.	3139	124 32221
	AC20D	Nameplate.	3141	050 00331
	AC20E	Power Button	3139	137 94231
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264 00411
	AC22	Cinch Cover.	3139	124 25551
	REMOTE	Remote Control Transmitter, RC1112917/1		
		7A.	3139	238 04701

20PT633R/37 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0212	2 Pin Connector.	2422	025 16375	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0218	A/V Jack	2422	026 04742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
0220	5 Pin Connector.	2422	025 04853	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
0221	2 Pin Connector.	2422	025 15503	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0222	2 Pin Connector.	2422	025 10646	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
0232	Headphone Jack	2422	026 04747	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
0243	6 Pin Connector.	2422	025 04854	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
0244	5 Pin Connector.	2422	025 04853	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
0245	6 Pin Connector.	2422	025 04854	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
S 0254	9 Pin CRT Socket	2422	500 80076	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
0267	3 Pin Connector.	2412	020 00725	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
0280	4 Pin Connector.	2422	025 12479	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2222	336 29148
S 1000	Tuner, V+U, PLL	2422	542 90108	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1002	SAW Filter, 45.75MHz	2422	549 44518	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90626
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
S 1515	Relay, 5 Amp, 12V.	2422	132 07467	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
1600	Tact Switch.	2422	128 02742	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
1601	Tact Switch.	2422	128 02742	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
1602	Tact Switch.	2422	128 02742	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
1603	Tact Switch.	2422	128 02742	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
1606	Tact Switch.	2422	128 02742	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
1660	Crystal, 12MHz000	2422	543 01203	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2181	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2182	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2183	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2862	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2868	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2869	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2870	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2871	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2330	Cap, 100n, 10%, 250v, Metalized Polyest			2872	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
	er.	2222	368 90177	2873	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320	2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610	2877	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559	2878	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445	2880	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210	2883	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730	2885	Cap, 220n, 10%, 50v, Polyester.	3198	014 02240
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139	2902	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222	479 90016	2904	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238	580 15624
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810	2906	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238	580 15624
2463	Cap, 680p, 10%, 2000v, Ceramic.	2020	558 90485	2908	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2465	Cap, 9n1, 5%, 1600v, Polypropylene.	2222	375 90153	2910	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2467	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234	2911	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2468	Cap, 33n, 10%, 400v, Polyester.	2222	347 90227	2950	Cap, 330p, 5%, 50v, Ceramic.	3198	016 33310
2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040	2981	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154	2982	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104	2983	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2984	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710

S = Safety Part Be sure to use exact replacement part.

20PT633R/37 (continued)

3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3498	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3184	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322 242 13335
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3186	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322 242 13155
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	3507	Surge Protector.	2422 549 43073
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198 013 02210
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198 011 02710
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198 021 55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass	3198 021 38230	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274
3247	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274	3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass	3198 021 31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620
3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020	3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478	3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478	3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520	3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820
3443	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050	3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530	3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film.	3198 011 01810	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210	3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390	3686	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809
3470	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274	3689	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808	3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010
3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803	3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3491	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320
3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030

S = Safety Part Be sure to use exact replacement part.

20PT633R/37 (continued)

3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220	6481	Zener Diode, 5.6 volt.	3198 010 25680
3981	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210	6482	Zener Diode, 9.1 volt.	9331 177 80133
3982	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198 011 01210	6483	Zener Diode, 33 volt.	3198 010 23390
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYD33J.	9337 234 20133
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYD33D.	9337 234 00133
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6520	Diode, Rect, BYD33D.	9337 234 00133
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6523	Diode, Signal, 1N4148.	3198 010 10010
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6524	Diode, Rect, 1N5062.	3198 010 10120
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt.	3198 020 52290
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt.	3198 020 51090
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6565	Diode, Signal, BAV70.	9331 849 10215
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6569	Diode, Signal, BAS316.	3198 010 10630
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6570	Zener Diode, 6.8 volt.	3198 020 56880
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6580	Diode, Signal, BAS316.	3198 010 10630
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6692	IR Receiver.	9322 127 54667
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7330	IC, TDA6107JF/N3.	9352 713 37112
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7450	Transistor, PNP, PDTA114ET	3198 010 44010
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7460	Transistor, NPN, BU4508DX.	9340 550 92127
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7462	Transistor, NPN, PDMC143ZT	9340 547 00215
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7471	IC, TDA8359J/N2.	9352 701 64112
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7480	Transistor, NPN, BD135	3198 020 41010
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7482	Transistor, NPN, BD135	3198 020 41010
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7520	IC, TEA1507P/N1.	9352 673 56112
5001	Coil, 27u, 10%	3198 018 22790	7521	Power FET, FQPF9N50.	9322 187 16687
5002	Coil, 820n, 10%	3198 018 18270	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5201	Coil, 6u8, 5%	3198 018 16880	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7541	Transistor, NPN, PDMC114ET	9340 310 10215
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7560	IC, L78L33ACZ.	9322 134 92676
5242	Coil, 10u, 5%	3198 018 11090	7561	Transistor, NPN, PDMC143ZT	9340 547 00215
5342	Coil, 22u.	2422 535 97333	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
S 5445	Transformer, LOT	2422 531 02519	7602	IC, M24C08-WBN6.	9322 154 38682
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7861	IC, TDA9853H/V1.	9352 671 19557
5453	Coil, 22u, 5%	3198 018 12290	7901	IC, AN7522N PH	9322 181 41682
5457	Coil, Linear Correction, 82u	2422 536 00425	9611	Coil, 27u, 10%	3198 018 22790
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465	9672	Coil, 22u, 10%	3198 018 22290
5471	Coil, 6u8, 20%	3198 018 76880	9678	Coil, 22u, 10%	3198 018 22290
5472	Coil, 3u3, 10%	3198 018 23380	CBA	Main Chassis Assembly.	3139 187 23221
5480	Coil, 22u.	2422 535 97333			
S 5501	Mains Filter	2422 549 43432			
S 5520	Transformer, SS39009-04.	2422 531 02459			
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5561	Coil, 27u, 5%	2422 535 95366			
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010			
5602	Coil, 5u6, 5%	3198 018 15680			
5603	Coil, 5u6, 5%	3198 018 15680			
5604	Coil, 5u6, 5%	3198 018 15680			
5861	Coil, 10u, 5%	3198 018 11090			
6001	Zener Diode, 33 volt.	3198 010 23390			
6181	Zener Diode, 6.8 volt.	3198 020 56880			
6201	Diode, Signal, BAS316.	3198 010 10630			
6202	Diode, Signal, BAS316.	3198 010 10630			
6206	Zener Diode, 6.8 volt.	3198 020 56880			
6331	Diode, Signal, BAV21.	3198 010 10070			
6332	Diode, Signal, BAS316.	3198 010 10630			
6333	Diode, Signal, BAV21.	3198 010 10070			
6335	Diode, Signal, BAV21.	3198 010 10070			
6445	Zener Diode, 10 volt.	3198 020 51090			
6447	Diode, Signal, 1N4148.	3198 010 10010			
6448	Zener Diode, 6.2 volt.	9331 668 30133			
6449	Diode, Signal, BAV99.	3198 010 10620			
6453	Zener Diode, 5.6 volt.	3198 020 55680			
6460	Diode, Rect, BY228/24.	9340 559 50112			
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682			
6463	Zener Diode, 8.2 volt.	3198 020 58280			
6465	Diode, Signal, BAV21.	3198 010 10070			
6466	Diode, Signal, BAV21.	3198 010 10070			
6467	Diode, Signal, BAS316.	3198 010 10630			
6468	Diode, Signal, BAS316.	3198 010 10630			
6470	Diode, Signal, BAV99.	3198 010 10620			
6476	Zener Diode, 15 volt.	3198 010 21590			

S = Safety Part Be sure to use exact replacement part.

20PT633R/37 (continued)

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3139	128	76161
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	46001
S	AC09	CRT, A51ERF135X82.	9301	903	81301
	AC10	Customer Control Buttons	3139	177	65681
S	AC12	Degaussing Coil.	3141	058	20131
	AC17	Owner's Manual	3121	235	20611
	AC20A	Cabinet Front.	3139	177	59721
	AC20B	Chassis Guide.	3139	124	30811
	AC20C	Light Guide.	3139	124	32221
	AC20D	Nameplate.	3139	120	01371
	AC20E	Power Button	3139	177	65691
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE		Remote Control Transmitter, RC19335004/01.	3139	228	86463

20PT643F/35R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
	Holder, Fuse, 2 Pin.	4822 265 11253	
0129	NTC Holder	3139 120 10151	
0136	Spring, IC	4822 492 70788	
0137	SPRING	4822 492 70289	
0138	Spring, IC	4822 492 70788	
0139	Spring, Transistor	4822 492 62076	
0141	Spring, IC	4822 492 70788	
0152	Cable, DIPMate, 6 Pin.	3139 121 08841	
0153	Cable, DIPMate, 5 Pin, 480mm	3139 121 07951	
0211	Connector, Printed Circuit, B2P3-VH.	4822 265 20723	
0212	Connector, Printed Circuit, 2 Pin, Male , (RED).	4822 267 10774	
0220	Connector, Printed Circuit, 5 Pin.	4822 265 30735	
0221	Connector, Printed Circuit, 2 Pin.	4822 267 10966	
0222	2 Pin Connector.	2422 025 10646	
0223	A/V Jack	2422 026 05236	
0225	SVHS Jack.	2422 026 04926	
0229	Connector, Printed Circuit	4822 267 10735	
0239	3 Pin Connector.	2422 025 16382	
0243	6 Pin Connector.	2422 025 04854	
0244	Connector, Printed Circuit, 5 Pin.	4822 265 30735	
0245	6 Pin Connector.	2422 025 04854	
S 0254	9 Pin CRT Socket	2422 500 80076	
0267	Connector, Printed Circuit	4822 267 10735	
0269	Jack	2422 026 05182	
0280	Connector, Printed Circuit, 4 Pin.	4822 267 10565	
S 1000	Tuner, V+U, PLL	2422 542 90108	
1002	SAW Filter, 45.75MHz	2422 549 44518	
1200	Filter, Ceramic.	4822 242 81978	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	
S 1515	Relay, 5 Amp, 12V.	2422 132 07467	
1606	Switch, Push Button.	4822 276 13775	
1660	Crystal, 12MHz000	2422 543 01203	
1811	Connector, Printed Circuit	4822 267 10735	
1861	Filter, Ceramic, CSB503F58	4822 242 10359	
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	
2005	Cap, 10u, 20%, 63V	4822 124 40248	
2006	Cap, 470u, 20%, 16v, Electrolytic.	4822 124 80791	
2007	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2008	Cap, 100u, 20%, 25v, Electrolytic.	4822 124 40207	
2009	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	4822 126 13482	
2102	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2103	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2104	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2105	Cap, 10u, 20%, 63V	4822 124 40248	
2106	Cap, 10u, 20%, 63V	4822 124 40248	
2111	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2112	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2113	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2121	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2122	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2123	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2124	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2125	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2131	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2132	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2133	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2134	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2135	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2136	Cap, 22p, 5%, 50v, Ceramic	4822 122 33761	
2141	Cap, 330p, 50V, Ceramic.	4822 126 14241	
2143	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	
2201	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2202	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2203	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2204	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879	
2208	Cap, 100n, +80/-20%, 50v, Ceramic.	2238 586 59812	
2209	Cap, 4u7, 20%, 100V, Electrolytic.	4822 124 40769	
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2213	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2214	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2215	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2216	Cap, 1000u, 20%, 16v, Electrolytic	4822 124 81144	
2217	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879	
2220	Cap, 470n, 5%, 63v, Metalized Polyester	4822 121 51252	
2221	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2226	Cap, 100p, 5%, 50v, Ceramic.	2020 552 94427	
2227	Cap, 4,7nF, 10%, 63V, Ceramic.	4822 126 13193	
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	
2229	Cap, 10u, 20%, 63V	4822 124 40248	
2241	Cap, 1n5, 10%, 50v, Ceramic.	4822 126 14247	
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2243	Cap, 2n2, 10%, 50v, Ceramic.	4822 126 14238	
2244	Cap, 100nF, 5%, 63V.	5322 121 42386	
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879	
2247	Cap, 1000u, 20%, 16v, Electrolytic	4822 124 81144	
2248	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2249	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	
2250	Cap, 2u2, 20%, 50v, Electrolytic	4822 124 22652	
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2254	Res, Zero ohm, "Chip" Jumper	4822 051 20008	
2330	Cap, 470nF, 20%, 63V, Film	4822 121 51473	
2340	Cap, 10u, 20%, 250v, Electrolytic.	4822 124 11565	
2341	Cap, 3n3, 10%, 500v, Ceramic	4822 126 13599	
2342	Cap, 560pF, 5%, 63V, Ceramic	5322 116 80853	
2343	Cap, 2n2, 10%, 2000v, Ceramic.	4822 126 13451	
2344	Cap, 100n, 10%, 50v, Ceramic	4822 126 14585	
2345	Cap, 1nF, 10%, 500V, Ceramic	4822 122 31175	
2405	Cap, 220u, 25V, Electrolytic	4822 124 12379	
2441	Cap, 1uF, 20%, 63V, Electrolytic	4822 124 21913	
2443	Cap, 47n, 10%, 50v, Ceramic.	4822 126 13751	
2444	Cap, 1uF, 20%, 63V, Electrolytic	4822 124 21913	
2450	Cap, 47u, 20%, 160v, Electrolytic.	4822 124 11575	
2455	Cap, 47uF, 20%, 25V, Electrolytic.	4822 124 40433	
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222 479 90016	
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138	
2459	Cap, 680p, 10%, 500v, Ceramic.	4822 126 13185	
2460	Cap, 100p, 5%, 50v, Ceramic.	5322 122 32531	
2463	Cap, 680p, 10%, 2000v, Ceramic	4822 126 14138	
2465	Cap, 9n1, 5%, 1600v, Polypropylene	4822 121 70649	
2467	Cap, 68n, 10%, 250v, Polyester	4822 121 40482	
2468	Cap, 33n, 10%, 400v, Polyester	5322 121 44151	
2471	Cap, 100nF, 5%, 63V.	5322 121 42386	
2472	Cap, 150n, 5%, 63V	4822 121 41854	
2473	Cap, 100nF, 5%, 63V.	5322 121 42386	
2474	Cap, 2,2nF, 10%, 63V, Ceramic.	4822 122 33127	
2475	Cap, 2,2nF, 10%, 63V, Ceramic.	4822 122 33127	
2476	Cap, 4n7, 10%, 63v, Ceramic.	5322 126 10223	
2480	Cap, 47u, 20%, 25V, Electrolytic	4822 124 11965	
2481	Cap, 470p, 10%, 500V, Ceramic.	4822 122 31177	
2482	Cap, 68n, 10%, 250v, Polyester	4822 121 40482	
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137	
2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139	
2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508	
2488	Cap, 1000u, 20%, 16v, Electrolytic	4822 124 81145	
2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139	
2491	Cap, 1nF, 10%, 500V, Ceramic	4822 122 31175	
2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	4822 126 13589	
2501	Cap, 2n2, 10%, 1000v, Ceramic.	4822 126 14153	
2502	Cap, 2n2, 10%, 1000v, Ceramic.	4822 126 14153	
2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90626	
2505	Cap, 2n2, 10%, 1000v, Ceramic.	4822 126 14153	
2507	Cap, 470pF, 10%, 50V, Ceramic.	9965 000 09661	
2508	Cap, 470p, 10%, 1000v, Ceramic	4822 122 50116	
S 2515	Cap, 1n5, 20%, v, Ceramic.	4822 126 14049	
2520	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177	
2521	Cap, 22u, 50v, Electrolytic Aluminum	4822 124 81151	
2522	Cap, 100n, 10%, 50v, Ceramic	4822 126 14585	
2523	Cap, 1n5, 10%, 2000v, Ceramic.	4822 126 13862	
2525	Cap, 470pF, 10%, 50V, Ceramic.	9965 000 09661	
2527	Cap, 2,2nF, 10%, 63V, Ceramic.	4822 122 33127	
2528	Cap, 1nF, 10%, 63V, Ceramic.	5322 122 31647	
2540	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177	
2541	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177	
2560	Cap, 680p, 10%, 1000v, Ceramic	4822 126 14152	
2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91496	
2562	Cap, 1nF, 10%, 100V, Ceramic	5322 122 32331	
2563	Cap, 100nF, 5%, 63V.	5322 121 42386	
2564	Cap, 2200u, 20%, 25V, Electrolytic	4822 124 12417	
2567	Cap, 47uF, 20%, 25V, Electrolytic.	4822 124 40433	
2568	Cap, 1uF, 20%, 63V, Electrolytic	4822 124 21913	
2580	Cap, 47u, 20%, 16v, Electrolytic	4822 124 81286	
2581	Cap, 22u, 50v, Electrolytic Aluminum	4822 124 81151	
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856	
2601	Cap, 220n, +/-80/20, 25v, Ceramic.	4822 126 14076	
2602	Cap, 100p, 5%, 50v, Ceramic.	2020 552 94427	
2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2607	Cap, 33p, 5%, 50v, Ceramic	2222 867 15339	
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2609	Cap, 33p, 5%, 50v, Ceramic	2222 867 15339	
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2612	Cap, 6p8, 7%, 50v, Ceramic	4822 126 13956	
2613	Cap, 6p8, 7%, 50v, Ceramic	4822 126 13956	
2615	Cap, 1n, 10%, 50v, Ceramic	5322 126 11578	
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	4822 126 14043	
2691	Cap, 220u, 25V, Electrolytic	4822 124 12379	
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879	
2803	Cap, 220n, +80/-20%, 16v, Ceramic.	4822 126 13879	
2810	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2813	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2862	Cap, 2u2, 10V, Ceramic	4822 126 14491	
2864	Cap, 2u2, 20%, 50v, Electrolytic	4822 124 22652	

20PT643F/35R (continued)

2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	4822 124 22652	3245	Res, 39K, 1%, 0W063.	5322 117 13064
2866	Cap, 2u2, 10V, Ceramic	4822 126 14491	3246	Res, 10k, 5%, 1/16W.	4822 051 30103
2867	Cap, 1n8, 10%, 50V, Ceramic.	4822 126 13617	3247	Res, 270K, 1%, 0W063.	4822 117 12889
2868	Cap, 150p, 5%, 50v, Ceramic.	4822 122 33753	3248	Res, 33k, 5%, 1/16W.	4822 051 30333
2869	Cap, 68nF, 5%, 63V	5322 121 42465	3249	Res, 820R, 5%, 0,5W.	4822 116 52231
2870	Cap, 68nF, 5%, 63V	5322 121 42465	3251	Res, 100 ohm, 5%, 1/2W	4822 116 52175
2871	Cap, 150p, 5%, 50v, Ceramic.	4822 122 33753	3256	Res, 1k, 5%, 1/16W	4822 051 30102
2872	Cap, 1n8, 10%, 50V, Ceramic.	4822 126 13617	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2873	Cap, 2u2, 10V, Ceramic	4822 126 14491	3258	Res, 100k, 1%, 1/16W	4822 117 13632
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	4822 124 40207	3259	Res, 47k, 5%, 1/16W.	4822 051 30474
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	4822 124 40207	3331	Res, 100 ohm, 5%, 1/2W	4822 116 52175
2876	Cap, 4u7, 20%, 100V, Electrolytic. . .	4822 124 40769	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2877	Cap, 10u, 20%, 63V	4822 124 40248	3333	Res, 100 ohm, 5%, 1/2W	4822 116 52175
2878	Cap, 1uF, 20%, 63V, Electrolytic . . .	4822 124 21913	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2879	Cap, 4,7nF, 10%, 63V, Ceramic.	4822 126 13193	3335	Res, 100 ohm, 5%, 1/2W	4822 116 52175
2880	Cap, 22n, 10%, 25v, Ceramic.	2238 916 15641	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	4822 124 80791	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	4822 052 11109
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	4822 124 22652	3341	Res, 1R, 5%, 0,33W	4822 052 10108
2885	Cap, 220n, 5%, 63v, Metalized Polyester	4822 121 42408	3342	Res, 1R, 5%, 0,33W	4822 052 10108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	4822 126 13879	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2892	Cap, 100n, +80/-20%, 50v, Ceramic. . .	2238 586 59812	3344	Res, 33R, 5%, 0,5W	4822 116 52191
2893	Cap, 100n, +80/-20%, 50v, Ceramic. . .	2238 586 59812	S 3345	Varactor, 1MA/50V, Max 115V.	4822 117 13016
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	4822 124 81144	3346	Res, 33R, 5%, 0,5W	4822 116 52191
2903	Cap, 1uF, 20%, 63V, Electrolytic . . .	4822 124 21913	3441	Res, 100 ohm, 1%, 1/8W, Metalized Glass	4822 117 11373
2904	Cap, 27nF, 10%, 63V, Ceramic	4822 122 33735	3442	Res, Zero ohm, "Chip" Jumper	4822 051 20008
2905	Cap, 1n2, 10%, 63v, Ceramic.	4822 122 32614	3443	Res, 1M, 5%, 1/8W, Metalized Glass . .	4822 051 20105
2906	Cap, 27nF, 10%, 63V, Ceramic	4822 122 33735	3445	Res, 15K, 5%, 1/2W, Metal Film	4822 116 52244
2907	Cap, 1n2, 10%, 63v, Ceramic.	4822 122 32614	3446	Res, 5K6, 5%, 0,5W	4822 116 52289
2908	Cap, 10u, 20%, 63V	4822 124 40248	3447	Res, 180R, 5%, 0,5W.	4822 116 52211
2910	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177	3448	Res, 820R, 5%, 0,5W.	4822 116 52231
2911	Cap, 10nF, 20%, 50V, Ceramic	4822 122 33177	3449	Res, 68R, 5%, 0,5W	4822 116 52199
2950	Cap, 330p, 50V, Ceramic.	4822 126 14241	3450	Res, 33R, 5%, 0,5W	4822 116 52191
3000	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3451	Res, 10R, 5%, 0,33W.	4822 052 10109
3001	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3452	Res, 3K6, 1%, 0,6W	4822 050 23602
3002	Res, Zero ohm, "Chip" Jumper	4822 051 30008	3453	Res, 1K0, 1%, 0,4W	4822 050 11002
3003	Res, 1k5, 5%, 1/16W.	4822 051 30152	3454	Res, 1K5, 1%, 0,6W	4822 050 21502
3004	Res, 8K2, 1%, 1/16W.	4822 117 12902	S 3455	Res, 6R8, 5%, 2W	4822 053 11688
3005	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3456	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3101	Res, 68R, 5%, 0,5W	4822 116 52199	3457	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3102	Res, 1k, 5%, 1/16W	4822 051 30102	3458	Res, 1K0, 1%, 0,4W	4822 050 11002
3103	Res, 150R, 5%, 0,5W.	4822 116 83868	S 3459	Res, 15K, 5%, 2W	4822 053 11153
3104	Res, 220K, 1%, 1/16W, Metalized Glass.	4822 117 12891	3460	Res, 3K9, 5%, 0,5W	4822 116 52276
3105	Res, 150R, 5%, 0,5W.	4822 116 83868	3463	Res, 33R, 5%, 0,5W	4822 116 52191
3106	Res, 220K, 1%, 1/16W, Metalized Glass.	4822 117 12891	3465	Res, 27K, 1%, 0,6W	4822 050 22703
3111	Res, 75R, 5%, 0,5W	4822 116 52201	3469	Res, 3K3, 5%, 0,5W	4822 116 52269
3112	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	4822 051 20274
3113	Res, 75R, 5%, 0,5W	4822 116 52201	3471	Res, 3R9, 1%, 0,6W	4822 050 23908
3114	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3472	Res, 6R8, 1%, 0,6W	4822 050 26808
3115	Res, 75R, 5%, 0,5W	4822 116 52201	3473	Res, 6R8, 1%, 0,6W	4822 050 26808
3116	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3474	Res, 2K2, 1%, 0,6W	4822 050 22202
3123	Res, 150R, 5%, 0,5W.	4822 116 83868	3475	Res, 2K2, 1%, 0,6W	4822 050 22202
3124	Res, 47k, 1%, 1/16W.	4822 117 12925	3477	Res, 150R, 5%, 0,5W.	4822 116 83868
3125	Res, 150R, 5%, 0,5W.	4822 116 83868	3478	Res, 150R, 5%, 0,5W.	4822 116 83868
3126	Res, 47k, 1%, 1/16W.	4822 117 12925	3479	Res, 2K7, 1%, 1/8W, Metalized Glass. .	4822 117 12955
3131	Res, 150R, 5%, 0,5W.	4822 116 83868	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3132	Res, 47k, 1%, 1/16W.	4822 117 12925	3481	Res, 18K, 1%, 0,6W	4822 050 21803
3133	Res, 150R, 5%, 0,5W.	4822 116 83868	3482	Res, 12k, 1%, 0,6W	4822 050 21203
3134	Res, 47k, 1%, 1/16W.	4822 117 12925	3484	Res, 3K9, 5%, 0,5W	4822 116 52276
3135	Res, 75R, 5%, 0,5W	4822 116 52201	3488	Res, 4R7, 5%, 1/2W, Metal Film	4822 052 11478
3136	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3490	Res, 8K2, 5%, 0,5W	4822 116 52303
3141	Res, 1K0, 1%, 0,4W	4822 050 11002	3491	Res, 10K, 1%, 1/8W, Metalized Glass. .	4822 117 10833
3149	Res, 100k, 1%, 1/16W	4822 117 13632	3492	Res, 1K, 2%, 0,25W	4822 051 10102
3150	Res, 150k, 5%, 1/16W	4822 051 30154	3493	Res, 6R8, 5%, 0,33W.	4822 052 10688
3154	Res, 5K6, 5%, 0,5W	4822 116 52289	3494	Res, 4R7, 5%, 1/2W, Metal Film	4822 052 11478
3156	Res, 10k, 1%, 1/16W	4822 050 21003	3495	Res, 22K, 5%, 1/8W, Metalized Glass. .	4822 051 20223
3157	Res, 1k5, 5%, 1/16W.	4822 051 30152	3496	Res, 100K, 1%, 0,1W.	4822 117 10837
3158	Res, 10k, 5%, 1/16W.	4822 051 30103	3497	Res, 100K, 1%, 0,1W.	4822 117 10837
3159	Res, 1K2, 5%, 1/8W, Metalized Glass. .	4822 051 20122	3498	Res, 12K, 1%, 0,1W	4822 117 11383
3200	Res, 390R, 5%, 0,5W.	4822 116 83881	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	4822 053 21335
3201	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	4822 053 21335
3202	Res, 100 ohm, 5%, 1/2W	4822 116 52175	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3203	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	4822 053 21155
3204	Res, 22k, 5%, 1/2W	4822 116 52257	3507	Surge Protector.	4822 252 11215
3205	Res, 1k, 5%, 1/16W	4822 051 30102	3508	Res, 220R, 5%, 0,5W.	4822 116 83872
3206	Res, 33k, 5%, 1/16W.	4822 051 30333	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00055
3207	Res, 1K0, 1%, 0,4W	4822 050 11002	3519	Res, 270 ohm, 5%, 1/2W	4822 116 83876
3208	Res, 220 ohm, 5%, 1/16W.	4822 051 30221	3520	Res, 1K2, 5%, 1/8W, Metalized Glass. .	4822 051 20122
3209	Res, 68R, 5%, 0,063W	4822 051 30689	3521	Res, 4R7, 1%, 0,6W	4822 050 24708
3212	Res, 470R, 5%, 0,062W.	4822 051 30471	3522	Res, 330K, 5%, 1/8W, Metalized Glass .	4822 051 20334
3213	Res, 560R, 5%, 0,5W.	4822 116 52226	3523	Res, 100R, 5%, 0,33W	4822 052 10101
3217	Res, 330k, 5%, 1/16W	4822 051 30334	3524	Res, 56K, 1%, 1/8W, Metalized Glass. .	4822 117 11148
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	4822 117 12864	3525	Res, 1K, 2%, 0,25W	4822 051 10102
3219	Res, 2k2, 5%, 1/16W.	4822 051 30222	S 3526	Res, 0R10, 2W.	4822 116 83303
3220	Res, 100 ohm, 5%, 1/2W	4822 116 52175	S 3527	Res, 0R33, 5%, 2W.	4822 117 11342
3221	Res, 560R, 5%, 0,5W.	4822 116 52226	3528	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3222	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3529	Res, 47K, 1%, 1/8W, Metalized Glass. .	4822 117 10834
3226	Res, 560 ohm, 5%, 1/16W.	4822 051 30561	3530	Res, 10K, 1%, 1/8W, Metalized Glass. .	4822 117 10833
3232	Res, 2k2, 5%, 1/16W.	4822 051 30222	3531	Res, 4K7, 5%, 1/8W, Metalized Glass. .	4822 051 20472
3235	Res, 100 ohm, 5%, 1/2W	4822 116 52175	3532	Res, 2K2, 5%, 0,33W.	4822 052 10222
3241	Res, 22k, 5%, 1/16W.	4822 051 30223	3541	Res, 470R, 5%, 0,1W.	4822 051 20471
3242	Res, 27K, 5%, 0,062W	4822 051 30273	3542	Res, 1K5, 1%, 1/8W, Metalized Glass. .	4822 117 11139
3244	Res, 820R, 5%, 0,5W.	4822 116 52231	3543	Res, 82K, 1%, 0,6W	4822 050 28203

S = Safety Part Be sure to use exact replacement part.

20PT643F/35R (continued)

3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	4822 117 11145	4617	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	4822 051 20274	4619	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3548	Res, 15K, 1%, 1/8W, Metalized Glass. .	4822 116 83933	4622	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3552	Res, 10K, 1%, 1/8W, Metalized Glass. .	4822 117 10833	4623	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3557	Res, 1K, 2%, 0.25W	4822 051 10102	4691	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3561	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4692	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3562	Res, 12K, 1%, 0.1W	4822 117 11383	4693	Res, Zero ohm, "Chip" Jumper	4822 051 30008
S 3563	Res, 5K6, 5%, 1/8W, Metalized Glass. .	4822 051 20562	4807	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	4822 053 10331	4812	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3566	Res, 2K2, 1%, 1/8W, Metalized Glass. .	4822 117 11449	4814	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3569	Res, 5K6, 5%, 1/8W, Metalized Glass. .	4822 051 20562	4820	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3580	Res, 47K, 1%, 1/8W, Metalized Glass. .	4822 117 10834	4825	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3594	Res, 330R, 1%, 1.25W	4822 117 13577	4827	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4829	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4830	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3601	Res, 8K2, 5%, 0.5W	4822 116 52303	4831	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3603	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4861	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3604	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4863	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3605	Res, 4k7, 5%, 1/16W.	4822 051 30472	4865	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3606	Res, 2k2, 5%, 1/2W	4822 116 52256	4866	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3607	Res, 2k2, 5%, 1/2W	4822 116 52256	4867	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3608	Res, 470 ohm, 5%, 1/2W	4822 116 83883	4869	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3609	Res, 1K0, 1%, 0.4W	4822 050 11002	4870	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3610	Res, 8K2, 5%, 0.5W	4822 116 52303	4871	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3611	Res, 100 ohm, 5%, 1/16W.	4822 051 30101	4873	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3618	Res, 6K8, 5%	4822 116 83961	4876	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3622	Res, Zero ohm, "Chip" Jumper	4822 051 30008	4879	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3623	Res, 4k7, 5%, 1/16W.	4822 051 30472	4880	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3624	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4881	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3625	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4883	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3626	Res, 4k7, 5%, 1/16W.	4822 051 30472	4885	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3627	Res, 4k7, 5%, 1/16W.	4822 051 30472	4892	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3628	Res, 10k, 5%, 1/16W.	4822 051 30103	4901	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3630	Res, 470R, 5%, 0.062W.	4822 051 30471	4903	Res, Zero ohm, "Chip" Jumper	4822 051 30008
3632	Res, Zero ohm, "Chip" Jumper	4822 051 30008	4906	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3634	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4924	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3635	Res, 100 ohm, 5%, 1/2W	4822 116 52175	4925	Res, Zero ohm, "Chip" Jumper	4822 051 20008
3636	Res, 1K, 2%, 0.25W	4822 051 10102	5001	Coil, 27u.	4822 157 52392
3637	Res, 75 ohm, 5%, 1/16W	4822 051 30759	5002	Coil, 820n, 10%.	3198 018 18270
3638	Res, 75 ohm, 5%, 1/16W	4822 051 30759	5201	Coil, 6u8.	4822 157 11139
3639	Res, Zero ohm, "Chip" Jumper	4822 051 30008	5204	Bead, Ferrite, 100MHz	4822 157 11411
3640	Res, 8K2, 5%, 0.5W	4822 116 52303	5205	Bead, Ferrite, 100MHz	4822 157 11411
3685	Res, 1K5, 1%, 1/8W, Metalized Glass. .	4822 117 11139	5206	Bead, Ferrite, 100MHz	4822 157 11411
3691	Res, 330 ohm, 5%, 1/16W.	4822 051 30331	5242	Coil, 10u, 5%.	4822 157 11706
3693	Res, 220 ohm, 5%, 1/16W.	4822 051 30221	5342	Coil, 22u.	4822 157 50961
3694	Res, 4k7, 5%, 1/16W.	4822 051 30472	S 5445	Transformer, LOT	2422 531 02519
3801	Res, 220 ohm, 5%, 1/16W.	4822 051 30221	5452	Bead, Ferrite, 100MHz	4822 157 11411
3802	Res, 1k, 5%, 1/16W	4822 051 30102	5453	Coil, 22u.	4822 157 11235
3814	Res, 100k, 1%, 1/16W	4822 117 13632	5457	Coil, Linear Correction, 82u	2422 536 00425
3815	Res, 100k, 1%, 1/16W	4822 117 13632	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3816	Res, 100k, 1%, 1/16W	4822 117 13632	5471	Coil, 6u8.	2422 535 94638
3817	Res, 100k, 1%, 1/16W	4822 117 13632	5472	Coil, 3u3.	4822 157 51157
3818	Res, 100k, 1%, 1/16W	4822 117 13632	5480	Coil, 22u.	4822 157 50961
3819	Res, 100k, 1%, 1/16W	4822 117 13632	S 5501	Filter, Line Choke, 5mH, 2A.	4822 157 11523
3820	Res, 100k, 1%, 1/16W	4822 117 13632	S 5520	Transformer, SS39009-04.	2422 531 02459
3821	Res, 100k, 1%, 1/16W	4822 117 13632	5521	Bead, Ferrite, 100MHz.	4822 526 10704
3861	Res, 100k, 1%, 1/16W	4822 117 13632	5560	Bead, Ferrite, 100MHz.	4822 526 10704
3862	Res, 15k, 5%, 1/16W	4822 051 30153	5561	Coil, 27u.	4822 157 71401
3863	Res, 1K2, 5%, 1/16W, Metalized Glass. .	4822 117 11817	5562	Bead, Ferrite, 100MHz.	4822 526 10704
3864	Res, 100 ohm, 5%, 1/16W.	4822 051 30101	5564	Bead, Ferrite, 100MHz.	4822 526 10704
3865	Res, 100 ohm, 5%, 1/2W	4822 116 52175	5602	Coil, 5.6uH, 5%.	4822 157 11867
3866	Res, 100 ohm, 5%, 1/2W	4822 116 52175	5603	Coil, 5.6uH, 5%.	4822 157 11867
3867	Res, 3k3, 5%, 1/16W.	4822 051 30332	5604	Coil, 5.6uH, 5%.	4822 157 11867
3891	Res, 100 ohm, 5%, 1/16W.	4822 051 30101	5861	Coil, 10u, 5%.	4822 157 11706
3893	Res, 330 ohm, 5%, 1/16W.	4822 051 30331	6001	Zener Diode, 33 volt.	4822 130 34142
3894	Res, 100 ohm, 5%, 1/16W.	4822 051 30101	6150	Diode, BAS316.	4822 130 11397
3896	Res, 330 ohm, 5%, 1/16W.	4822 051 30331	6201	Diode, BAS316.	4822 130 11397
3901	Res, 1k, 5%, 1/16W	4822 051 30102	6202	Diode, BAS316.	4822 130 11397
3902	Res, 3k3, 5%, 1/16W.	4822 051 30332	6206	Diode, Reference, PDZ6.8B.	4822 130 11416
3903	Res, 3k3, 5%, 1/16W.	4822 051 30332	6331	Diode, BAV21	4822 130 30842
3904	Res, 10k, 5%, 1/16W.	4822 051 30103	6332	Diode, BAS316.	4822 130 11397
3905	Res, 3k3, 5%, 1/16W.	4822 051 30332	6333	Diode, BAV21	4822 130 30842
3906	Res, 10k, 5%, 1/16W.	4822 051 30103	6335	Diode, BAV21	4822 130 30842
3907	Res, 8K2, 1%, 1/16W.	4822 117 12902	6445	Diode, Reference, UDS10B.	4822 130 11551
4001	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6447	Diode, 1N4148.	4822 130 30621
4002	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6448	Zener Diode, 6.2 volt.	4822 130 34167
4122	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6449	Diode, BAV99	5322 130 34337
4123	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6453	Zener Diode, 5.6 volt.	3198 020 55680
4127	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6460	Diode, Rect, BY228/24.	9340 559 50112
4214	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6461	Diode, Rect, RGP30J-L7004	4822 130 80572
4216	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6463	Zener Diode, 8.2 volt.	4822 130 10837
4341	Res, Zero ohm, "Chip" Jumper	4822 051 20008	6465	Diode, BAV21	4822 130 30842
4388	Res, Zero ohm, "Chip" Jumper	4822 051 20008	6466	Diode, BAV21	4822 130 30842
4401	Res, Zero ohm, "Chip" Jumper	4822 051 20008	6467	Diode, BAS316.	4822 130 11397
4431	Res, Zero ohm, "Chip" Jumper	4822 051 20008	6468	Diode, BAS316.	4822 130 11397
4601	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6470	Diode, BAV99	5322 130 34337
4608	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6476	Zener Diode, 15 volt.	4822 130 34281
4609	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6481	Zener Diode, 5.6 volt.	4822 130 34173
4613	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6482	Zener Diode, 9.1 volt.	4822 130 30862
4614	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6483	Zener Diode, 33 volt.	4822 130 34142
4615	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6485	Diode, Rect, BYV95C.	4822 130 41487
4616	Res, Zero ohm, "Chip" Jumper	4822 051 30008	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682

S = Safety Part Be sure to use exact replacement part.

20PT643F/35R (continued)

6487	Diode, Rect, BYV95A.	4822	130	41601
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682
6500	Diode, Bridge Rect.	4822	130	10741
6520	Diode, Rect, BYV95A.	4822	130	41601
6523	Diode, 1N4148.	4822	130	30621
6524	Diode, Rect, 1N5062.	4822	130	31083
6525	Diode, Rect, 1N5062.	4822	130	31083
6526	Zener Diode, 22 volt.	9340	548	67115
6540	Zener Diode, 6.2 volt.	4822	130	34167
6541	Diode, Reference, UDZS10B.	4822	130	11551
6560	Diode, Rect, BYV29X-500.	3139	120	52021
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682
6563	Diode, BAS316.	4822	130	11397
6565	Diode, BAV70.	5322	130	34331
6566	Diode, 1N4148.	4822	130	30621
6569	Diode, BAS316.	4822	130	11397
6570	Diode, Reference, PDZ6.8B.	4822	130	11416
6580	Diode, BAS316.	4822	130	11397
6691	LED, LTL-10234WHCR.	9322	185	69682
6692	IR Receiver.	9322	127	54667
6901	Res, Zero ohm, "Chip" Jumper.	4822	051	20008
6904	Res, Zero ohm, "Chip" Jumper.	4822	051	20008
7101	Transistor, NPN, BC846B.	5322	130	60159
7102	Transistor, PNP, BC856B.	4822	130	60373
7103	Transistor, NPN, BC846B.	5322	130	60159
7200	IC, TDA9577H/N1/AI/1130.	9352	731	51557
7201	Transistor, NPN, BC846B.	5322	130	60159
7204	Transistor, PNP, BC856B.	4822	130	60373
7205	Transistor, PNP, BC856B.	4822	130	60373
7330	IC, TDA6107JF/N3.	9352	713	37112
7441	Transistor, PNP, BC856B.	4822	130	60373
7443	Transistor, BC557B.	4822	130	44568
7450	Transistor, PNP, PDTA114ET.	3198	010	44010
7460	Transistor, NPN, BU4508DX.	9340	550	92127
7461	Transistor, BC337-25.	4822	130	40981
7462	Transistor, NPN, PDTCL43ZT.	9340	547	00215
7463	Transistor, BC327-25.	4822	130	41246
7471	IC, TDA8359J/N2.	9352	701	64112
7480	Transistor, NPN, BD135.	4822	130	40823
7482	Transistor, NPN, BD135.	4822	130	40823
7515	Coupler, Optic, TCET1103G.	8238	274	02070
7520	IC, TEA1507P/N1.	9352	673	56112
7521	Power FET, FQPF9N50.	9322	187	16687
7522	Transistor, NPN, BC846B.	5322	130	60159
7540	Transistor, BC547B.	4822	130	40959
7541	Transistor, NPN, PDTCL14ET.	4822	130	11155
7542	Transistor, PNP, BC856B.	4822	130	60373
7560	IC, LF33CV.	4822	209	16978
7561	Transistor, NPN, PDTCL43ZT.	9340	547	00215
7580	Transistor, PNP, BC856B.	4822	130	60373
7602	IC, M24C08-WBN6.	9322	154	38682
7802	IC, Digital, MOS, HEF4053BT.	5322	209	14481
7861	IC, TDA9853H/V1.	9352	671	19557
7891	Transistor, NPN, BC846B.	5322	130	60159
7892	Transistor, NPN, BC846B.	5322	130	60159
7901	IC, AN7522N PH.	9322	181	41682
9611	Coil, 27u.	4822	157	52392
9672	Coil, 22u.	4822	157	50961
9678	Coil, 22u.	4822	157	50961
CBA	Main Chassis Assembly.	3141	058	59191

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322	734	63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass.	2322	734	61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322	734	62701
3096	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3097	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702
3098	Res, 75 ohm, 1%, 1/8W, Metalized Glass.	2322	734	67509
3099	Res, 68 ohm, 1%, 1/8W, Metalized Glass.	2322	734	66809
4091	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
CBA	Top Control Panel Assembly.	3139	177	26241

Cabinet & Accessory Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3139	128	76161
AC04	Batteries for Remote Control Transmitter.	9299	000	65263
AC05	Cabinet Back.	3139	124	45991
S AC09	CRT, A51ERF135X82.	9301	903	81343
S AC12	Degaussing Coil.	3141	058	20131
AC17	Owner's Manual.	3121	235	20621
AC17	Owner's Manual, French.	3139	125	31601
AC20A	Cabinet Front.	3139	177	65671
AC20B	Chassis Guide.	3139	124	30812
AC20C	Light Guide.	3139	124	32221
AC20D	Nameplate.	3139	120	01371
AC20E	Power Button.	3139	177	65691
AC20H	Speaker, 16 ohm, 5W (2 Used).	2422	264	00411
AC20J1	Top Control Bracket.	3139	124	30381
AC20J3	Top Control Cover.	3139	124	31131
AC20J4	Top Control Rubber.	3139	124	30391
AC20J5	Top Control Button Assembly.	3139	137	66921
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part Be sure to use exact replacement part.

20PT643R01 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector.	2422 025 16269	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0211	2 Pin Connector.	2422 025 16375	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0212	5 Pin Connector.	2422 025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
0220	2 Pin Connector.	2422 025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic. . . .	2020 558 90559
0222	2 Pin Connector.	2422 025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
0223	A/V Jack	2422 026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0225	SVHS Jack.	2422 026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0229	3 Pin Connector.	2412 020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0239	3 Pin Connector.	2422 025 16382	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0243	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2450	Cap, 47u, 20%, 160v, Electrolytic. . . .	2020 021 91139
0245	6 Pin Connector.	2422 025 04854	2455	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790
S 0254	9 Pin CRT Socket	2422 500 80076	2457	Cap, 270n, 5%, 250v, Metalized Polyprop	2222 479 90016
0267	3 Pin Connector.	2412 020 00725	2458	Cap, 2u2, 20%, 100v, Electrolytic. . . .	2020 021 91331
0269	Jack	2422 026 05182	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
0280	4 Pin Connector.	2422 025 12479	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 1000	Tuner, V+U, PLL	2422 542 90108	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
1002	SAW Filter, 45.75MHz	2422 549 44518	2465	Cap, 9n1, 5%, 1600v, Polypropylene . .	2222 375 90153
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2467	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
S 1515	Relay, 5 Amp, 12V.	2422 132 07467	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1606	Tact Switch.	2422 128 02742	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
1660	Crystal, 12MHz000	2422 543 01203	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
1811	3 Pin Connector.	2412 020 00725	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2005	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic. . . .	2020 021 90586
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	2487	Cap, 47u, 20%, 50v, Electrolytic. . . .	2020 021 90854
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic. . . .	2020 021 91049
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2105	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2500	Cap, 470n, 20%, 275v, Metalized Polypro	2222 336 29148
2106	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic. . . .	2020 024 90626
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2123	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2125	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2132	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2134	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2143	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2150	Cap, 150n, +80/-20%, 16v, Ceramic. . . .	2238 786 19852	2561	Cap, 100u, 20%, 160v, Electrolytic. . . .	2020 021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . . .	2222 910 19856
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2216	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2247	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2864	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222 368 90177	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2331	Cap, 10n, +80/-20% 1000v, Ceramic. . . .	2020 558 90445	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
			2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626

S = Safety Part Be sure to use exact replacement part.

20PT643R01 (continued)

2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2878	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . . .	2306 207 03109
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 580 15624	3443	Res, 1M, 5%, 1/10W, Metalized Glass . .	3198 021 51050
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 580 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01810
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3452	Res, 3K6, 1%, 3/5W, Metal Film	2312 915 13602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3454	Res, 1K5, 1%, 3/5W, Metal Film	2312 915 11502
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3102	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3104	Res, 220K, 5%, 1/16W, Metalized Glass . .	3198 021 32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3106	Res, 220K, 5%, 1/16W, Metalized Glass . .	3198 021 32240	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3470	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322 730 61274
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3473	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film	2122 101 02083
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3491	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3149	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198 021 31040	3492	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3150	Res, 150K, 5%, 1/16W, Metalized Glass . .	3198 021 31540	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030	3495	Res, 22K, 5%, 1/10W, Metalized Glass . .	3198 021 52230
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3496	Res, 100K, 5%, 1/10W, Metalized Glass . .	3198 021 51040
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3497	Res, 100K, 5%, 1/10W, Metalized Glass . .	3198 021 51040
3159	Res, 1K2, 1%, 1/8W, Metalized Glass . .	2322 734 61202	3498	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03910	3500	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322 242 13335
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . .	2322 242 13155
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3507	Surge Protector.	2422 549 43073
3205	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film . .	3198 013 02210
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02710
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3522	Res, 330K, 5%, 1/10W, Metalized Glass . .	3198 021 53340
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3217	Res, 330K, 5%, 1/16W, Metalized Glass . .	3198 021 33340	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322 730 61274
3247	Res, 270K, 5%, 1/16W, Metalized Glass . .	2322 702 60274	3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198 021 51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210	3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass . .	3198 021 31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198 021 55620

S = Safety Part Be sure to use exact replacement part.

20PT643R01 (continued)

S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4829	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	5001	Coil, 27u, 10%	3198 018 22790
3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5002	Coil, 820n, 10%	3198 018 18270
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5201	Coil, 6u8, 5%	3198 018 16880
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3685	Res, 1K5, 1%, 1/8W, Metalized Glass. . .	2322 734 61502	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5242	Coil, 10u, 5%	3198 018 11090
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5342	Coil, 22u.	2422 535 97333
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	S 5445	Transformer, LOT	2422 531 02519
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5453	Coil, 22u, 5%	3198 018 12290
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear Correction, 82u	2422 536 00425
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 6u8, 20%	3198 018 76880
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 22u.	2422 535 97333
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5561	Coil, 27u, 5%	2422 535 95366
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5602	Coil, 5u6, 5%	3198 018 15680
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5604	Coil, 5u6, 5%	3198 018 15680
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5861	Coil, 10u, 5%	3198 018 11090
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	6001	Zener Diode, 33 volt	3198 010 23390
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	6150	Diode, Signal, BAS316.	3198 010 10630
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	6201	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	6202	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6206	Zener Diode, 6.8 volt.	3198 020 56880
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6331	Diode, Signal, BAV21	3198 010 10070
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6332	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6333	Diode, Signal, BAV21	3198 010 10070
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6335	Diode, Signal, BAV21	3198 010 10070
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6445	Zener Diode, 10 volt	3198 020 51090
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6453	Zener Diode, 5.6 volt.	3198 020 55680
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, BY228/24.	9340 559 50112
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6463	Zener Diode, 8.2 volt.	3198 020 58280
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6465	Diode, Signal, BAV21	3198 010 10070
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6466	Diode, Signal, BAV21	3198 010 10070
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6467	Diode, Signal, BAS316.	3198 010 10630
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6468	Diode, Signal, BAS316.	3198 010 10630
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYD33J.	9337 234 20133
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6487	Diode, Rect, BYD33D.	9337 234 00133
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6520	Diode, Rect, BYD33D.	9337 234 00133
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4807	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290

20PT643R01 (continued)

6540	Zener Diode, 6.2 volt.	9331	668	30133
6541	Zener Diode, 10 volt.	3198	020	51090
6560	Diode, Rect, BYV29X-500.	9340	555	59127
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682
6563	Diode, Signal, BAS316.	3198	010	10630
6565	Diode, Signal, BAV70.	9331	849	10215
6566	Diode, Signal, BAS316.	3198	010	10010
6569	Diode, Signal, BAS316.	3198	010	10630
6570	Zener Diode, 6.8 volt.	3198	020	56880
6580	Diode, Signal, BAS316.	3198	010	10630
6691	LED, LTL-10234WHCR.	9322	185	69682
6692	IR Receiver.	9322	127	54667
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
7101	Transistor, NPN, BC847B(COL).	3198	010	42030
7102	Transistor, PNP, BC857B(COL).	3198	010	42150
7103	Transistor, NPN, BC847B(COL).	3198	010	42030
7200	IC, TDA9577H/N1/AI/1130.	9352	731	51557
7201	Transistor, NPN, BC847B(COL).	3198	010	42030
7204	Transistor, PNP, BC857B(COL).	3198	010	42150
7205	Transistor, PNP, BC857B(COL).	3198	010	42150
7330	IC, TDA6107JF/N3.	9352	713	37112
7441	Transistor, PNP, BC857B(COL).	3198	010	42150
7443	Transistor, PNP, BC557B(COL).	3198	020	40110
7450	Transistor, PNP, PDTA114ET.	3198	010	44010
7460	Transistor, NPN, BU4508DX.	9340	550	92127
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530
7462	Transistor, NPN, PDTC143ZT.	9340	547	00215
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430
7471	IC, TDA8359J/N2.	9352	701	64112
7480	Transistor, NPN, BD135.	3198	020	41010
7482	Transistor, NPN, BD135.	3198	020	41010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667
7520	IC, TEA1507P/N1.	9352	673	56112
7521	Power FET, FQPF9N50.	9322	187	16687
7522	Transistor, NPN, BC847B(COL).	3198	010	42030
7540	Transistor, NPN, BC547B(COL).	3198	020	40030
7541	Transistor, NPN, PDTC114ET.	9340	310	10215
7542	Transistor, PNP, BC857B(COL).	3198	010	42150
7560	IC, L78L33ACZ.	9322	134	92676
7561	Transistor, NPN, PDTC143ZT.	9340	547	00215
7580	Transistor, PNP, BC857B(COL).	3198	010	42150
7602	IC, M24C08-WBN6.	9322	154	38682
7802	IC, HEF4053BT.	9333	729	60653
7861	IC, TDA9853H/V1.	9352	671	19557
7891	Transistor, NPN, BC847B(COL).	3198	010	42030
7892	Transistor, NPN, BC847B(COL).	3198	010	42030
7901	IC, AN7522N PH.	9322	181	41682
9611	Coil, 27u, 10%.	3198	018	22790
9672	Coil, 22u, 10%.	3198	018	22290
9678	Coil, 22u, 10%.	3198	018	22290
CBA	Main Chassis Assembly.	3139	187	23211

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742

S = Safety Part Be sure to use exact replacement part.

1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3089	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass.	2322	734	63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass.	2322	734	61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass.	2322	734	62701
3096	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3097	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702
3098	Res, 75 ohm, 1%, 1/8W, Metalized Glass.	2322	734	67509
3099	Res, 68 ohm, 1%, 1/8W, Metalized Glass.	2322	734	66809
4091	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
CBA	Top Control Panel Assembly.	3139	177	26241

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3139	128	76161
AC03	Anode Lead Spacer.	3139	124	17541
AC04	Batteries for Remote Control Transmitter.	9299	000	65263
AC05	Cabinet Back.	3139	124	45991
S AC09	CRT, A51ERF135X82.	9301	903	81301
S AC12	Degaussing Coil.	3141	058	20131
AC17	Owner's Manual.	3121	235	20621
AC20A	Cabinet Front.	3139	177	65671
AC20B	Chassis Guide.	3139	124	30812
AC20C	Light Guide.	3139	124	32221
AC20D	Nameplate.	3139	120	01371
AC20E	Power Button.	3139	177	65691
AC20H	Speaker, 16 ohm, 5W (2 Used).	2422	264	00411
AC20J1	Top Control Bracket.	3139	124	30381
AC20J3	Top Control Cover.	3139	124	31131
AC20J4	Top Control Rubber.	3139	124	30391
AC20J5	Top Control Button Assembly.	3139	137	66921
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

20PT653R/37 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector.	2422	025 16375	2340	er.	2222	368 90177
0214	5 Pin Connector.	2422	025 12481	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0219	6 Pin Connector.	2422	025 12482	2342	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector.	2422	025 04853	2343	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0221	2 Pin Connector.	2422	025 15503	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0222	2 Pin Connector.	2422	025 10646	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0223	A/V Jack	2422	026 05236	2405	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack.	2422	026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0229	3 Pin Connector.	2412	020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0239	3 Pin Connector.	2422	025 16382	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
0243	6 Pin Connector.	2422	025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0244	5 Pin Connector.	2422	025 04853	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
0245	6 Pin Connector.	2422	025 04854	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
0246	5 Pin Connector.	2422	025 12481	2457	Cap, 270n, 5%, 250v, Metalized Polyprop		
S 0254	9 Pin CRT Socket	2422	500 80076		ylene.	2222	479 90016
0267	3 Pin Connector.	2412	020 00725	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
0269	Jack	2422	026 05182	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 1000	Tuner, V+U, PLL	2422	542 90108	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1002	SAW Filter, 45.75MHz	2422	549 44518	2463	Cap, 680p, 10%, 2000v, Ceramic	2020	558 90485
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2465	Cap, 9n1, 5%, 1600v, Polypropylene	2222	375 90153
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2467	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
S 1515	Relay, 5 Amp, 12V.	2422	132 07467	2468	Cap, 33n, 10%, 400v, Polyester	2222	347 90227
1660	Crystal, 12MHz000	2422	543 01203	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
1811	3 Pin Connector.	2412	020 00725	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290		pylene	2222	336 29148
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90626
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2868	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2869	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
				2870	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
				2871	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510

S = Safety Part Be sure to use exact replacement part.

20PT653R/37 (continued)

2872	Cap, 1n8, 10%, 50v, Ceramic.	2238	586	15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198	021	31060
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198	021	34740
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
2876	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198	025	54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020
2877	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198	025	51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198	025	51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
2880	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306	207	03109
2884	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198	025	52280	3341	Res, 4R7, 5%, 1/3W, Metal Film. . . .	2306	204	03478
2885	Cap, 220n, 10%, 50v, Polyester.	3198	014	02240	3342	Res, 4R7, 5%, 1/3W, Metal Film. . . .	2306	204	03478
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017	42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198	013	01520
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322	593	13507
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198	026	21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198	025	51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010
2904	Cap, 27n, 10%, 50v, Ceramic.	2238	580	15642	3442	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238	580	15624	3443	Res, 1M, 5%, 1/10W, Metalized Glass. . .	3198	021	51050
2906	Cap, 27n, 10%, 50v, Ceramic.	2238	580	15642	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198	011	01530
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238	580	15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198	011	05620
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198	025	51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01810
2910	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210
2911	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	06890
2950	Cap, 330p, 5%, 50v, Ceramic.	3198	016	33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03109
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3452	Res, 3K6, 1%, 3/5W, Metal Film.	2312	915	13602
3002	Res, Zero ohm, "Chip" Jumper.	3198	021	90030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198	021	31520	3454	Res, 1K5, 1%, 3/5W, Metal Film.	2312	915	11502
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198	021	38220	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198	012	26880
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3456	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	06890	3457	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198	012	21530
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198	021	32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198	011	03920
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198	021	32240	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312	915	12703
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198	011	03320
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3470	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322	730	61274
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312	915	13908
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3472	Res, 6R8, 1%, 3/5W, Metal Film.	2312	915	16808
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3473	Res, 6R8, 1%, 3/5W, Metal Film.	2312	915	16808
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312	915	12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312	915	12202
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198	021	34730	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198	021	34730	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198	021	52720
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122	101	02083
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198	021	34730	3481	Res, 18K, 1%, 3/5W, Metal Film.	2312	915	11803
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312	915	11203
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198	021	34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198	011	03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306	207	03478
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	3491	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198	021	51030
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198	021	31540	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306	204	03688
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198	011	05620	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306	207	03478
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198	011	01030	3495	Res, 22K, 5%, 1/10W, Metalized Glass. .	3198	021	52230
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198	021	31520	3496	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198	021	51040
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198	021	31030	3497	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198	021	51040
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322	734	61202	3498	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198	021	51230
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03910	S 3504	Res, PTC, 3 ohm, 144V.	2122	663	00019
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322	242	13155
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3507	Surge Protector.	2422	549	43073
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198	013	02210
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198	011	02230	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	02710
3206	Res, 33K, 5%, 1/16W, Metalized Glass. . .	3198	021	33330	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198	021	51220
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198	011	04780
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198	021	53340
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03101
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198	021	55630
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	05610	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198	021	33340	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198	012	11070
3218	Res, 82K, 5%, 1/16W, Metalized Glass. . .	3198	021	38230	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. . .	3198	021	32220	3528	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3529	Res, 47K, 5%, 1/10W, Metalized Glass. . .	3198	021	54730
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	05610	3530	Res, 10K, 5%, 1/10W, Metalized Glass. . .	3198	021	51030
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. . .	3198	021	54720
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610	3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306	204	03222
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. . .	3198	021	32220	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. . .	3198	021	51520
3241	Res, 22K, 5%, 1/16W, Metalized Glass. . .	3198	021	32230	3543	Res, 82K, 1%, 3/5W, Metal Film.	2312	915	18203
3242	Res, 27K, 5%, 1/16W, Metalized Glass. . .	3198	021	32730	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322	734	64702
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	08210	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322	730	61274
3245	Res, 39K, 1%, 1/16W, Metalized Glass. . .	2322	704	63903	3548	Res, 15K, 5%, 1/10W, Metalized Glass. . .	3198	021	51530
3246	Res, 10K, 5%, 1/16W, Metalized Glass. . .	3198	021	31030	3552	Res, 10K, 5%, 1/10W, Metalized Glass. . .	3198	021	51030
3247	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322	702	60274	3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020
3248	Res, 33K, 5%, 1/16W, Metalized Glass. . .	3198	021	33330	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	08210	3562	Res, 12K, 5%, 1/10W, Metalized Glass. . .	3198	021	51230
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3563	Res, 5K6, 5%, 1/10W, Metalized Glass. . .	3198	021	55620
3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	S 3565	Res, 330 ohm, 5%, 1W, Metal Film. . . .	3198	012	13310

S = Safety Part Be sure to use exact replacement part.

20PT653R/37 (continued)

3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5001	Coil, 27u, 10%	3198	018	22790
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5002	Coil, 820n, 10%	3198	018	18270
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5201	Coil, 6u8, 5%	3198	018	16880
3636	Res, 1K, 5%, 1/10W, Metalized Glass .	3198	021	51020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	5242	Coil, 10u, 5%	3198	018	11090
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5342	Coil, 22u.	2422	535	97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	S 5445	Transformer, LOT	2422	531	02519
3802	Res, 1K, 5%, 1/16W, Metalized Glass .	3198	021	31020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5453	Coil, 22u, 5%	3198	018	12290
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear Correction, 82u	2422	536	00425
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 22u.	2422	535	97333
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5520	Transformer, SS90009-04.	2422	531	02459
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5561	Coil, 27u, 5%	2422	535	95366
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5604	Coil, 5u6, 5%	3198	018	15680
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	6001	Zener Diode, 33 volt	3198	010	23390
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	6150	Diode, Signal, BAS316.	3198	010	10630
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	6201	Diode, Signal, BAS316.	3198	010	10630
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	6202	Diode, Signal, BAS316.	3198	010	10630
3901	Res, 1K, 5%, 1/16W, Metalized Glass .	3198	021	31020	6206	Zener Diode, 6.8 volt.	3198	020	56880
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6331	Diode, Signal, BAV21	3198	010	10070
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6332	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6333	Diode, Signal, BAV21	3198	010	10070
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6335	Diode, Signal, BAV21	3198	010	10070
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6445	Zener Diode, 10 volt.	3198	020	51090
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6447	Diode, Signal, 1N4148.	3198	010	10010
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6453	Zener Diode, 5.6 volt.	3198	020	55680
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6463	Zener Diode, 8.2 volt.	3198	020	58280
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6466	Diode, Signal, BAV21	3198	010	10070
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6467	Diode, Signal, BAS316.	3198	010	10630
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6470	Diode, Signal, BAV99	3198	010	10620
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6476	Zener Diode, 15 volt	3198	010	21590
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6481	Zener Diode, 5.6 volt.	3198	020	25680
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6482	Zener Diode, 9.1 volt.	9331	177	80133
4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6483	Zener Diode, 33 volt	3198	010	23390
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6485	Diode, Rect, BYD33J.	9337	234	20133
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6486	Diode, Rect, EGP20DL-5100.	9322	164	42682
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6487	Diode, Rect, BYD33D.	9337	234	00133
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6488	Diode, Rect, EGP20DL-5100.	9322	164	42682
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322	138	08667
4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6520	Diode, Rect, BYD33D.	9337	234	00133
4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6523	Diode, Signal, 1N4148.	3198	010	10010
4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6524	Diode, Rect, 1N5062.	3198	010	10120
4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6525	Diode, Rect, 1N5062.	3198	010	10120
4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6526	Zener Diode, 22 volt	3198	020	52290
4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6540	Zener Diode, 6.2 volt.	9331	668	30133
4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6541	Zener Diode, 10 volt	3198	020	51090
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6560	Diode, Rect, BYV29X-500.	9340	555	59127
4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6562	Diode, Rect, EGP20DL-5100.	9322	164	42682

S = Safety Part Be sure to use exact replacement part.

20PT653R/37 (continued)

6563	Diode, Signal, BAS316.	3198	010	10630
6565	Diode, Signal, BAV70	9331	849	10215
6566	Diode, Signal, 1N4148.	3198	010	10010
6569	Diode, Signal, BAS316.	3198	010	10630
6570	Zener Diode, 6.8 volt.	3198	020	56880
6580	Diode, Signal, BAS316.	3198	010	10630
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020
7101	Transistor, NPN, BC847B(COL)	3198	010	42030
7102	Transistor, PNP, BC857B(COL)	3198	010	42150
7103	Transistor, NPN, BC847B(COL)	3198	010	42030
7200	IC, TDA9577H/N1/AI/1130.	9352	731	51557
7201	Transistor, NPN, BC847B(COL)	3198	010	42030
7204	Transistor, PNP, BC857B(COL)	3198	010	42150
7205	Transistor, PNP, BC857B(COL)	3198	010	42150
7330	IC, TDA6107JF/N3	9352	713	37112
7441	Transistor, PNP, BC857B(COL)	3198	010	42150
7443	Transistor, PNP, BC557B(COL)	3198	020	40110
7450	Transistor, PNP, PDTA114ET	3198	010	44010
7460	Transistor, NPN, BU4508DX.	9340	550	92127
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530
7462	Transistor, NPN, PDTCL43ZT	9340	547	00215
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430
7471	IC, TDA8359J/N2.	9352	701	64112
7480	Transistor, NPN, BD135	3198	020	41010
7482	Transistor, NPN, BD135	3198	020	41010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667
7520	IC, TEA1507P/N1.	9352	673	56112
7521	Power FET, FQPF9N50.	9322	187	16687
7522	Transistor, NPN, BC847B(COL)	3198	010	42030
7540	Transistor, NPN, BC547B(COL)	3198	020	40030
7541	Transistor, NPN, PDTCL14ET	9340	310	10215
7542	Transistor, PNP, BC857B(COL)	3198	010	42150
7560	IC, L78L33ACZ.	9322	134	92676
7561	Transistor, NPN, PDTCL43ZT	9340	547	00215
7580	Transistor, PNP, BC857B(COL)	3198	010	42150
7602	IC, M24C08-WBN6.	9322	154	38682
7802	IC, HEF4053BT.	9333	729	60653
7861	IC, TDA9853H/V1.	9352	671	19557
7891	Transistor, NPN, BC847B(COL)	3198	010	42030
7892	Transistor, NPN, BC847B(COL)	3198	010	42030
7901	IC, AN7522N PH	9322	181	41682
9611	Coil, 27u, 10%	3198	018	22790
9672	Coil, 22u, 10%	3198	018	22290
9678	Coil, 22u, 10%	3198	018	22290
CBA	Main Chassis Assembly.	3139	187	21091

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

S = Safety Part Be sure to use exact replacement part.

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glass	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3013	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702
3084	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509
3085	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701
4086	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4087	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90020
CBA	Top Control Panel Assembly	3139	187	20701

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3139	128	76161
AC03	Anode Lead Spacer.	3139	124	17541
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	43531
S AC09	CRT, A51ERF135X82.	9301	903	81301
S AC12	Degaussing Coil.	3141	058	20131
AC13	Front Interface Panel Bracket.	3139	124	32892
AC14	Front Main PCB Bracket	3139	124	45641
AC17	Owner's Manual	3139	125	30831
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20A	Cabinet Front.	3139	177	53181
AC20B	Chassis Guide.	3139	124	25893
AC20B	Chassis Guide.	3139	124	45661
AC20C	Light Guide.	3139	124	41421
AC20D	Nameplate.	3139	120	01371
AC20E	Power Button	3139	177	58491
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC20J	Top Control Assembly	3139	177	56381
AC20J1	Top Control Bracket.	3139	124	39172
AC20J2	Top Control Buttons.	3139	124	39182
REMOTE	Remote Control Transmitter, RC19036001/01.	3139	228	86493

21PT6331/44R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0022	Bracket	3139	124 44421
0040	Cover, 3 Pin Cinch	3139	124 25551
0118	U-Cooling Plate	3139	121 26731
0122	Heatsink	3139	121 62214
0123	Heatsink, Audio	3139	121 62501
0127	Socket Fuse	2422	088 00271
0129	NTC Holder	3139	120 10151
0136	IC-Spring	3104	301 22081
0137	Spring	3139	121 24583
0138	IC-Spring	3104	301 22081
0139	Spring	3135	011 01041
0141	IC-Spring	3104	301 22081
0152	Cable, DIPMate, 6 Pin	3139	121 08841
0153	Cable, DIPMate, 5 Pin, 480mm	3139	121 07951
0211	2 Pin Connector	2422	025 16269
0218	A/V Jack	2422	026 04742
0232	Headphone Jack	2422	026 04747
S 0254	9 Pin CRT Socket	2422	500 80076
0280	4 Pin Connector	2422	025 12479
0320	Factory Plate	3122	120 01701
S 1000	Tuner, V+U, PLL	2422	542 90108
S 1515	Relay, 5 Amp, 12V.	2422	132 07444
1600	Tact Switch	2422	128 02742
1601	Tact Switch	2422	128 02742
1602	Tact Switch	2422	128 02742
1603	Tact Switch	2422	128 02742
1606	Tact Switch	2422	128 02742
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344
2004	Cap, 47n, +80/-20%, 50v, Ceramic	3198	024 44730
2181	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2182	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2183	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2210	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2226	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2227	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
2228	Cap, 820p, 5%, 25v, Ceramic	3198	016 38210
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2243	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445
2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene	2222	479 90016
2458	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
S 2465	Cap, 9n1, 5%, 1600v, Polypropylene	2020	301 90248
2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2468	Cap, 33n, 10%, 400v, Polyester	2222	347 90227
2472	Cap, 10n, 10%, 100v, Metalized Polyester	2222	365 85103
2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2482	Cap, 33n, 10%, 250v, Polyester	2222	347 90213
2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022	330 00018
S 2503	Cap, 330u, 20%, 450v, Electrolytic	2020	024 90774
2509	Cap, 100n, 20%, 275v, Metalized Polypropylene	2222	336 29144
S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90128
2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222	910 19856
2606	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740
2691	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic	2238	586 15626
2868	Cap, 150p, 5%, 50v, Ceramic	3198	016 31510
2869	Cap, 68n, 10%, 50v, Polyester	3198	014 06830
2870	Cap, 68n, 10%, 50v, Polyester	3198	014 06830
2871	Cap, 150p, 5%, 50v, Ceramic	3198	016 31510
2872	Cap, 1n8, 10%, 50v, Ceramic	2238	586 15626
2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2874	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010
2875	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780
2877	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090

2878	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2879	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
2880	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2883	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2885	Cap, 220n, 10%, 50v, Polyester	3198	014 02240
2886	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2904	Cap, 27n, 10%, 50v, Ceramic	2238	580 15642
2905	Cap, 1n2, 10%, 50v, Ceramic	2238	586 15624
2906	Cap, 27n, 10%, 50v, Ceramic	2238	580 15642
2907	Cap, 1n2, 10%, 50v, Ceramic	2238	586 15624
2910	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030
2911	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030
2950	Cap, 330p, 5%, 50v, Ceramic	3198	016 33310
2981	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2982	Cap, 470p, 10%, 50v, Ceramic	3198	017 34710
2983	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2984	Cap, 470p, 10%, 50v, Ceramic	3198	017 34710
3182	Wire Jumper	3198	036 90010
3184	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021 34730
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198	011 01510
3186	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021 34730
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film	3198	011 01510
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198	021 33330
3232	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021 32220
3247	Res, 270K, 5%, 1/16W, Metalized Glass	3222	702 60274
3258	Res, 330K, 5%, 1/16W, Metalized Glass	3198	021 33340
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306	204 03108
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306	204 03108
3442	Res, Zero ohm, "Chip" Jumper	3198	021 90020
3443	Res, 1M, 5%, 1/10W, Metalized Glass	3198	021 51050
3447	Res, 56 ohm, 5%, 1/4W, Carbon Film	2122	101 02081
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film	2306	204 03109
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312	915 15102
3454	Res, 2K, 1%, 3/5W, Metal Film	2312	915 12002
3456	Res, Zero ohm, "Chip" Jumper	3198	021 90020
3457	Res, Zero ohm, "Chip" Jumper	3198	021 90020
3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198	011 03320
3470	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730 61274
3471	Res, 6R8, 1%, 3/5W, Metal Film	2312	915 16808
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312	915 16808
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312	915 13908
3481	Res, 18K, 1%, 3/5W, Metal Film	2312	915 11803
3482	Res, 12K, 1%, 3/5W, Metal Film	2312	915 11203
3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011 08220
3491	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
3492	Res, 820 ohm, 5%, 1/10W, Metalized Glass	3198	021 58210
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306	204 03688
3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198	021 52230
3496	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021 51040
3497	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021 51040
3498	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021 51230
3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322	242 13335
3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322	242 13335
S 3504	Res, PTC, 9 ohm, 265V.	2122	663 00021
3521	Res, 22 ohm, 5%, 1/6W, Carbon Film	3198	011 02290
3522	Res, 390K, 5%, 1/8W, Metalized Glass	2322	730 61394
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film	2306	204 03479
3526	Res, 0R15, 5%, 3/5W, Metal Film	3198	012 11570
3527	Res, 0R22, 5%, 3/5W, Metal Film	3198	012 12270
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730 61274
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198	021 51020
3561	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198	011 02210
3563	Res, 8K2, 5%, 1/10W, Metalized Glass	3198	021 58220
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012 13310
3622	Res, Zero ohm, "Chip" Jumper	3198	021 90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198	021 34710
3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021 37590
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734 61801
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734 62701
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734 63901
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734 63901
3686	Res, Zero ohm, "Chip" Jumper	3198	021 90030
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734 67509
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734 66809
3689	Res, 2K7, 1%, 1/8W, Metalized Glass	2322	734 62702
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glass	3198	021 33310
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glass	3198	021 32210
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021 34720
3861	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021 31040
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198	021 31530
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198	021 31220
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glass	3198	021 31010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011 01010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011 01010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021 33320
3901	Res, 1K, 5%, 1/16W, Metalized Glass	3198	021 31020
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021 33320
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021 33320
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021 31030

S = Safety Part Be sure to use exact replacement part.

21PT6331/44R (continued)

3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	9511	Wire Jumper.	3198 036 90010
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	9512	Wire Jumper.	3198 036 90010
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	9513	Wire Jumper.	3198 036 90010
3981	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210	9514	Wire Jumper.	3198 036 90010
3982	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210	9515	Wire Jumper.	3198 036 90010
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9516	Wire Jumper.	3198 036 90010
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9521	Wire Jumper.	3198 036 90010
4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9522	Wire Jumper.	3198 036 90010
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9524	Wire Jumper.	3198 036 90010
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9528	Wire Jumper.	3198 036 90010
4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9530	Wire Jumper.	3198 036 90010
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9612	Wire Jumper.	3198 036 90010
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9613	Wire Jumper.	3198 036 90010
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9614	Wire Jumper.	3198 036 90010
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9617	Wire Jumper.	3198 036 90010
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9619	Wire Jumper.	3198 036 90010
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9620	Wire Jumper.	3198 036 90010
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9621	Wire Jumper.	3198 036 90010
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9622	Wire Jumper.	3198 036 90010
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9623	Wire Jumper.	3198 036 90010
5202	Wire Jumper.	3198 036 90010	9626	Wire Jumper.	3198 036 90010
5241	Wire Jumper.	3198 036 90010	9627	Wire Jumper.	3198 036 90010
5342	Coil, 22u.	2422 535 97333	9628	Wire Jumper.	3198 036 90010
S 5445	Transformer, LOT	2422 531 02519	9629	Wire Jumper.	3198 036 90010
5453	Coil, 22u, 5%.	3198 018 12290	9631	Wire Jumper.	3198 036 90010
5457	Coil, Linear Correction, 82u	2422 536 00425	9632	Wire Jumper.	3198 036 90010
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465	9633	Wire Jumper.	3198 036 90010
5471	Coil, 6u8, 20%	3198 018 76880	9637	Wire Jumper.	3198 036 90010
5480	Coil, 4u7, 5%.	2422 535 94213	9638	Wire Jumper.	3198 036 90010
S 5500	Mains Filter	2422 549 43567	9639	Wire Jumper.	3198 036 90010
S 5520	Transformer, SS42025-03.	2422 531 02462	9640	Wire Jumper.	3198 036 90010
5861	Coil, 10u, 5%.	3198 018 11090	9641	Wire Jumper.	3198 036 90010
6181	Zener Diode, 6.8 volt.	3198 020 56880	9642	Wire Jumper.	3198 036 90010
6453	Zener Diode, 5.6 volt.	3198 020 55680	9643	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9648	Wire Jumper.	3198 036 90010
6463	Zener Diode, 9.1 volt.	9322 150 08685	9650	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9654	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9657	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9658	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667	9659	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9660	Wire Jumper.	3198 036 90010
6541	Zener Diode, 9.1 volt.	9322 150 08685	9664	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9665	Wire Jumper.	3198 036 90010
6567	Zener Diode, 4.7 volt.	3198 020 54780	9666	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.2 volt.	9322 163 91685	9668	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9669	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9670	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9671	Wire Jumper.	3198 036 90010
7450	Transistor, PNP, PDTA114ET	3198 010 44010	9674	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1104(G)	9322 175 72667	9675	Wire Jumper.	3198 036 90010
7521	Transistor, FET, STP10NK80ZFP.	9322 196 57687	9676	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9679	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9680	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9686	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9687	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9184	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9850	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9852	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9853	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9861	Wire Jumper.	3198 036 90010
9451	Wire Jumper.	3198 036 90010	9862	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9864	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9865	Wire Jumper.	3198 036 90010
9472	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9873	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9877	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9903	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9904	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

21PT6331/44R (continued)

9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9912	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9916	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
CBA	Main Chassis	3141	058	58201

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3121	231	00081
AC04	Batteries for Remote Control Transmitter.	9299	000	65263
AC05	Cabinet Back.	3139	124	40813
AC09	CRT, A51QDX992X003	9322	182	97682
AC10	Customer Control Buttons	3139	177	60291
S AC12	Degaussing Coil.	2422	549	45507
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20942
AC20	Cabinet Front Assembly	3121	237	53042
AC20A	Cabinet Front.	3139	177	60311
AC20B	Chassis Guide.	3139	124	37561
AC20C	Light Guide.	3139	124	41241
AC20D	Nameplate.	3139	120	01371
AC20E	Power Button	3139	177	60301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC32	Yoke Wedge (2 Used).	3135	013	00311
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

21PT633R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0212	2 Pin Connector.	2422	025 16375	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
0218	A/V Jack	2422	026 04742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
0220	5 Pin Connector.	2422	025 04853	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
0221	2 Pin Connector.	2422	025 15503	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0222	2 Pin Connector.	2422	025 10646	2482	Cap, 33n, 10%, 250v, Polyester.	2222	347 90213
0232	Headphone Jack	2422	026 04747	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
0243	6 Pin Connector.	2422	025 04854	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
0244	5 Pin Connector.	2422	025 04853	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
0245	6 Pin Connector.	2422	025 04854	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
S 0254	9 Pin CRT Socket	2422	500 80076	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
0267	3 Pin Connector.	2412	020 00725	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
0280	4 Pin Connector.	2422	025 12479	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2222	336 29148
S 1000	Tuner, V+U PLL	2422	542 90098	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1002	SAW Filter, 45.75MHz	2422	549 44518	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
1600	Tact Switch.	2422	128 02742	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
1601	Tact Switch.	2422	128 02742	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
1602	Tact Switch.	2422	128 02742	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
1603	Tact Switch.	2422	128 02742	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
1606	Tact Switch.	2422	128 02742	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
1660	Crystal, 12MHz000	2422	543 01203	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2181	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2182	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2183	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2209	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2210	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2243	Cap, 10n, 10%, 50v, Ceramic.	3198	017 31030	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2864	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2868	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2869	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2870	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2330	Cap, 100n, 10%, 250v, Metalized Polyest			2871	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
	er.	2222	368 90177	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445	2873	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495	2874	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320	2875	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610	2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559	2877	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040	2878	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445	2879	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210	2880	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2883	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730	2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080	2885	Cap, 220n, 10%, 50v, Polyester.	3198	014 02240
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139	2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790	2902	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222	479 90016	2903	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331	2904	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810	2905	Cap, 1n2, 10%, 50v, Ceramic.	2238	586 15624
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010	2906	Cap, 27n, 10%, 50v, Ceramic.	2238	580 15642
S 2463	Cap, 390p, 10%, 2000v, Ceramic.	2020	558 90482	2907	Cap, 1n2, 10%, 50v, Ceramic.	2238	586 15624
2465	Cap, 9n1, 5%, 1600v, Polypropylene.	2222	375 90153	2908	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2466	Cap, 15n, 10%, 400v, Polyester.	2222	347 90219	2910	Cap, 10n, 10%, 50v, Ceramic.	3198	017 31030
2468	Cap, 33n, 10%, 400v, Polyester.	2222	347 90227	2911	Cap, 10n, 10%, 50v, Ceramic.	3198	017 31030
2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040	2950	Cap, 330p, 5%, 50v, Ceramic.	3198	016 33310
2472	Cap, 10n, 10%, 100v, Metalized Polyeste	2222	365 85103	2981	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104	2982	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710
				2983	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2984	Cap, 470p, 10%, 50v, Ceramic.	3198	017 34710

S = Safety Part Be sure to use exact replacement part.

21PT633R85C (continued)

3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198	021	58210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306	204	03688
3002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306	207	03478
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	3496	Res, 100K, 5%, 1/10W, Metalized Glass..	3198	021	51040
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3497	Res, 100K, 5%, 1/10W, Metalized Glass..	3198	021	51040
3182	Wire Jumper.	3198	036	90010	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3501	Res, 3M3, 5%, 1/2W, Metalized Glass..	2322	242	13335
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730	S 3504	Res, PTC, 3 ohm, 144V.	2122	663	00019
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3506	Res, 1M5, 5%, 1/2W, Metalized Glass..	2322	242	13155
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03910	3507	Surge Protector.	2422	549	43073
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198	013	02210
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02710
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198	011	02230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198	021	51220
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198	021	33330	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198	011	04780
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	3522	Res, 330K, 5%, 1/10W, Metalized Glass..	3198	021	53340
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306	204	03101
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198	021	55630
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070
3217	Res, 330K, 5%, 1/16W, Metalized Glass..	3198	021	33340	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198	012	13370
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198	021	38230	3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198	021	32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198	021	32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322	704	63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274
3247	Res, 270K, 5%, 1/16W, Metalized Glass..	2322	702	60274	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198	021	33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210	3557	Res, 1K, 5%, 1/10W, Metalized Glass..	3198	021	51020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198	021	31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620
3258	Res, 330K, 5%, 1/16W, Metalized Glass..	3198	021	33340	S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310
3259	Res, 470K, 5%, 1/16W, Metalized Glass..	3198	021	34740	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020	3595	Res, 220K, 5%, 1/10W, Metalized Glass..	3198	021	52240
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	3596	Res, 220K, 5%, 1/10W, Metalized Glass..	3198	021	52240
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198	013	01020	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306	207	03109	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3341	Res, 1R, 5%, 0.33W	4822	052	10108	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198	013	01520	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020
S 3345	Varactor, 1MA/50V, Max 115V.	2322	593	13507	3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820
3442	Res, Zero ohm, "Chip" Jumper	3198	021	90020	3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198	021	51050	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198	011	01530	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198	011	05620	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3447	Res, 56 ohm, 5%, 1/4W, Carbon Film. . .	2122	101	02081	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198	011	08210	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	06890	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03109	3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312	915	15102	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020
3453	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312	915	12002	3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198	012	26880	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90020	3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801
3457	Res, Zero ohm, "Chip" Jumper	3198	021	90020	3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701
3458	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198	012	21530	3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198	011	03920	3686	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390	3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509
3465	Res, 27K, 1%, 3/5W, Metal Film	2312	915	12703	3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198	011	03320	3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322	734	62702
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310
3471	Res, 6R8, 1%, 3/5W, Metal Film	2312	915	16808	3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210
3472	Res, 6R8, 1%, 3/5W, Metal Film	2312	915	16808	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312	915	13908	3861	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312	915	12202	3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312	915	12202	3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01510	3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198	021	52720	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3481	Res, 18K, 1%, 3/5W, Metal Film	2312	915	11803	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3482	Res, 12K, 1%, 3/5W, Metal Film	2312	915	11203	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198	011	03920	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306	207	03478	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320

S = Safety Part Be sure to use exact replacement part.

21PT633R85C (continued)

3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6468	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6470	Diode, Signal, BAV99	3198 010 10620
3981	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210	6476	Zener Diode, 15 volt	3198 010 21590
3982	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01210	6481	Zener Diode, 5.6 volt.	3198 010 25680
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYD33J.	9337 234 20133
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6487	Diode, Rect, BYD33D.	9337 234 00133
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6520	Diode, Rect, BYD33D.	9337 234 00133
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6566	Diode, Signal, 1N4148.	3198 010 10010
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6569	Diode, Signal, BAS316.	3198 010 10630
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6570	Zener Diode, 6.8 volt.	3198 020 56880
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6580	Diode, Signal, BAS316.	3198 010 10630
4808	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6691	LED, LTL-10234WHCR	9322 185 69682
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6692	IR Receiver.	9322 127 54667
4817	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4819	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7330	IC, TDA6107JF/N3	9352 713 37112
4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7443	Transistor, PNP, BC857B(COL)	3198 020 40110
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7450	Transistor, PNP, PDTA114ET	3198 010 44010
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7460	Transistor, NPN, BU4508DX.	9340 550 92127
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7462	Transistor, NPN, PDTCL143ZT	9340 547 00215
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7471	IC, TDA8359J/N2.	9352 701 64112
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	7480	Transistor, NPN, BD135	3198 020 41010
5001	Coil, 27u, 10%	3198 018 22790	7482	Transistor, NPN, BD135	3198 020 41010
5002	Coil, 820n, 10%	3198 018 18270	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
5201	Coil, 6u8, 5%	3198 018 16880	7520	IC, TEA1507P/N1.	9352 673 56112
5202	Wire Jumper.	3198 036 90010	7521	Power FET, FQPF9N50.	9322 187 16687
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7541	Transistor, NPN, PDTCL14ET	9340 310 10215
5241	Wire Jumper.	3198 036 90010	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5242	Coil, 10u, 5%	3198 018 11090	7560	IC, L78L33ACZ.	9322 134 92676
5342	Coil, 22u.	2422 535 97333	7561	Transistor, NPN, PDTCL143ZT	9340 547 00215
S 5445	Transformer, LOT	2422 531 02519	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7602	IC, M24C08-WBN6.	9322 154 38682
5453	Coil, 22u, 5%	3198 018 12290	7861	IC, TDA9853H/V1.	9352 671 19557
5457	Coil, Linear Correction, 82u	2422 536 00425	7901	IC, AN7522N PH	9322 181 41682
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465	9001	Wire Jumper.	3198 036 90010
5471	Coil, 6u8, 20%	3198 018 76880	9181	Wire Jumper.	3198 036 90010
5472	Coil, 3u3, 10%	3198 018 23380	9182	Wire Jumper.	3198 036 90010
5480	Coil, 4u7, 5%	2422 535 94213	9183	Wire Jumper.	3198 036 90010
S 5501	Mains Filter	2422 549 43432	9184	Wire Jumper.	3198 036 90010
S 5520	Transformer, SS39009-04.	2422 531 02459	9192	Wire Jumper.	3198 036 90010
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	9193	Wire Jumper.	3198 036 90010
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	9311	Wire Jumper.	3198 036 90010
5561	Coil, 27u, 5%	2422 535 95366	9312	Wire Jumper.	3198 036 90010
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	9406	Wire Jumper.	3198 036 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	9407	Wire Jumper.	3198 036 90010
5602	Coil, 5u6, 5%	3198 018 15680	9408	Wire Jumper.	3198 036 90010
5603	Coil, 5u6, 5%	3198 018 15680	9409	Wire Jumper.	3198 036 90010
5604	Coil, 5u6, 5%	3198 018 15680	9410	Wire Jumper.	3198 036 90010
5861	Coil, 10u, 5%	3198 018 11090	9411	Wire Jumper.	3198 036 90010
6001	Zener Diode, 33 volt	3198 010 23390	9412	Wire Jumper.	3198 036 90010
6181	Zener Diode, 6.8 volt.	3198 020 56880	9413	Wire Jumper.	3198 036 90010
6201	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9416	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9417	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21	3198 010 10070	9418	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9419	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21	3198 010 10070	9421	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21	3198 010 10070	9422	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9423	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9425	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9427	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9451	Wire Jumper.	3198 036 90010
6453	Zener Diode, 5.6 volt.	3198 020 55680	9453	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9460	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9472	Wire Jumper.	3198 036 90010
6463	Zener Diode, 9.1 volt.	9322 150 08685	9500	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9501	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9503	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9506	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

21PT633R85C (continued)

9507	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9873	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9877	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9901	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9902	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010	9903	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010	9904	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010	9905	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010	9911	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010	9912	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010	9913	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010	9914	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010	9915	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010	9916	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010	9918	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790	9919	Wire Jumper.	3198 036 90010
9612	Wire Jumper.	3198 036 90010	9920	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010	9991	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010	9993	Wire Jumper.	3198 036 90010
9617	Wire Jumper.	3198 036 90010	9994	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010	9996	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010	9997	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010	CBA	Main Chassis Assembly.	3141 058 57931
9622	Wire Jumper.	3198 036 90010	Channel One Card Parts		
9623	Wire Jumper.	3198 036 90010	Channel One Card Parts		
9626	Wire Jumper.	3198 036 90010	2D 3 Line Comb Filter Parts		
9627	Wire Jumper.	3198 036 90010	2D 3 Line Comb Filter Parts		
9628	Wire Jumper.	3198 036 90010	DAF Panel Parts		
9629	Wire Jumper.	3198 036 90010	DAF Panel Parts		
9631	Wire Jumper.	3198 036 90010	DVD Eject Panel Parts		
9632	Wire Jumper.	3198 036 90010	DVD Eject Panel Parts		
9633	Wire Jumper.	3198 036 90010	DVD Interface Panel Parts		
9637	Wire Jumper.	3198 036 90010	DVD Interface Panel Parts		
9638	Wire Jumper.	3198 036 90010	Front Interface Panel Parts		
9639	Wire Jumper.	3198 036 90010	Front Interface Panel Parts		
9640	Wire Jumper.	3198 036 90010	ITV Front Jack Panel Parts		
9641	Wire Jumper.	3198 036 90010	ITV Front Jack Panel Parts		
9642	Wire Jumper.	3198 036 90010	Net 1 Panel (part of Scan 4 Card Assembly)		
9643	Wire Jumper.	3198 036 90010	Net 1 Panel (part of Scan 4 Card Assemb ly)		
9648	Wire Jumper.	3198 036 90010	Scan 4 Card (part of Scan 4 Card Assembly)		
9650	Wire Jumper.	3198 036 90010	Scan 4 Card (part of Scan 4 Card Assemb ly)		
9654	Wire Jumper.	3198 036 90010	Side Jack Panel Parts		
9657	Wire Jumper.	3198 036 90010	Side Jack Panel Parts		
9658	Wire Jumper.	3198 036 90010	Subwoofer Panel Parts		
9659	Wire Jumper.	3198 036 90010	Subwoofer Panel Parts		
9660	Wire Jumper.	3198 036 90010	Top Control Panel Parts		
9664	Wire Jumper.	3198 036 90010	Top Control Panel Parts		
9665	Wire Jumper.	3198 036 90010	Cabinet & Accessory Parts		
9666	Wire Jumper.	3198 036 90010	Cabinet & Accessory Parts		
9668	Wire Jumper.	3198 036 90010	S AC01	AC Cord.	3135 010 03831
9669	Wire Jumper.	3198 036 90010	AC03	Anode Lead Spacer (3 Used)	3135 014 04471
9670	Wire Jumper.	3198 036 90010	AC04	Batteries for Remote Control Transmitt	9299 000 65263
9671	Wire Jumper.	3198 036 90010	AC05	Cabinet Back	3139 124 40813
9672	Coil, 22u, 10%	3198 018 22290	S AC09	CRT, A51QDX992X001	9322 182 96682
9674	Wire Jumper.	3198 036 90010	AC10	Customer Control Buttons	3139 177 60291
9675	Wire Jumper.	3198 036 90010	S AC12	Degaussing Coil.	3139 128 23841
9676	Wire Jumper.	3198 036 90010	AC17	Owner's Manual	3121 235 20731
9678	Coil, 22u, 10%	3198 018 22290	AC20	Cabinet Front Assembly	3121 237 53041
9679	Wire Jumper.	3198 036 90010	AC20A	Cabinet Front.	3139 177 60311
9680	Wire Jumper.	3198 036 90010	AC20B	Chassis Guide.	3139 124 37561
9686	Wire Jumper.	3198 036 90010	AC20C	Light Guide.	3139 124 41241
9687	Wire Jumper.	3198 036 90010	AC20D	Nameplate.	3139 120 01371
9688	Wire Jumper.	3198 036 90010	AC20E	Power Button	3139 177 60301
9690	Wire Jumper.	3198 036 90010	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
9691	Wire Jumper.	3198 036 90010	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139 228 86463
9695	Wire Jumper.	3198 036 90010			
9697	Wire Jumper.	3198 036 90010			
9698	Wire Jumper.	3198 036 90010			
9699	Wire Jumper.	3198 036 90010			
9821	Wire Jumper.	3198 036 90010			
9822	Wire Jumper.	3198 036 90010			
9825	Wire Jumper.	3198 036 90010			
9828	Wire Jumper.	3198 036 90010			
9829	Wire Jumper.	3198 036 90010			
9831	Wire Jumper.	3198 036 90010			
9832	Wire Jumper.	3198 036 90010			
9837	Wire Jumper.	3198 036 90010			
9838	Wire Jumper.	3198 036 90010			
9839	Wire Jumper.	3198 036 90010			
9846	Wire Jumper.	3198 036 90010			
9847	Wire Jumper.	3198 036 90010			
9849	Wire Jumper.	3198 036 90010			
9850	Wire Jumper.	3198 036 90010			
9851	Wire Jumper.	3198 036 90010			
9852	Wire Jumper.	3198 036 90010			
9853	Wire Jumper.	3198 036 90010			
9856	Wire Jumper.	3198 036 90010			
9860	Wire Jumper.	3198 036 90010			
9861	Wire Jumper.	3198 036 90010			
9862	Wire Jumper.	3198 036 90010			
9864	Wire Jumper.	3198 036 90010			
9865	Wire Jumper.	3198 036 90010			

S = Safety Part. Be sure to use exact replacement part.

21PT6431/44R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0122	Heatsink	3139	121 62214
0123	Heatsink, Audio.	3139	121 62501
0127	Socket Fuse.	2422	088 00271
0129	NTC Holder	3139	120 10151
0136	IC-Spring.	3104	301 22081
0137	Spring	3139	121 24583
0138	IC-Spring.	3104	301 22081
0139	Spring for Bracket	3122	121 24786
0141	IC-Spring.	3104	301 22081
0152	Cable, DIPMate, 6 Pin.	3139	121 08841
0153	Cable, DIPMate, 5 Pin, 480mm	3139	121 07951
0211	2 Pin Connector.	2422	025 16269
0212	2 Pin Connector.	2422	025 16375
0220	5 Pin Connector.	2422	025 04853
0221	2 Pin Connector.	2422	025 15503
0223	A/V Jack	2422	026 05236
0225	SVHS Jack.	2422	026 04926
0229	3 Pin Connector.	2412	020 00725
0239	3 Pin Connector.	2422	025 16382
0244	5 Pin Connector.	2422	025 04853
S 0254	9 Pin CRT Socket	2422	500 80076
0267	3 Pin Connector.	2412	020 00725
0269	Jack	2422	026 05182
0280	4 Pin Connector.	2422	025 12479
0320	Factory Plate.	3122	120 01701
S 1000	Tuner, V+U, PLL	2422	542 90108
1200	Filter, Ceramic, 4MHz5	2422	549 40807
S 1515	Relay, 5 Amp, 12V.	2422	132 07444
1606	Tact Switch.	2422	128 02742
1811	3 Pin Connector.	2412	020 00725
1861	Ceramic Resonator, 514KHz5, CSB503P58.	2422	540 98344
2004	Cap, 47n, +80/-20%, 50v, Ceramic	3198	024 44730
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2210	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2226	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2227	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
2228	Cap, 820p, 5%, 25v, Ceramic	3198	016 38210
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520
2243	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222	368 90177

S = Safety Part. Be sure to use exact replacement part.

2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222	479 90016
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
S 2465	Cap, 9n1, 5%, 1600v, Polypropylene	2020	301 90248
2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2468	Cap, 33n, 10%, 400v, Polyester	2222	347 90227
2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2472	Cap, 10n, 10%, 100v, Metalized Polyester	2222	365 85103
2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222	365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2482	Cap, 33n, 10%, 250v, Polyester	2222	347 90213
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022	330 00018
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
S 2503	Cap, 330u, 20%, 450v, Electrolytic	2020	024 90774
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2509	Cap, 100n, 20%, 275v, Metalized Polypropylene	2222	336 29144
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2864	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2865	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626
2868	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510
2869	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2870	Cap, 68n, 10%, 50v, Polyester.	3198	014 06830
2871	Cap, 150p, 5%, 50v, Ceramic.	3198	016 31510

21PT6431/44R (continued)

2872	Cap, 1n8, 10%, 50v, Ceramic.	2238	586	15626	3258	Res, 330K, 5%, 1/16W, Metalized Glass.	3198	021	33340
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198	017	22250	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198	021	34740
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198	025	31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198	025	31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025	54780	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
2877	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306	207	03109
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198	025	51080	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03108
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03108
2880	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198	025	24710	S 3345	Varactor, 1MA/50V, Max 115V.	2322	593	13507
2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
2885	Cap, 220n, 10%, 50v, Polyester.	3198	014	02240	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198	017	42240	3442	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198	023	41040	3443	Res, 1M, 5%, 1/10W, Metalized Glass. . .	3198	021	51050
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198	023	41040	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198	011	01530
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198	026	21020	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198	011	05620
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198	025	51080	3447	Res, 56 ohm, 5%, 1/4W, Carbon Film. . .	2122	101	02081
2904	Cap, 27n, 10%, 50v, Ceramic.	2238	580	15642	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	08210
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238	586	15624	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	06890
2906	Cap, 27n, 10%, 50v, Ceramic.	2238	580	15642	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238	586	15624	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03109
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312	915	15102
2910	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020
2911	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312	915	12002
2950	Cap, 330p, 5%, 50v, Ceramic.	3198	016	33310	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198	012	26880
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3456	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3457	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3002	Res, Zero ohm, "Chip" Jumper.	3198	021	90030	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198	021	31520	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198	012	21530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198	021	38220	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198	011	03920
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03390
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	06890	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312	915	12703
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198	011	03320
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3470	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322	730	61274
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198	021	32240	3471	Res, 6R8, 1%, 3/5W, Metal Film.	2312	915	16808
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3472	Res, 6R8, 1%, 3/5W, Metal Film.	2312	915	16808
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198	021	32240	3473	Res, 3R9, 1%, 3/5W, Metal Film.	2312	915	13908
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312	915	12202
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312	915	12202
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198	021	52720
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3481	Res, 18K, 1%, 3/5W, Metal Film.	2312	915	11803
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312	915	11203
3124	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198	011	03920
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306	207	03478
3126	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3491	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198	021	51030
3132	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730	3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198	021	58210
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01510	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306	204	03688
3134	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306	207	03478
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	07590	3495	Res, 22K, 5%, 1/10W, Metalized Glass. .	3198	021	52230
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3496	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198	021	51040
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	3497	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198	021	51040
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	3498	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198	021	51230
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198	021	31540	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322	242	13335
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198	011	05620	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322	242	13335
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198	011	01030	S 3504	Res, PTC, 9R 220V.	2120	661	00024
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198	021	31520	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322	242	13155
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198	021	31030	3507	Surge Protector.	2422	549	43073
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322	734	61202	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198	013	02210
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	03910	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02710
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198	021	51220
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3521	Res, 22 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	02290
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198	011	02230	3522	Res, 390K, 5%, 1/8W, Metalized Glass. .	2322	730	61394
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306	204	03479
3206	Res, 33K, 5%, 1/16W, Metalized Glass. . .	3198	021	33330	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198	021	55630
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	3526	Res, 0R15, 5%, 3/5W, Metal Film.	3198	012	11570
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890	3527	Res, 0R22, 5%, 3/5W, Metal Film.	3198	012	12270
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	3528	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	05610	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198	021	33340	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198	021	51030
3218	Res, 82K, 5%, 1/16W, Metalized Glass. . .	3198	021	38230	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198	021	54720
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. . .	3198	021	32220	3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306	204	03222
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	05610	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198	021	51520
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3543	Res, 82K, 1%, 3/5W, Metal Film.	2312	915	18203
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322	734	64702
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198	021	32220	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322	730	61274
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198	021	51530
3241	Res, 22K, 5%, 1/16W, Metalized Glass. . .	3198	021	32230	3552	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198	021	51030
3242	Res, 27K, 5%, 1/16W, Metalized Glass. . .	3198	021	32730	3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	08210	3561	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
3245	Res, 39K, 1%, 1/16W, Metalized Glass. . .	2322	704	63903	3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198	021	51230
3246	Res, 10K, 5%, 1/16W, Metalized Glass. . .	3198	021	31030	3563	Res, 8K2, 5%, 1/10W, Metalized Glass. .	3198	021	58220
3247	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322	702	60274	S 3565	Res, 330 ohm, 5%, 1W, Metal Film.	3198	012	13310
3248	Res, 33K, 5%, 1/16W, Metalized Glass. . .	3198	021	33330	3566	Res, 2K2, 5%, 1/10W, Metalized Glass. .	3198	021	52220
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	08210	3569	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198	021	55620
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	3580	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730
3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310

S = Safety Part Be sure to use exact replacement part.

21PT6431/44R (continued)

3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5001	Coil, 27u, 10%	3198 018 22790
3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5201	Coil, 6u8, 5%	3198 018 16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5202	Wire Jumper.	3198 036 90010
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3685	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5241	Wire Jumper.	3198 036 90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5242	Coil, 10u, 5%	3198 018 11090
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5342	Coil, 22u.	2422 535 97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 5445	Transformer, LOT	2422 531 02519
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5453	Coil, 22u, 5%	3198 018 12290
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear Correction, 82u	2422 536 00425
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 6u8, 20%	3198 018 76880
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 4u7, 5%	2422 535 94213
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5500	Mains Filter	2422 549 43567
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS42025-03.	2422 531 02462
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5561	Coil, 27u, 5%	2422 535 95366
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5602	Coil, 5u6, 5%	3198 018 15680
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5603	Coil, 5u6, 5%	3198 018 15680
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5604	Coil, 5u6, 5%	3198 018 15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5861	Coil, 10u, 5%	3198 018 11090
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	6001	Zener Diode, 33 volt	3198 010 23390
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	6150	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6206	Zener Diode, 6.8 volt.	3198 020 56880
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6331	Diode, Signal, BAV21	3198 010 10070
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6332	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6333	Diode, Signal, BAV21	3198 010 10070
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6453	Zener Diode, 5.6 volt.	3198 020 55680
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, BY228/24.	9340 559 50112
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6463	Zener Diode, 9.1 volt.	9322 150 08685
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6465	Diode, Signal, BAV21	3198 010 10070
4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6466	Diode, Signal, BAV21	3198 010 10070
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6485	Diode, Rect, BYV95C.	9335 001 80133
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6520	Diode, Rect, BYV95A.	9335 000 90133
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4807	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 9.1 volt.	9322 150 08685
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4829	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010

S = Safety Part Be sure to use exact replacement part.

21PT6431/44R (continued)

6567	Zener Diode, 4.7 volt.	3198 020 54780	9524	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9528	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.2 volt.	9322 163 91685	9530	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9611	Coil, 27u, 10%	3198 018 22790
6691	LED, LTL-10234WHCR	9322 185 69682	9612	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9613	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9614	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9615	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9617	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9619	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9620	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9621	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9622	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9623	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9624	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9626	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9627	Wire Jumper.	3198 036 90010
7450	Transistor, PNP, PDTA114ET	3198 010 44010	9628	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9629	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9631	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9632	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9633	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9637	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1104(G)	9322 175 72667	9638	Wire Jumper.	3198 036 90010
7521	Transistor, FET, STP10NK80ZFP.	9322 196 57687	9639	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9640	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9641	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCL14ET	9340 310 10215	9642	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9648	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9650	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9652	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9654	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9657	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9658	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9659	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9660	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9182	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9810	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9451	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9472	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9850	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9852	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9853	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010	9861	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010	9862	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010	9864	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010	9865	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

21PT6431/44R (continued)

9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis	3141	058	58191

AC20D	Nameplate.	3139	120	01371
AC20E	Power Button	3139	177	60301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC20J1	Top Control Bracket.	3139	124	30381
AC20J3	Top Control Cover.	3139	124	31131
AC20J4	Top Control Rubber	3139	124	30391
AC20J5	Top Control Button Assembly.	3139	137	66921
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701
3096	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3097	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702
3098	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509
3099	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809
4091	Res, Zero ohm, "Chip" Jumper	3198	021	90020
CBA	Top Control Panel Assembly	3139	177	26241

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3121	231	00081
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44701
AC09	CRT, A51QDX992X003	9322	182	97682
S AC12	Degaussing Coil.	2422	549	45507
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20942
AC20	Cabinet Front Assembly	3121	237	53291
AC20A	Cabinet Front.	3139	177	59711
AC20B	Chassis Guide.	3139	124	37561
AC20C	Light Guide.	3139	124	41241

S = Safety Part Be sure to use exact replacement part.

21PT643R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0212	2 Pin Connector.	2422 025 16375	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0220	5 Pin Connector.	2422 025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
0221	2 Pin Connector.	2422 025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
0222	2 Pin Connector.	2422 025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
0223	A/V Jack	2422 026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0225	SVHS Jack.	2422 026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0229	3 Pin Connector.	2412 020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0239	3 Pin Connector.	2422 025 16382	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0243	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
0245	6 Pin Connector.	2422 025 04854	2455	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790
S 0254	9 Pin CRT Socket	2422 500 80076	2457	Cap, 270n, 5%, 250v, Metalized Polyprop	
0267	3 Pin Connector.	2412 020 00725		ylene.	2222 479 90016
0269	Jack	2422 026 05182	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
0280	4 Pin Connector.	2422 025 12479	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
S 1000	Tuner, V+U PLL	2422 542 90098	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
1002	SAW Filter, 45.75MHz	2422 549 44518	S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
1200	Filter, Ceramic, 4MHz5	2422 549 40807	S 2465	Cap, 9n1, 5%, 1600v, Polypropylene . .	2020 301 90248
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2468	Cap, 33n, 10%, 400v, Polyester	2222 347 90227
1606	Tact Switch.	2422 128 02742	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1660	Crystal, 12MHz000	2422 543 01203	2472	Cap, 10n, 10%, 100v, Metalized Polyeste	2222 365 85103
1811	3 Pin Connector.	2412 020 00725	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2006	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2008	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	2482	Cap, 33n, 10%, 250v, Polyester	2222 347 90213
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290		pylene	2022 330 00018
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 024 90647
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2523	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2522	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2143	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic. . . .	2238 786 19852	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2210	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2606	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210
2243	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 44740
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2330	Cap, 100n, 10%, 250v, Metalized Polyest		2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
	er.	2222 368 90177	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2331	Cap, 10n, +80/-20% 1000v, Ceramic. . . .	2020 558 90445	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
			2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
			2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626

S = Safety Part Be sure to use exact replacement part.

21PT643R85C (continued)

2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3258	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2878	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . . .	2306 207 03109
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3341	Res, 1R, 5%, 0,33W	4822 052 10108
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3443	Res, 1M, 5%, 1/10W, Metalized Glass . .	3198 021 51050
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3447	Res, 56 ohm, 5%, 1/4W, Carbon Film . . .	2122 101 02081
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3454	Res, 2K, 1%, 3/5W, Metal Film	2312 915 12002
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3102	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198 021 31020	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3104	Res, 220K, 5%, 1/16W, Metalized Glass . .	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3106	Res, 220K, 5%, 1/16W, Metalized Glass . .	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3470	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322 730 61274
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3471	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3472	Res, 6R8, 1%, 3/5W, Metal Film	2312 915 16808
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01510	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3491	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3149	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198 021 31040	3492	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210
3150	Res, 150K, 5%, 1/16W, Metalized Glass . .	3198 021 31540	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030	3495	Res, 22K, 5%, 1/10W, Metalized Glass . .	3198 021 52230
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3496	Res, 100K, 5%, 1/10W, Metalized Glass . .	3198 021 51040
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3497	Res, 100K, 5%, 1/10W, Metalized Glass . .	3198 021 51040
3159	Res, 1K2, 1%, 1/8W, Metalized Glass . . .	2322 734 61202	3498	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03910	3500	Res, 3M3, 5%, 1/2W, Metalized Glass . . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass . . .	2322 242 13335
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . . .	2322 242 13155
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3507	Surge Protector.	2422 549 43073
3205	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198 021 31020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film . .	3198 013 02210
3206	Res, 33K, 5%, 1/16W, Metalized Glass . . .	3198 021 33330	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 02710
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3522	Res, 330K, 5%, 1/10W, Metalized Glass . .	3198 021 53340
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3217	Res, 330K, 5%, 1/16W, Metalized Glass . .	3198 021 33340	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630
3218	Res, 82K, 5%, 1/16W, Metalized Glass . . .	3198 021 38230	3525	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198 021 51020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . . .	3198 021 32220	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 05610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass . . .	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass . . .	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322 730 61274
3247	Res, 270K, 5%, 1/16W, Metalized Glass . .	2322 702 60274	3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198 021 51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass . . .	3198 021 33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 08210	3557	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198 021 51020
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198 021 31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass . .	3198 021 31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198 021 55620

S = Safety Part Be sure to use exact replacement part.

21PT643R85C (continued)

S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4829	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	5001	Coil, 27u, 10%	3198 018 22790
3637	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5002	Coil, 820n, 10%	3198 018 18270
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5201	Coil, 6u8, 5%	3198 018 16880
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5202	Wire Jumper.	3198 036 90010
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3685	Res, 1K5, 1%, 1/8W, Metalized Glass. . .	2322 734 61502	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5242	Coil, 10u, 5%	3198 018 11090
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5342	Coil, 22u.	2422 535 97333
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 5445	Transformer, LOT	2422 531 02519
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5453	Coil, 22u, 5%	3198 018 12290
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear Correction, 82u	2422 536 00425
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 6u8, 20%	3198 018 76880
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 4u7, 5%	2422 535 94213
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5561	Coil, 27u, 5%	2422 535 95366
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5602	Coil, 5u6, 5%	3198 018 15680
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5603	Coil, 5u6, 5%	3198 018 15680
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5604	Coil, 5u6, 5%	3198 018 15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5861	Coil, 10u, 5%	3198 018 11090
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	6001	Zener Diode, 33 volt	3198 010 23390
3901	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	6150	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6206	Zener Diode, 6.8 volt.	3198 020 56880
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6331	Diode, Signal, BAV21	3198 010 10070
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6332	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6333	Diode, Signal, BAV21	3198 010 10070
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6453	Zener Diode, 5.6 volt.	3198 020 55680
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, BY228/24.	9340 559 50112
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6463	Zener Diode, 9.1 volt.	9322 150 08685
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6465	Diode, Signal, BAV21	3198 010 10070
4470	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6466	Diode, Signal, BAV21	3198 010 10070
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6485	Diode, Rect, BYD33J.	9337 234 20133
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYD33D.	9337 234 00133
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYD33D.	9337 234 00133
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4807	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120

21PT643R85C (continued)

6525	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9506	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9507	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9510	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9511	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9512	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9514	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9515	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9518	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9520	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9521	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9522	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9524	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9528	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9613	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9614	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9618	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9620	Wire Jumper.	3198 036 90010
7450	Transistor, PNP, PDTA114ET.	3198 010 44010	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9637	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9638	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9639	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9641	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WB6.	9322 154 38682	9648	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9652	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9657	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9658	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%.	3198 018 22290
9192	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%.	3198 018 22290
9406	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9810	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9451	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9472	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

21PT643R85C (continued)

9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	57941

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3093	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901
3094	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801
3095	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701
3096	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3097	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702
3098	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509
3099	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809
4091	Res, Zero ohm, "Chip" Jumper	3198	021	90020

S = Safety Part Be sure to use exact replacement part.

CBA	Top Control Panel Assembly	3139	177	26241
-----	--------------------------------------	------	-----	-------

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44701
S AC09	CRT, A51QDX992X001	9322	182	96682
S AC12	Degaussing Coil.	3139	128	23841
AC17	Owner's Manual	3121	235	20941
AC20	Cabinet Front Assembly	3121	237	53291
AC20A	Cabinet Front.	3139	177	59711
AC20B	Chassis Guide.	3139	124	37561
AC20C	Light Guide.	3139	124	41241
AC20D	Nameplate.	3139	120	01371
AC20E	Power Button	3139	177	60301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC20J1	Top Control Bracket.	3139	124	30381
AC20J3	Top Control Cover.	3139	124	31131
AC20J4	Top Control Rubber	3139	124	30391
AC20J5	Top Control Button Assembly.	3139	137	66921
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

24PT633F/35R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0127	Socket Fuse.	2422 088 00271	
0129	NTC Holder.	3139 120 10151	
0136	IC-Spring.	3104 301 22081	
0137	Spring.	3139 121 24583	
0138	IC-Spring.	3104 301 22081	
0139	Spring for Bracket.	3122 121 24786	
0140	Spring.	3139 121 24583	
0141	IC-Spring.	3104 301 22081	
0152	Cable, DIP, 6 Pin, 400mm.	3104 301 09421	
0153	Cable, DIPMate.	3104 301 08381	
0211	2 Pin Connector.	2422 025 16269	
0212	2 Pin Connector.	2422 025 16375	
0219	6 Pin Connector.	2422 025 12482	
0220	5 Pin Connector.	2422 025 04853	
0221	2 Pin Connector.	2422 025 15503	
0222	2 Pin Connector.	2422 025 10646	
0223	A/V Jack.	2422 026 05236	
0225	SVHS Jack.	2422 026 04926	
0229	3 Pin Connector.	2412 020 00725	
0243	6 Pin Connector.	2422 025 04854	
0244	5 Pin Connector.	2422 025 04853	
0245	6 Pin Connector.	2422 025 04854	
0246	5 Pin Connector.	2422 025 12481	
S 0254	9 Pin CRT Socket.	2422 500 80076	
0267	3 Pin Connector.	2412 020 00725	
0269	Jack.	2422 026 05182	
S 1000	Tuner, V+U, PLL.	2422 542 90108	
1002	SAW Filter, 45.75MHz.	2422 549 44518	
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	
S 1515	Relay, 5 Amp, 12V.	2422 132 07467	
1600	Tact Switch.	2422 128 02742	
1601	Tact Switch.	2422 128 02742	
1602	Tact Switch.	2422 128 02742	
1603	Tact Switch.	2422 128 02742	
1606	Tact Switch.	2422 128 02742	
1660	Crystal, 12MHz000.	2422 543 01203	
1811	3 Pin Connector.	2412 020 00725	
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445	
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320	
2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610	
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559	
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445	
2401	Cap, 2u2, 20%, 50v, Electrolytic.	2038 035 13503	
2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710	
2404	Cap, 47u, 20%, 50v, Electrolytic.	3198 025 54790	
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210	
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	
2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730	
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	
2448	Cap, 100p, 10%, 1000v, Ceramic.	3198 019 51010	
2450	Cap, 47u, 20%, 160v, Electrolytic.	2022 031 00103	
2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530	
2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790	
2457	Cap, 390n, 5%, 250v, Metalized Polypropylene.	2222 479 90021	
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2022 031 00138	
2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810	
2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
2463	Cap, 220p, 10%, 2000v, Ceramic.	2020 558 90478	
2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042	
2465	Cap, 15n, 5%, 1600v, Polypropylene.	2222 375 90158	
2466	Cap, 15n, 10%, 400v, Polyester.	2222 347 90219	
2468	Cap, 18n, 10%, 400v, Polyester.	2222 347 90222	
2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	
2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154	
2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104	
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720	
2480	Cap, 47u, 20%, 25v, Electrolytic.	2038 035 13301	
2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710	
2482	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234	
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2022 031 00137	
2486	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139	
2487	Cap, 47u, 20%, 50v, Electrolytic.	2038 035 13508	
2488	Cap, 1000u, 20%, 16v, Electrolytic.	2022 031 00144	
2489	Cap, 470u, 20%, 16v, Electrolytic.	2022 031 00139	
2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020	
2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2222 336 29148	
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220	
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220	
2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90626	
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220	
2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710	
2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710	
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90128	
2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290	
2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040	
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489	
2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710	
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	
2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472	
2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654	
2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020	
2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	
2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353	
2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790	
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	
2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790	
2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290	
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856	
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240	
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	

24PT633F/35R (continued)

2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3232	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	3222 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass . .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624	3401	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 5%, 1/6W, Carbon Film.	3198 011 08230
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3405	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3406	Res, 10 ohm, 5%, 1/6W, Carbon Film	3198 011 01090
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520	3443	Res, 1M, 5%, 1/10W, Metalized Glass. . . .	3198 021 51050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 08180
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3106	Res, 220K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32240	3452	Res, 4K7, 1%, 3/5W, Metal Film	2312 915 14702
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3454	Res, 1K8, 1%, 3/5W, Metal Film	2312 915 11802
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 08180
3126	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3470	Res, 470K, 5%, 1/10W, Metalized Glass. . . .	3198 021 54740
3132	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3134	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3157	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3158	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3491	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3206	Res, 33K, 5%, 1/16W, Metalized Glass	3198 021 33330	3495	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3496	Res, 100K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3497	Res, 100K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51040

S = Safety Part Be sure to use exact replacement part.

24PT633F/35R (continued)

3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335	3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335	3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
S 3504	Res, PTC, 3 ohm, 144V.	2122	663	00019	3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322	242	13155	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3507	Surge Protector.	2422	549	43073	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198	013	02210	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02710	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198	021	51220	3904	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198	021	31030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198	011	04780	3905	Res, 3K3, 5%, 1/16W, Metalized Glass. .	3198	021	33320
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198	021	53340	3906	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198	021	31030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306	204	03101	3907	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198	021	38220
3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198	021	55630	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, OR1, 5%, 3/5W, Metal Film.	3198	012	11070	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198	012	13370	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198	021	51030	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198	021	54720	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306	204	03222	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198	021	51520	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film.	2312	915	18203	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/10W, Metalized Glass. .	2322	734	64702	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322	730	61274	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198	021	51530	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film. . . .	3198	012	13310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass. .	3198	021	52220	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3569	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198	021	54730	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198	021	34720	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass. .	3198	021	53320	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	5001	Coil, 27u, 10%	3198	018	22790
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5201	Coil, 6u8, 5%	3198	018	16880
3686	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198	021	51520	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198	021	34720	5242	Coil, 10u, 5%	3198	018	11090
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5341	Coil, 22u.	2422	535	97333
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	5342	Coil, 15u.	2422	535	97331
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5401	Coil, 1mH, 10%	3198	018	71020
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT AT2078.	3128	138	21401
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5457	Coil, Linear Correction.	2422	536	00511
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5480	Coil, 39u, 10%	2422	535	97336
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3862	Res, 15K, 5%, 1/16W, Metalized Glass. .	3198	021	31530	S 5520	Transformer, SS39009-04.	2422	531	02459
3863	Res, 1K2, 5%, 1/16W, Metalized Glass. .	3198	021	31220	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366

S = Safety Part Be sure to use exact replacement part.

24PT633F/35R (continued)

5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
5602	Coil, 5u6, 5%.	3198 018 15680
5603	Coil, 5u6, 5%.	3198 018 15680
5604	Coil, 5u6, 5%.	3198 018 15680
5861	Coil, 10u, 5%.	3198 018 11090
6001	Zener Diode, 33 volt.	3198 010 23390
6150	Diode, Signal, BAS316.	3198 010 10630
6201	Diode, Signal, BAS316.	3198 010 10630
6202	Diode, Signal, BAS316.	3198 010 10630
6206	Zener Diode, 6.8 volt.	3198 020 56880
6331	Diode, Signal, BAV21.	3198 010 10070
6332	Diode, Signal, BAS316.	3198 010 10630
6333	Diode, Signal, BAV21.	3198 010 10070
6335	Diode, Signal, BAV21.	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt.	3198 010 24790
6445	Zener Diode, 10 volt.	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99.	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 10 volt.	3198 010 21090
6465	Diode, Signal, BAV21.	3198 010 10070
6466	Diode, Signal, BAV21.	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6469	Diode, Rect, BYD33J.	9337 234 20133
6470	Diode, Signal, BAV99.	3198 010 10620
6476	Zener Diode, 15 volt.	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt.	3198 010 23390
6485	Diode, Rect, BYV95C.	9335 001 80133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYV95A.	9335 000 90133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYV95A.	9335 000 90133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt.	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt.	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70.	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6681	Diode, Signal, BAT85.	9336 247 60133
6691	LED, LTL-10234WHCR.	9322 185 69682
6692	IR Receiver.	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
7101	Transistor, NPN, BC847B(COL).	3198 010 42030
7102	Transistor, PNP, BC857B(COL).	3198 010 42150
7103	Transistor, NPN, BC847B(COL).	3198 010 42030
7200	IC, TDA9588H/N1/3I/1129.	9352 731 49557
7201	Transistor, NPN, BC847B(COL).	3198 010 42030
7204	Transistor, PNP, BC857B(COL).	3198 010 42150
7205	Transistor, PNP, BC857B(COL).	3198 010 42150
7330	IC, TDA6107JF/N3.	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL).	3198 010 42150
7443	Transistor, PNP, BC557B(COL).	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135.	3198 020 41010
7482	Transistor, NPN, BD135.	3198 020 41010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL).	3198 010 42030
7540	Transistor, NPN, BC547B(COL).	3198 020 40030
7541	Transistor, NPN, PPTC114ET.	9340 310 10215
7542	Transistor, PNP, BC857B(COL).	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215
7580	Transistor, NPN, BC857B(COL).	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL).	3198 010 42030

7892	Transistor, NPN, BC847B(COL).	3198 010 42030
7901	IC, AN7522N PH.	9322 181 41682
9611	Coil, 27u, 10%.	3198 018 22790
9672	Coil, 22u, 10%.	3198 018 22290
9678	Coil, 22u, 10%.	3198 018 22290
CBA	Main Chassis Assembly.	3141 058 59231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack.	2422 026 04747
0250	A/V Jack.	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
9150	Wire Jumper.	3198 036 90010
9151	Wire Jumper.	3198 036 90010
9152	Wire Jumper.	3198 036 90010
9153	Wire Jumper.	3198 036 90010
9154	Wire Jumper.	3198 036 90010
9155	Wire Jumper.	3198 036 90010
9170	Wire Jumper.	3198 036 90010
CBA	Side Jack Panel Assembly.	3139 187 28121

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

24PT633F/35R (continued)

S	AC01	AC Cord.	2422	070	98202
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	35181
S	AC09	CRT, A59QDF891X001(L).	9322	163	87682
	AC10	Customer Control Buttons	3139	177	65681
S	AC12	Degaussing Coil.	3139	128	76341
	AC15	Holder, Degaussing Coil (4 Used)	3139	124	21802
	AC17	Owner's Manual	3139	125	30822
	AC17	Owner's Manual, French	3139	125	31591
	AC18	Quick Use Guide.	3139	125	31611
	AC19	Side Jack Panel Bracket.	3139	124	39111
	AC20A	Cabinet Front.	3139	177	60691
	AC20B	Chassis Guide.	3139	124	25893
	AC20C	Light Guide.	3139	124	32221
	AC20D	Nameplate.	3141	050	00161
	AC20E	Power Button	3139	177	65691
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE		Remote Control Transmitter, RC19036001/			
		01A.	3139	238	04303

24PT633R37 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0212	2 Pin Connector.	2422	025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0219	6 Pin Connector.	2422	025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0220	5 Pin Connector.	2422	025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0221	2 Pin Connector.	2422	025 15503		er.	2222	368 90177
0222	2 Pin Connector.	2422	025 10646	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0223	A/V Jack	2422	026 05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0225	SVHS Jack.	2422	026 04926	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0229	3 Pin Connector.	2412	020 00725	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0243	6 Pin Connector.	2422	025 04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0244	5 Pin Connector.	2422	025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0245	6 Pin Connector.	2422	025 04854	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
0246	5 Pin Connector.	2422	025 12481	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
S 0254	9 Pin CRT Socket	2422	500 80076	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0267	3 Pin Connector.	2412	020 00725	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0269	Jack	2422	026 05182	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 1000	Tuner, V+U, PLL	2422	542 90108	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
1002	SAW Filter, 45.75MHz	2422	549 44518	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2448	Cap, 100p, 10%, 1000v, Ceramic	3198	019 51010
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
S 1515	Relay, 5 Amp, 12V.	2422	132 07467	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
1600	Tact Switch.	2422	128 02742	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
1601	Tact Switch.	2422	128 02742	2457	Cap, 390n, 5%, 250v, Metalized Polyprop		
1602	Tact Switch.	2422	128 02742		ylene.	2222	479 90021
1603	Tact Switch.	2422	128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1606	Tact Switch.	2422	128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1660	Crystal, 12MHz000	2422	543 01203	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1811	3 Pin Connector.	2412	020 00725	2463	Cap, 220p, 10%, 2000v, Ceramic	2020	558 90478
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730		lene	2222	479 90042
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2465	Cap, 15n, 5%, 1600v, Polypropylene	2222	375 90158
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2468	Cap, 18n, 10%, 400v, Polyester	2222	347 90222
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		pylene	2222	336 29148
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90626
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90128
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2525	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2560	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2561	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2562	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2563	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2564	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2581	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2590	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2601	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	918 19856
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2602	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2606	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2607	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2608	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2609	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2611	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2612	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

24PT633R37 (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03100
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3401	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3403	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624	3405	Res, 10 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01090
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3406	Res, 10 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 01090
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 580 15624	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3443	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3452	Res, 4K7, 1%, 3/5W, Metal Film	2312 915 14702
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3454	Res, 1K8, 1%, 3/5W, Metal Film	2312 915 11802
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3470	Res, 470K, 5%, 1/10W, Metalized Glass.	3198 021 54740
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3491	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3496	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3497	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3507	Surge Protector.	2422 549 43073
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

24PT633R37 (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021	53320	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	5001	Coil, 27u, 10%	3198	018	22790
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5201	Coil, 6u8, 5%	3198	018	16880
3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5242	Coil, 10u, 5%	3198	018	11090
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5341	Coil, 22u.	2422	535	97333
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5342	Coil, 22u.	2422	535	97333
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5401	Coil, 1mH, 10%	3198	018	71020
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT AT2078.	3128	138	21401
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5453	Diode, Rect, BYD33J.	9337	234	20133
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear Correction.	2422	536	00511
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5472	Coil, 3u3, 10%	3198	018	23380
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 56u.	2422	535	97338
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198	021	31530	S 5501	Mains Filter	2422	549	43432
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198	021	31220	S 5520	Transformer, SS39009-04.	2422	531	02459
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5603	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5604	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5861	Coil, 10u, 5%	3198	018	11090
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6150	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6202	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6206	Zener Diode, 6.8 volt.	3198	020	56880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220	6331	Diode, Signal, BAV21	3198	010	10070
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630

S = Safety Part Be sure to use exact replacement part.

24PT633R37 (continued)

6333	Diode, Signal, BAV21	3198 010 10070
6335	Diode, Signal, BAV21	3198 010 10070
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
6401	Zener Diode, 47 volt	3198 010 24790
6445	Zener Diode, 10 volt	3198 020 51090
6447	Diode, Signal, 1N4148.	3198 010 10010
6448	Zener Diode, 6.2 volt.	9331 668 30133
6449	Diode, Signal, BAV99	3198 010 10620
6460	Diode, Rect, BY228/24.	9340 559 50112
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
6462	Zener Diode, 10 volt	3198 010 21090
6465	Diode, Signal, BAV21	3198 010 10070
6466	Diode, Signal, BAV21	3198 010 10070
6467	Diode, Signal, BAS316.	3198 010 10630
6468	Diode, Signal, BAS316.	3198 010 10630
6470	Diode, Signal, BAV99	3198 010 10620
6476	Zener Diode, 15 volt	3198 010 21590
6481	Zener Diode, 5.6 volt.	3198 010 25680
6482	Zener Diode, 9.1 volt.	9331 177 80133
6483	Zener Diode, 33 volt	3198 010 23390
6485	Diode, Rect, BYD33J.	9337 234 20133
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
6487	Diode, Rect, BYD33D.	9337 234 00133
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
6520	Diode, Rect, BYD33D.	9337 234 00133
6523	Diode, Signal, 1N4148.	3198 010 10010
6524	Diode, Rect, 1N5062.	3198 010 10120
6525	Diode, Rect, 1N5062.	3198 010 10120
6526	Zener Diode, 22 volt	3198 020 52290
6540	Zener Diode, 6.2 volt.	9331 668 30133
6541	Zener Diode, 10 volt	3198 020 51090
6560	Diode, Rect, BYV29X-500.	9340 555 59127
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
6563	Diode, Signal, BAS316.	3198 010 10630
6565	Diode, Signal, BAV70	9331 849 10215
6566	Diode, Signal, 1N4148.	3198 010 10010
6569	Diode, Signal, BAS316.	3198 010 10630
6570	Zener Diode, 6.8 volt.	3198 020 56880
6580	Diode, Signal, BAS316.	3198 010 10630
6681	Diode, Signal, BAT85	9336 247 60133
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver.	9322 127 54667
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
7101	Transistor, NPN, BC847B(COL)	3198 010 42030
7102	Transistor, PNP, BC857B(COL)	3198 010 42150
7103	Transistor, NPN, BC847B(COL)	3198 010 42030
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557
7201	Transistor, NPN, BC847B(COL)	3198 010 42030
7204	Transistor, PNP, BC857B(COL)	3198 010 42150
7205	Transistor, PNP, BC857B(COL)	3198 010 42150
7330	IC, TDA6107JF/N3	9352 713 37112
7400	Power FET, STP3NC60FP.	9322 157 37687
7441	Transistor, PNP, BC857B(COL)	3198 010 42150
7443	Transistor, PNP, BC557B(COL)	3198 020 40110
7460	Transistor, NPN, BU4508DX.	9340 550 92127
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
7462	Transistor, NPN, PPTC143ZT	9340 547 00215
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
7471	IC, TDA8359J/N2.	9352 701 64112
7480	Transistor, NPN, BD135	3198 020 41010
7482	Transistor, NPN, BD135	3198 020 41010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
7520	IC, TEA1507P/N1.	9352 673 56112
7521	Power FET, FQPF9N50.	9322 187 16687
7522	Transistor, NPN, BC847B(COL)	3198 010 42030
7540	Transistor, NPN, BC547B(COL)	3198 020 40030
7541	Transistor, NPN, PPTC114ET	9340 310 10215
7542	Transistor, PNP, BC857B(COL)	3198 010 42150
7560	IC, L78L33ACZ.	9322 134 92676
7561	Transistor, NPN, PPTC143ZT	9340 547 00215
7580	Transistor, NPN, BC857B(COL)	3198 010 42150
7602	IC, M24C08-WBN6.	9322 154 38682
7606	Transistor, NPN, PPTC143ZT	9340 547 00215
7802	IC, HEF4053BT.	9333 729 60653
7861	IC, TDA9853H/V1.	9352 671 19557
7891	Transistor, NPN, BC847B(COL)	3198 010 42030
7892	Transistor, NPN, BC847B(COL)	3198 010 42030
7901	IC, AN7522N PH	9322 181 41682
9611	Coil, 27u, 10%	3198 018 22790
9672	Coil, 22u, 10%	3198 018 22290
9678	Coil, 22u, 10%	3198 018 22290
CBA	Main Chassis Assembly.	3139 187 15171

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422 026 04747
0250	A/V Jack	2422 026 04815
0251	6 Pin Connector.	2422 025 12482
0254	5 Pin Connector.	2422 025 12481
0255	4 Pin Connector.	2422 025 12479
1810	3 Pin Connector.	2412 020 00725
1811	3 Pin Connector.	2412 020 00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198 011 01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198 021 31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4823	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90030
6161	Zener Diode, 6.8 volt.	3198 010 26880
7802	IC, HEF4053BT.	9333 729 60653
CBA	Side Jack Panel Assembly	3139 187 28121

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	2422 070 98202
AC03	Anode Lead Spacer.	3139 124 17541
AC04	Batteries for Remote Control Transmitter	9299 000 65263
AC05	Cabinet Back	3139 124 35181
S AC09	CRT, A59QDF891X001(L).	9322 163 87682
AC10	Customer Control Buttons	3139 177 60711
S AC12	Degaussing Coil.	3139 128 76341
AC19	Side Jack Panel Bracket.	3139 124 39111
AC20A	Cabinet Front.	3139 177 60691
AC20B	Chassis Guide.	3139 124 25893
AC20C	Light Guide.	3139 124 32221
AC20D	Nameplate.	3141 050 00161
AC20E	Power Button	3139 177 60701
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422 264 00411
REMOTE	Remote Control Transmitter, RC19036001/01.	3139 228 86493

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16269	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0212	2 Pin Connector.	2422	025 16375	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0218	A/V Jack	2422	026 04742		er.	2222	368 90177
0220	5 Pin Connector.	2422	025 04853	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0221	2 Pin Connector.	2422	025 15503	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0222	2 Pin Connector.	2422	025 10646	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0223	A/V Jack	2422	026 05236	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0225	SVHS Jack.	2422	026 04926	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0240	7 Pin Connector.	2422	025 11244	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0243	6 Pin Connector.	2422	025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0244	5 Pin Connector.	2422	025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0245	6 Pin Connector.	2422	025 04854	2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
0251	3 Pin Connector.	2412	020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 0254	9 Pin CRT Socket	2422	500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
0259	5 Pin Connector.	2422	025 15848	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0262	3 Pin Connector.	2422	025 16937	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
0267	3 Pin Connector.	2412	020 00725	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
0280	4 Pin Connector.	2422	025 12479	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
S 1000	Tuner, V+U, PLL	2422	542 90108		ylene.	2022	333 00086
1002	SAW Filter, 45.75MHz	2422	549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2462	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
1600	Tact Switch.	2422	128 02742	S 2463	Cap, 470p, 10%, 2000v, Ceramic.	2020	558 90483
1601	Tact Switch.	2422	128 02742	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020	301 90254
1602	Tact Switch.	2422	128 02742	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
1603	Tact Switch.	2422	128 02742	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
1606	Tact Switch.	2422	128 02742	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
1660	Crystal, 12MHz000	2422	543 01203	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
1861	Ceramic Resonator, 51KHz5, CSB503F58.	2422	540 98344	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090		pylene	2022	330 00018
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2123	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2125	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2181	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2182	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2183	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2864	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
				2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
				2867	Cap, 1n8, 10%, 50v, Ceramic.	2238	586 15626

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 (continued)

2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2877	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3454	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3123	Wire Jumper.	3198 036 90010	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3481	Res, 8K2, 1%, 3/5W, Metal Film.	2312 915 18202
3125	Wire Jumper.	3198 036 90010	3482	Res, 22K, 1%, 3/5W, Metal Film.	2312 915 12203
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3182	Wire Jumper.	3198 036 90010	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306 204 03222
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3543	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702
3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530
3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840	3552	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230
3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3563	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620
3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060	S 3565	Res, 330 ohm, 5%, 1W, Metal Film. . . .	3198 012 13310

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 (continued)

3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5342	Coil, 12u, 10%	3198	018	12190
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT	2422	531	02519
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5457	Coil, Linear Correction.	3128	138	56801
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5480	Coil, 27u, 10%	3198	018	22790
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	S 5520	Transformer, SS39009-04.	2422	531	02459
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5604	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5861	Coil, 10u, 5%	3198	018	11090
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	6001	Zener Diode, 33 volt	3198	010	23390
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6181	Zener Diode, 6.8 volt.	3198	020	56880
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6206	Zener Diode, 6.8 volt.	3198	020	56880
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6331	Diode, Signal, BAV21	3198	010	10070
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6332	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, DG3-7005L	9336	436	10682
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 8.2 volt.	3198	010	28280
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6465	Diode, Signal, BAV21	3198	010	10070
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6467	Diode, Signal, BAS316.	3198	010	10630
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6469	Diode, Rect, BYV95C.	9335	001	80133
4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6470	Diode, Signal, BAV99	3198	010	10620
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6476	Zener Diode, 15 volt	3198	010	21590
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6481	Zener Diode, 5.6 volt.	3198	010	25680
4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6482	Zener Diode, 9.1 volt.	9331	177	80133
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6483	Zener Diode, 33 volt	3198	010	23390
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6485	Diode, Rect, BYV95C.	9335	001	80133
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6486	Diode, Rect, EGP20DL-5100.	9322	164	42682
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6487	Diode, Rect, BYV95A.	9335	000	90133
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6488	Diode, Rect, EGP20DL-5100.	9322	164	42682
4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322	138	08667
4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6520	Diode, Rect, BYV95A.	9335	000	90133

S = Safety Part Be sure to use exact replacement part.

25LT220L/17 (continued)

6523	Diode, Signal, 1N4148.	3198 010 10010	9514	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9515	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9516	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9518	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9520	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9521	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9522	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9524	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9528	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9530	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9611	Coil, 27u, 10%	3198 018 22790
6569	Diode, Signal, BAS316.	3198 010 10630	9612	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9613	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9614	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9615	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9617	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9618	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9619	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9622	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9623	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I.	4835 310 57622	9626	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9627	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9628	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9629	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9631	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9632	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9637	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9638	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9640	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9642	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9643	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9647	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9648	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9650	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9652	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9654	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9655	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9657	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9658	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9659	Wire Jumper.	3198 036 90010
7560	IC, LE33CZ.	9322 106 11676	9660	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9661	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9662	Wire Jumper.	3198 036 90010
7602	IC, M24C16-WBN6.	9322 147 25682	9663	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9664	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9665	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9666	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9667	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9668	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9173	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9192	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9451	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010	9850	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9852	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9853	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

25LT220L/17 (continued)

9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	Main Chassis Assembly.	3139	187	26771

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	07161
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45291
S AC09	CRT, A63QDB891X01.	9322	151	39682
AC10	Customer Control Buttons	3139	124	27351
S AC12	Degaussing Coil.	2422	549	44489
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC20	Cabinet Front Assembly	3121	237	53351
AC20A	Cabinet Front.	3139	177	62031
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	26444
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC22	Cinch Cover.	3139	124	25551

25LT421L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0212	2 Pin Connector.	2422	025 16375	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0219	6 Pin Connector.	2422	025 12482	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0220	5 Pin Connector.	2422	025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0221	2 Pin Connector.	2422	025 15503	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0222	2 Pin Connector.	2422	025 10646	2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
0223	A/V Jack.	2422	026 05236	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0225	SVHS Jack.	2422	026 04926	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
0240	7 Pin Connector.	2422	025 11244	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0243	6 Pin Connector.	2422	025 04854	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
0244	5 Pin Connector.	2422	025 04853	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
0245	6 Pin Connector.	2422	025 04854	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022	333 00086
0246	5 Pin Connector.	2422	025 12481	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
0251	3 Pin Connector.	2412	020 00725	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 0254	9 Pin CRT Socket.	2422	500 80076	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
0259	5 Pin Connector.	2422	025 15848	2462	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
0262	3 Pin Connector.	2422	025 16937	S 2463	Cap, 470p, 10%, 2000v, Ceramic.	2020	558 90483
0267	3 Pin Connector.	2412	020 00725	S 2465	Cap, 13n, 5%, 1600v, Polypropylene.	2020	301 90254
S 1000	Tuner, V+U, PLL.	2422	542 90108	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
1002	SAW Filter, 45.75MHz.	2422	549 44518	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222	365 75154
1200	Filter, Ceramic, 4MHz5.	2422	549 40807	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222	365 75104
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
1600	Tact Switch.	2422	128 02742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
1601	Tact Switch.	2422	128 02742	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
1602	Tact Switch.	2422	128 02742	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
1603	Tact Switch.	2422	128 02742	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
1606	Tact Switch.	2422	128 02742	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
1660	Crystal, 12MHz000.	2422	543 01203	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422	543 00842	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022	330 00018
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2123	Res, Zero ohm, 'Chip' Jumper.	3198	021 90020	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2125	Res, Zero ohm, 'Chip' Jumper.	3198	021 90020	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2831	Cap, 1p, 25%, 50v, Ceramic.	3198	016 31080
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2832	Cap, 1p, 25%, 50v, Ceramic.	3198	016 31080
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2833	Cap, 47p, 5%, 50v, Ceramic.	3198	016 34790
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2834	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2835	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520
2254	Res, Zero ohm, 'Chip' Jumper.	3198	021 90020	2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222	368 90177	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2331	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445	2841	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495	2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320	2843	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2844	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
				2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040

S = Safety Part Be sure to use exact replacement part.

25LT421L/17 (continued)

2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3123	Wire Jumper.	3198 036 90010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3125	Wire Jumper.	3198 036 90010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710

S = Safety Part Be sure to use exact replacement part.

25LT421L/17 (continued)

3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5001	Coil, 27u, 10%	3198 018 22790
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5002	Coil, 820n, 10%	3198 018 18270
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5201	Coil, 6u8, 5%	3198 018 16880
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5202	Wire Jumper.	3198 036 90010
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5241	Wire Jumper.	3198 036 90010
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5242	Coil, 10u, 5%	3198 018 11090
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5342	Coil, 12u, 10%	3198 018 12290
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	S 5445	Transformer, LOT	2422 531 02519
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5457	Coil, Linear Correction.	3128 138 56801
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 3u3, 20%	3198 018 73380
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 27u, 10%	3198 018 22790
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	5602	Coil, 5u6, 5%	3198 018 15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5604	Coil, 5u6, 5%	3198 018 15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5831	Coil, 6u8, 5%	3198 018 16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5832	Coil, 6u8, 5%	3198 018 16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5833	Coil, 6u8, 5%	3198 018 16880
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5835	Coil, 12u, 10%	3198 018 31290
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6202	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6206	Zener Diode, 6.8 volt.	3198 020 56880
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6331	Diode, Signal, BAV21	3198 010 10070
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6332	Diode, Signal, BAS316.	3198 010 10630
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, DG3-7005L	9336 436 10682
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6462	Zener Diode, 8.2 volt.	3198 010 28280
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6465	Diode, Signal, BAV21	3198 010 10070
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21	3198 010 10070
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6467	Diode, Signal, BAS316.	3198 010 10630
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6468	Diode, Signal, BAS316.	3198 010 10630
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6469	Diode, Rect, BYV95C.	9335 001 80133
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYV95C.	9335 001 80133
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6569	Diode, Signal, BAS316.	3198 010 10630
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6570	Zener Diode, 6.8 volt.	3198 020 56880
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6580	Diode, Signal, BAS316.	3198 010 10630
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6681	Diode, Signal, BAT85	9336 247 60133
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6691	LED, LTL-10234WHCR	9322 185 69682
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6692	IR Receiver.	9322 127 54667

S = Safety Part Be sure to use exact replacement part.

25LT421L/17 (continued)

6831	Diode, Signal, 1N4148.	3198	010	10010	9623	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9626	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9627	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9628	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57626	9629	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9631	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9632	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9637	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9638	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9640	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9641	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9642	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9643	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT	9340	547	00215	9647	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9648	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9650	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9652	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9654	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9655	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9657	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9658	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9659	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9660	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET	9340	310	10215	9661	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9662	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ	9322	106	11676	9663	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT	9340	547	00215	9664	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9665	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9666	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9667	Wire Jumper.	3198	036	90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682	9668	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH	9322	181	41682	9669	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9171	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9183	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9821	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9822	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9825	Wire Jumper.	3198	036	90010
9419	Wire Jumper.	3198	036	90010	9828	Wire Jumper.	3198	036	90010
9421	Wire Jumper.	3198	036	90010	9829	Wire Jumper.	3198	036	90010
9422	Wire Jumper.	3198	036	90010	9831	Wire Jumper.	3198	036	90010
9423	Wire Jumper.	3198	036	90010	9832	Wire Jumper.	3198	036	90010
9425	Wire Jumper.	3198	036	90010	9837	Wire Jumper.	3198	036	90010
9427	Wire Jumper.	3198	036	90010	9838	Wire Jumper.	3198	036	90010
9451	Wire Jumper.	3198	036	90010	9839	Wire Jumper.	3198	036	90010
9453	Wire Jumper.	3198	036	90010	9846	Wire Jumper.	3198	036	90010
9460	Wire Jumper.	3198	036	90010	9847	Wire Jumper.	3198	036	90010
9500	Wire Jumper.	3198	036	90010	9849	Wire Jumper.	3198	036	90010
9501	Wire Jumper.	3198	036	90010	9851	Wire Jumper.	3198	036	90010
9503	Wire Jumper.	3198	036	90010	9856	Wire Jumper.	3198	036	90010
9506	Wire Jumper.	3198	036	90010	9858	Wire Jumper.	3198	036	90010
9507	Wire Jumper.	3198	036	90010	9859	Wire Jumper.	3198	036	90010
9510	Wire Jumper.	3198	036	90010	9860	Wire Jumper.	3198	036	90010
9511	Wire Jumper.	3198	036	90010	9862	Wire Jumper.	3198	036	90010
9512	Wire Jumper.	3198	036	90010	9864	Wire Jumper.	3198	036	90010
9513	Wire Jumper.	3198	036	90010	9865	Wire Jumper.	3198	036	90010
9514	Wire Jumper.	3198	036	90010	9867	Wire Jumper.	3198	036	90010
9515	Wire Jumper.	3198	036	90010	9868	Wire Jumper.	3198	036	90010
9516	Wire Jumper.	3198	036	90010	9869	Wire Jumper.	3198	036	90010
9518	Wire Jumper.	3198	036	90010	9873	Wire Jumper.	3198	036	90010
9520	Wire Jumper.	3198	036	90010	9874	Wire Jumper.	3198	036	90010
9521	Wire Jumper.	3198	036	90010	9875	Wire Jumper.	3198	036	90010
9522	Wire Jumper.	3198	036	90010	9877	Wire Jumper.	3198	036	90010
9524	Wire Jumper.	3198	036	90010	9901	Wire Jumper.	3198	036	90010
9528	Wire Jumper.	3198	036	90010	9902	Wire Jumper.	3198	036	90010
9530	Wire Jumper.	3198	036	90010	9903	Wire Jumper.	3198	036	90010
9611	Coil, 27u, 10%	3198	018	22790	9904	Wire Jumper.	3198	036	90010
9612	Wire Jumper.	3198	036	90010	9905	Wire Jumper.	3198	036	90010
9613	Wire Jumper.	3198	036	90010	9911	Wire Jumper.	3198	036	90010
9614	Wire Jumper.	3198	036	90010	9913	Wire Jumper.	3198	036	90010
9615	Wire Jumper.	3198	036	90010	9914	Wire Jumper.	3198	036	90010
9618	Wire Jumper.	3198	036	90010	9915	Wire Jumper.	3198	036	90010
9619	Wire Jumper.	3198	036	90010	9991	Wire Jumper.	3198	036	90010
9622	Wire Jumper.	3198	036	90010	9996	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

25LT421L/17 (continued)

9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	Main Chassis Assembly.	3139	187	26781

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	07161
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3121	237	52933
S AC09	CRT, A63QDB891X01.	9322	151	39682
AC10	Customer Control Buttons	3139	177	60721
S AC12	Degaussing Coil.	2422	549	44489
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53431
AC20A	Cabinet Front.	3139	177	60741
AC20B	Chassis Guide.	3139	124	37561
AC20C	Light Guide.	3139	124	36551
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	177	60731
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411

25PT533S37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422 025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422 025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422 025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222 368 90177
0221	2 Pin Connector.	2422 025 15503		er.	
0222	2 Pin Connector.	2422 025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0223	A/V Jack	2422 026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0225	SVHS Jack.	2422 026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0229	3 Pin Connector.	2412 020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0243	6 Pin Connector.	2422 025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0244	5 Pin Connector.	2422 025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0245	6 Pin Connector.	2422 025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0246	5 Pin Connector.	2422 025 12481	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
S 0254	9 Pin CRT Socket	2422 500 80076	2415	Cap, 330p, 10%, 50v, Ceramic	3198 017 03310
0267	3 Pin Connector.	2412 020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0269	Jack	2422 026 05182	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
S 1000	Tuner, V+U PLL	2422 542 90098	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
1002	SAW Filter, 45.75MHz	2422 549 44518	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
1200	Filter, Ceramic, 4MHz5	2422 549 48087	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	2022 333 00086
S 1515	Relay, 5 Amp, 12V.	2422 132 07444		ylene.	
1600	Tact Switch.	2422 128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1601	Tact Switch.	2422 128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1602	Tact Switch.	2422 128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1603	Tact Switch.	2422 128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1606	Tact Switch.	2422 128 02742	S 2463	Cap, 470p, 10%, 2000v, Ceramic	2020 558 90483
1660	Crystal, 12MHz000	2422 543 01203	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
1811	3 Pin Connector.	2412 020 00725	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	2022 330 00018
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290		pylene	
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
			2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
			2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

25PT533S37C (continued)

2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

25PT533S37C (continued)

3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509	5001	Coil, 27u, 10%	3198	018	22790
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809	5002	Coil, 820n, 10%	3198	018	18270
3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322	734	62702	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 12u.	2422	535	97329
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT	2422	531	02519
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear Correction.	3128	138	56801
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 27u, 10%	3198	018	22790
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5501	Mains Filter	2422	549	43432
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5520	Transformer, SS39009-04.	2422	531	02459
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5602	Coil, 5u6, 5%	3198	018	15680
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5603	Coil, 5u6, 5%	3198	018	15680
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5604	Coil, 5u6, 5%	3198	018	15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5861	Coil, 10u, 5%	3198	018	11090
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	6001	Zener Diode, 33 volt	3198	010	23390
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	6150	Diode, Signal, BAS316.	3198	010	10630
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6202	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6206	Zener Diode, 6.8 volt.	3198	020	56880
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6331	Diode, Signal, BAV21	3198	010	10070
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6332	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6333	Diode, Signal, BAV21	3198	010	10070
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, DG3-7005L	9336	436	10682
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 8.2 volt.	3198	010	28280
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6465	Diode, Signal, BAV21	3198	010	10070
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6467	Diode, Signal, BAS316.	3198	010	10630
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6469	Diode, Rect, BYD33J.	9337	234	20133

S = Safety Part Be sure to use exact replacement part.

25PT533S37C (continued)

6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9451	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9453	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9460	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9500	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9501	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9506	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9507	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9510	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9511	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9512	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9514	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9515	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9518	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9520	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9521	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9522	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9524	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9528	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9613	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9614	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9618	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9620	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9621	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9622	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9623	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9624	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9626	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9627	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9629	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9631	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9632	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9633	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9637	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9638	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9641	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9648	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9651	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9652	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9184	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9192	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9406	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

25PT533S37C (continued)

9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	14431

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310

S = Safety Part Be sure to use exact replacement part.

2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3121	237	53311
S AC09	CRT, A63QDB891X01.	9322	151	39682
AC10	Customer Control Buttons	3139	177	60721
S AC12	Degaussing Coil.	2422	549	44489
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01651
AC17	Owner's Manual	3121	235	20631
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53061
AC20A	Cabinet Front.	3139	177	60741
AC20B	Chassis Guide.	3139	124	37561
AC20C	Light Guide.	3139	124	36551
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	177	60731
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

25PT633R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422 025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422 025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422 025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er. 2222 368 90177
0221	2 Pin Connector.	2422 025 15503	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0222	2 Pin Connector.	2422 025 10646	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0223	A/V Jack	2422 026 05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0225	SVHS Jack.	2422 026 04926	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0229	3 Pin Connector.	2412 020 00725	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0243	6 Pin Connector.	2422 025 04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0244	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0245	6 Pin Connector.	2422 025 04854	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0246	5 Pin Connector.	2422 025 15848	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
S 0254	9 Pin CRT Socket	2422 500 80076	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0267	3 Pin Connector.	2412 020 00725	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0269	Jack	2422 026 05182	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 1000	Tuner, V+U PLL	2422 542 90098	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
1002	SAW Filter, 45.75MHz	2422 549 44518	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2448	Cap, 100p, 10%, 1000v, Ceramic	3198 019 51010
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
1600	Tact Switch.	2422 128 02742	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
1601	Tact Switch.	2422 128 02742	2457	Cap, 390n, 5%, 250v, Metalized Polyprop	ylene. 2022 333 00085
1602	Tact Switch.	2422 128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1603	Tact Switch.	2422 128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1606	Tact Switch.	2422 128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1660	Crystal, 12MHz000	2422 543 01203	2463	Cap, 1n5, 10%, 2000v, Ceramic Only with	5445 (JF0501-21835) Layer Wound. 2020 558 90489
1811	3 Pin Connector.	2412 020 00725	2464	Cap, 220p, 10%, 2000v, Ceramic	2020 558 90478
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344		Cap, 2u2, 5%, 160v, Metalized Polypropy	lene 2222 479 90042
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90221
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene 2022 330 00018
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230			
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230			
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280			

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 220K, 5%, 1/6W, Carbon Film. . . .	3198 011 02240
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3405	Res, 10 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01090
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 10 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01090
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3451	Res, 2R7, 5%, 1/3W, Metal Film.	2306 204 03278
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590		h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 4K7, 1%, 3/5W, Metal Film.	2312 915 14702
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 1K8, 1%, 3/5W, Metal Film.	2312 915 11802
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010		5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3470	Res, 470K, 5%, 1/10W, Metalized Glass. .	3198 021 54740
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3481	Res, 15K, 1%, 3/5W, Metal Film.	2312 915 11503
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3491	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322	242	13155	3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3507	Surge Protector.	2422	549	43073	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film.	3198	013	02210	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056	3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198	011	02710	3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3520	Res, 1K2, 5%, 1/10W, Metalized Glass.	3198	021	51220	3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198	011	04780	3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film.	2306	204	03101	3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198	021	38220
3524	Res, 56K, 5%, 1/10W, Metalized Glass.	3198	021	55630	4001	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4002	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198	012	11070	4122	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4123	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	4127	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4214	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4216	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass.	3198	021	54720	4388	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306	204	03222	4401	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4402	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	4431	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film.	2312	915	18203	4601	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4608	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4609	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4613	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4615	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film.	3198	012	13310	4622	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4623	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4692	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4693	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4812	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4814	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4820	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4825	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4827	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4830	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4831	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4861	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4863	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4866	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4867	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4869	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4871	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4873	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper.	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4892	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4901	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4903	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper.	3198	021	90030	4906	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4924	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4925	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass.	3198	021	53320	4982	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	5001	Coil, 27u, 10%.	3198	018	22790
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%.	3198	018	18270
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5201	Coil, 6u8, 5%.	3198	018	16880
3686	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	5202	Wire Jumper.	3198	036	90010
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5241	Wire Jumper.	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5242	Coil, 10u, 5%.	3198	018	11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5341	Coil, 22u.	2422	535	97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 15u.	2422	535	97331
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%.	3198	018	71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040		ound.	2422	531	02611
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT AT2078.	3128	138	21401
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%.	3198	018	73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5453	Diode, Rect, BYD33J.	9337	234	20133
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5457	Coil, 33u.	2422	535	91021
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198	021	31530	5463	Coil, Choke.	3128	138	37021
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198	021	31220	5471	Coil, 3u3, 20%.	3198	018	73380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5472	Coil, 3u3, 10%.	3198	018	23380
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5480	Coil, 47u, 10%.	2422	535	97337
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	S 5501	Mains Filter.	2422	549	43432
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	S 5520	Transformer, SS39009-04.	2422	531	02459
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

5561	Coil, 27u, 5%	2422	535	95366	7892	Transistor, NPN, BC847B(COL)	3198	010	42030
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7901	IC, AN7522N PH	9322	181	41682
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	9001	Wire Jumper.	3198	036	90010
5602	Coil, 5u6, 5%	3198	018	15680	9101	Wire Jumper.	3198	036	90010
5603	Coil, 5u6, 5%	3198	018	15680	9102	Wire Jumper.	3198	036	90010
5604	Coil, 5u6, 5%	3198	018	15680	9103	Wire Jumper.	3198	036	90010
5861	Coil, 10u, 5%	3198	018	11090	9104	Wire Jumper.	3198	036	90010
6001	Zener Diode, 33 volt	3198	010	23390	9123	Wire Jumper.	3198	036	90010
6150	Diode, Signal, BAS316.	3198	010	10630	9171	Wire Jumper.	3198	036	90010
6201	Diode, Signal, BAS316.	3198	010	10630	9173	Wire Jumper.	3198	036	90010
6202	Diode, Signal, BAS316.	3198	010	10630	9175	Wire Jumper.	3198	036	90010
6206	Zener Diode, 6.8 volt.	3198	020	56880	9176	Wire Jumper.	3198	036	90010
6331	Diode, Signal, BAV21.	3198	010	10070	9178	Wire Jumper.	3198	036	90010
6332	Diode, Signal, BAS316.	3198	010	10630	9179	Wire Jumper.	3198	036	90010
6333	Diode, Signal, BAV21.	3198	010	10070	9181	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21.	3198	010	10070	9182	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/SW, Metal Film.	2312	915	11002	9183	Wire Jumper.	3198	036	90010
6401	Zener Diode, 47 volt	3198	010	24790	9192	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9193	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9311	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt.	9331	668	30133	9312	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99.	3198	010	10620	9406	Wire Jumper.	3198	036	90010
6460	Diode, Rect, BY228/24.	9340	559	50112	9407	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9408	Wire Jumper.	3198	036	90010
6462	Zener Diode, 10 volt	3198	010	21090	9409	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9410	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9411	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9412	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9413	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99.	3198	010	10620	9414	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9415	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9416	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9417	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9418	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYD33J.	9337	234	20133	9419	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9421	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYD33D.	9337	234	00133	9422	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9423	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9424	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYD33D.	9337	234	00133	9425	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9426	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9427	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9453	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9460	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9463	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9500	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9501	Wire Jumper.	3198	036	90010
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	9503	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9506	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9507	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9510	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9511	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9512	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9513	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85.	9336	247	60133	9514	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9515	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9516	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9518	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9520	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9521	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9522	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9524	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I/1053.	9352	728	40557	9528	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9530	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9611	Coil, 27u, 10%	3198	018	22790
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9612	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9613	Wire Jumper.	3198	036	90010
7400	Power FET, STP3NC60FP.	9322	157	37687	9614	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9615	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9617	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9618	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9619	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT	9340	547	00215	9620	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9621	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9622	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9623	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9624	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9626	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9627	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9628	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9629	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9631	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET	9340	310	10215	9632	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9633	Wire Jumper.	3198	036	90010
7560	IC, L78L33ACZ.	9322	134	92676	9637	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT	9340	547	00215	9638	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9639	Wire Jumper.	3198	036	90010
7602	IC, M24C08-WBN6.	9322	154	38682	9640	Wire Jumper.	3198	036	90010
7606	Transistor, NPN, PPTC143ZT	9340	547	00215	9641	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9642	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9643	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL)	3198	010	42030	9648	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

25PT633R85C (continued)

9650	Wire Jumper.	3198	036	90010
9651	Wire Jumper.	3198	036	90010
9652	Wire Jumper.	3198	036	90010
9654	Wire Jumper.	3198	036	90010
9655	Wire Jumper.	3198	036	90010
9656	Wire Jumper.	3198	036	90010
9657	Wire Jumper.	3198	036	90010
9658	Wire Jumper.	3198	036	90010
9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	57961

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	28121

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3139	128	75281
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	35181
S AC09	CRT, A59QDF891X001(L).	9322	163	87682
AC10	Customer Control Buttons	3139	138	13911
S AC12	Degaussing Coil.	2422	549	44489
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20951
AC19	Side Jack Panel Bracket.	3139	124	39111
AC20	Cabinet Front Assembly	3121	237	53161
AC20A	Cabinet Front.	3139	177	60691

25PT633R85C (continued)

AC20B	Chassis Guide.	3139	124	25893
AC20C	Light Guide.	3139	124	41241
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	13871
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/			
	01.	3139	228	86463

25ST220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
0212	2 Pin Connector.	2422 025 16375	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0213	2 Pin Connector.	2422 025 16374	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0217	6 Pin Connector.	2422 025 12482	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
0218	A/V Jack	2422 026 04742	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0220	5 Pin Connector.	2422 025 04853	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0221	2 Pin Connector.	2422 025 15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector.	2422 025 10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er.
0223	A/V Jack	2422 026 05236	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2222 368 90177
0225	SVHS Jack.	2422 026 04926	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0227	6 Pin Connector.	2422 025 15849	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0229	3 Pin Connector.	2412 020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0240	7 Pin Connector.	2422 025 11244	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0242	7 Pin Connector.	2422 025 17042	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
0243	6 Pin Connector.	2422 025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0244	5 Pin Connector.	2422 025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0245	6 Pin Connector.	2422 025 04854	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
S 0254	9 Pin CRT Socket	2422 500 80076	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0259	5 Pin Connector.	2422 025 15848	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0262	3 Pin Connector.	2422 025 16937	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0267	3 Pin Connector.	2412 020 00725	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
0280	4 Pin Connector.	2422 025 12479	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
S 1000	Tuner, V+U, PLL	2422 542 90108	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	ylene.
1002	SAW Filter, 45.75MHz	2422 549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2022 333 00086
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	2020 021 91331
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 019 46810
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2462	Cap, 330n, 10%, 250v, MPP.	3198 016 01010
1600	Tact Switch.	2422 128 02742	S 2463	Cap, 470p, 10%, 2000v, Ceramic	2022 333 00084
1601	Tact Switch.	2422 128 02742	S 2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020 558 90483
1602	Tact Switch.	2422 128 02742	2471	Cap, 100n, 10%, 50v, Polyester	2020 301 90254
1603	Tact Switch.	2422 128 02742	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
1606	Tact Switch.	2422 128 02742	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
1660	Crystal, 12MHz000	2422 543 01203	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2006	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2008	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2101	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 24740	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2501	Cap, 2n2, 10%, 1000v, Ceramic.	2022 330 00018
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	3198 019 52220
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	2020 024 90647
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2507	Cap, 470p, 10%, 50v, Ceramic	3198 019 52220
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 017 04710
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	S 2515	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	2520	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2521	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2522	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2523	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2525	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2527	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2528	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2540	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2560	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2561	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2562	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2563	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2564	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2567	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2568	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2581	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2590	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2602	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2606	Cap, 330n, +80/-20%, 25v, Ceramic. . . .	2222 910 19856
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2607	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2609	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2612	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2613	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2615	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2616	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2619	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2691	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2802	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2803	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2810	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2813	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220		Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104		Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240			

S = Safety Part Be sure to use exact replacement part.

25ST220L/17 (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic . . .	3198 017 44740	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . .	2306 207 03109
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass . .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film . . .	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film . . .	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3454	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film .	3198 011 02210
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3102	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3104	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3106	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3480	Res, 1R5, 5%, 1/4W, Carbon Film	2122 101 02083
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06810	3481	Res, 8K2, 1%, 3/5W, Metal Film	2312 915 18202
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06810	3482	Res, 22K, 1%, 3/5W, Metal Film	2312 915 12203
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06810	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3492	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3182	Wire Jumper	3198 036 90010	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3500	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322 242 13335
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03910	3501	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . .	2322 242 13155
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3507	Surge Protector	2422 549 43073
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film .	3198 011 02710
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3217	Res, 330K, 5%, 1/16W, Metalized Glass .	3198 021 33340	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3527	Res, OR33, 5%, 3/5W, Metal Film	3198 012 13370
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210	3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322 734 64702
3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3247	Res, 680K, 5%, 1/16W, Metalized Glass .	3198 021 36840	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

25ST220L/17 (continued)

S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5001	Coil, 27u, 10%	3198 018 22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5002	Coil, 820n, 10%	3198 018 18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5201	Coil, 6u8, 5%	3198 018 16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5202	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5241	Wire Jumper.	3198 036 90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5242	Coil, 10u, 5%	3198 018 11090
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5342	Coil, 12u, 10%	3198 018 12190
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT	2422 531 02519
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear Correction.	3128 138 56801
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 3u3, 20%	3198 018 73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5480	Coil, 27u, 10%	3198 018 22790
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	S 5501	Mains Filter	2422 549 43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	S 5520	Transformer, SS39009-04.	2422 531 02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5561	Coil, 27u, 5%	2422 535 95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5602	Coil, 5u6, 5%	3198 018 15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5603	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5604	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5861	Coil, 10u, 5%	3198 018 11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6181	Zener Diode, 6.8 volt.	3198 020 56880
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6202	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6206	Zener Diode, 6.8 volt.	3198 020 56880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, DG3-7005L	9336 436 10682
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6462	Zener Diode, 8.2 volt.	3198 010 28280
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6465	Diode, Signal, BAV21	3198 010 10070
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21	3198 010 10070
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6467	Diode, Signal, BAS316.	3198 010 10630
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6468	Diode, Signal, BAS316.	3198 010 10630
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6469	Diode, Rect, BYV95C.	9335 001 80133
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390

S = Safety Part Be sure to use exact replacement part.

25ST220L/17 (continued)

6485	Diode, Rect, BYV95C.	9335	001	80133	9506	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9507	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9510	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9511	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9512	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9513	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9514	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9515	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9516	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9518	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9520	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9521	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9522	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010.	9322	128	18682	9524	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9528	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9530	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9611	Coil, 27u, 10%.	3198	018	22790
6569	Diode, Signal, BAS316.	3198	010	10630	9612	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9613	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9614	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85.	9336	247	60133	9615	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR.	9322	185	69682	9616	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9617	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9618	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9619	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL).	3198	010	42030	9622	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I.	4835	310	57622	9623	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL).	3198	010	42030	9626	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL).	3198	010	42150	9627	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL).	3198	010	42150	9628	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3.	9352	713	37112	9629	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL).	3198	010	42150	9631	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL).	3198	020	40110	9632	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9634	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530	9637	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT.	9340	547	00215	9638	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430	9640	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9641	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135.	3198	020	41010	9642	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135.	3198	020	41010	9643	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667	9647	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9648	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9650	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL).	3198	010	42030	9652	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL).	3198	020	40030	9654	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET.	9340	310	10215	9655	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL).	3198	010	42150	9657	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ.	9322	106	11676	9658	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT.	9340	547	00215	9659	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL).	3198	010	42150	9660	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9661	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9662	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9663	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL).	3198	010	42030	9664	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL).	3198	010	42030	9665	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH.	9322	181	41682	9666	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9667	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%.	3198	018	22290
9182	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%.	3198	018	22290
9311	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9419	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010
9421	Wire Jumper.	3198	036	90010	9821	Wire Jumper.	3198	036	90010
9422	Wire Jumper.	3198	036	90010	9822	Wire Jumper.	3198	036	90010
9423	Wire Jumper.	3198	036	90010	9825	Wire Jumper.	3198	036	90010
9425	Wire Jumper.	3198	036	90010	9828	Wire Jumper.	3198	036	90010
9427	Wire Jumper.	3198	036	90010	9829	Wire Jumper.	3198	036	90010
9451	Wire Jumper.	3198	036	90010	9831	Wire Jumper.	3198	036	90010
9453	Wire Jumper.	3198	036	90010	9832	Wire Jumper.	3198	036	90010
9460	Wire Jumper.	3198	036	90010	9837	Wire Jumper.	3198	036	90010
9500	Wire Jumper.	3198	036	90010	9838	Wire Jumper.	3198	036	90010
9501	Wire Jumper.	3198	036	90010	9839	Wire Jumper.	3198	036	90010
9503	Wire Jumper.	3198	036	90010	9846	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

25ST220L/17 (continued)

9847	Wire Jumper.	3198	036	90010	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
9849	Wire Jumper.	3198	036	90010	AC22	Cinch Cover.	3139	124	25551
9850	Wire Jumper.	3198	036	90010	AC26	EPS Bracket.	3119	107	17241
9851	Wire Jumper.	3198	036	90010	AC27	ITV Card Bracket	3139	124	37933
9852	Wire Jumper.	3198	036	90010	AC28	ITV Card Slot Cover.	3139	124	30571
9853	Wire Jumper.	3198	036	90010					
9856	Wire Jumper.	3198	036	90010					
9860	Wire Jumper.	3198	036	90010					
9861	Wire Jumper.	3198	036	90010					
9862	Wire Jumper.	3198	036	90010					
9864	Wire Jumper.	3198	036	90010					
9865	Wire Jumper.	3198	036	90010					
9868	Wire Jumper.	3198	036	90010					
9873	Wire Jumper.	3198	036	90010					
9874	Wire Jumper.	3198	036	90010					
9875	Wire Jumper.	3198	036	90010					
9877	Wire Jumper.	3198	036	90010					
9891	Wire Jumper.	3198	036	90010					
9892	Wire Jumper.	3198	036	90010					
9901	Wire Jumper.	3198	036	90010					
9902	Wire Jumper.	3198	036	90010					
9903	Wire Jumper.	3198	036	90010					
9904	Wire Jumper.	3198	036	90010					
9905	Wire Jumper.	3198	036	90010					
9911	Wire Jumper.	3198	036	90010					
9913	Wire Jumper.	3198	036	90010					
9914	Wire Jumper.	3198	036	90010					
9915	Wire Jumper.	3198	036	90010					
9918	Wire Jumper.	3198	036	90010					
9919	Wire Jumper.	3198	036	90010					
9920	Wire Jumper.	3198	036	90010					
9991	Wire Jumper.	3198	036	90010					
9996	Wire Jumper.	3198	036	90010					
9998	Wire Jumper.	3198	036	90010					
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372					
CBA	EPS Module (ITV)	3139	137	22961					
CBA	Main Chassis Assembly.	3139	187	26791					
CBA	Interface Panel (ITV).	3139	188	04541					

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135	010	07161
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC05	Cabinet Back	3139	124	45281
S	AC09	CRT, A63QDB891X01.	9322	151	39682
	AC10	Customer Control Buttons	3139	124	27351
S	AC12	Degaussing Coil.	2422	549	44489
	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
	AC20	Cabinet Front Assembly	3121	237	53351
	AC20A	Cabinet Front.	3139	177	62031
	AC20B	Chassis Guide (2 Used)	3139	124	31381
	AC20C	Light Guide.	3139	124	26461
	AC20D	Nameplate.	3135	015	03571
	AC20E	Power Button	3139	124	26444

S = Safety Part Be sure to use exact replacement part.

27DV693R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er. 2222 368 90177
0212	2 Pin Connector.	2422 025 16375	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0214	5 Pin Connector.	2422 025 12481	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0217	3 Pin Connector.	2412 020 00725	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0219	6 Pin Connector.	2422 025 12482	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0220	5 Pin Connector.	2422 025 04853	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0221	2 Pin Connector.	2422 025 15503	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0222	2 Pin Connector.	2422 025 10646	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0223	A/V Jack.	2422 026 05236	2401	Cap, 2u2, 20%, 50v, Electrolytic.	2020 021 90552
0225	SVHS Jack.	2422 026 04926	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0229	7 Pin Connector.	2422 025 11244	2404	Cap, 47u, 20%, 50v, Electrolytic.	3198 025 54790
0239	3 Pin Connector.	2422 025 16382	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0240	4 Pin Connector.	2422 025 12479	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0243	6 Pin Connector.	2422 025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0245	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0246	5 Pin Connector.	2422 025 12481	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
0251	4 Pin Connector.	2422 025 15847	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
S 0254	9 Pin CRT Socket.	2422 500 80076	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
0267	3 Pin Connector.	2412 020 00725	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
0269	Jack.	2422 026 05182	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	ylene. 2022 333 00163
S 1000	Tuner, V+U, PLL.	2422 542 90108	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1002	SAW Filter, 45.75MHz.	2422 549 44518	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy	lene. 2222 479 90042
1660	Crystal, 12MHz000.	2422 543 01203	S 2465	Cap, 15n, 5%, 1600v, Polypropylene.	2020 301 90255
1810	6 Pin Connector.	2422 025 15849	2466	Cap, 15n, 10%, 400v, Polyester.	2222 347 90219
1831	Crystal, Resonator, 18MHz432, 12 Pin, H	C49/U A. 2422 543 00842	2468	Cap, 27n, 10%, 400v, Polyester.	2222 347 90232
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	ylene. 2222 479 90051
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene. 2022 330 00018
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91374
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2604	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020			
2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020			

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3507	Surge Protector.	2422 549 43073
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	S 3527	Res, OR33, 5%, 3/5W, Metal Film.	3198 012 13370

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322 734 64702	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film	2306 204 03109	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198 011 04710	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198 011 06820	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	5001	Coil, 27u, 10%	3198 018 22790
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	5002	Coil, 820n, 10%	3198 018 18270
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5201	Coil, 6u8, 5%	3198 018 16880
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5202	Wire Jumper	3198 036 90010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	5241	Wire Jumper	3198 036 90010
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5242	Coil, 10u, 5%	3198 018 11090
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5341	Coil, 22u	2422 535 97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5342	Coil, 3u9, 10%	2422 535 97323
3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51020	5401	Coil, 1mH, 10%	3198 018 71020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5445	Transformer, LOT	2422 531 02574
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5451	Coil, 22u, 10%	3198 018 72290
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	S 5457	Coil, 25u	2422 535 91028
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020	5463	Coil, Choke	3128 138 37021
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 6u8, 20%	3198 018 76880
3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	5480	Coil, 47u, 10%	2422 535 97337
3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	S 5520	Transformer, SS42202-00 B	2422 531 02562
3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198 021 31040	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	5602	Coil, 5u6, 5%	3198 018 15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5604	Coil, 5u6, 5%	3198 018 15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5831	Coil, 6u8, 5%	3198 018 16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198 011 01010	5832	Coil, 6u8, 5%	3198 018 16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	5833	Coil, 6u8, 5%	3198 018 16880
3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820	5835	Coil, 12u, 10%	3198 018 31290
3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	6001	Zener Diode, 33 volt	3198 010 23390
3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198 021 34730	6150	Diode, Signal, BAS316	3198 010 10630
3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730	6201	Diode, Signal, BAS316	3198 010 10630
3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198 021 32730	6202	Diode, Signal, BAS316	3198 010 10630
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198 011 08210	6206	Zener Diode, 6.8 volt.	3198 020 56880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316	3198 010 10630
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6400	Res, 1K, 1%, 3/5W, Metal Film	2312 915 11002
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6445	Zener Diode, 10 volt	3198 020 51090
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148	3198 010 10010
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6448	Zener Diode, 6.2 volt.	9331 668 30133
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, BY228/24	9340 559 50112
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6461	Diode, Rect, RGP30J-L7004	9338 617 60682
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6462	Zener Diode, 9.1 volt.	9331 177 80133
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21	3198 010 10070
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21	3198 010 10070
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6467	Diode, Signal, BAS316	3198 010 10630
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

6469	Diode, Rect, BYV95C.	9335	001	80133	9414	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99.	3198	010	10620	9415	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt.	3198	010	21590	9416	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9417	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9418	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9419	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9421	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9422	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9424	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9425	Wire Jumper.	3198	036	90010
6490	Diode, Rect, BYV95C.	9335	001	80133	9426	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322	132	55667	9427	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9453	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9460	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9463	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9500	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9501	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9503	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9506	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9507	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9511	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9512	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9513	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9514	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9515	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6582	Diode, Rect, STPS10L60D.	9322	175	70667	9518	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9520	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9521	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9522	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL).	3198	010	42030	9524	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL).	3198	010	42150	9528	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL).	3198	010	42030	9530	Wire Jumper.	3198	036	90010
7200	IC, TDA9569H/N1/4I/1313.	9352	743	94557	9611	Coil, 27u, 10%.	3198	018	22790
7201	Transistor, NPN, BC847B(COL).	3198	010	42030	9612	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL).	3198	010	42150	9613	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL).	3198	010	42150	9614	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3.	9352	713	37112	9615	Wire Jumper.	3198	036	90010
7400	Power FET, IR.	9322	053	35687	9618	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL).	3198	010	42150	9619	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL).	3198	020	40110	9620	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9621	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530	9622	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT.	9340	547	00215	9623	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430	9624	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9626	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135.	3198	020	41010	9627	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135.	3198	020	41010	9628	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667	9629	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9631	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9632	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL).	3198	010	42030	9633	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL).	3198	020	40030	9637	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET.	9340	310	10215	9638	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL).	3198	010	42150	9640	Wire Jumper.	3198	036	90010
7560	IC, L78L33ACZ.	9322	134	92676	9641	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT.	9340	547	00215	9642	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL).	3198	010	42150	9643	Wire Jumper.	3198	036	90010
7602	IC, M24C08-WBN6.	9322	154	38682	9644	Wire Jumper.	3198	036	90010
7606	Transistor, NPN, PPTC143ZT.	9340	547	00215	9645	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9648	Wire Jumper.	3198	036	90010
7803	IC, HEF4053BT.	9333	729	60653	9650	Wire Jumper.	3198	036	90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L.	9322	187	89682	9652	Wire Jumper.	3198	036	90010
7901	IC, AN7580.	9322	166	29682	9654	Wire Jumper.	3198	036	90010
7903	Transistor, NPN, BC847B(COL).	3198	010	42030	9655	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9656	Wire Jumper.	3198	036	90010
9101	Wire Jumper.	3198	036	90010	9657	Wire Jumper.	3198	036	90010
9102	Wire Jumper.	3198	036	90010	9658	Wire Jumper.	3198	036	90010
9103	Wire Jumper.	3198	036	90010	9659	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9660	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9661	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9662	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9663	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9664	Wire Jumper.	3198	036	90010
9176	Wire Jumper.	3198	036	90010	9665	Wire Jumper.	3198	036	90010
9178	Wire Jumper.	3198	036	90010	9666	Wire Jumper.	3198	036	90010
9179	Wire Jumper.	3198	036	90010	9667	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%.	3198	018	22290
9311	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%.	3198	018	22290
9408	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27DV693R37A (continued)

9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9876	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9923	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	23581
CBA	DVD Loader SD5.12.	3139	188	55471
CBA	DVD MPEG Assembly SD5.12	3139	188	55481
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835	310	57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

0267	3 Pin Board Connector.	2422	025	09191
0361	Eject Button	3139	177	63451
1110	Tact Switch.	2422	128	02742
CBA	DVD Eject Panel Assembly	3139	187	23311

DVD Interface Panel Parts

DVD Interface Panel Parts

0226	Connector, 6 Pin	2422	025	12482
0228	Connector, 3 Pin	2412	020	00725
0251	Connector, 4 Pin	2422	025	15847
0253	Connector, 7 Pin	2422	025	11244
0254	Connector, 3 Pin	2422	025	16382
0266	Connector, 6 Pin	2422	025	15849
0269	Connector, 5 Pin	2422	025	15848
1100	Socket, Cinch, 1 Pin	2422	026	04425
1101	Connector, 8 Pin	2422	025	12483
S 1330	Fuse, 2A, 250V	2422	086	10422
S 1331	Fuse, 2A, 250V	2422	086	10422
S 1332	Fuse, 2A, 250V	2422	086	10421
2101	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790
2102	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090
2103	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790
2104	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040
2110	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040
2111	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250

2112	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2113	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2114	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2185	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2260	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
2262	Cap, 4u7, +80/-20%, 10V, Ceramic	2020	552	96305
2300	Cap, 10u, 20%, 250v, Electrolytic.	2020	012	93495
2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222	365	55223
2302	Cap, 100p, 10%, 1KV, Ceramic	3198	019	51010
2310	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2311	Cap, 470n, 10%, 25v, Ceramic	2020	552	96465
2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2315	Cap, 220p, 10%, 1KV, Ceramic	3198	019	62210
2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
2319	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023	22240
2330	Cap, 2u2, 20%, 25v, Electrolytic	3198	026	32220
2331	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
2332	Cap, 2u2, 20%, 25v, Electrolytic	3198	026	32220
2333	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
2337	Cap, 1000u, 20%, 25v, Electrolytic	3198	026	31020
2338	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710
2339	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710
2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
2342	Cap, 47u, 20%, 16v, Electrolytic	3198	028	24790
2350	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
2351	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
2353	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3118	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3262	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3263	Res, 82K, 5%, 1/16W, Metalized Glass	3198	021	38230
3264	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3265	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730
3271	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3272	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306	204	03108
S 3301	Power Resistor, 68K, 5%, 2W.	3198	012	26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198	021	31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198	021	31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198	011	01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198	011	01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322	704	61004
3339	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3342	Res, 4K7, 1%, 1/16W, Metalized Glass	2322	704	64702
3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322	704	64702
3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198	021	34780
3361	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020
4105	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4106	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4185	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4226	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4261	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4265	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4316	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4342	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4343	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4361	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4363	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
4364	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
5100	Inductor, Variable, 100uH, 10%	2422	549	41663
5110	Coil, 220n	3198	018	12270
5300	Coil, 27u.	3198	018	22790
5301	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
S 5315	Transformer, SS25113-00.	2422	531	02596
5331	Coil, 10u, 5%.	2422	535	95363
5333	Coil, 10u, 5%.	2422	535	95363
5337	Coil, 10u, 10%.	2422	535	97328
5339	Coil, 10u, 10%.	2422	535	97328
6100	Diode, Signal, BAS316.	3198	010	10630
6101	Diode, Signal, BAS316.	3198	010	10630
6300	Diode, Rect, BYD33J	9337	234	20133
6311	Diode, Signal, BAS316.	3198	010	10630

S = Safety Part Be sure to use exact replacement part.

27DV693R37A (continued)

6312	Zener Diode, 22 volt	3198	020	52290
6330	Diode, Rect, EGP20DL-5100	9322	164	42682
6332	Diode, Rect, SB340L-7024	9322	161	76682
6336	Diode, Rect, BYV27-200	9335	526	80133
7110	IC, HEF4053BT	9333	729	60653
7260	Transistor, NPN, BC847B	3198	010	42030
7261	Transistor, NPN, BC847B	3198	010	42030
7262	Transistor, NPN, PDTCl24ET	9340	310	20215
7310	Transistor, NPN, PDTCl14ET	3198	010	44110
7311	Transistor, PNP, PDTAl14ET	3198	010	44010
7312	Transistor, PNP, BC857B	3198	010	42150
7313	Transistor, NPN, BC847B	3198	010	42030
7315	IC, TEAl523P/N2	9352	699	68112
S 7340	Optical Coupler, TCET1103(G)	9322	140	14667
7341	IC, TL431CLP	9337	711	00676
9110	Wire Jumper	3198	036	90010
9111	Wire Jumper	3198	036	90010
9183	Wire Jumper	3198	036	90010
9266	Wire Jumper	3198	036	90010
9315	Wire Jumper	3198	036	90010
9350	Wire Jumper	3198	036	90010
9351	Wire Jumper	3198	036	90010
9352	Wire Jumper	3198	036	90010
9355	Wire Jumper	3198	036	90010
9357	Wire Jumper	3198	036	90010
CBA	DVD Interface Panel Assembly	3139	187	20761

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector	2422	025	16268
S 0212	2 Pin Connector	2422	025	16559
0214	5 Pin Connector	2422	025	06353
1606	Tact Switch	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V	9322	127	54667
9001	Wire Jumper	3198	036	90010
9002	Wire Jumper	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts				
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector	2422	025	15849
0254	5 Pin Connector	2422	025	12481
0255	4 Pin Connector	2422	025	12479
2171	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2172	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2173	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2174	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2176	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198	019	14710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film	3198	011	01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film	3198	011	01210
6161	Zener Diode, 6.8 volt	3198	010	26880
9153	Wire Jumper	3198	036	90010
9170	Wire Jumper	3198	036	90010
9171	Wire Jumper	3198	036	90010
CBA	Side Jack Panel Assembly	3139	188	03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts
S = Safety Part Be sure to use exact replacement part.

0215	3 Pin Connector	2422	025	16601
1091	Tact Switch	2422	128	02742
1092	Tact Switch	2422	128	02742
1093	Tact Switch	2422	128	02742
1094	Tact Switch	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glass	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44931
AC06	Cabinet Back Screw Cover (2 Used)	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual	3121	235	21121
AC18	Quick Use Guide	3121	233	44461
AC20	Cabinet Front Assembly	3121	237	53502
AC20A	Cabinet Front	3139	138	10391
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	177	56381
AC23	DVD Door	3139	177	63441
AC24	DVD Interface Panel Bracket	3139	124	43291
REMOTE	Remote Control Transmitter, RC19042007/01	3128	147	14521

27LT220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0212	2 Pin Connector.	2422	025 16375	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0218	A/V Jack	2422	026 04742	2331	er.	2222	368 90177
0220	5 Pin Connector.	2422	025 04853	2340	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0221	2 Pin Connector.	2422	025 15503	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0222	2 Pin Connector.	2422	025 10646	2342	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0223	A/V Jack	2422	026 05236	2343	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0225	SVHS Jack.	2422	026 04926	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0240	7 Pin Connector.	2422	025 11244	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0243	6 Pin Connector.	2422	025 04854	2405	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0244	5 Pin Connector.	2422	025 04853	2415	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0245	6 Pin Connector.	2422	025 04854	2441	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
0251	3 Pin Connector.	2412	020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 0254	9 Pin CRT Socket	2422	500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
0259	5 Pin Connector.	2422	025 15848	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0262	3 Pin Connector.	2422	025 16937	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
0267	3 Pin Connector.	2412	020 00725	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
0280	4 Pin Connector.	2422	025 12479	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
S 1000	Tuner, V+U, PLL	2422	542 90108	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
1002	SAW Filter, 45.75MHz	2422	549 44518	2458	ylene.	2022	333 00086
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2459	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2460	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2462	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1600	Tact Switch.	2422	128 02742	2463	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
1601	Tact Switch.	2422	128 02742	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with		
1602	Tact Switch.	2422	128 02742	S 2465	5445 (JF0501-21835) Layer Wound.	2020	558 90487
1603	Tact Switch.	2422	128 02742	S 2465	Cap, 680p, 10%, 2000v, Ceramic.	2020	558 90485
1606	Tact Switch.	2422	128 02742		Cap, 11n, 5%, 1600v, Polypropylene	2020	301 90251
1660	Crystal, 12MHz000	2422	543 01203	2471	Cap, 12n, 5%, 1600v, Polypropylene Only		
1861	Ceramic Resonator, 51KHz5, CSB503F58.	2422	540 98344	2472	with 5445 (JF0501-21835) Layer Wound	2222	375 90156
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2473	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2474	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2475	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2476	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2480	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2481	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2482	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2485	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2486	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2487	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2488	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2489	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2491	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2500	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290		Cap, 470n, 20%, 275v, Metalized Polypro		
2123	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2501	pylene	2022	330 00018
2125	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2503	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2505	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2507	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2508	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2515	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2520	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2181	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2521	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2182	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2522	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2183	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2523	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2525	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2527	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

27LT220L/17 (continued)

2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520	
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050	
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530	
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810	
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880	
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320	
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	
3123	Wire Jumper.	3198 036 90010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720	
3125	Wire Jumper.	3198 036 90010	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390	
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	
3182	Wire Jumper.	3198 036 90010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3507	Surge Protector.	2422 549 43073	
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030	
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720	
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	
3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520	
3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	
3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840				
3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330				

S = Safety Part Be sure to use exact replacement part.

27LT220L/17 (continued)

3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass.	3198	021	53320	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040		ound	2422	531	02611
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198	021	31530	5472	Coil, 3u3, 10%	3198	018	23380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198	021	31220	5480	Coil, 39u, 10%	2422	535	97336
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5501	Mains Filter	2422	549	43432
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5603	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6181	Zener Diode, 6.8 volt.	3198	020	56880
3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198	021	38220	6202	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6449	Diode, Signal, BAV99	3198	010	10620
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6460	Diode, Rect, BY228/24.	9340	559	50112
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 9.1 volt.	9331	177	80133
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6465	Diode, Signal, BAV21	3198	010	10070
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6466	Diode, Signal, BAV21	3198	010	10070
4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6467	Diode, Signal, BAS316.	3198	010	10630
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6468	Diode, Signal, BAS316.	3198	010	10630

S = Safety Part Be sure to use exact replacement part.

27LT220L/17 (continued)

6469	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99.	3198	010	10620	9460	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt.	3198	010	21590	9500	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9501	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9503	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9506	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9507	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9511	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9513	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9514	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9516	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9518	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9520	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9521	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9522	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9524	Wire Jumper.	3198	036	90010
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	9528	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9530	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9611	Coil, 27u, 10%.	3198	018	22790
6566	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9613	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9614	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9615	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85.	9336	247	60133	9617	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR.	9322	185	69682	9618	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9619	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9622	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9623	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL).	3198	010	42030	9626	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I.	4835	310	57622	9627	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL).	3198	010	42030	9628	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL).	3198	010	42150	9629	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL).	3198	010	42150	9631	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3.	9352	713	37112	9632	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL).	3198	010	42150	9637	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL).	3198	020	40110	9638	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9640	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530	9641	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT.	9340	547	00215	9642	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430	9643	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9647	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135.	3198	020	41010	9648	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135.	3198	020	41010	9650	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667	9652	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9654	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9655	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL).	3198	010	42030	9657	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL).	3198	020	40030	9658	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET.	9340	310	10215	9659	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL).	3198	010	42150	9660	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ.	9322	106	11676	9661	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT.	9340	547	00215	9662	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL).	3198	010	42150	9663	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9664	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9665	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9666	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL).	3198	010	42030	9667	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL).	3198	010	42030	9668	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH.	9322	181	41682	9669	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%.	3198	018	22290
9171	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%.	3198	018	22290
9183	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9821	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9822	Wire Jumper.	3198	036	90010
9419	Wire Jumper.	3198	036	90010	9825	Wire Jumper.	3198	036	90010
9421	Wire Jumper.	3198	036	90010	9828	Wire Jumper.	3198	036	90010
9422	Wire Jumper.	3198	036	90010	9829	Wire Jumper.	3198	036	90010
9423	Wire Jumper.	3198	036	90010	9831	Wire Jumper.	3198	036	90010
9425	Wire Jumper.	3198	036	90010	9832	Wire Jumper.	3198	036	90010
9427	Wire Jumper.	3198	036	90010	9837	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27LT220L/17 (continued)

9838	Wire Jumper.	3198	036	90010	AC20D	Nameplate.	3135	015	03571
9839	Wire Jumper.	3198	036	90010	AC20E	Power Button	3139	124	26444
9846	Wire Jumper.	3198	036	90010	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
9847	Wire Jumper.	3198	036	90010	AC22	Cinch Cover.	3139	124	25551
9849	Wire Jumper.	3198	036	90010					
9850	Wire Jumper.	3198	036	90010					
9851	Wire Jumper.	3198	036	90010					
9852	Wire Jumper.	3198	036	90010					
9853	Wire Jumper.	3198	036	90010					
9856	Wire Jumper.	3198	036	90010					
9860	Wire Jumper.	3198	036	90010					
9861	Wire Jumper.	3198	036	90010					
9862	Wire Jumper.	3198	036	90010					
9864	Wire Jumper.	3198	036	90010					
9865	Wire Jumper.	3198	036	90010					
9868	Wire Jumper.	3198	036	90010					
9873	Wire Jumper.	3198	036	90010					
9874	Wire Jumper.	3198	036	90010					
9875	Wire Jumper.	3198	036	90010					
9877	Wire Jumper.	3198	036	90010					
9891	Wire Jumper.	3198	036	90010					
9892	Wire Jumper.	3198	036	90010					
9901	Wire Jumper.	3198	036	90010					
9902	Wire Jumper.	3198	036	90010					
9903	Wire Jumper.	3198	036	90010					
9904	Wire Jumper.	3198	036	90010					
9905	Wire Jumper.	3198	036	90010					
9911	Wire Jumper.	3198	036	90010					
9913	Wire Jumper.	3198	036	90010					
9914	Wire Jumper.	3198	036	90010					
9915	Wire Jumper.	3198	036	90010					
9918	Wire Jumper.	3198	036	90010					
9919	Wire Jumper.	3198	036	90010					
9920	Wire Jumper.	3198	036	90010					
9991	Wire Jumper.	3198	036	90010					
9996	Wire Jumper.	3198	036	90010					
9998	Wire Jumper.	3198	036	90010					
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372					
CBA	Main Chassis Assembly.	3139	187	26841					

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135	010	07161
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC05	Cabinet Back	3139	124	45271
S	AC09	CRT, A68AJB82X11	9301	891	90631
	AC10	Customer Control Buttons	3139	124	30901
S	AC12	Degaussing Coil.	2422	549	43967
	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
	AC20	Cabinet Front Assembly	3121	237	52392
	AC20A	Cabinet Front.	3135	127	50011
	AC20B	Chassis Guide (2 Used)	3139	124	31381
	AC20B	Chassis Guide.	3139	124	41711
	AC20C	Light Guide.	3139	124	26461

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16374	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . . .	2020	558 90445
0212	2 Pin Connector.	2422	025 16375	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020	021 90552
0214	5 Pin Connector.	2422	025 12481	2402	Cap, 470p, 10%, 500v, Ceramic . . .	3198	019 44710
0219	6 Pin Connector.	2422	025 12482	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198	025 54790
0220	5 Pin Connector.	2422	025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025 32210
0221	2 Pin Connector.	2422	025 15503	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
0222	2 Pin Connector.	2422	025 10646	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025 51080
0223	A/V Jack	2422	026 05236	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198	017 24730
0225	SVHS Jack.	2422	026 04926	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025 51080
0239	3 Pin Connector.	2422	025 16382	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020	021 91139
0240	7 Pin Connector.	2422	025 11244	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
0243	6 Pin Connector.	2422	025 04854	2452	Cap, 180p, 5%, 50v, Ceramic.	3198	016 01810
0244	5 Pin Connector.	2422	025 04853	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025 34790
0245	6 Pin Connector.	2422	025 04854	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022	333 00163
0246	5 Pin Connector.	2422	025 12481	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020	021 91331
0251	3 Pin Connector.	2422	020 00725	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 0254	9 Pin CRT Socket	2422	500 80076	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
0259	5 Pin Connector.	2422	025 15848	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
0262	3 Pin Connector.	2422	025 16937	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222	479 90042
0267	3 Pin Connector.	2412	020 00725	S 2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020	301 90255
S 1000	Tuner, V+U, PLL	2422	542 90108	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
1002	SAW Filter, 45.75MHz	2422	549 44518	2468	Cap, 27n, 10%, 400v, Polyester	2222	347 90232
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222	365 75154
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222	365 75104
1660	Crystal, 12MHz000	2422	543 01203	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422	543 00842	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020	021 90586
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025 24710	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222	479 90051
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025 31010	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020	021 90856
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020	021 91577
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198	017 24740	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020	021 90854
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020	021 91049
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020	021 91577
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022	330 00018
2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020	024 90647
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2123	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2125	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198	025 52290
2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020	021 91654
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198	025 54780	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020	021 91353
2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025 34790
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017 44740	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025 51080
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028 24790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198	025 52290
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198	023 22240
2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198	026 21020	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017 44740
2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198	026 21020	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198	017 21050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198	025 52280	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2831	Cap, 1p, 25%, 50v, Ceramic	3198	016 31080
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2832	Cap, 1p, 25%, 50v, Ceramic	3198	016 31080
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222	368 90177	2833	Cap, 47p, 5%, 50v, Ceramic	3198	016 34790
2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020	558 90445	2834	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020	012 93495	2835	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210
2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610	2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198	025 54780
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559	2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040
2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 21040	2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 (continued)

2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3507	Surge Protector.	2422 549 43073
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 (continued)

3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5001	Coil, 27u, 10%	3198 018 22790
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	5002	Coil, 820n, 10%	3198 018 18270
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	5201	Coil, 6u8, 5%	3198 018 16880
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5202	Wire Jumper.	3198 036 90010
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5241	Wire Jumper.	3198 036 90010
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5242	Coil, 10u, 5%	3198 018 11090
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5341	Coil, 22u, 10%	2422 535 97333
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5342	Coil, 3u9, 10%	2422 535 97323
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5401	Coil, 1mH, 10%	3198 018 71020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5445	Transformer, LOT	2422 531 02574
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5451	Coil, 22u, 10%	3198 018 72290
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 5457	Coil, 25u.	2422 535 91028
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5463	Coil, Choke.	3128 138 37021
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5471	Coil, 6u8, 20%	3198 018 76880
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5480	Coil, 47u, 10%	2422 535 97337
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5602	Coil, 5u6, 5%	3198 018 15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5604	Coil, 5u6, 5%	3198 018 15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5831	Coil, 6u8, 5%	3198 018 16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5832	Coil, 6u8, 5%	3198 018 16880
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5833	Coil, 6u8, 5%	3198 018 16880
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5835	Coil, 12u, 10%	3198 018 31290
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6206	Zener Diode, 6.8 volt.	3198 020 56880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6331	Diode, Signal, BAV21	3198 010 10070
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6449	Diode, Signal, BAV99	3198 010 10620
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, BY228/24.	9340 559 50112
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6462	Zener Diode, 9.1 volt.	9331 177 80133
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6464	Diode, Signal, BAS316.	3198 010 10630
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21	3198 010 10070
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21	3198 010 10070
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6469	Diode, Rect, BYV95C.	9335 001 80133
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6470	Diode, Signal, BAV99	3198 010 10620
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6482	Zener Diode, 9.1 volt.	9331 177 80133
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYV95C.	9335 001 80133
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6562	Diode, Rect, EGP20DL-5100.	9322 164 42682
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215

S = Safety Part Be sure to use exact replacement part.

27LT621L/17 (continued)

6566	Diode, Signal, 1N4148.	3198 010 10010	9524	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9528	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9530	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9611	Coil, 27u, 10%	3198 018 22790
6831	Diode, Signal, 1N4148.	3198 010 10010	9612	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9613	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9614	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I	4835 310 57626	9618	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9619	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9622	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9623	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9626	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9627	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9628	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9629	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9631	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9632	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9637	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9638	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9640	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9641	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9642	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9643	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9647	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9648	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9652	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9654	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9655	Wire Jumper.	3198 036 90010
7560	IC, LE33CZ	9322 106 11676	9656	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9657	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9658	Wire Jumper.	3198 036 90010
7602	IC, M24C16-WBN6.	9322 147 25682	9659	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9660	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9661	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9662	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9663	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9124	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9125	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9183	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9312	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010	9858	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9859	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9862	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9864	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010	9865	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010	9867	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010	9869	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010	9873	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010	9874	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010	9875	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

27LT621L/17 (continued)

9877	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27374
CBA	Main Chassis Assembly.	3139	188	04101

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR.	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack.	2422	026	04747
0250	A/V Jack.	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly.	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas.	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas.	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass.	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6092	Diode, Signal.	9340	453	90115
CBA	Top Control Panel.	3139	187	10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	07161
AC03	Anode Lead Spacer (3 Used).	3135	014	04471
AC05	Cabinet Back.	3139	124	41812
AC08	Chassis Tray.	3139	124	31325
S AC09	CRT, A68QCU754X73(N).	9301	925	60527
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used).	3139	124	31122
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly.	3121	237	52922
AC20A	Cabinet Front.	3139	177	62041
AC20C	Light Guide.	3139	124	33811
AC20D	Nameplate.	3111	250	00571
AC20F	Power Button Cover.	3139	124	32921
AC20G	Power Button Shaft.	3139	124	32791
AC20H	Speaker, 16 ohm, 5W (2 Used).	3139	128	76071
AC20J1	Top Control Bracket.	3139	124	33941
AC20J3	Top Control Cover.	3139	124	31131
AC20J4	Top Control Rubber.	3139	124	30391

27MS3404/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025	16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422	025	16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422	025	12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422	025	04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er. 2222 368 90177
0221	2 Pin Connector.	2422	025	15503	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0222	2 Pin Connector.	2422	025	10646	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0223	A/V Jack	2422	026	05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0225	SVHS Jack.	2422	026	04926	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0229	3 Pin Connector.	2412	020	00725	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0243	6 Pin Connector.	2422	025	04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0244	5 Pin Connector.	2422	025	04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0245	6 Pin Connector.	2422	025	04854	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0246	5 Pin Connector.	2422	025	12481	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
S 0254	9 Pin CRT Socket	2422	500	80076	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0267	3 Pin Connector.	2412	020	00725	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0269	Jack	2422	026	05182	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 1000	Tuner, V+U PLL	2422	542	90141	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
1002	SAW Filter, 45.75MHz	2422	549	44518	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
1200	Filter, Ceramic, 4MHz5	2422	549	40807	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422	086	10914	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	ylene. 2022 333 00086
S 1515	Relay, 5 Amp, 12V.	2422	132	07444	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1600	Tact Switch.	2422	128	02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1601	Tact Switch.	2422	128	02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1602	Tact Switch.	2422	128	02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1603	Tact Switch.	2422	128	02742	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with	5445 (JF0501-21835) Layer Wound. 2020 558 90487
1606	Tact Switch.	2422	128	02742	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
1660	Crystal, 12MHz000	2422	543	01203	S 2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
1811	3 Pin Connector.	2412	020	00725	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only	with 5445 (JF0501-21835) Layer Wound. 2222 375 90156
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540	98344	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024	44730	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene 2022 330 00018
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786	19852	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025	54780	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026	21020	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198	014	04740	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016	31010	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016	38210	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017	31520	2619	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017	32220	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370	76104	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026	21020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230			
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230			
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025	52280			

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108	
2885	Cap, 220n, 10%, 50v, Polyester. . . .	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108	
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520	
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050	
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530	
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810	
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . .	2312 915 12002
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . .	2312 915 12002
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880	
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530	
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703	
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202	
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720	
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203	
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390	
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478	
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688	
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478	
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030	
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335	
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3507	Surge Protector.	2422 549 43073	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220	
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070	
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370	
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509	5001	Coil, 27u, 10%	3198	018	22790
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809	5002	Coil, 820n, 10%	3198	018	18270
3689	Res, 2K7, 1%, 1/8W, Metalized Glass . .	2322	734	62702	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040		ound	2422	531	02611
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 3u3, 20%	3198	018	73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5480	Coil, 39u, 10%	2422	535	97336
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070

27MS3404/17 (continued)

6335	Diode, Signal, BAV21	3198 010 10070	9193	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9311	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9312	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9406	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9407	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9408	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9409	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9410	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9427	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9453	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9460	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9500	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9501	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9506	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9507	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9522	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9524	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9528	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9530	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9613	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9614	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9620	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9637	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9638	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9640	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9642	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9648	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9650	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9651	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9652	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9657	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9184	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27MS3404/17 (continued)

9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	15081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part. Be sure to use exact replacement part.

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3141	058	81981

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	40513
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	124	32701
S AC12	Degaussing Coil.	2422	549	45709
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21741
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	54861
AC20A	Cabinet Front.	3139	138	12621
AC20C	Light Guide.	3139	124	32671
AC20D	Nameplate.	3141	050	00401
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
REMOTE	Remote Control Transmitter, RC1112813/1	3139	238	05781

27MS4504/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222	368 90177
0212	2 Pin Connector.	2422	025 16375	2331	er.	2020	558 90445
0214	5 Pin Connector.	2422	025 12481	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0219	6 Pin Connector.	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector.	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0221	2 Pin Connector.	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0222	2 Pin Connector.	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack.	2422	026 04926	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
0229	3 Pin Connector.	2412	020 00725	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0239	3 Pin Connector.	2422	025 16382	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0243	6 Pin Connector.	2422	025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0244	5 Pin Connector.	2422	025 04853	2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
0245	6 Pin Connector.	2422	025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0246	5 Pin Connector.	2422	025 12481	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
S 0254	9 Pin CRT Socket	2422	500 80076	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0267	3 Pin Connector.	2412	020 00725	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
0269	Jack	2422	026 05182	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
S 1000	Tuner, V+U PLL	2422	542 90098	2452	Cap, 180p, 5%, 50v, Ceramic.	3198	016 01810
1002	SAW Filter, 45.75MHz	2422	549 44518	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	2022	333 00163
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2458	ylene.	2020	021 91331
S 1510	Relay, 5 Amp, 12V.	2422	132 07444	2459	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1600	Crystal, 12MHz000	2422	543 01203	2460	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1811	3 Pin Connector.	2412	020 00725	2462	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	S 2463	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2464	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2465	Cap, 2u2, 5%, 160v, Metalized Polypropy	2022	479 90042
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	S 2466	lene	2020	301 90255
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2466	Cap, 15n, 10%, 400v, Polyester	2022	347 90219
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2468	Cap, 27n, 10%, 400v, Polyester	2022	347 90232
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2022	365 75154
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2022	365 75104
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	2022	479 90051
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	ylene.	2020	021 90856
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 91577
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2487	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2488	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2500	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2501	Cap, 470n, 20%, 275v, Metalized Polypro	2022	330 00018
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2502	pylene	3198	019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2503	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2505	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2508	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2515	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2521	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2525	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2541	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2560	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2561	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2562	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2563	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2580	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2581	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2590	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2601	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 330n, +80/-20%, 25v, Ceramic.	2022	910 19856
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2603	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2606	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2607	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2608	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2609	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2611	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2613	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2615	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020				
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020				
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020				

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3507	Surge Protector.	2422 549 43073
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198	012	13370	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5001	Coil, 27u, 10%	3198	018	22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5002	Coil, 820n, 10%	3198	018	18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5201	Coil, 6u8, 5%	3198	018	16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5202	Wire Jumper.	3198	036	90010
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5241	Wire Jumper.	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5242	Coil, 10u, 5%	3198	018	11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5341	Coil, 22u.	2422	535	97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT	2422	531	02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 22u, 10%	3198	018	72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 6u8, 20%	3198	018	76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198	021	31530	5480	Coil, 27u, 10%	3198	018	22790
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21.	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6447	Diode, Signal, 1N4148.	3198	010	10010
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

6449	Diode, Signal, BAV99	3198 010 10620	9409	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9410	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDMC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDMC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDMC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PDMC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEP4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9407	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27MS4504/17 (continued)

9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis	3141	058	58471

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

S 0211	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040

S = Safety Part. Be sure to use exact replacement part.

S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass.	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6092	Diode, Signal.	9340	453	90115
CBA	Top Control Panel.	3139	187	10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
--------	------------------	------	-----	-------

27MS4504/17 (continued)

AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	36763
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil	2422	549	45709
AC13	Front Interface Panel Bracket	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21751
AC19	Side Jack Panel Bracket	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	54871
AC20A	Cabinet Front	3139	177	60011
AC20C	Light Guide	3139	124	33811
AC20D	Nameplate	3141	050	00391
AC20F	Power Button Cover	3139	124	32921
AC20G	Power Button Shaft	3139	124	32791
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
AC20J1	Top Control Bracket	3139	124	30381
AC20J3	Top Control Cover	3139	124	31131
AC20J4	Top Control Rubber	3139	124	30391
REMOTE	Remote Control Transmitter, RC1112813/1	3139	238	05781

27PT541S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025	16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422	025	16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422	025	12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422	025	04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er. 2222 368 90177
0221	2 Pin Connector.	2422	025	15503	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0222	2 Pin Connector.	2422	025	10646	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0223	A/V Jack	2422	026	05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0225	SVHS Jack.	2422	026	04926	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0229	3 Pin Connector.	2412	020	00725	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0243	6 Pin Connector.	2422	025	04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0244	5 Pin Connector.	2422	025	04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0245	6 Pin Connector.	2422	025	04854	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0246	5 Pin Connector.	2422	025	12481	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
S 0254	9 Pin CRT Socket	2422	500	80076	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0267	3 Pin Connector.	2412	020	00725	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0269	Jack	2422	026	05182	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 1000	Tuner, V+U PLL	2422	542	90141	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
1002	SAW Filter, 45.75MHz	2422	549	44518	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
1200	Filter, Ceramic, 4MHz5	2422	549	40807	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422	086	10914	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	ylene. 2022 333 00086
S 1515	Relay, 5 Amp, 12V.	2422	132	07444	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1600	Tact Switch.	2422	128	02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1601	Tact Switch.	2422	128	02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1602	Tact Switch.	2422	128	02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1603	Tact Switch.	2422	128	02742	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
1606	Tact Switch.	2422	128	02742	S 2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
1660	Crystal, 12MHz000	2422	543	01203	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1811	3 Pin Connector.	2412	020	00725	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540	98344	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024	44730	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene 2022 330 00018
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786	19852	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	021	42240	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025	54780	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026	21020	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2220	Cap, 470n, 10%, 50v, Polyester	3198	014	04740	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016	31010	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	016	38210	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016	38210	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017	31520	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017	32220	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370	76104	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026	21020	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025	52280			

S = Safety Part Be sure to use exact replacement part.

27PT541S37A (continued)

2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2877	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3507	Surge Protector.	2422 549 43073
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03101
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274

S = Safety Part Be sure to use exact replacement part.

27PT541S37A (continued)

3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509	5001	Coil, 27u, 10%	3198	018	22790
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809	5002	Coil, 820n, 10%	3198	018	18270
3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322	734	62702	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198	018	90020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5480	Coil, 39u, 10%	2422	535	97336
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	S 5520	Transformer, SS39009-04.	2422	531	02459
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5521	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5560	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5562	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5564	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5604	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5861	Coil, 10u, 5%	3198	018	11090
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	6001	Zener Diode, 33 volt	3198	010	23390
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6150	Diode, Signal, BAS316.	3198	010	10630
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6206	Zener Diode, 6.8 volt.	3198	020	56880
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6331	Diode, Signal, BAV21	3198	010	10070
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6332	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 9.1 volt.	9331	177	80133
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6466	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6467	Diode, Signal, BAS316.	3198	010	10630

27PT541S37A (continued)

6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9427	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9453	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9460	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9500	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9501	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9506	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9507	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9522	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9524	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9528	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9530	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9613	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9614	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9620	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9637	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9638	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, BC337-25(COL)	9340 310 10215	9640	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9642	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9648	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9650	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9651	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9652	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9657	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9184	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9312	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27PT541S37A (continued)

9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	15081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310

S = Safety Part Be sure to use exact replacement part.

2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9082	100	90002
AC05	Cabinet Back	3139	124	35862
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	124	32701
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21351
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53601
AC20A	Cabinet Front.	3139	137	70561
AC20C	Light Guide.	3139	124	32671
AC20D	Nameplate.	3139	120	01291
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

27PT543F35A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422 025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422 025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422 025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222 368 90177
0221	2 Pin Connector.	2422 025 15503		er.	
0222	2 Pin Connector.	2422 025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0223	A/V Jack	2422 026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0225	SVHS Jack.	2422 026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0229	3 Pin Connector.	2412 020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0243	6 Pin Connector.	2422 025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0244	5 Pin Connector.	2422 025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0245	6 Pin Connector.	2422 025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0246	5 Pin Connector.	2422 025 12481	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
S 0254	9 Pin CRT Socket	2422 500 80076	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0267	3 Pin Connector.	2412 020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0269	Jack	2422 026 05182	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
S 1000	Tuner, V+U, PLL	2422 542 90108	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
1002	SAW Filter, 45.75MHz	2422 549 44518	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	2022 333 00086
1600	Tact Switch.	2422 128 02742	2458	ylene.	
1601	Tact Switch.	2422 128 02742	2459	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1602	Tact Switch.	2422 128 02742	2460	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1603	Tact Switch.	2422 128 02742	2462	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1606	Tact Switch.	2422 128 02742	2463	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1660	Crystal, 12MHz000	2422 543 01203		Cap, 1nf, 10%, 2000v, Ceramic Only with	
1811	3 Pin Connector.	2412 020 00725	2463	5445 (JF0501-21835) Layer Wound.	2020 558 90487
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2465	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	S 2465	Cap, 11n, 5%, 1600v, Polypropylene	2020 301 90251
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2471	Cap, 12n, 5%, 1600v, Polypropylene Only	
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2472	with 5445 (JF0501-21835) Layer Wound	2222 375 90156
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2473	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2474	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2475	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2476	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2477	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310		pylene	2022 330 00018
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
			2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01010	
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109	
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520	
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050	
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530	
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810	
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . .	2312 915 12002
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902	
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880	
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530	
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720	
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 33390	
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . . .	2322 242 13335	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . . .	2322 242 13335	
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . . .	2322 242 13155	
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3507	Surge Protector.	2422 549 43073	
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3232	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730	
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010				
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230				

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509	5001	Coil, 27u, 10%	3198	018	22790
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809	5002	Coil, 820n, 10%	3198	018	18270
3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322	734	62702	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040		ound	2422	531	02611
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 3u3, 20%	3198	018	73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5480	Coil, 39u, 10%	2422	535	97336
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

6445	Zener Diode, 10 volt	3198 020 51090	9311	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9312	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9406	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9407	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9408	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9409	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9410	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9427	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9453	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9460	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9500	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9501	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9506	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9507	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9522	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9524	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9528	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9530	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9613	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI	9352 707 19557	9614	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9620	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9637	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9638	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9640	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9642	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9648	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9650	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9651	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9652	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9657	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9184	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27PT543F35A (continued)

9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	59211

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part Be sure to use exact replacement part.

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3121	237	52454
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	177	60751
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual, English.	3121	235	20641
AC17	Owner's Manual, French	3121	235	21271
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53071
AC20A	Cabinet Front.	3139	177	53551
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	35111
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	177	60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

27PT543S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0212	2 Pin Connector.	2422	025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0219	6 Pin Connector.	2422	025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0220	5 Pin Connector.	2422	025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0221	2 Pin Connector.	2422	025 15503		er.	2222	368 90177
0222	2 Pin Connector.	2422	025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0223	A/V Jack	2422	026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0225	SVHS Jack.	2422	026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0229	3 Pin Connector.	2412	020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0243	6 Pin Connector.	2422	025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0244	5 Pin Connector.	2422	025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0245	6 Pin Connector.	2422	025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0246	5 Pin Connector.	2422	025 12481	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
S 0254	9 Pin CRT Socket	2422	500 80076	2415	Cap, 330p, 10%, 50v, Ceramic	3198	017 03310
0267	3 Pin Connector.	2412	020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0269	Jack	2422	026 05182	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
S 1000	Tuner, V+U PLL	2422	542 90098	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
1002	SAW Filter, 45.75MHz	2422	549 44518	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
1200	Filter, Ceramic, 4MHz5	2422	549 48087	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
1600	Tact Switch.	2422	128 02742		ylene.	2022	333 00086
1601	Tact Switch.	2422	128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1602	Tact Switch.	2422	128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1603	Tact Switch.	2422	128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1606	Tact Switch.	2422	128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
1660	Crystal, 12MHz000	2422	543 01203	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with		
1811	3 Pin Connector.	2412	020 00725		5445 (JF0501-21835) Layer Wound.	2020	558 90487
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2463	Cap, 680p, 10%, 2000v, Ceramic	2020	558 90485
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	S 2465	Cap, 11n, 5%, 1600v, Polypropylene	2020	301 90251
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only		
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710		with 5445 (JF0501-21835) Layer Wound	2222	375 90156
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222	365 75154
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222	365 75104
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250		pylene	2022	330 00018
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2619	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 21050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
				2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108	
2885	Cap, 220n, 10%, 50v, Polyester. . . .	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108	
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520	
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050	
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530	
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810	
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902	
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880	
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530	
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202	
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202	
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720	
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203	
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390	
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478	
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688	
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478	
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335	
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3507	Surge Protector.	2422 549 43073	
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220				
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010				

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322 734 64702	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509	5001	Coil, 27u, 10%	3198 018 22790	
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809	5002	Coil, 820n, 10%	3198 018 18270	
3689	Res, 2K7, 1%, 1/8W, Metalized Glass . .	2322 734 62702	5201	Coil, 6u8, 5%	3198 018 16880	
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5202	Wire Jumper.	3198 036 90010	
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020	
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020	
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020	
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	5241	Wire Jumper.	3198 036 90010	
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5242	Coil, 10u, 5%	3198 018 11090	
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5342	Coil, 22u.	2422 535 97333	
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT (JF0501-21835) Layer W	ound	2422 531 02611
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT (1342.0043B).	2422 531 02506	
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390	
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020	
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5457	Coil, 42u.	2422 535 94865	
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478	
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 3u3, 20%	3198 018 73380	
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5472	Coil, 3u3, 10%	3198 018 23380	
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 39u, 10%	2422 535 97336	
3862	Res, 15K, 5%, 1/16W, Metalized Glass . .	3198 021 31530	S 5501	Mains Filter	2422 549 43432	
3863	Res, 1K2, 5%, 1/16W, Metalized Glass . .	3198 021 31220	S 5520	Transformer, SS39009-04.	2422 531 02459	
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5561	Coil, 27u, 5%	2422 535 95366	
3867	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5602	Coil, 5u6, 5%	3198 018 15680	
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5603	Coil, 5u6, 5%	3198 018 15680	
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5604	Coil, 5u6, 5%	3198 018 15680	
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	5861	Coil, 10u, 5%	3198 018 11090	
3902	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390	
3903	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	6150	Diode, Signal, BAS316.	3198 010 10630	
3904	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630	
3905	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630	
3906	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	6206	Zener Diode, 6.8 volt.	3198 020 56880	
3907	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	6331	Diode, Signal, BAV21	3198 010 10070	
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630	
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070	
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030				

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

6335	Diode, Signal, BAV21	3198 010 10070	9193	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9311	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9312	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9406	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9407	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9408	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9409	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9410	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9453	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9460	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9500	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9501	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9506	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9507	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9522	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9524	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9528	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9530	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9613	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9614	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9620	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9637	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9638	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9640	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9642	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9648	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9650	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9651	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9652	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9657	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9184	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27PT543S37A (continued)

9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	15081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part. Be sure to use exact replacement part.

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3121	237	52452
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	177	60751
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual, English.	3121	235	20641
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53071
AC20A	Cabinet Front.	3139	177	53551
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	35111
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	177	60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

27PT563S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16269	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0212	2 Pin Connector.	2422	025 16375	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0219	6 Pin Connector.	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0220	5 Pin Connector.	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0221	2 Pin Connector.	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0222	2 Pin Connector.	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0223	A/V Jack.	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0225	SVHS Jack.	2422	026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0243	6 Pin Connector.	2422	025 04854	2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
0244	5 Pin Connector.	2422	025 04853	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0245	6 Pin Connector.	2422	025 04854	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
0246	5 Pin Connector.	2422	025 12481	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 0254	9 Pin CRT Socket.	2422	500 80076	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
0267	3 Pin Connector.	2412	020 00725	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
0269	Jack.	2422	026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
S 1000	Tuner, V+U PLL.	2422	542 90141	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022	333 00086
1002	SAW Filter, 45.75MHz.	2422	549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1200	Filter, Ceramic, 4MHz5.	2422	549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2462	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
1600	Tact Switch.	2422	128 02742	2463	Cap, 1n, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020	558 90487
1601	Tact Switch.	2422	128 02742	2463	Cap, 680p, 10%, 2000v, Ceramic.	2020	558 90485
1602	Tact Switch.	2422	128 02742	S 2465	Cap, 11n, 5%, 1600v, Polypropylene.	2020	301 90251
1603	Tact Switch.	2422	128 02742	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound.	2222	375 90156
1606	Tact Switch.	2422	128 02742	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
1660	Crystal, 12MHz000.	2422	543 01203	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222	365 75154
1810	6 Pin Connector.	2422	025 16607	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222	365 75104
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422	543 00842	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022	330 00018
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2831	Cap, 1p, 25%, 50v, Ceramic.	3198	016 31080
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2832	Cap, 1p, 25%, 50v, Ceramic.	3198	016 31080
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2833	Cap, 47p, 5%, 50v, Ceramic.	3198	016 34790
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2834	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
2254	Res, Zero ohm, "Chip" Jumper.	3198	021 90020	2835	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222	368 90177				

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010		h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010		5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 33390
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3205	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198 021 31020	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3507	Surge Protector.	2422 549 43073
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film . .	3198 013 02210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	3530	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3531	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322	730	61274	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198	021	51530	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198	021	51030	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198	021	51230	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198	021	55620	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198	021	52220	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198	021	55620	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198	021	54730	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass . .	3198	021	52240	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass . .	3198	021	52240	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198	021	53320	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198	021	51520	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5241	Wire Jumper	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5342	Coil, 22u.	2422	535	97333
3812	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3813	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020		ound	2422	531	02611
3814	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B)	2422	531	02506
3815	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3816	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3818	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3819	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3820	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3821	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5480	Coil, 39u, 10%	2422	535	97336
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5501	Mains Filter	2422	549	43432
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	S 5520	Transformer, SS39009-04.	2422	531	02459
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5602	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198	021	33320	5603	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5810	Coil, 10u, 10%	3198	018	51090
3905	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198	021	33320	5831	Coil, 6u8, 5%	3198	018	16880
3906	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5832	Coil, 6u8, 5%	3198	018	16880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198	021	38220	5833	Coil, 6u8, 5%	3198	018	16880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5835	Coil, 12u, 10%	3198	018	31290
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6001	Zener Diode, 33 volt	3198	010	23390
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6150	Diode, Signal, BAS316.	3198	010	10630
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6202	Diode, Signal, BAS316.	3198	010	10630
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6206	Zener Diode, 6.8 volt.	3198	020	56880
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6332	Diode, Signal, BAS316.	3198	010	10630
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6333	Diode, Signal, BAV21.	3198	010	10070
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6335	Diode, Signal, BAV21.	3198	010	10070
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

6448	Zener Diode, 6.2 volt.	9331	668	30133	9312	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9406	Wire Jumper.	3198	036	90010
6460	Diode, Rect, BY228/24.	9340	559	50112	9407	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9408	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9409	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9410	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9411	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9412	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9413	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9415	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9416	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt.	3198	010	21590	9417	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9418	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9419	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9421	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9422	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9423	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9425	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9427	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9453	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9460	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9500	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9501	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9503	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9506	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9507	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9510	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9511	Wire Jumper.	3198	036	90010
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9513	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9514	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9518	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9520	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85	9336	247	60133	9521	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9522	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9524	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9528	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9530	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9611	Coil, 27u, 10%	3198	018	22790
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9612	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9613	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9614	Wire Jumper.	3198	036	90010
7200	IC, TDA9587H/N1/3I/0990.	9352	725	47557	9615	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9618	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9619	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9620	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9621	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9622	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9623	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9624	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9626	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT	9340	547	00215	9627	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9628	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9629	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9631	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9632	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9633	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9637	Wire Jumper.	3198	036	90010
7521	Power FET, FQFP9N50.	9322	187	16687	9638	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9640	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9641	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET	9340	310	10215	9642	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9643	Wire Jumper.	3198	036	90010
7560	IC, L78L33ACZ.	9322	134	92676	9648	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT	9340	547	00215	9650	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9651	Wire Jumper.	3198	036	90010
7602	IC, M24C08-WBN6.	9322	154	38682	9652	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9654	Wire Jumper.	3198	036	90010
7803	IC, HEF4053BT.	9333	729	60653	9655	Wire Jumper.	3198	036	90010
7804	Transistor, NPN, BC847B(COL)	3198	010	42030	9657	Wire Jumper.	3198	036	90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682	9658	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH	9322	181	41682	9659	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9660	Wire Jumper.	3198	036	90010
9101	Wire Jumper.	3198	036	90010	9661	Wire Jumper.	3198	036	90010
9102	Wire Jumper.	3198	036	90010	9662	Wire Jumper.	3198	036	90010
9103	Wire Jumper.	3198	036	90010	9663	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9664	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9665	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9666	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9667	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9176	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9178	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9179	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9182	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9311	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

27PT563S37A (continued)

9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9682	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9863	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9870	Wire Jumper.	3198	036	90010
9871	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9876	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9878	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	21101

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts				
0266	6 Pin Connector.	2422	025	16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198	028	44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017	44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025	34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030

S = Safety Part. Be sure to use exact replacement part.

2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122	118	05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482

27PT563S37A (continued)

0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3121	237	53661
S AC09	CRT, A68AJB82X11	9301	891	90631
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20651
AC18	Quick Use Guide.	3121	233	43471
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53081
AC20A	Cabinet Front.	3139	177	55961
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	43141
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3121	237	53341
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC29	Plastic Facade	3139	177	60071
REMOTE	Remote Control Transmitter, RC19036001/01.	3139	228	86493

27PT633R37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector.	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0211	2 Pin Connector.	2422 025 16375	2331	er.	2222 368 90177
0212	5 Pin Connector.	2422 025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0214	6 Pin Connector.	2422 025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0219	5 Pin Connector.	2422 025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0220	2 Pin Connector.	2422 025 15503	2343	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0221	2 Pin Connector.	2422 025 10646	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0222	A/V Jack.	2422 026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0223	SVHS Jack.	2422 026 04926	2401	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0225	3 Pin Connector.	2412 020 00725	2402	Cap, 2u2, 20%, 50v, Electrolytic.	2020 021 90552
0229	3 Pin Connector.	2422 025 16382	2404	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0239	6 Pin Connector.	2422 025 04854	2405	Cap, 47u, 20%, 50v, Electrolytic.	3198 025 54790
0243	5 Pin Connector.	2422 025 04853	2441	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0244	6 Pin Connector.	2422 025 04854	2443	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0245	5 Pin Connector.	2422 025 12481	2444	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0246	9 Pin CRT Socket.	2422 500 80076	2450	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 0254	3 Pin Connector.	2412 020 00725	2451	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
0267	Jack.	2422 026 05182	2452	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
S 1000	Tuner, V+U PLL.	2422 542 90098	2455	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
1002	SAW Filter, 45.75MHz.	2422 549 44518	2457	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	2458	Cap, 360n, 5%, 250v, Metalized Polyprop	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2459	ylene.	2022 333 00163
S 1510	Relay, 5 Amp, 12V.	2422 132 07444	2460	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1650	Crystal, 12MHz000.	2422 543 01203	S 2463	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1811	3 Pin Connector.	2412 020 00725	2464	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2465	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	S 2466	Cap, 2u2, 5%, 160v, Metalized Polypropy	
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2467	lene.	2222 479 90042
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2468	Cap, 15n, 5%, 1600v, Polypropylene.	2020 301 90255
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2471	Cap, 15n, 10%, 400v, Polyester.	2222 347 90219
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2472	Cap, 22n, 10%, 400v, Polyester.	2222 347 90223
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2473	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2474	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2475	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2476	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2480	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2481	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2482	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2485	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2486	Cap, 120n, 5%, 250v, Metalized Polyprop	
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2487	ylene.	2222 479 90051
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2488	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2491	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2500	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2501	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2502	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2503	Cap, 470n, 20%, 25v, Ceramic.	2022 330 00018
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2507	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2508	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2515	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2520	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2522	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	S 2523	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2525	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2527	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2561	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2562	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2563	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2564	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2567	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2590	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2602	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2606	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2608	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2609	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2611	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2612	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2613	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2615	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2618	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2619	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2802	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2803	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2810	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 021 21050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2813	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2816	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020		Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020		Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020		Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3401	Res, 220K, 5%, 1/6W, Carbon Film . . .	3198 011 02240
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02210
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass .	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass . .	2322 734 61202	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film . .	3198 012 32290
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3496	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	S 3504	Res, PTC, 3 ohm, 144V	2122 663 00019
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . .	2322 242 13155
3217	Res, 330K, 5%, 1/16W, Metalized Glass .	3198 021 33340	3507	Surge Protector	2422 549 43073
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	S 3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02710
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3522	Res, 330K, 5%, 1/10W, Metalized Glass .	3198 021 53340
3232	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5001	Coil, 27u, 10%	3198 018 22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5201	Coil, 6u8, 5%	3198 018 16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5202	Wire Jumper.	3198 036 90010
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5205	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5206	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5341	Coil, 22u.	2422 535 97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5342	Coil, 22u.	2422 535 97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT	2422 531 02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 22u, 10%	3198 018 72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5457	Coil, 25u.	2422 535 91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 6u8, 20%	3198 018 76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5480	Coil, 47u, 10%	2422 535 97337
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	S 5501	Mains Filter	2422 549 43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	S 5520	Transformer, SS39009-04.	2422 531 02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5521	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5561	Coil, 27u, 5%	2422 535 95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5602	Coil, 5u6, 5%	3198 018 15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5603	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5604	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5861	Coil, 10u, 5%	3198 018 11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6150	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6202	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6206	Zener Diode, 6.8 volt.	3198 020 56880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film. . . .	2312 915 11002
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148.	3198 010 10010
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6449	Diode, Signal, BAV99	3198 010 10620

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

6460	Diode, Rect, BY228/24.	9340	559	50112	9409	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9410	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9411	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9412	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9413	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9414	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9415	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYD33J.	9337	234	20133	9416	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99.	3198	010	10620	9417	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt.	3198	010	21590	9418	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9419	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9421	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9422	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYD33J.	9337	234	20133	9423	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9424	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYD33D.	9337	234	00133	9425	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9426	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9427	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYD33D.	9337	234	00133	9453	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9460	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9463	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9500	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9501	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9503	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9506	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9507	Wire Jumper.	3198	036	90010
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9511	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9512	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9513	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9514	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9515	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9518	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9520	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL).	3198	010	42030	9521	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL).	3198	010	42150	9522	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL).	3198	010	42030	9524	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I/1053.	9352	728	40557	9528	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL).	3198	010	42030	9530	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL).	3198	010	42150	9611	Coil, 27u, 10%.	3198	018	22790
7205	Transistor, PNP, BC857B(COL).	3198	010	42150	9612	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3.	9352	713	37112	9613	Wire Jumper.	3198	036	90010
7400	Power FET, STP3NC60FP.	9322	157	37687	9614	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL).	3198	010	42150	9615	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL).	3198	020	40110	9617	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9618	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530	9619	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDMC143ZT.	9340	547	00215	9620	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430	9621	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9622	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135.	3198	020	41010	9623	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135.	3198	020	41010	9624	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667	9626	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9627	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9628	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL).	3198	010	42030	9629	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL).	3198	020	40030	9631	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDMC114ET.	9340	310	10215	9632	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL).	3198	010	42150	9633	Wire Jumper.	3198	036	90010
7560	IC, L78L33ACZ.	9322	134	92676	9637	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PDMC143ZT.	9340	547	00215	9638	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL).	3198	010	42150	9639	Wire Jumper.	3198	036	90010
7602	IC, M24C08-WBN6.	9322	154	38682	9640	Wire Jumper.	3198	036	90010
7606	Transistor, NPN, PDMC143ZT.	9340	547	00215	9641	Wire Jumper.	3198	036	90010
7802	IC, HEP4053BT.	9333	729	60653	9642	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9643	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL).	3198	010	42030	9648	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL).	3198	010	42030	9650	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH.	9322	181	41682	9651	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9652	Wire Jumper.	3198	036	90010
9101	Wire Jumper.	3198	036	90010	9654	Wire Jumper.	3198	036	90010
9102	Wire Jumper.	3198	036	90010	9655	Wire Jumper.	3198	036	90010
9103	Wire Jumper.	3198	036	90010	9656	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9657	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9658	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9659	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9660	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9661	Wire Jumper.	3198	036	90010
9176	Wire Jumper.	3198	036	90010	9662	Wire Jumper.	3198	036	90010
9178	Wire Jumper.	3198	036	90010	9663	Wire Jumper.	3198	036	90010
9179	Wire Jumper.	3198	036	90010	9664	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9665	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9666	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9667	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%.	3198	018	22290
9407	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

27PT633R37C (continued)

9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	23231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

S 0211	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040

S = Safety Part. Be sure to use exact replacement part.

S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6092	Diode, Signal.	9340	453	90115
CBA	Top Control Panel.	3139	187	10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
--------	------------------	------	-----	-------

27PT633R37C (continued)

AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	36763
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A68QCP893X001	9322	173	75682
S AC12	Degaussing Coil	2422	549	43967
AC13	Front Interface Panel Bracket	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual	3121	235	20661
AC18	Quick Use Guide	3121	233	43481
AC19	Side Jack Panel Bracket	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53091
AC20A	Cabinet Front	3139	177	60011
AC20C	Light Guide	3139	124	33811
AC20D	Nameplate	3141	050	00161
AC20F	Power Button Cover	3139	124	32921
AC20G	Power Button Shaft	3139	124	32791
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
AC20J1	Top Control Bracket	3139	124	33941
AC20J3	Top Control Cover	3139	124	31131
AC20J4	Top Control Rubber	3139	124	30391
REMOTE	Remote Control Transmitter, RC19036002/			
	01.	3139	228	88003

27PT643F35A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0211	2 Pin Connector	2422 025 16375	2331	er.	2222 368 90177
0212	5 Pin Connector	2422 025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic . . .	2020 558 90445
0214	6 Pin Connector	2422 025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic . . .	2020 012 93495
0219	5 Pin Connector	2422 025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0220	2 Pin Connector	2422 025 15503	2343	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
0221	2 Pin Connector	2422 025 10646	2344	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
0222	A/V Jack	2422 026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
0223	SVHS Jack	2422 026 04926	2401	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0229	3 Pin Connector	2412 020 00725	2402	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0239	3 Pin Connector	2422 025 16382	2404	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
0243	6 Pin Connector	2422 025 04854	2405	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0244	5 Pin Connector	2422 025 04853	2415	Cap, 220u, 20%, 25v, Electrolytic . . .	3198 025 32210
0245	6 Pin Connector	2422 025 04854	2416	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
0246	5 Pin Connector	2422 025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
S 0254	9 Pin CRT Socket	2422 500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0267	3 Pin Connector	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
0269	Jack	2422 026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic . . .	2020 021 91139
S 1000	Tuner, V+U, PLL	2422 542 90108	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
1002	SAW Filter, 45.75MHz	2422 549 44518	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC	2422 086 10914	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	
S 1510	Relay, 5 Amp, 12V	2422 132 07444	2458	ylene.	2022 333 00163
1650	Crystal, 12MHz000	2422 543 01203	2459	Cap, 2u2, 20%, 100v, Electrolytic . . .	2020 021 91331
1811	3 Pin Connector	2412 020 00725	2460	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2463	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	2464	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090		Cap, 2u2, 5%, 160v, Metalized Polypropy	
2006	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	S 2465	lene	2222 479 90042
2007	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	2466	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
2008	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2471	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
2101	Cap, 470n, +80/-20%, 16v, Ceramic . . .	3198 017 24740	2472	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290		ylene.	2222 479 90051
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310		pylene	2022 330 00018
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 021 21050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
			2816	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740

S = Safety Part Be sure to use exact replacement part.

27PT643F35A (continued)

2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3470	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass .	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film	2120 101 74158
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film . .	3198 012 32290
3159	Res, 1K2, 1%, 1/8W, Metalized Glass . .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . .	2322 242 13155
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film .	3198 011 05610	3507	Surge Protector	2422 549 43073
3217	Res, 330K, 5%, 1/16W, Metalized Glass .	3198 021 33340	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film .	3198 011 02710
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass .	3198 021 53340
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3524	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070

S = Safety Part Be sure to use exact replacement part.

27PT643F35A (continued)

S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5001	Coil, 27u, 10%	3198 018 22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5201	Coil, 6u8, 5%	3198 018 16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5202	Wire Jumper.	3198 036 90010
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5341	Coil, 22u.	2422 535 97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5342	Coil, 3u9, 10%	2422 535 97323
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT	2422 531 02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 22u, 10%	3198 018 72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5457	Coil, 25u.	2422 535 91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 6u8, 20%	3198 018 76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5480	Coil, 47u, 10%	2422 535 97337
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	S 5501	Mains Filter	2422 549 43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	S 5520	Transformer, SS39009-04.	2422 531 02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5561	Coil, 27u, 5%	2422 535 95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5602	Coil, 5u6, 5%	3198 018 15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5603	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5604	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5861	Coil, 10u, 5%	3198 018 11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6150	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6202	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6206	Zener Diode, 6.8 volt.	3198 020 56880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21.	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21.	3198 010 10070
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21.	3198 010 10070
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148.	3198 010 10010
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6449	Diode, Signal, BAV99	3198 010 10620
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6460	Diode, Rect, BY228/24.	9340 559 50112

27PT643F35A (continued)

6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9411	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9412	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9413	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9414	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9415	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9416	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9417	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9418	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9419	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9421	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9422	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9423	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9424	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9425	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9426	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9427	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9453	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9460	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9463	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9500	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9501	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9503	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9506	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9507	Wire Jumper.	3198	036	90010
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9511	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9512	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9513	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9514	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9515	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9518	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9520	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9521	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9522	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9524	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	9352	728	40557	9528	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9530	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9611	Coil, 27u, 10%	3198	018	22790
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9612	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9613	Wire Jumper.	3198	036	90010
7400	Power FET, IR.	9322	053	35687	9614	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9615	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9617	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9618	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9619	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT	9340	547	00215	9620	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9621	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9622	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9623	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9624	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9626	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1	9352	673	56112	9627	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9628	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9629	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9631	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET	9340	310	10215	9632	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9633	Wire Jumper.	3198	036	90010
7560	IC, L78L33ACZ.	9322	134	92676	9637	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT	9340	547	00215	9638	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9640	Wire Jumper.	3198	036	90010
7602	IC, M24C08-WBN6.	9322	154	38682	9641	Wire Jumper.	3198	036	90010
7606	Transistor, NPN, PPTC143ZT	9340	547	00215	9642	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9643	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9648	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL)	3198	010	42030	9650	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL)	3198	010	42030	9651	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH	9322	181	41682	9652	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9654	Wire Jumper.	3198	036	90010
9101	Wire Jumper.	3198	036	90010	9655	Wire Jumper.	3198	036	90010
9102	Wire Jumper.	3198	036	90010	9656	Wire Jumper.	3198	036	90010
9103	Wire Jumper.	3198	036	90010	9657	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9658	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9659	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9660	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9661	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9662	Wire Jumper.	3198	036	90010
9176	Wire Jumper.	3198	036	90010	9663	Wire Jumper.	3198	036	90010
9178	Wire Jumper.	3198	036	90010	9664	Wire Jumper.	3198	036	90010
9179	Wire Jumper.	3198	036	90010	9665	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9666	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9667	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9406	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9410	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27PT643F35A (continued)

9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	59201

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR.	9322	185	69682

S = Safety Part. Be sure to use exact replacement part.

6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack.	2422	026	04747
0250	A/V Jack.	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly.	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas.	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass.	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly.	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used).	3135	014	04471
AC04	Batteries for Remote Control Transmitt.	9299	000	65263
AC05	Cabinet Back.	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39301
AC08	Chassis Tray.	3139	124	31325
S AC09	CRT, A68QCU754X73(N).	9301	925	60527

27PT643F35A (continued)

S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual, English.	3121	235	21091
AC17	Owner's Manual, French	3121	235	21281
AC18	Quick Use Guide.	3121	233	43491
AC18	Quick Use Guide, French.	3121	233	44841
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53303
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 5W (2 Used).	2422	264	00409
AC20J	Top Control Assembly	3139	138	11451
REMOTE	Remote Control Transmitter, RC19036002/ 01A.	3139	238	04312

27PT643R/37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Socket Fuse.	2422	088	00271	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220
0127	NTC Holder.	3139	120	10151	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
0136	IC-Spring.	3104	301	22081	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
0137	Spring.	3139	121	24583	2247	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020
0138	IC-Spring.	3104	301	22081	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0139	Spring for Bracket.	3122	121	24786	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0140	Spring.	3139	121	24583	2250	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280
0141	IC-Spring.	3104	301	22081	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0152	Cable, DIP, 6 Pin, 400mm.	3104	301	09421	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0153	Cable, DIPMate, 5 Pin, 480mm.	3139	121	07951	2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
0211	2 Pin Connector.	2422	025	16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er. 2222 368 90177
0212	2 Pin Connector.	2422	025	16375	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445
0214	5 Pin Connector.	2422	025	12481	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0219	6 Pin Connector.	2422	025	12482	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0220	5 Pin Connector.	2422	025	04853	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0221	2 Pin Connector.	2422	025	15503	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0222	2 Pin Connector.	2422	025	10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
0223	A/V Jack.	2422	026	05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic. . .	2020 558 90445
0225	SVHS Jack.	2422	026	04926	2401	Cap, 2u2, 20%, 50v, Electrolytic. . .	2020 021 90552
0229	3 Pin Connector.	2412	020	00725	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0239	3 Pin Connector.	2422	025	16382	2404	Cap, 47u, 20%, 50v, Electrolytic. . .	3198 025 54790
0243	6 Pin Connector.	2422	025	04854	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0244	5 Pin Connector.	2422	025	04853	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0245	6 Pin Connector.	2422	025	04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0246	5 Pin Connector.	2422	025	12481	2443	Cap, 47n, +80/-20%, 50v, Ceramic. . .	3198 017 24730
S 0254	9 Pin CRT Socket.	2422	500	80076	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0267	3 Pin Connector.	2412	020	00725	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
0269	Jack.	2422	026	05182	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
S 1000	Tuner, V+U PLL.	2422	542	90141	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
1002	SAW Filter, 45.75MHz.	2422	549	44518	2455	Cap, 47u, 20%, 25v, Electrolytic. . .	3198 025 34790
1200	Filter, Ceramic, 4MHz5.	2422	549	40807	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	ylene. 2022 333 00163
S 1500	Fuse, 4A, 250V, IEC.	2422	086	10914	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
S 1515	Relay, 5 Amp, 12V.	2422	132	07444	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1660	Crystal, 12MHz000.	2422	543	01203	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1811	3 Pin Connector.	2412	020	00725	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540	98344	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy	lene. 2222 479 90042
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024	44730	S 2465	Cap, 15n, 5%, 1600v, Polypropylene. . .	2020 301 90255
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	2466	Cap, 15n, 10%, 400v, Polyester.	2222 347 90219
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710	2468	Cap, 22n, 10%, 400v, Polyester.	2222 347 90223
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	ylene. 2222 479 90051
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2487	Cap, 47u, 20%, 50v, Electrolytic. . .	2020 021 90854
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2488	Cap, 1000u, 20%, 16v, Electrolytic. . .	2020 021 91049
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene. 2022 330 00018
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2503	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 024 90647
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786	19852	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040	2561	Cap, 100u, 20%, 160v, Electrolytic. . .	2020 021 91654
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025	54780	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026	21020	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014	04740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016	31010	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016	38210	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017	31520			
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050			

S = Safety Part Be sure to use exact replacement part.

27PT643R/37C (continued)

2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 220K, 5%, 1/6W, Carbon Film. . . .	3198 011 02240
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3472	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3473	Res, 2R2, 1%, 3/5W, Metal Film.	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155

S = Safety Part Be sure to use exact replacement part.

27PT643R/37C (continued)

3507	Surge Protector.	2422	549	43073	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198	013	02210	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198	011	02710	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198	011	04780	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306	204	03101	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198	021	55630	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5001	Coil, 27u, 10%	3198	018	22790
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5002	Coil, 820n, 10%	3198	018	18270
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5201	Coil, 6u8, 5%	3198	018	16880
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5202	Wire Jumper.	3198	036	90010
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5241	Wire Jumper.	3198	036	90010
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5242	Coil, 10u, 5%	3198	018	11090
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5341	Coil, 22u.	2422	535	97333
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5342	Coil, 3u9, 10%	2422	535	97323
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT	2422	531	02574
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 22u, 10%	3198	018	72290
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5472	Coil, 3u3, 10%	3198	018	23380
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198	021	31530	S 5501	Mains Filter	2422	549	43432
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198	021	31220	S 5520	Transformer, SS39009-04.	2422	531	02459
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5603	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5604	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5861	Coil, 10u, 5%	3198	018	11090
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6150	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6202	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6206	Zener Diode, 6.8 volt.	3198	020	56880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220	6331	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

27PT643R/37C (continued)

6332	Diode, Signal, BAS316.	3198 010 10630	9182	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9183	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9192	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9193	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt.	3198 010 24790	9311	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt.	3198 020 51090	9312	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9406	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9407	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9408	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9409	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9410	Wire Jumper.	3198 036 90010
6464	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQFP9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9641	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9643	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9648	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9652	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27PT643R/37C (continued)

9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	23231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210

2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR.	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack.	2422	026	04747
0250	A/V Jack.	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly.	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas.	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas.	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass.	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6091	Diode, Signal.	9340	453	90115

S = Safety Part. Be sure to use exact replacement part.

27PT643R/37C (continued)

CBA Top Control Panel Assembly 3139 187 15841

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used)	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCP893X001	9322	173	75682
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual, English.	3121	235	21091
AC18	Quick Use Guide.	3121	233	43491
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53303
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 5W (2 Used).	2422	264	00409
AC20J	Top Control Assembly	3139	177	56381
REMOTE	Remote Control Transmitter, RC19036002/01A.	3139	238	04313

27PT643R/97A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0127	Socket Fuse.	2422	088 00271	2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220
0129	NTC Holder.	3139	120 10151	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
0136	IC-Spring.	3104	301 22081	2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240
0137	Spring.	3139	121 24583	2247	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198	026 21020
0138	IC-Spring.	3104	301 22081	2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
0139	Spring for Bracket.	3122	121 24786	2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
0140	Spring.	3139	121 24583	2250	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198	025 52280
0141	IC-Spring.	3104	301 22081	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0152	Cable, DIP, 6 Pin, 400mm.	3104	301 09421	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0153	Cable, DIPMate, 5 Pin, 480mm.	3139	121 07951	2254	Res, Zero ohm, "Chip" Jumper.	3198	021 90020
0211	2 Pin Connector.	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector.	2422	025 16375		er.	2222	368 90177
0214	5 Pin Connector.	2422	025 12481	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020	558 90445
0219	6 Pin Connector.	2422	025 12482	2340	Cap, 10u, 20%, 250v, Electrolytic. . . .	2020	012 93495
0220	5 Pin Connector.	2422	025 04853	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0221	2 Pin Connector.	2422	025 15503	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0222	2 Pin Connector.	2422	025 10646	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0223	A/V Jack.	2422	026 05236	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 21040
0225	SVHS Jack.	2422	026 04926	2345	Cap, 10n, +80/-20%, 1000v, Ceramic. . .	2020	558 90445
0229	3 Pin Connector.	2412	020 00725	2401	Cap, 2u2, 20%, 50v, Electrolytic. . . .	2020	021 90552
0239	3 Pin Connector.	2422	025 16382	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0243	6 Pin Connector.	2422	025 04854	2404	Cap, 47u, 20%, 50v, Electrolytic. . . .	3198	025 54790
0244	5 Pin Connector.	2422	025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198	025 32210
0245	6 Pin Connector.	2422	025 04854	2415	Cap, 1n, 5%, 50v, Ceramic.	3198	016 01020
0246	5 Pin Connector.	2422	025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 0254	9 Pin CRT Socket.	2422	500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic. . . .	3198	017 24730
0267	3 Pin Connector.	2412	020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0269	Jack.	2422	026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic. . . .	2020	021 91139
S 1000	Tuner, V+U PLL.	2422	542 90141	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
1002	SAW Filter, 45.75MHz.	2422	549 44518	2452	Cap, 180p, 5%, 50v, Ceramic.	3198	016 01810
1200	Filter, Ceramic, 4MHz5.	2422	549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2457	Cap, 360n, 5%, 250v, Metalized Polyprop		
S 1515	Relay, 5 Amp, 12V.	2422	132 07444		ylene.	2022	333 00163
1660	Crystal, 12MHz000.	2422	543 01203	2458	Cap, 2u2, 20%, 100v, Electrolytic. . . .	2020	021 91331
1811	3 Pin Connector.	2412	020 00725	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198	025 51090	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
2006	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198	025 24710		lene.	2222	479 90042
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198	023 41040	S 2465	Cap, 15n, 5%, 1600v, Polypropylene. . .	2020	301 90255
2008	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198	025 31010	2466	Cap, 15n, 10%, 400v, Polyester.	2222	347 90219
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2468	Cap, 27n, 10%, 400v, Polyester.	2222	347 90232
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198	017 24740	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2482	Cap, 120n, 5%, 250v, Metalized Polyprop		
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290		ylene.	2222	479 90051
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020	021 90856
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020	021 91577
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2488	Cap, 1000u, 20%, 16v, Electrolytic. . . .	2020	021 91049
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020	021 91577
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250		pylene.	2022	330 00018
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic. . . .	2020	024 90647
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic. . . .	2020	021 91654
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2216	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198	026 21020	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198	017 42240	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . . .	2222	910 19856
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198	023 22240
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
				2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
				2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390

S = Safety Part Be sure to use exact replacement part.

27PT643R/97A (continued)

2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film.	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film.	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film.	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. . . .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. . . .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film.	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film.	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film.	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film.	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3470	Res, 470K, 5%, 1/16W, Metalized Glass. . .	3198 021 34740
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film.	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3472	Res, 4R7, 1%, 3/5W, Metal Film.	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3473	Res, 2R2, 1%, 3/5W, Metal Film.	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. . . .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. . . .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31030	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 32290
3159	Res, 1K2, 1%, 1/8W, Metalized Glass.	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass. . . .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . . .	2322 242 13155

S = Safety Part Be sure to use exact replacement part.

27PT643R/97A (continued)

3507	Surge Protector.	2422	549	43073	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198	013	02210	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198	011	02710	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198	011	04780	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306	204	03101	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198	021	55630	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5001	Coil, 27u, 10%	3198	018	22790
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5002	Coil, 820n, 10%	3198	018	18270
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5201	Coil, 6u8, 5%	3198	018	16880
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5202	Wire Jumper.	3198	036	90010
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5241	Wire Jumper.	3198	036	90010
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5242	Coil, 10u, 5%	3198	018	11090
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5341	Coil, 22u.	2422	535	97333
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5342	Coil, 3u9, 10%	2422	535	97323
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT	2422	531	02574
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 22u, 10%	3198	018	72290
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5472	Coil, 3u3, 10%	3198	018	23380
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198	021	31530	S 5501	Mains Filter	2422	549	43432
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198	021	31220	S 5520	Transformer, SS39009-04.	2422	531	02459
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5603	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5604	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5861	Coil, 10u, 5%	3198	018	11090
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6150	Diode, Signal, BAS316.	3198	010	10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6202	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6206	Zener Diode, 6.8 volt.	3198	020	56880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220	6331	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

27PT643R/97A (continued)

6332	Diode, Signal, BAS316.	3198 010 10630	9182	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9183	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9192	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9193	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt.	3198 010 24790	9311	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt.	3198 020 51090	9312	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9406	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9407	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9408	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9409	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9410	Wire Jumper.	3198 036 90010
6464	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9641	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9643	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9648	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9652	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

27PT643R/97A (continued)

9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis	3141	058	58471

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210

2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR.	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack.	2422	026	04747
0250	A/V Jack.	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly.	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass. .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6091	Diode, Signal.	9340	453	90115

S = Safety Part. Be sure to use exact replacement part.

27PT643R/97A (continued)

CBA Top Control Panel Assembly 3139 187 15841

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used)	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual, English.	3121	235	21091
AC18	Quick Use Guide.	3121	233	43491
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53303
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 5W (2 Used).	2422	264	00409
AC20J	Top Control Assembly	3139	177	56381
REMOTE	Remote Control Transmitter, RC19036002/01A.	3139	238	04313

27PT643R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0211	2 Pin Connector	2422 025 16375	2331	er.	2222 368 90177
0212	5 Pin Connector	2422 025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic . . .	2020 558 90445
0214	6 Pin Connector	2422 025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic . . .	2020 012 93495
0219	5 Pin Connector	2422 025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0220	2 Pin Connector	2422 025 15503	2343	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
0222	2 Pin Connector	2422 025 10646	2344	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
0223	A/V Jack	2422 026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
0225	SVHS Jack	2422 026 04926	2401	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0229	3 Pin Connector	2412 020 00725	2402	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0239	3 Pin Connector	2422 025 16382	2404	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
0243	6 Pin Connector	2422 025 04854	2405	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0244	5 Pin Connector	2422 025 04853	2415	Cap, 220u, 20%, 25v, Electrolytic . . .	3198 025 32210
0245	6 Pin Connector	2422 025 04854	2416	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
0246	5 Pin Connector	2422 025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
S 0254	9 Pin CRT Socket	2422 500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0267	3 Pin Connector	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
0269	Jack	2422 026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic . . .	2020 021 91139
S 1000	Tuner, V+U PLL	2422 542 90098	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
1002	SAW Filter, 45.75MHz	2422 549 44518	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC	2422 086 10914	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	
S 1515	Relay, 5 Amp, 12V	2422 132 07444	2458	ylene.	2022 333 00163
1600	Crystal, 12MHz000	2422 543 01203	2459	Cap, 2u2, 20%, 100v, Electrolytic . . .	2020 021 91331
1811	3 Pin Connector	2412 020 00725	2460	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2463	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	2464	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090		Cap, 2u2, 5%, 160v, Metalized Polypropy	
2006	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	S 2465	lene	2222 479 90042
2007	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	2466	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
2008	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2471	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
2101	Cap, 470n, +80/-20%, 16v, Ceramic . . .	3198 017 24740	2472	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290		ylene.	2222 479 90051
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310		pylene	2022 330 00018
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
			2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester. . . .	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film.	2312 915 14708
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film.	2312 915 12208
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3507	Surge Protector.	2422 549 43073
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film.	3198 013 02210
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198	012	13370	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5001	Coil, 27u, 10%	3198	018	22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5002	Coil, 820n, 10%	3198	018	18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5201	Coil, 6u8, 5%	3198	018	16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5202	Wire Jumper.	3198	036	90010
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5241	Wire Jumper.	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5242	Coil, 10u, 5%	3198	018	11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5341	Coil, 22u.	2422	535	97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT	2422	531	02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 22u, 10%	3198	018	72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 6u8, 20%	3198	018	76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198	021	31530	5480	Coil, 27u, 10%	3198	018	22790
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21.	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6447	Diode, Signal, 1N4148.	3198	010	10010
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

6449	Diode, Signal, BAV99	3198 010 10620	9408	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9409	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9410	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQFPFN50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9407	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27PT643R37A (continued)

9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis	3141	058	58471

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730

2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass.	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part. Be sure to use exact replacement part.

27PT643R37A (continued)

S	AC01	AC Cord.	3135	010	03831
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	44711
	AC06	Cabinet Back Screw Cover (2 Used)	3139	124	39301
	AC08	Chassis Tray	3139	124	31324
S	AC09	CRT, A68QCU754X73(N)	9301	925	60527
S	AC12	Degaussing Coil	2422	549	43967
	AC13	Front Interface Panel Bracket	3139	124	32891
	AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
	AC17	Owner's Manual, English	3121	235	21091
	AC19	Side Jack Panel Bracket	3139	124	37061
	AC20	Cabinet Front Assembly	3121	237	53301
	AC20A	Cabinet Front	3139	177	58401
	AC20C	Light Guide	3139	124	39701
	AC20D	Nameplate	3141	050	00161
	AC20E	Power Button	3139	138	10881
	AC20H	Speaker, 8 ohm, 5W (2 Used)	2422	264	00409
	AC20J	Top Control Assembly	3139	138	11451
	AC20J1	Top Control Bracket	3139	124	39802
	AC20J2	Top Control Buttons	3139	124	39812
REMOTE		Remote Control Transmitter, RC19036002/			
		01.	3139	228	88003

27PT663R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			Main Chassis Parts		
0211	2 Pin Connector.	2422 025 16374	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0212	2 Pin Connector.	2422 025 16375	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0214	5 Pin Connector.	2422 025 12481	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0219	6 Pin Connector.	2422 025 12482	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0220	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0221	2 Pin Connector.	2422 025 15503	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0222	2 Pin Connector.	2422 025 10646	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0223	A/V Jack	2422 026 05236	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0225	SVHS Jack.	2422 026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0239	3 Pin Connector.	2422 025 16382	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0243	6 Pin Connector.	2422 025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0245	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0246	5 Pin Connector.	2422 025 12481	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 0254	9 Pin CRT Socket	2422 500 80076	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
0267	3 Pin Connector.	2412 020 00725	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
0269	Jack	2422 026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1000	Tuner, V+U PLL	2422 542 90141	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
1002	SAW Filter, 45.75MHz	2422 549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
1660	Crystal, 12MHz000	2422 543 01203	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042
1810	6 Pin Connector.	2422 025 16607	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part Be sure to use exact replacement part.

27PT663R37A (continued)

2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

27PT663R37A (continued)

3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3565	Res, 220 ohm, 5%, 1W, Metal Film	3198	012	12210	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03109	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5001	Coil, 27u, 10%	3198	018	22790
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5002	Coil, 820n, 10%	3198	018	18270
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5201	Coil, 6u8, 5%	3198	018	16880
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5202	Wire Jumper	3198	036	90010
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021	51020	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper	3198	036	90010
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5242	Coil, 10u, 5%	3198	018	11090
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	5341	Coil, 22u.	2422	535	97333
3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5342	Coil, 22u.	2422	535	97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5401	Coil, 1mH, 10%	3198	018	71020
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	S 5445	Transformer, LOT	2422	531	02574
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5451	Coil, 22u, 10%	3198	018	72290
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3812	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	S 5457	Coil, 25u.	2422	535	91028
3813	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3814	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3815	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3816	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3817	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5480	Coil, 27u, 10%	3198	018	22790
3818	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3819	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3820	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3821	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5561	Coil, 27u, 5%	2422	535	95366
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5602	Coil, 5u6, 5%	3198	018	15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5604	Coil, 5u6, 5%	3198	018	15680
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5810	Coil, 10u, 10%	3198	018	51090
3901	Res, 6K8, 5%, 1/16W, Metalized Glass . .	3198	021	36820	5831	Coil, 6u8, 5%	3198	018	16880
3903	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5832	Coil, 6u8, 5%	3198	018	16880
3905	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5833	Coil, 6u8, 5%	3198	018	16880
3909	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198	021	32730	5835	Coil, 12u, 10%	3198	018	31290
3910	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198	021	32730	6001	Zener Diode, 33 volt	3198	010	23390
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198	011	08210	6150	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6332	Diode, Signal, BAS316.	3198	010	10630
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6335	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6401	Zener Diode, 47 volt	3198	010	24790
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6465	Diode, Signal, BAV21	3198	010	10070
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

27PT663R37A (continued)

6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYD33J.	9337 234 20133	9425	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9426	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9453	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9500	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9501	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9503	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9511	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9512	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9514	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9515	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9516	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9518	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9521	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9522	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9524	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9528	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9530	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9611	Coil, 27u, 10%.	3198 018 22790
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9614	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9615	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9619	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9620	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9621	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9622	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9623	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9624	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9626	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9627	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9628	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9629	Wire Jumper.	3198 036 90010
7521	Power FET, FQFFN50.	9322 187 16687	9631	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9633	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9637	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9639	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9640	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9642	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL).	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L.	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580.	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL).	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%.	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%.	3198 018 22290
9408	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

27PT663R37A (continued)

9682	Wire Jumper.	3198 036 90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9685	Wire Jumper.	3198 036 90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9686	Wire Jumper.	3198 036 90010	2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9687	Wire Jumper.	3198 036 90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9688	Wire Jumper.	3198 036 90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9689	Wire Jumper.	3198 036 90010	2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9690	Wire Jumper.	3198 036 90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9691	Wire Jumper.	3198 036 90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9694	Wire Jumper.	3198 036 90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9695	Wire Jumper.	3198 036 90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9697	Wire Jumper.	3198 036 90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
9698	Wire Jumper.	3198 036 90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
9699	Wire Jumper.	3198 036 90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9821	Wire Jumper.	3198 036 90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
9822	Wire Jumper.	3198 036 90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
9825	Wire Jumper.	3198 036 90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9828	Wire Jumper.	3198 036 90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
9829	Wire Jumper.	3198 036 90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9831	Wire Jumper.	3198 036 90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9832	Wire Jumper.	3198 036 90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9837	Wire Jumper.	3198 036 90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
9838	Wire Jumper.	3198 036 90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9839	Wire Jumper.	3198 036 90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9846	Wire Jumper.	3198 036 90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9847	Wire Jumper.	3198 036 90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9849	Wire Jumper.	3198 036 90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9851	Wire Jumper.	3198 036 90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9856	Wire Jumper.	3198 036 90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9858	Wire Jumper.	3198 036 90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9859	Wire Jumper.	3198 036 90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9860	Wire Jumper.	3198 036 90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9862	Wire Jumper.	3198 036 90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9863	Wire Jumper.	3198 036 90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9864	Wire Jumper.	3198 036 90010	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9865	Wire Jumper.	3198 036 90010	3457	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9868	Wire Jumper.	3198 036 90010	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9869	Wire Jumper.	3198 036 90010	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9870	Wire Jumper.	3198 036 90010	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9871	Wire Jumper.	3198 036 90010	5401	Coil, 10u, 10%	3198 018 31090
9873	Wire Jumper.	3198 036 90010	5407	Coil, 33u, 5%	3198 018 13390
9874	Wire Jumper.	3198 036 90010	5408	Coil, 33u, 20%	3198 018 33390
9875	Wire Jumper.	3198 036 90010	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
9876	Wire Jumper.	3198 036 90010	5425	Coil, 10u, 10%	3198 018 31090
9877	Wire Jumper.	3198 036 90010	5428	Coil, 10u, 5%	3198 018 11090
9878	Wire Jumper.	3198 036 90010	5429	Coil, 10u, 10%	3198 018 31090
9901	Wire Jumper.	3198 036 90010	5430	Coil, 10u, 10%	3198 018 31090
9902	Wire Jumper.	3198 036 90010	5440	Coil, 10u, 10%	3198 018 31090
9903	Wire Jumper.	3198 036 90010	5442	Coil, 22u, 5%	3198 018 12290
9904	Wire Jumper.	3198 036 90010	5450	Coil, 10u, 10%	3198 018 31090
9911	Wire Jumper.	3198 036 90010	5452	Coil, 33u, 5%	3198 018 13390
9913	Wire Jumper.	3198 036 90010	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
9914	Wire Jumper.	3198 036 90010	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
9915	Wire Jumper.	3198 036 90010	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
9923	Wire Jumper.	3198 036 90010	7421	IC, TC90A53N	9322 182 18682
9991	Wire Jumper.	3198 036 90010	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
9993	Wire Jumper.	3198 036 90010	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
9996	Wire Jumper.	3198 036 90010	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
9997	Wire Jumper.	3198 036 90010	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9998	Wire Jumper.	3198 036 90010	9401	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 58611	9402	Wire Jumper.	3198 036 90010
			9403	Wire Jumper.	3198 036 90010
			CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

	2D 3 Line Comb Filter Parts	
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030

S = Safety Part. Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

	Front Interface Panel Parts	
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682
6692	IR Receiver, TSOP1836UH3V.	9322 127 54667

27PT663R37A (continued)

9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

AC20J2	Top Control Buttons.	3139	124	39812
REMOTE	Remote Control Transmitter, RC19036002/ 01.	3139	228	88003

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	39301
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3139	124	31122
AC17	Owner's Manual	3121	235	20671
AC18	Quick Use Guide.	3121	233	43491
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53101
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	138	11451
AC20J1	Top Control Bracket.	3139	124	39802

S = Safety Part Be sure to use exact replacement part.

27PT663R37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16374	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0212	2 Pin Connector.	2422 025 16375	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0214	5 Pin Connector.	2422 025 12481	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0219	6 Pin Connector.	2422 025 12482	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0220	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0221	2 Pin Connector.	2422 025 15503	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0222	2 Pin Connector.	2422 025 10646	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0223	A/V Jack	2422 026 05236	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0225	SVHS Jack.	2422 026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0239	3 Pin Connector.	2422 025 16382	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0243	6 Pin Connector.	2422 025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0245	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0246	5 Pin Connector.	2422 025 12481	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 0254	9 Pin CRT Socket	2422 500 80076	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
0267	3 Pin Connector.	2412 020 00725	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
0269	Jack	2422 026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1000	Tuner, V+U PLL	2422 542 90098	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
1002	SAW Filter, 45.75MHz	2422 549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
1660	Crystal, 12MHz000	2422 543 01203	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042
1810	6 Pin Connector.	2422 025 16607	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3565	Res, 220 ohm, 5%, 1W, Metal Film	3198	012	12210	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03109	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5001	Coil, 27u, 10%	3198	018	22790
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5002	Coil, 820n, 10%	3198	018	18270
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5201	Coil, 6u8, 5%	3198	018	16880
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5202	Wire Jumper	3198	036	90010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5241	Wire Jumper	3198	036	90010
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	5242	Coil, 10u, 5%	3198	018	11090
3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5341	Coil, 22u.	2422	535	97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5342	Coil, 22u.	2422	535	97333
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5401	Coil, 1mH, 10%	3198	018	71020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5445	Transformer, LOT	2422	531	02574
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5451	Coil, 22u, 10%	3198	018	72290
3812	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3813	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	S 5457	Coil, 25u.	2422	535	91028
3814	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3815	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3816	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3817	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3818	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3819	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3820	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3821	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5561	Coil, 27u, 5%	2422	535	95366
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5602	Coil, 5u6, 5%	3198	018	15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5604	Coil, 5u6, 5%	3198	018	15680
3901	Res, 6K8, 5%, 1/16W, Metalized Glass . .	3198	021	36820	5810	Coil, 10u, 10%	3198	018	51090
3903	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5831	Coil, 6u8, 5%	3198	018	16880
3905	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5832	Coil, 6u8, 5%	3198	018	16880
3909	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198	021	32730	5833	Coil, 6u8, 5%	3198	018	16880
3910	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198	021	32730	5835	Coil, 12u, 10%	3198	018	31290
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198	011	08210	6001	Zener Diode, 33 volt	3198	010	23390
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6150	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6331	Diode, Signal, BAV21	3198	010	10070
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6333	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6335	Diode, Signal, BAV21	3198	010	10070
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

6466	Diode, Signal, BAV21	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYD33J.	9337 234 20133	9425	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9426	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9453	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9500	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9501	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9503	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9511	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9512	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9514	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9515	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9516	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9518	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9521	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9522	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9524	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9528	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9530	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9614	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9615	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9619	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9620	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9621	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9622	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9623	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9624	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9626	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9627	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9628	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9629	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9631	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9633	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9637	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9639	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9640	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9642	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL)	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9408	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

27PT663R37C (continued)

9681	Wire Jumper.	3198 036 90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9682	Wire Jumper.	3198 036 90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9685	Wire Jumper.	3198 036 90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9686	Wire Jumper.	3198 036 90010	2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9687	Wire Jumper.	3198 036 90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9688	Wire Jumper.	3198 036 90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9689	Wire Jumper.	3198 036 90010	2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9690	Wire Jumper.	3198 036 90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9691	Wire Jumper.	3198 036 90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9694	Wire Jumper.	3198 036 90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9695	Wire Jumper.	3198 036 90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9697	Wire Jumper.	3198 036 90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
9698	Wire Jumper.	3198 036 90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
9699	Wire Jumper.	3198 036 90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9821	Wire Jumper.	3198 036 90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
9822	Wire Jumper.	3198 036 90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
9825	Wire Jumper.	3198 036 90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9828	Wire Jumper.	3198 036 90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122 118 05951
9829	Wire Jumper.	3198 036 90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9831	Wire Jumper.	3198 036 90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9832	Wire Jumper.	3198 036 90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9837	Wire Jumper.	3198 036 90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
9838	Wire Jumper.	3198 036 90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9839	Wire Jumper.	3198 036 90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9846	Wire Jumper.	3198 036 90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9847	Wire Jumper.	3198 036 90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9849	Wire Jumper.	3198 036 90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9851	Wire Jumper.	3198 036 90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9856	Wire Jumper.	3198 036 90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9858	Wire Jumper.	3198 036 90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9859	Wire Jumper.	3198 036 90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9860	Wire Jumper.	3198 036 90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9862	Wire Jumper.	3198 036 90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9863	Wire Jumper.	3198 036 90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9864	Wire Jumper.	3198 036 90010	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9865	Wire Jumper.	3198 036 90010	3457	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9868	Wire Jumper.	3198 036 90010	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9869	Wire Jumper.	3198 036 90010	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9870	Wire Jumper.	3198 036 90010	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9871	Wire Jumper.	3198 036 90010	5401	Coil, 10u, 10%	3198 018 31090
9873	Wire Jumper.	3198 036 90010	5407	Coil, 33u, 5%	3198 018 13390
9874	Wire Jumper.	3198 036 90010	5408	Coil, 33u, 20%	3198 018 33390
9875	Wire Jumper.	3198 036 90010	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
9876	Wire Jumper.	3198 036 90010	5425	Coil, 10u, 10%	3198 018 31090
9877	Wire Jumper.	3198 036 90010	5428	Coil, 10u, 5%	3198 018 11090
9878	Wire Jumper.	3198 036 90010	5429	Coil, 10u, 10%	3198 018 31090
9901	Wire Jumper.	3198 036 90010	5430	Coil, 10u, 10%	3198 018 31090
9902	Wire Jumper.	3198 036 90010	5440	Coil, 10u, 10%	3198 018 31090
9903	Wire Jumper.	3198 036 90010	5442	Coil, 22u, 5%	3198 018 12290
9904	Wire Jumper.	3198 036 90010	5450	Coil, 10u, 10%	3198 018 31090
9911	Wire Jumper.	3198 036 90010	5452	Coil, 33u, 5%	3198 018 13390
9913	Wire Jumper.	3198 036 90010	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
9914	Wire Jumper.	3198 036 90010	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
9915	Wire Jumper.	3198 036 90010	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
9923	Wire Jumper.	3198 036 90010	7421	IC, TC90A53N	9322 182 18682
9991	Wire Jumper.	3198 036 90010	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
9993	Wire Jumper.	3198 036 90010	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
9996	Wire Jumper.	3198 036 90010	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
9997	Wire Jumper.	3198 036 90010	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9998	Wire Jumper.	3198 036 90010	9401	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 177 26271	9402	Wire Jumper.	3198 036 90010
			9403	Wire Jumper.	3198 036 90010
			CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts		
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts		
S 0211	2 Pin Connector.	2422 025 16268
S 0212	2 Pin Connector.	2422 025 16559
0214	5 Pin Connector.	2422 025 06353
1606	Tact Switch.	2422 128 02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730
2698	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322 242 13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198 011 05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
6691	LED, LTL-10234WHCR	9322 185 69682

27PT663R37C (continued)

6692	IR Receiver, TSOP1836UH3V.	9322	127	54667	AC20J1	Top Control Bracket.	3139	124	39802
9001	Wire Jumper.	3198	036	90010	AC20J2	Top Control Buttons.	3139	124	39812
9002	Wire Jumper.	3198	036	90010	REMOTE	Remote Control Transmitter, RC19036002/			
CBA	Front Interface Panel Assembly	3139	177	26211	01.		3139	228	88003

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39301
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A68QCP893X001	9322	173	75682
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual	3121	235	20671
AC18	Quick Use Guide.	3121	233	43491
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53101
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	138	11451

S = Safety Part Be sure to use exact replacement part.

27ST110P/35 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
0212	2 Pin Connector.	2422 025 16375	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0213	2 Pin Connector.	2422 025 16374	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0217	6 Pin Connector.	2422 025 12482	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
0218	A/V Jack	2422 026 04742	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0220	5 Pin Connector.	2422 025 04853	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0221	2 Pin Connector.	2422 025 15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector.	2422 025 10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er.
0223	A/V Jack	2422 026 05236	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2222 368 90177
0225	SVHS Jack.	2422 026 04926	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0227	6 Pin Connector.	2422 025 15849	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0229	3 Pin Connector.	2412 020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0240	7 Pin Connector.	2422 025 11244	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0242	7 Pin Connector.	2422 025 17042	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
0243	6 Pin Connector.	2422 025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0244	5 Pin Connector.	2422 025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0245	6 Pin Connector.	2422 025 04854	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
S 0254	9 Pin CRT Socket	2422 500 80076	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0259	5 Pin Connector.	2422 025 15848	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0262	3 Pin Connector.	2422 025 16937	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0267	3 Pin Connector.	2412 020 00725	2450	Cap, 47u, 20%, 160v, Electrolytic. . . .	2020 021 91139
0280	4 Pin Connector.	2422 025 12479	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
S 1000	Tuner, V+U, PLL	2422 542 90108	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
1002	SAW Filter, 45.75MHz	2422 549 44518	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	ylene.
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic. . . .	2022 333 00086
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2459	Cap, 680p, 10%, 500v, Ceramic.	2020 021 91331
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1600	Tact Switch.	2422 128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1601	Tact Switch.	2422 128 02742	S 2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
1602	Tact Switch.	2422 128 02742	S 2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
1603	Tact Switch.	2422 128 02742	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1606	Tact Switch.	2422 128 02742	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
1660	Crystal, 12MHz000	2422 543 01203	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2006	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2008	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	2022 330 00018
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 024 90647
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2181	Cap, 22p, 5%, 50v, Ceramic	3198 017 33310	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 021 21050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240			

S = Safety Part Be sure to use exact replacement part.

27ST110P/35 (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic . . .	3198 017 44740	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . .	2306 207 03109
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass . .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film . . .	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film . . .	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02210
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3470	Res, 330K, 5%, 1/10W, Metalized Glass .	3198 021 53340
3102	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3104	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3106	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3480	Res, 1R5, 5%, 1/4W, Carbon Film	2122 101 02083
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06810	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06810	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06810	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film . .	3198 012 33390
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3492	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3182	Wire Jumper	3198 036 90010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3496	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3497	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01510	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03910	3500	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass . .	2322 242 13335
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . .	2322 242 13155
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3507	Surge Protector	2422 549 43073
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02710
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass .	3198 021 53340
3217	Res, 330K, 5%, 1/16W, Metalized Glass .	3198 021 33340	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film . .	3198 011 05610	S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3247	Res, 680K, 5%, 1/16W, Metalized Glass .	3198 021 36840	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

27ST110P/35 (continued)

3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5001	Coil, 27u, 10%	3198	018	22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5002	Coil, 820n, 10%	3198	018	18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%	3198	018	16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper.	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5241	Wire Jumper.	3198	036	90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5472	Coil, 3u3, 10%	3198	018	23380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5480	Coil, 39u, 10%	2422	535	97336
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5501	Mains Filter	2422	549	43432
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5603	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6181	Zener Diode, 6.8 volt.	3198	020	56880
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6202	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4126	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4181	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 9.1 volt.	9331	177	80133
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6466	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6467	Diode, Signal, BAS316.	3198	010	10630
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6469	Diode, Rect, BYV95C.	9335	001	80133
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6470	Diode, Signal, BAV99	3198	010	10620
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6476	Zener Diode, 15 volt	3198	010	21590
4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6481	Zener Diode, 5.6 volt.	3198	010	25680

27ST110P/35 (continued)

6482	Zener Diode, 9.1 volt.	9331	177	80133	9503	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9506	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9507	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9511	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9513	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9514	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9516	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9518	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9520	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9521	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9522	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9524	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010.	9322	128	18682	9528	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9530	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9611	Coil, 27u, 10%	3198	018	22790
6566	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9613	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9614	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9615	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85.	9336	247	60133	9616	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR.	9322	185	69682	9617	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9618	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9619	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	9622	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL).	3198	010	42030	9623	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I.	4835	310	57622	9626	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL).	3198	010	42030	9627	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL).	3198	010	42150	9628	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL).	3198	010	42150	9629	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3.	9352	713	37112	9631	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL).	3198	010	42150	9632	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL).	3198	020	40110	9634	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9637	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530	9638	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDTCL143ZT.	9340	547	00215	9640	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430	9641	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9642	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135.	3198	020	41010	9643	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135.	3198	020	41010	9647	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667	9648	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9650	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9652	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL).	3198	010	42030	9654	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL).	3198	020	40030	9655	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDTCL114ET.	9340	310	10215	9657	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL).	3198	010	42150	9658	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ.	9322	106	11676	9659	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PDTCL143ZT.	9340	547	00215	9660	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL).	3198	010	42150	9661	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9662	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9663	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9664	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL).	3198	010	42030	9665	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL).	3198	010	42030	9666	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH.	9322	181	41682	9667	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9181	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9193	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010
9419	Wire Jumper.	3198	036	90010	9821	Wire Jumper.	3198	036	90010
9421	Wire Jumper.	3198	036	90010	9822	Wire Jumper.	3198	036	90010
9422	Wire Jumper.	3198	036	90010	9825	Wire Jumper.	3198	036	90010
9423	Wire Jumper.	3198	036	90010	9828	Wire Jumper.	3198	036	90010
9425	Wire Jumper.	3198	036	90010	9829	Wire Jumper.	3198	036	90010
9427	Wire Jumper.	3198	036	90010	9831	Wire Jumper.	3198	036	90010
9453	Wire Jumper.	3198	036	90010	9832	Wire Jumper.	3198	036	90010
9460	Wire Jumper.	3198	036	90010	9837	Wire Jumper.	3198	036	90010
9500	Wire Jumper.	3198	036	90010	9838	Wire Jumper.	3198	036	90010
9501	Wire Jumper.	3198	036	90010	9839	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27ST110P/35 (continued)

9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	EPS Module (ITV).	3139	137	22961
CBA	Main Chassis Assembly.	3139	187	26831
CBA	Interface Panel (ITV).	3139	188	04541

Channel One Card Parts

Channel One Card Parts				
0010	4.7k, 5%, Metal Film.	2322	187	53472
0010	Transistor, Signal, BC547B	3198	020	40030
0020	4.7k, 5%, Metal Film.	2322	187	53472
0020	0.1uF., 10%, 50 Volt, Polyester.	3198	014	01040
0030	4.7k, 5%, Metal Film.	2322	187	53472
0030	100pF., 50 Volt, NP0, Ceramic.	3198	019	01010
0040	4.7k, 5%, Metal Film.	2322	187	53472
0040	Shield	3135	011	01471
0040	1000 pF, 10%, 50 Volt, Polyester	3198	014	01020
0050	3.3k, 5%, Metal Film	2322	187	53332
0060	47k, 5%, Metal Film.	2322	187	53473
0060	IC, P87C52EBPN IC4	3135	019	01011
0060	1000 pF, 10%, 50 Volt, Polyester	3198	014	01020
0070	10k, 5%, Metal Film.	2322	187	53103
0070	1000 pF, 10%, 50 Volt, Polyester	3198	014	01020
0080	47k, 5%, Metal Film.	2322	187	53473
0080	0.1uF., 10%, 50 Volt, Polyester.	3198	014	01040
0080	IC, 74HC08N.	9336	687	80652
0090	10k, 5%, Metal Film.	2322	187	53103
0090	Transistor, Signal, BC547B	3198	020	40030
0090	IC, SA614AD.	9339	954	10118
0100	10k, 5%, Metal Film.	2322	187	53103
0100	Variable Inductor, 7MM, 24M576B, L3.	2422	549	43232
0100	Transistor, Signal, BC547B	3198	020	40030
0110	220 ohm, 5%, Metal Film.	2322	187	53221
0110	Transistor, Signal, BC547B	3198	020	40030
0110	IC, MC7805CT.	9334	536	00682
0120	47k, 5%, Metal Film.	2322	187	53473
0120	Transistor, Signal, BC547B	3198	020	40030
0130	47k, 5%, Metal Film.	2322	187	53473
0130	32 Pin Connector	3135	010	03541
0130	Transistor, Signal, BC547B	3198	020	40030
0140	4.7pF, 0.25%, 50 Volt, NP0, Ceramic.	2020	552	90585
0140	47k, 5%, Metal Film.	2322	187	53473
0150	47k, 5%, Metal Film.	2322	187	53473
0150	Transistor, Signal, BC547B	3198	020	40030
0160	0.01uF, 10%, 50 Volt, Polyester.	2020	300	90573
0160	Fixed Inductor, 1uH, 20%	2422	535	97315
0170	12pF, 5%, 50 Volt, NP0, Ceramic.	2020	552	90591
0170	6 Pin Modular Jack Socket.	2422	025	14552
0170	Zener Diode, BZX79-C16, 16 Volt.	3198	010	21690
0180	47pF, 5%, 50 Volt, NP0, Ceramic.	2020	552	90598
0180	1 Pin Cinch Socket	2422	026	04366
0180	Diode, Regulator, BZX79-C8V2, 8.2 Volt	3198	010	28280
0190	4.7uF, 20%, 50 Volt, Electrolytic.	2020	012	92651
0190	F-Connector.	2422	031	10792
0190	Diode, Regulator, BZX79-C8V2, 8.2 Volt	3198	010	28280
0200	0.01uF, 10%, 50 Volt, Polyester.	2020	300	90573
0200	Ceramic Resonator, 12MHz	2422	540	98187
0200	Diode, Regulator, BZX79-C8V2, 8.2 Volt	3198	010	28280

0210	0.01uF, 10%, 50 Volt, Polyester.	2020	300	90573
0210	40 Pin Socket.	2422	549	13629
0220	0.01uF, 10%, 50 Volt, Polyester.	2020	300	90573
0220	10k, 5%, Metal Film.	2322	187	53103
0220	Variable Inductor, 7MM, 24M576B, L3.	2422	549	43232
0230	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0230	47k, 5%, Metal Film.	2322	187	53473
0240	1pF, 0.25%, 50 Volt, NP0, Ceramic.	2020	552	90576
0240	Wire Jumper.	3198	036	90010
0250	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0250	16K, 5%, Carbon.	2120	101	74163
0250	IC, LM393N	9337	591	30682
0260	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0260	Wire Jumper.	3198	036	90010
0270	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0270	10k, 5%, Metal Film.	2322	187	53103
0280	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0280	Wire Jumper.	3198	036	90010
0290	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0290	Wire Jumper.	3198	036	90010
0300	0.1uF, 10%, 50 Volt, Polyester.	2020	300	90586
0300	Wire Jumper.	3198	036	90010
0310	100uF, 20%, 25 Volt, Electrolytic.	2020	012	92639
0310	Wire Jumper.	3198	036	90010
0320	Wire Jumper.	3198	036	90010
0320	Transistor, Signal, BC557B	9332	026	20126
0330	Wire Jumper.	3198	036	90010
0340	Wire Jumper.	3198	036	90010
0360	1k, 5%, Metal Film	2322	187	53102
0370	1k, 5%, Metal Film	2322	187	53102
0380	1k, 5%, Metal Film	2322	187	53102
0390	100 ohm, 5%, Metal Film.	2322	187	53101
0400	100 ohm, 5%, Metal Film.	2322	187	53101
0410	100 ohm, 5%, Metal Film.	2322	187	53101
0420	270K, 5%, Carbon	2120	101	74274
0430	24K, 5%, Carbon.	2120	101	74243
0440	100 ohm, 5%, Metal Film.	2322	187	53101
0450	10k, 5%, Metal Film.	2322	187	53103
CBA	Channel One Card Assembly.	3135	127	10131

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	128	70011
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45261
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	124	30901
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC20	Cabinet Front Assembly	3121	237	52392
AC20A	Cabinet Front.	3135	127	50011
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20B	Chassis Guide.	3139	124	41711
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	26444
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401

27ST110P/35 (continued)

AC21	Card Door.	3135 014 05191
AC22	Cinch Cover.	3139 124 25551
AC26	EPS Bracket.	3119 107 17241
AC27	ITV Card Bracket	3139 124 37933

27ST220L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
0212	2 Pin Connector.	2422 025 16375	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0213	2 Pin Connector.	2422 025 16374	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0217	6 Pin Connector.	2422 025 12482	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
0218	A/V Jack	2422 026 04742	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0220	5 Pin Connector.	2422 025 04853	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0221	2 Pin Connector.	2422 025 15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector.	2422 025 10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0223	A/V Jack	2422 026 05236		er.	
0225	SVHS Jack.	2422 026 04926	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2222 368 90177
0227	6 Pin Connector.	2422 025 15849	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 558 90445
0229	3 Pin Connector.	2412 020 00725	2341	Cap, 3n3, 10%, 500v, Ceramic.	2020 012 93495
0240	7 Pin Connector.	2422 025 11244	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 019 43320
0242	7 Pin Connector.	2422 025 17042	2343	Cap, 2n2, 10%, 2000v, Ceramic.	3198 016 05610
0243	6 Pin Connector.	2422 025 04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	2020 558 90559
0244	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	3198 023 21040
0245	6 Pin Connector.	2422 025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	2020 558 90445
S 0254	9 Pin CRT Socket	2422 500 80076	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 025 32210
0259	5 Pin Connector.	2422 025 15848	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 016 03310
0262	3 Pin Connector.	2422 025 16937	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 025 51080
0267	3 Pin Connector.	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 017 24730
0280	4 Pin Connector.	2422 025 12479	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	3198 025 51080
S 1000	Tuner, V+U, PLL	2422 542 90108	2451	Cap, 15n, 10%, 50v, Polyester.	2020 021 91139
1002	SAW Filter, 45.75MHz	2422 549 44518	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 014 01530
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914		ylene.	
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2022 333 00086
1600	Tact Switch.	2422 128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	2020 021 91331
1601	Tact Switch.	2422 128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 019 46810
1602	Tact Switch.	2422 128 02742	2462	Cap, 330n, 10%, 250v, MPP.	3198 016 01010
1603	Tact Switch.	2422 128 02742	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with	
1606	Tact Switch.	2422 128 02742		5445 (JF0501-21835) Layer Wound. . . .	2022 333 00084
1660	Crystal, 12MHz000	2422 543 01203	S 2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90487
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2252 712 95024
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only	
2005	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090		with 5445 (JF0501-21835) Layer Wound . .	2020 301 90251
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	2471	Cap, 100n, 10%, 50v, Polyester	2222 375 90156
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	3198 014 01040
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75154
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic.	2222 365 75104
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 017 04720
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	2020 021 90586
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2482	Cap, 68n, 10%, 250v, Polyester	3198 019 44710
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2222 347 90234
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	Cap, 47u, 20%, 16v, Electrolytic. . . .	2020 021 90856
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590		pylene	
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	2022 330 00018
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	2020 024 90647
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 017 04710
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	3198 019 64710
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	2020 554 90172
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198 025 52290
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	3198 017 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	2020 558 90489
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	3198 017 01030
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 558 90472
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2562	Cap, 10u, 20%, 160v, Electrolytic . . .	2020 021 91654
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2563	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2564	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2216	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	2580	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2601	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2602	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2607	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2608	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2609	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2611	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2612	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
			2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
			2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210

S = Safety Part Be sure to use exact replacement part.

27ST220L/17 (continued)

2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 013 01520
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester. . . .	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090		h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010		5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3182	Wire Jumper.	3198 036 90010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3507	Surge Protector.	2422 549 43073
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W.	2122 612 00056
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3223	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

27ST220L/17 (continued)

3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5001	Coil, 27u, 10%	3198	018	22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5002	Coil, 820n, 10%	3198	018	18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%	3198	018	16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5241	Wire Jumper	3198	036	90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3817	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3818	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3819	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040		ound	2422	531	02611
3820	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B)	2422	531	02506
3821	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3861	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5471	Coil, 3u3, 20%	3198	018	73380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5472	Coil, 3u3, 10%	3198	018	23380
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5480	Coil, 39u, 10%	2422	535	97336
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	S 5501	Mains Filter	2422	549	43432
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	S 5520	Transformer, SS39009-04.	2422	531	02459
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5602	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5603	Coil, 5u6, 5%	3198	018	15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	5604	Coil, 5u6, 5%	3198	018	15680
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6181	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4126	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21.	3198	010	10070
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4181	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6449	Diode, Signal, BAV99	3198	010	10620
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6460	Diode, Rect, BY228/24.	9340	559	50112

S = Safety Part Be sure to use exact replacement part.

27ST220L/17 (continued)

6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9419	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9421	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9422	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9423	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9425	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9427	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99.	3198	010	10620	9460	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt.	3198	010	21590	9500	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9501	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9503	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9506	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9507	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9511	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9513	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9514	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9516	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9518	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9520	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9521	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9522	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9524	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010.	9322	128	18682	9528	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9530	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9611	Coil, 27u, 10%	3198	018	22790
6566	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9613	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9614	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9615	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85.	9336	247	60133	9616	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR.	9322	185	69682	9617	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9618	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9619	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9622	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9623	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I.	4835	310	57622	9626	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9627	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9628	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9629	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3.	9352	713	37112	9631	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9632	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9634	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9637	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9638	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDTCL143ZT.	9340	547	00215	9640	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9641	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9642	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135.	3198	020	41010	9643	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135.	3198	020	41010	9647	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G).	9322	140	14667	9648	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9650	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9652	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9654	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9655	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDTCL14ET.	9340	310	10215	9657	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9658	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ.	9322	106	11676	9659	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PDTCL143ZT.	9340	547	00215	9660	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9661	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9662	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9663	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9664	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL)	3198	010	42030	9665	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL)	3198	010	42030	9666	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH.	9322	181	41682	9667	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9181	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9193	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27ST220L/17 (continued)

9821	Wire Jumper.	3198	036	90010	S AC01	AC Cord.	3135	128	70011
9822	Wire Jumper.	3198	036	90010	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
9825	Wire Jumper.	3198	036	90010	AC05	Cabinet Back	3139	124	45261
9828	Wire Jumper.	3198	036	90010	S AC09	CRT, A68AJB82X11	9301	891	90631
9829	Wire Jumper.	3198	036	90010	AC10	Customer Control Buttons	3139	124	30901
9831	Wire Jumper.	3198	036	90010	S AC12	Degaussing Coil.	2422	549	43967
9832	Wire Jumper.	3198	036	90010	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
9837	Wire Jumper.	3198	036	90010	AC20	Cabinet Front Assembly	3121	237	52392
9838	Wire Jumper.	3198	036	90010	AC20A	Cabinet Front.	3135	127	50011
9839	Wire Jumper.	3198	036	90010	AC20B	Chassis Guide (2 Used)	3139	124	31381
9846	Wire Jumper.	3198	036	90010	AC20B	Chassis Guide.	3139	124	41711
9847	Wire Jumper.	3198	036	90010	AC20C	Light Guide.	3139	124	26461
9849	Wire Jumper.	3198	036	90010	AC20D	Nameplate.	3135	015	03571
9850	Wire Jumper.	3198	036	90010	AC20E	Power Button	3139	124	26444
9851	Wire Jumper.	3198	036	90010	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
9852	Wire Jumper.	3198	036	90010	AC22	Cinch Cover.	3139	124	25551
9853	Wire Jumper.	3198	036	90010	AC26	EPS Bracket.	3119	107	17241
9856	Wire Jumper.	3198	036	90010	AC27	ITV Card Bracket	3139	124	37933
9860	Wire Jumper.	3198	036	90010	AC28	ITV Card Slot Cover.	3139	124	30571
9861	Wire Jumper.	3198	036	90010	ITV	Institutional Interconnect Device (Mode			
9862	Wire Jumper.	3198	036	90010		1 27ST240P/35 Only).	0Net	1DE	VX/35
9864	Wire Jumper.	3198	036	90010					
9865	Wire Jumper.	3198	036	90010					
9868	Wire Jumper.	3198	036	90010					
9873	Wire Jumper.	3198	036	90010					
9874	Wire Jumper.	3198	036	90010					
9875	Wire Jumper.	3198	036	90010					
9877	Wire Jumper.	3198	036	90010					
9891	Wire Jumper.	3198	036	90010					
9892	Wire Jumper.	3198	036	90010					
9901	Wire Jumper.	3198	036	90010					
9902	Wire Jumper.	3198	036	90010					
9903	Wire Jumper.	3198	036	90010					
9904	Wire Jumper.	3198	036	90010					
9905	Wire Jumper.	3198	036	90010					
9911	Wire Jumper.	3198	036	90010					
9913	Wire Jumper.	3198	036	90010					
9914	Wire Jumper.	3198	036	90010					
9915	Wire Jumper.	3198	036	90010					
9918	Wire Jumper.	3198	036	90010					
9919	Wire Jumper.	3198	036	90010					
9920	Wire Jumper.	3198	036	90010					
9991	Wire Jumper.	3198	036	90010					
9996	Wire Jumper.	3198	036	90010					
9998	Wire Jumper.	3198	036	90010					
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372					
CBA	EPS Module (ITV)	3139	137	22961					
CBA	Main Chassis Assembly.	3139	187	26831					
CBA	Interface Panel (ITV).	3139	188	04541					

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

ITV Institutional Interconnect Device (For
ITV Models Only) 0Net 1DE VX/35

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

27ST220L17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
0212	2 Pin Connector.	2422 025 16375	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0213	2 Pin Connector.	2422 025 16374	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0217	6 Pin Connector.	2422 025 12482	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
0218	A/V Jack	2422 026 04742	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0220	5 Pin Connector.	2422 025 04853	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0221	2 Pin Connector.	2422 025 15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector.	2422 025 10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0223	A/V Jack	2422 026 05236		er.	
0225	SVHS Jack.	2422 026 04926	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2222 368 90177
0227	6 Pin Connector.	2422 025 15849	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 558 90445
0229	3 Pin Connector.	2412 020 00725	2341	Cap, 3n3, 10%, 500v, Ceramic.	2020 012 93495
0240	7 Pin Connector.	2422 025 11244	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 019 43320
0242	7 Pin Connector.	2422 025 17042	2343	Cap, 2n2, 10%, 2000v, Ceramic.	3198 016 05610
0243	6 Pin Connector.	2422 025 04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	2020 558 90559
0244	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	3198 023 21040
0245	6 Pin Connector.	2422 025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	2020 558 90445
S 0254	9 Pin CRT Socket	2422 500 80076	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 025 32210
0259	5 Pin Connector.	2422 025 15848	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 016 03310
0262	3 Pin Connector.	2422 025 16937	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 025 51080
0267	3 Pin Connector.	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 017 24730
0280	4 Pin Connector.	2422 025 12479	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	3198 025 51080
S 1000	Tuner, V+U, PLL	2422 542 90108	2451	Cap, 15n, 10%, 50v, Polyester.	2020 021 91139
1002	SAW Filter, 45.75MHz	2422 549 44518	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 014 01530
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914		ylene.	2022 333 00086
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
1600	Tact Switch.	2422 128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1601	Tact Switch.	2422 128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1602	Tact Switch.	2422 128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1603	Tact Switch.	2422 128 02742	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with	
1606	Tact Switch.	2422 128 02742		5445 (JF0501-21835) Layer Wound. . .	2020 558 90487
1660	Crystal, 12MHz000	2422 543 01203	S 2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only	
2005	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090		with 5445 (JF0501-21835) Layer Wound .	2222 375 90156
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590		pylene	2022 330 00018
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
			2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
			2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210

S = Safety Part Be sure to use exact replacement part.

27ST220L17 (continued)

2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 013 01520
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090		h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010		5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3182	Wire Jumper.	3198 036 90010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3507	Surge Protector.	2422 549 43073
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W.	2122 612 00056
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3223	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

27ST220L17 (continued)

3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5001	Coil, 27u, 10%	3198	018	22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5002	Coil, 820n, 10%	3198	018	18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%	3198	018	16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5241	Wire Jumper	3198	036	90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3817	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3818	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3819	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040		ound	2422	531	02611
3820	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B)	2422	531	02506
3821	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3861	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5471	Coil, 3u3, 20%	3198	018	73380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5472	Coil, 3u3, 10%	3198	018	23380
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5480	Coil, 39u, 10%	2422	535	97336
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	S 5501	Mains Filter	2422	549	43432
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	S 5520	Transformer, SS39009-04.	2422	531	02459
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5602	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5603	Coil, 5u6, 5%	3198	018	15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	5604	Coil, 5u6, 5%	3198	018	15680
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6181	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4126	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21.	3198	010	10070
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4181	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6449	Diode, Signal, BAV99	3198	010	10620
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6460	Diode, Rect, BY228/24.	9340	559	50112

27ST220L17 (continued)

6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9419	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9421	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9422	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9423	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9425	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9427	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9460	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9500	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9501	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9503	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9506	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9507	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9511	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9513	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9514	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9516	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9518	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9520	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9521	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9522	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9524	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010	9322	128	18682	9528	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9530	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9611	Coil, 27u, 10%	3198	018	22790
6566	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9613	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9614	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9615	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85	9336	247	60133	9616	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9617	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9618	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9619	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9622	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9623	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57622	9626	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9627	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9628	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9629	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9631	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9632	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9634	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9637	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9638	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDTCL143ZT	9340	547	00215	9640	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9641	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9642	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9643	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9647	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9648	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9650	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9652	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9654	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9655	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDTCL14ET	9340	310	10215	9657	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9658	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ	9322	106	11676	9659	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PDTCL143ZT	9340	547	00215	9660	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9661	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9662	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9663	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9664	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL)	3198	010	42030	9665	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL)	3198	010	42030	9666	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH	9322	181	41682	9667	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9181	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9193	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27ST220L17 (continued)

9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	EPS Module (ITV)	3139	137	22961
CBA	Main Chassis Assembly.	3139	187	26831
CBA	Interface Panel (ITV).	3139	188	04541

S AC01	AC Cord.	3135	128	70011
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45261
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	124	30901
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC20	Cabinet Front Assembly	3121	237	52392
AC20A	Cabinet Front.	3135	127	50011
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20B	Chassis Guide.	3139	124	41711
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	26444
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC22	Cinch Cover.	3139	124	25551
AC26	EPS Bracket.	3119	107	17241
AC27	ITV Card Bracket	3139	124	37933
AC28	ITV Card Slot Cover.	3139	124	30571
ITV	Institutional Interconnect Device (Mode 1 27ST240P/35 Only).	0Net	1DE	VX/35

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

ITV Institutional Interconnect Device (For
ITV Models Only) 0Net 1DE VX/35

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
0212	2 Pin Connector.	2422 025 16375	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0213	2 Pin Connector.	2422 025 16374	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0217	6 Pin Connector.	2422 025 12482	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
0218	A/V Jack	2422 026 04742	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0220	5 Pin Connector.	2422 025 04853	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0221	2 Pin Connector.	2422 025 15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector.	2422 025 10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er.
0223	A/V Jack	2422 026 05236	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2222 368 90177
0225	SVHS Jack.	2422 026 04926	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012 93495
0227	6 Pin Connector.	2422 025 15849	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0229	3 Pin Connector.	2412 020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0240	7 Pin Connector.	2422 025 11244	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0242	7 Pin Connector.	2422 025 17042	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
0243	6 Pin Connector.	2422 025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0244	5 Pin Connector.	2422 025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0245	6 Pin Connector.	2422 025 04854	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
S 0254	9 Pin CRT Socket	2422 500 80076	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0259	5 Pin Connector.	2422 025 15848	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0262	3 Pin Connector.	2422 025 16937	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0267	3 Pin Connector.	2412 020 00725	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
0280	4 Pin Connector.	2422 025 12479	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
S 1000	Tuner, V+U, PLL	2422 542 90108	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
1002	SAW Filter, 45.75MHz	2422 549 44518	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	ylene.
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2022 333 00086
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2459	Cap, 680p, 10%, 500v, Ceramic.	2020 021 91331
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1600	Tact Switch.	2422 128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1601	Tact Switch.	2422 128 02742	S 2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
1602	Tact Switch.	2422 128 02742	S 2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
1603	Tact Switch.	2422 128 02742	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1606	Tact Switch.	2422 128 02742	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
1660	Crystal, 12MHz000	2422 543 01203	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020 021 90856
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020 021 90854
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020 021 91049
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020 021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	2022 330 00018
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020 024 90647
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2181	Cap, 22p, 5%, 50v, Ceramic	3198 017 33310	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020 021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2209	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 021 21050
2229	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240			

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2876	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2877	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2884	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film.	3198 012 26880
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film.	3198 012 21530
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06890	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3132	Res, 47K, 5%, 1/16W, Metalized Glass. . .	3198 021 34730	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3134	Res, 47K, 5%, 1/16W, Metalized Glass. . .	3198 021 34730	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3182	Wire Jumper.	3198 036 90010	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3184	Res, 47K, 5%, 1/16W, Metalized Glass. . .	3198 021 34730	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3186	Res, 47K, 5%, 1/16W, Metalized Glass. . .	3198 021 34730	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3507	Surge Protector.	2422 549 43073
3206	Res, 33K, 5%, 1/16W, Metalized Glass. . .	3198 021 33330	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	S 3510	Res, NTC, 4R7, 20%, 3W.	2122 612 00056
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. . .	3198 021 51220
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03101
3218	Res, 82K, 5%, 1/16W, Metalized Glass. . .	3198 021 38230	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. . .	3198 021 32220	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. . .	3198 021 32220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass. . .	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass. . .	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass. . .	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass. . .	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840	3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5001	Coil, 27u, 10%	3198	018	22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5002	Coil, 820n, 10%	3198	018	18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%	3198	018	16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper.	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5241	Wire Jumper.	3198	036	90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5472	Coil, 3u3, 10%	3198	018	23380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5480	Coil, 39u, 10%	2422	535	97336
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5501	Mains Filter	2422	549	43432
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5603	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6181	Zener Diode, 6.8 volt.	3198	020	56880
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6202	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4126	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4181	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 9.1 volt.	9331	177	80133
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6466	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6467	Diode, Signal, BAS316.	3198	010	10630
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6469	Diode, Rect, BYV95C.	9335	001	80133
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6470	Diode, Signal, BAV99	3198	010	10620
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6476	Zener Diode, 15 volt	3198	010	21590
4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6481	Zener Diode, 5.6 volt.	3198	010	25680

27ST230P/35 (continued)

6482	Zener Diode, 9.1 volt.	9331 177 80133	9503	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9506	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9507	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9511	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9512	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9513	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9514	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9515	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9516	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9518	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9520	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9521	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9522	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9524	Wire Jumper.	3198 036 90010
6561	Diode, Rect, SB340L-7010.	9322 128 18682	9528	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9530	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9611	Coil, 27u, 10%	3198 018 22790
6566	Diode, Signal, 1N4148.	3198 010 10010	9612	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9613	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9614	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9615	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9616	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9617	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9618	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9619	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9622	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9623	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I.	4835 310 57622	9626	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9627	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9628	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9629	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9631	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9632	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9634	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9637	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9638	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTCL143ZT.	9340 547 00215	9640	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9641	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9642	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9643	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9647	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9648	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9650	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9652	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9655	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCL114ET.	9340 310 10215	9657	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9658	Wire Jumper.	3198 036 90010
7560	IC, LE33CZ.	9322 106 11676	9659	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDTCL143ZT.	9340 547 00215	9660	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9661	Wire Jumper.	3198 036 90010
7602	IC, M24C16-WBN6.	9322 147 25682	9662	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9663	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9664	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9665	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9666	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9667	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9181	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9193	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

27ST230P/35 (continued)

9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Scan 4 Card Assembly	3121	237	53761
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	EPS Module (ITV)	3139	137	22961
CBA	Main Chassis Assembly.	3139	187	26831
CBA	Interface Panel (ITV).	3139	188	04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

1000	F-Connector.	2422	031	10792
1001	Socket, Cinch, 1 Pin	2422	026	05003
1002	5 Pin Connector.	2422	025	12708
2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2001	Cap, 39p, 5%, 50v, Ceramic	3198	016	03990
2002	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2003	Cap, 39p, 5%, 50v, Ceramic	3198	016	03990
2004	Cap, 100n, 10%, 25v, Ceramic	2238	910	15649
2005	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2006	Cap, 390p, 5%, 50v, Ceramic.	3198	016	03910
2007	Cap, 33p, 5%, 50v, Ceramic	3198	016	03390
2008	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2009	Cap, 10p, 5%, 50v, Ceramic	3198	016	01090
2010	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2011	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2012	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2013	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2015	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
3000	Res, 10k, 5%	3198	021	51030
3001	Res, 10k, 5%	3198	021	51030
3002	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198	021	54790
3003	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3004	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3005	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3006	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720

3008	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3009	Res, 47k, 5%	3198	021	54730
3011	Res, 10k, 5%	3198	021	51030
3012	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198	021	54790
5000	Fixed Inductor, 0.15uH, 10%.	3198	018	31570
5001	Fixed Inductor, 0.15uH, 10%.	3198	018	31570
5002	Fixed Inductor, 0.68uH, 10%.	3198	018	36870
5003	Fixed Inductor, 2.2uH, 5%.	2422	535	96509
5004	Fixed Inductor, 10uH, 10%.	3198	018	31090
5005	Inductor, Fixed 22u, 20%	3198	018	32290
5006	Fixed Inductor, 4.7uH., 10%.	3198	018	34780
6000	Diode, Signal, BAS216.	9340	255	30115
6001	Diode, Signal, BAS216.	9340	255	30115
6002	Diode, Signal, BAS216.	9340	255	30115
7000	IC, NE592/N8	9337	334	80602
7001	Transistor, Signal, BC847B	9335	895	90215
CBA	Net 1 Panel (part of Scan 4 Card Assembly).	3135	127	10151

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

1000	Connector, 15 Pin.	2422	025	16857
1001	Crystal, Resonator, 20M140	2422	543	01196
1002	SOC MDIN H 4P F YKF51 B	2422	026	05133
1003	SOC CINCH H 4P F WHRD B	2422	026	04402
1005	Resonator Crystal, 14M31818, 20P	2422	543	00904
1010	Connector, 32 Pin.	3135	010	03541
1011	Crystal, Resonator, 12MHz, 20 Pin.	2422	543	00488
1012	Connector, 5 Pin	2422	025	12708
2000	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2001	Cap, 82p, 5%, 50v, Ceramic	3198	016	08290
2002	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2003	Cap, 15p, 5%, 50v, Ceramic	3198	016	01590
2004	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2005	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2006	Cap, 82p, 5%, 50v, Ceramic	3198	016	08290
2007	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2008	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2009	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510
2010	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2011	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2012	Cap, 15p, 5%, 50v, Ceramic	3198	016	01590
2013	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2014	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510
2015	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2016	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2017	Cap, 10u, 20%, 25V, Electrolytic	2020	004	90288
2018	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2019	Cap, 15p, 5%, 50v, Ceramic	3198	016	01590
2020	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2021	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2022	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510
2023	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2024	Cap, 82p, 5%, 50v, Ceramic	3198	016	08290
2025	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2026	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2059	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2060	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2061	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2062	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2063	Cap, 4u7, +80/-20%, 10v, Ceramic	2020	552	96305
2064	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2065	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2066	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2067	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2068	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2070	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2071	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2072	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2073	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2074	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2075	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2076	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2077	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2078	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2079	Cap, 1n, 10%, 50v, Ceramic	3198	017	01020
2080	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2081	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2082	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2083	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2084	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2085	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2086	Cap, 1n, 10%, 50v, Ceramic	3198	017	01020
2087	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2088	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2089	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2090	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2091	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2092	Cap, 1n, 10%, 50v, Ceramic	3198	017	01020
2093	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2094	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

2095	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3091	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339
2096	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3097	Res, 150 ohm, 5%, 1/10W, Metalized Glas	3198 021 51510
2097	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3099	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
2098	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3100	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
2099	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3101	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
2100	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790	3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
2101	Cap, 1u, 20%, 35v, Electrolytic.	2020 004 90282	3103	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
2102	Cap, 1u, 20%, 35v, Electrolytic.	2020 004 90282	3104	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
2103	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3105	Res, 150 ohm, 5%, 1/10W, Metalized Glas	3198 021 51510
2104	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3106	Res, 270 ohm, 5%, 1/10W, Metalized Glas	3198 021 52710
2106	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3108	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
2107	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3109	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
2111	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3110	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
2112	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3111	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
2113	Cap, 1u, 20%, 50v, Electrolytic.	3198 030 81080	3112	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
2114	Cap, 470u, 20%, 25v, Electrolytic. . . .	2020 012 93457	3113	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
2115	Cap, 10u, 20%, 10v, Electrolytic	3198 032 34130	3114	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
2116	Cap, 10u, 20%, 10v, Electrolytic	3198 032 34130	3116	Res, 1K8, 5%, 1/10W, Metalized Glass .	3198 021 51820
2118	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	3117	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
2119	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	3118	Res, 6K8, 5%, 1/10W, Metalized Glass .	3198 021 56820
2120	Cap, 680p, 10%, 50v, Ceramic	3198 017 06810	3119	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
2121	Cap, 680p, 10%, 50v, Ceramic	3198 017 06810	3120	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
2122	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3121	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
2123	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3122	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
2124	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3124	Res, 910 ohm, 1%, 1/8W, Metalized Glass	2322 734 69101
2125	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3129	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2126	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3130	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2127	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3132	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
2129	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3133	Res, 100K, 5%, 1/10W, Metalized Glass.	3198 021 51040
2130	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3135	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230
2131	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3136	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2132	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3137	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2134	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3138	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2135	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3139	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2136	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	3140	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
2137	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	3141	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
2139	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3142	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
2140	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3143	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2141	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810	4004	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
2142	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810	4005	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3001	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4006	Res, Zero ohm, 'Chip' Jumper	3198 021 90020
3002	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210	5001	Coil, 820n	3198 018 38270
3003	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198 021 51050	5002	Coil, 1u2	3198 018 31280
3004	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	5003	Coil, 1u2	3198 018 31280
3005	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	5004	Coil, 1u2	3198 018 31280
3006	Res, 1K8, 5%, 1/10W, Metalized Glass .	3198 021 51820	5010	Coil, 820n	3198 018 38270
3007	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	5012	Coil, 820n	3198 018 38270
3008	Res, 150K, 5%, 1/10W, Metalized Glass. .	3198 021 51540	5014	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3009	Res, 13K, 5%, 1/8W, Metalized Glass. . .	2322 730 61133	5015	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3010	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	5016	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3011	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	5017	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3012	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5018	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3013	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	5019	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3014	Res, 150K, 5%, 1/10W, Metalized Glass. .	3198 021 51540	5020	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3015	Res, 13K, 5%, 1/8W, Metalized Glass. . .	2322 730 61133	5021	Coil, 82u.	2422 535 95408
3016	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	5023	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198 018 90060
3017	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5024	Coil, 1u8.	3198 018 31880
3018	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	6001	Diode, Signal, BAV99	3198 010 10620
3019	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	6002	Diode, Signal, BAV99	3198 010 10620
3020	Res, 150K, 5%, 1/10W, Metalized Glass. .	3198 021 51540	6003	Diode, Signal, BAV99	3198 010 10620
3021	Res, 13K, 5%, 1/8W, Metalized Glass. . .	2322 730 61133	6004	Diode, Signal, BAV99	3198 010 10620
3022	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	6005	Diode, Signal, BAV99	3198 010 10620
3023	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	6006	Diode, Signal, BAV99	3198 010 10620
3024	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	6009	Diode, Signal, BAV99	3198 010 10620
3025	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	6010	Diode, Signal, BAV99	3198 010 10620
3026	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	6011	Diode, Signal, BAS16WS	9322 031 99685
3027	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	6012	Diode, Signal, BAS16WS	9322 031 99685
3028	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	6013	Diode, Signal, BAS16WS	9322 031 99685
3029	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	6014	Diode, Signal, BAS16WS	9322 031 99685
3030	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	6015	Diode, Signal, BAS16WS	9322 031 99685
3031	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	6016	Diode, Signal, BAS16WS	9322 031 99685
3033	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	6017	Diode, Rect, MBRSL40.	9322 070 26668
3049	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	6018	Zener Diode, 6.8 volt.	9340 386 40115
3052	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	6019	Diode, Signal, BAS316.	3198 010 10630
3053	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	7000	F.E.T. Signal, BSN20	9340 125 00235
3056	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	7001	IC, LM393D	9339 575 30668
3057	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	7002	IC, LM393D	9339 575 30668
3058	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	7003	Transistor, NPN, BC847B.	3198 010 42030
3059	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	7004	Transistor, NPN, BC847B.	3198 010 42030
3060	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	7005	Transistor, NPN, BC847B.	3198 010 42030
3061	Res, 1M, 5%, 1/10W, Metalized Glass. . .	3198 021 51050	7006	Transistor, PNP, BC857B.	3198 010 42150
3062	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210	7007	FET Signal, BSN20.	9340 125 00235
3063	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198 021 58210	7010	FET Signal, BSN20.	9340 125 00235
3064	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198 021 52210	7011	IC, FS401AC.	9322 107 99671
3065	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7012	IC, HY57V161610DTC-10.	9322 161 58668
3066	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7013	FET Signal, BSN20.	9340 125 00235
3073	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7014	IC SM P87C51RD+4A SCAN 4	3135 120 50111
3074	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7016	IC, 74HC4066D.	9337 144 20653
3082	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7018	IC, M24C04-WMN6.	9322 122 33668
3085	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7019	Wire Jumper.	3198 036 90010
3089	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	7020	Transistor, PNP, BC857B.	3198 010 42150
3090	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350 035 10339	7021	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

27ST230P/35 (continued)

7022	IC, MC33269D-3.3	9322	106	88668
7023	IC, MC33269D-3.3	9322	106	88668
7024	IC, LM2596S-ADJ.	9322	130	86685
7028	FET Signal, BSH103	9340	547	13215
7036	FET Signal, BSH103	9340	547	13215
7037	Transistor, NPN, BC847B.	3198	010	42030
CBA	Scan 4 Card (part of Scan 4 Card Assemb ly).	3135	127	10281

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135	128	70011
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	45261
S	AC09	CRT, A68AJB82X11	9301	891	90631
	AC10	Customer Control Buttons	3139	124	30901
S	AC12	Degaussing Coil.	2422	549	43967
	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
	AC17	Owner's Manual, Scan 4 Card.	3135	125	21341
	AC20	Cabinet Front Assembly	3121	237	52392
	AC20A	Cabinet Front.	3135	127	50011
	AC20B	Chassis Guide (2 Used)	3139	124	31381
	AC20B	Chassis Guide.	3139	124	41711
	AC20C	Light Guide.	3139	124	26461
	AC20D	Nameplate.	3135	015	03571
	AC20E	Power Button	3139	124	26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
	AC22	Cinch Cover.	3139	124	25551
	AC26	EPS Bracket.	3119	107	17241
	AC27	ITV Card Bracket	3139	124	37933
	AC30	Scan 3 VGA Adapter	3135	017	07401
	AC31	Scan 4 Card Cover.	3139	124	45551
	REMOTE	Remote Control Transmitter, RC2572/01.	3139	228	88691

27ST240P/35 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
0212	2 Pin Connector.	2422 025 16375	2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0213	2 Pin Connector.	2422 025 16374	2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230
0217	6 Pin Connector.	2422 025 12482	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280
0218	A/V Jack	2422 026 04742	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0220	5 Pin Connector.	2422 025 04853	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0221	2 Pin Connector.	2422 025 15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector.	2422 025 10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0223	A/V Jack	2422 026 05236		er.	
0225	SVHS Jack.	2422 026 04926	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2222 368 90177
0227	6 Pin Connector.	2422 025 15849	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 558 90445
0229	3 Pin Connector.	2412 020 00725	2341	Cap, 3n3, 10%, 500v, Ceramic.	2020 012 93495
0240	7 Pin Connector.	2422 025 11244	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 019 43320
0242	7 Pin Connector.	2422 025 17042	2343	Cap, 2n2, 10%, 2000v, Ceramic.	3198 016 05610
0243	6 Pin Connector.	2422 025 04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	2020 558 90559
0244	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	3198 023 21040
0245	6 Pin Connector.	2422 025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	2020 558 90445
S 0254	9 Pin CRT Socket	2422 500 80076	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 025 32210
0259	5 Pin Connector.	2422 025 15848	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 016 03310
0262	3 Pin Connector.	2422 025 16937	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 025 51080
0267	3 Pin Connector.	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	2020 021 91139
0280	4 Pin Connector.	2422 025 12479	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
S 1000	Tuner, V+U, PLL	2422 542 90108	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
1002	SAW Filter, 45.75MHz	2422 549 44518	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	
1200	Filter, Ceramic, 4MHz5	2422 549 40807		ylene.	2022 333 00086
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1600	Tact Switch.	2422 128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1601	Tact Switch.	2422 128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1602	Tact Switch.	2422 128 02742	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with	
1603	Tact Switch.	2422 128 02742		5445 (JF0501-21835) Layer Wound. . . .	2020 558 90487
1606	Tact Switch.	2422 128 02742	S 2463	Cap, 680p, 10%, 2000v, Ceramic	2252 712 95024
1660	Crystal, 12MHz000	2422 543 01203	S 2465	Cap, 11n, 5%, 1600v, Polypropylene . .	2020 301 90251
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only	
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730		with 5445 (JF0501-21835) Layer Wound . .	2222 375 90156
2005	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020 021 90586
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590		pylene	2022 330 00018
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 024 90647
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2216	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2616	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
			2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210

S = Safety Part Be sure to use exact replacement part.

27ST240P/35 (continued)

2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 013 01520
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester.	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090		h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010		5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3182	Wire Jumper.	3198 036 90010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3507	Surge Protector.	2422 549 43073
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W.	2122 612 00056
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3223	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32210	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

27ST240P/35 (continued)

3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5001	Coil, 27u, 10%	3198	018	22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5002	Coil, 820n, 10%	3198	018	18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%	3198	018	16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3815	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5241	Wire Jumper	3198	036	90010
3816	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3817	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3818	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3819	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040		ound	2422	531	02611
3820	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B)	2422	531	02506
3821	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3861	Res, 100K, 5%, 1/16W, Metalized Glass .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5471	Coil, 3u3, 20%	3198	018	73380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5472	Coil, 3u3, 10%	3198	018	23380
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5480	Coil, 39u, 10%	2422	535	97336
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	S 5501	Mains Filter	2422	549	43432
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	S 5520	Transformer, SS39009-04.	2422	531	02459
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5602	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5603	Coil, 5u6, 5%	3198	018	15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	5604	Coil, 5u6, 5%	3198	018	15680
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6181	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4126	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21.	3198	010	10070
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4181	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6449	Diode, Signal, BAV99	3198	010	10620
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6460	Diode, Rect, BY228/24.	9340	559	50112

S = Safety Part Be sure to use exact replacement part.

27ST240P/35 (continued)

6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9419	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9421	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9422	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9423	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9425	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9427	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9460	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt.	3198	010	21590	9500	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9501	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9503	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt.	3198	010	23390	9506	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9507	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9510	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9511	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9513	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9514	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9516	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9518	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt.	3198	020	52290	9520	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9521	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt.	3198	020	51090	9522	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9524	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010	9322	128	18682	9528	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9530	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9611	Coil, 27u, 10%	3198	018	22790
6566	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9613	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9614	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9615	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85	9336	247	60133	9616	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9617	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9618	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9619	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9622	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9623	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57622	9626	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9627	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9628	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9629	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9631	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9632	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9634	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9637	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9638	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDTCL143ZT	9340	547	00215	9640	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9641	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9642	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9643	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9647	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9648	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9650	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9652	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9654	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9655	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDTCL14ET	9340	310	10215	9657	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9658	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ	9322	106	11676	9659	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PDTCL143ZT	9340	547	00215	9660	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9661	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9662	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9663	Wire Jumper.	3198	036	90010
7861	IC, TDA9853H/V1.	9352	671	19557	9664	Wire Jumper.	3198	036	90010
7891	Transistor, NPN, BC847B(COL)	3198	010	42030	9665	Wire Jumper.	3198	036	90010
7892	Transistor, NPN, BC847B(COL)	3198	010	42030	9666	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH	9322	181	41682	9667	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9181	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9183	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290
9193	Wire Jumper.	3198	036	90010	9679	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9680	Wire Jumper.	3198	036	90010
9312	Wire Jumper.	3198	036	90010	9681	Wire Jumper.	3198	036	90010
9406	Wire Jumper.	3198	036	90010	9685	Wire Jumper.	3198	036	90010
9407	Wire Jumper.	3198	036	90010	9686	Wire Jumper.	3198	036	90010
9408	Wire Jumper.	3198	036	90010	9687	Wire Jumper.	3198	036	90010
9409	Wire Jumper.	3198	036	90010	9688	Wire Jumper.	3198	036	90010
9410	Wire Jumper.	3198	036	90010	9689	Wire Jumper.	3198	036	90010
9411	Wire Jumper.	3198	036	90010	9690	Wire Jumper.	3198	036	90010
9412	Wire Jumper.	3198	036	90010	9691	Wire Jumper.	3198	036	90010
9413	Wire Jumper.	3198	036	90010	9694	Wire Jumper.	3198	036	90010
9415	Wire Jumper.	3198	036	90010	9695	Wire Jumper.	3198	036	90010
9416	Wire Jumper.	3198	036	90010	9697	Wire Jumper.	3198	036	90010
9417	Wire Jumper.	3198	036	90010	9698	Wire Jumper.	3198	036	90010
9418	Wire Jumper.	3198	036	90010	9699	Wire Jumper.	3198	036	90010

S = Safety Part. Be sure to use exact replacement part.

27ST240P/35 (continued)

9821	Wire Jumper.	3198	036	90010	S AC01	AC Cord.	3135	128	70011
9822	Wire Jumper.	3198	036	90010	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
9825	Wire Jumper.	3198	036	90010	AC05	Cabinet Back	3139	124	45261
9828	Wire Jumper.	3198	036	90010	S AC09	CRT, A68AJB82X11	9301	891	90631
9829	Wire Jumper.	3198	036	90010	AC10	Customer Control Buttons	3139	124	30901
9831	Wire Jumper.	3198	036	90010	S AC12	Degaussing Coil.	2422	549	43967
9832	Wire Jumper.	3198	036	90010	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
9837	Wire Jumper.	3198	036	90010	AC20	Cabinet Front Assembly	3121	237	52392
9838	Wire Jumper.	3198	036	90010	AC20A	Cabinet Front.	3135	127	50011
9839	Wire Jumper.	3198	036	90010	AC20B	Chassis Guide (2 Used)	3139	124	31381
9846	Wire Jumper.	3198	036	90010	AC20B	Chassis Guide.	3139	124	41711
9847	Wire Jumper.	3198	036	90010	AC20C	Light Guide.	3139	124	26461
9849	Wire Jumper.	3198	036	90010	AC20D	Nameplate.	3135	015	03571
9850	Wire Jumper.	3198	036	90010	AC20E	Power Button	3139	124	26444
9851	Wire Jumper.	3198	036	90010	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
9852	Wire Jumper.	3198	036	90010	AC22	Cinch Cover.	3139	124	25551
9853	Wire Jumper.	3198	036	90010	AC26	EPS Bracket.	3119	107	17241
9856	Wire Jumper.	3198	036	90010	AC27	ITV Card Bracket	3139	124	37933
9860	Wire Jumper.	3198	036	90010	AC28	ITV Card Slot Cover.	3139	124	30571
9861	Wire Jumper.	3198	036	90010	ITV	Institutional Interconnect Device (Mode			
9862	Wire Jumper.	3198	036	90010		1 27ST240P/35 Only).	0Net	1DE	VX/35
9864	Wire Jumper.	3198	036	90010					
9865	Wire Jumper.	3198	036	90010					
9868	Wire Jumper.	3198	036	90010					
9873	Wire Jumper.	3198	036	90010					
9874	Wire Jumper.	3198	036	90010					
9875	Wire Jumper.	3198	036	90010					
9877	Wire Jumper.	3198	036	90010					
9891	Wire Jumper.	3198	036	90010					
9892	Wire Jumper.	3198	036	90010					
9901	Wire Jumper.	3198	036	90010					
9902	Wire Jumper.	3198	036	90010					
9903	Wire Jumper.	3198	036	90010					
9904	Wire Jumper.	3198	036	90010					
9905	Wire Jumper.	3198	036	90010					
9911	Wire Jumper.	3198	036	90010					
9913	Wire Jumper.	3198	036	90010					
9914	Wire Jumper.	3198	036	90010					
9915	Wire Jumper.	3198	036	90010					
9918	Wire Jumper.	3198	036	90010					
9919	Wire Jumper.	3198	036	90010					
9920	Wire Jumper.	3198	036	90010					
9991	Wire Jumper.	3198	036	90010					
9996	Wire Jumper.	3198	036	90010					
9998	Wire Jumper.	3198	036	90010					
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372					
CBA	EPS Module (ITV)	3139	137	22961					
CBA	Main Chassis Assembly.	3139	187	26831					
CBA	Interface Panel (ITV).	3139	188	04541					

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

ITV Institutional Interconnect Device (For
ITV Models Only) 0Net 1DE VX/35

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0212	2 Pin Connector.	2422 025 16375	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0213	2 Pin Connector.	2422 025 16374	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0219	6 Pin Connector.	2422 025 12482	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0220	5 Pin Connector.	2422 025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0221	2 Pin Connector.	2422 025 15503	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0222	2 Pin Connector.	2422 025 10646	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0223	A/V Jack.	2422 026 05236	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0225	SVHS Jack.	2422 026 04926	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0240	7 Pin Connector.	2422 025 11244	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
0243	6 Pin Connector.	2422 025 04854	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
0244	5 Pin Connector.	2422 025 04853	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
0245	6 Pin Connector.	2422 025 04854	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
S 0254	9 Pin CRT Socket.	2422 500 80076	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
0259	5 Pin Connector.	2422 025 15848	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
0262	3 Pin Connector.	2422 025 16937	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
0267	3 Pin Connector.	2412 020 00725	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
0280	4 Pin Connector.	2422 025 12479	2463	Cap, 680p, 10%, 2000v, Ceramic.	2020 558 90485
S 1000	Tuner, V+U, PLL.	2422 542 90108	S 2465	Cap, 11n, 5%, 1600v, Polypropylene.	2020 301 90251
1002	SAW Filter, 45.75MHz.	2422 549 44518	2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1600	Tact Switch.	2422 128 02742	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1601	Tact Switch.	2422 128 02742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
1602	Tact Switch.	2422 128 02742	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
1603	Tact Switch.	2422 128 02742	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
1606	Tact Switch.	2422 128 02742	2482	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
1660	Crystal, 12MHz000.	2422 543 01203	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2123	Res, Zero ohm, 'Chip' Jumper.	3198 021 90020	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2125	Res, Zero ohm, 'Chip' Jumper.	3198 021 90020	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2254	Res, Zero ohm, 'Chip' Jumper.	3198 021 90020	2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2331	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445	2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320	2843	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
			2844	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
			2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 (continued)

2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3123	Wire Jumper.	3198 036 90010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3125	Wire Jumper.	3198 036 90010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3217	Res, 330K, 5%, 1/16W, Metalized Glass .	3198 021 33340	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13070
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	S 3558	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520	3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 (continued)

3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	5001	Coil, 27u, 10%	3198 018 22790
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5002	Coil, 820n, 10%	3198 018 18270
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5201	Coil, 6u8, 5%	3198 018 16880
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5202	Wire Jumper.	3198 036 90010
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5241	Wire Jumper.	3198 036 90010
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5242	Coil, 10u, 5%	3198 018 11090
3686	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520	5342	Coil, 22u.	2422 535 97333
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	S 5445	Transformer, LOT (1342.0043B).	2422 531 02506
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5451	Coil, 33u, 10%	3198 018 73390
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 5457	Coil, 42u.	2422 535 94865
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 3u3, 20%	3198 018 73380
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 39u, 10%	2422 535 97336
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS39009-04.	2422 531 02459
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5602	Coil, 5u6, 5%	3198 018 15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5604	Coil, 5u6, 5%	3198 018 15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5831	Coil, 6u8, 5%	3198 018 16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	5832	Coil, 6u8, 5%	3198 018 16880
3901	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5833	Coil, 6u8, 5%	3198 018 16880
3902	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	5835	Coil, 12u, 10%	3198 018 31290
3903	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass . .	3198 021 33320	6202	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	6206	Zener Diode, 6.8 volt.	3198 020 56880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	6331	Diode, Signal, BAV21	3198 010 10070
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6447	Diode, Signal, 1N4148.	3198 010 10010
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99	3198 010 10620
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6460	Diode, Rect, BY228/24.	9340 559 50112
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6462	Zener Diode, 9.1 volt.	9331 177 80133
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21	3198 010 10070
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6466	Diode, Signal, BAV21	3198 010 10070
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6467	Diode, Signal, BAS316.	3198 010 10630
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6468	Diode, Signal, BAS316.	3198 010 10630
4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6469	Diode, Rect, BYV95C.	9335 001 80133
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6485	Diode, Rect, BYV95C.	9335 001 80133
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6540	Zener Diode, 6.2 volt.	9331 668 30133
4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6541	Zener Diode, 10 volt	3198 020 51090
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6561	Diode, Rect, SB340L-7010	9322 128 18682
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010
4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6569	Diode, Signal, BAS316.	3198 010 10630
4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6570	Zener Diode, 6.8 volt.	3198 020 56880
4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6580	Diode, Signal, BAS316.	3198 010 10630
4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6681	Diode, Signal, BAT85	9336 247 60133
4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6691	LED, LTL-10234WHCR	9322 185 69682

S = Safety Part Be sure to use exact replacement part.

27ST420L/17 (continued)

6692	IR Receiver.	9322 127 54667	9623	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9626	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9627	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9628	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I	4835 310 57626	9631	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9637	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9640	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9642	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9643	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9647	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9648	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9650	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9652	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9654	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9655	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9657	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9658	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9659	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9660	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9661	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9662	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9663	Wire Jumper.	3198 036 90010
7560	IC, LE33CZ	9322 106 11676	9664	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9665	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9666	Wire Jumper.	3198 036 90010
7602	IC, M24C16-WBN6.	9322 147 25682	9667	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9668	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9669	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9670	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9123	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9182	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010	9858	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010	9859	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9862	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9864	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9865	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010	9867	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010	9869	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010	9873	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010	9874	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010	9875	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010	9877	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010	9901	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010	9902	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010	9903	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790	9904	Wire Jumper.	3198 036 90010
9612	Wire Jumper.	3198 036 90010	9905	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010	9911	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010	9913	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010	9914	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010	9915	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010	9919	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010	9920	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

27ST420L/17 (continued)

9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	EPS Module (ITV).	3139	137	22961
CBA	Main Chassis Assembly.	3139	187	26851
CBA	Interface Panel (ITV).	3139	188	04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

1002	3 Pin A/V Jack	2422	026	05208
1219	6 Pin Board Connector.	2422	025	10738
2002	Cap, 330p, 50v, Ceramic.	3198	017	03310
2004	Cap, 330p, 50v, Ceramic.	3198	017	03310
3001	Res, 75 ohm, 5%.	3198	021	57590
3002	Res, 150 ohm, 5%.	3198	021	51510
3003	Res, 47k, 5%.	3198	021	54730
3004	Res, 150 ohm, 5%.	3198	021	51510
3005	Res, 47k, 5%.	3198	021	54730
6001	Zener Diode, 6.8V.	3198	020	56880
CBA	ITV Front Jack Panel Assembly.	3139	187	26901

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	07161
AC03	Anode Lead Spacer (3 Used).	3135	014	04471
AC05	Cabinet Back	3139	124	45241
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	124	42141
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC20	Cabinet Front Assembly	3121	237	53571
AC20A	Cabinet Front.	3135	017	07161
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	42151
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC26	EPS Bracket.	3119	107	17241
AC27	ITV Card Bracket	3139	124	37933
AC28	ITV Card Slot Cover.	3139	124	30571

27ST421L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0212	2 Pin Connector.	2422 025 16375	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0213	2 Pin Connector.	2422 025 16374	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0219	6 Pin Connector.	2422 025 12482	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0220	5 Pin Connector.	2422 025 04853	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0221	2 Pin Connector.	2422 025 15503	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0222	2 Pin Connector.	2422 025 10646	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0223	A/V Jack.	2422 026 05236	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0225	SVHS Jack.	2422 026 04926	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0240	7 Pin Connector.	2422 025 11244	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
0243	6 Pin Connector.	2422 025 04854	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
0244	5 Pin Connector.	2422 025 04853	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
0245	6 Pin Connector.	2422 025 04854	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
S 0254	9 Pin CRT Socket.	2422 500 80076	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
0259	5 Pin Connector.	2422 025 15848	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
0262	3 Pin Connector.	2422 025 16937	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
0267	3 Pin Connector.	2412 020 00725	2462	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
0280	4 Pin Connector.	2422 025 12479	2463	Cap, 1n, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020 558 90487
S 1000	Tuner, V+U, PLL.	2422 542 90108	2463	Cap, 680p, 10%, 2000v, Ceramic.	2020 558 90485
1002	SAW Filter, 45.75MHz.	2422 549 44518	S 2465	Cap, 11n, 5%, 1600v, Polypropylene.	2020 301 90251
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound.	2222 375 90156
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2471	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154
1600	Tact Switch.	2422 128 02742	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104
1601	Tact Switch.	2422 128 02742	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1602	Tact Switch.	2422 128 02742	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1603	Tact Switch.	2422 128 02742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
1606	Tact Switch.	2422 128 02742	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
1660	Crystal, 12MHz000.	2422 543 01203	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	2482	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2123	Res, Zero ohm, 'Chip' Jumper.	3198 021 90020	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2125	Res, Zero ohm, 'Chip' Jumper.	3198 021 90020	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2616	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710
2254	Res, Zero ohm, 'Chip' Jumper.	3198 021 90020	2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445	2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320	2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090

S = Safety Part Be sure to use exact replacement part.

27ST421L/17 (continued)

2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2843	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2844	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . .	3198 011 01520
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080		h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3452	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020		5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3454	Res, 3K9, 1%, 3/5W, Metal Film.	2312 915 13902
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3123	Wire Jumper.	3198 036 90010	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3125	Wire Jumper.	3198 036 90010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3507	Surge Protector.	2422 549 43073
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper.	3198 021 90020
3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720
3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903	3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306 204 03222
3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840	3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520
3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3543	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530
3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060	3552	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 3558	Res, 330 ohm, 5%, 1W, Metal Film. . . .	3198 012 13310
3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3563	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3566	Res, 2K2, 5%, 1/10W, Metalized Glass. .	3198 021 52220
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3569	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3580	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310

S = Safety Part Be sure to use exact replacement part.

27ST421L/17 (continued)

3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5001	Coil, 27u, 10%	3198	018	22790
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5002	Coil, 820n, 10%	3198	018	18270
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5201	Coil, 6u8, 5%	3198	018	16880
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5202	Wire Jumper.	3198	036	90010
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021	53320	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5241	Wire Jumper.	3198	036	90010
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5242	Coil, 10u, 5%	3198	018	11090
3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	5342	Coil, 22u.	2422	535	97333
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210		ound	2422	531	02611
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	S 5445	Transformer, LOT (1342.0043B)	2422	531	02506
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5451	Coil, 33u, 10%	3198	018	73390
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 39u, 10%	2422	535	97336
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5520	Transformer, SS39009-04.	2422	531	02459
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	5561	Coil, 27u, 5%	2422	535	95366
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5602	Coil, 5u6, 5%	3198	018	15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5604	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5831	Coil, 6u8, 5%	3198	018	16880
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5832	Coil, 6u8, 5%	3198	018	16880
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5833	Coil, 6u8, 5%	3198	018	16880
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	5835	Coil, 12u, 10%	3198	018	31290
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6201	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220	6202	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6449	Diode, Signal, BAV99	3198	010	10620
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6460	Diode, Rect, BY228/24.	9340	559	50112
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6462	Zener Diode, 9.1 volt.	9331	177	80133
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6465	Diode, Signal, BAV21	3198	010	10070
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6466	Diode, Signal, BAV21	3198	010	10070
4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6467	Diode, Signal, BAS316.	3198	010	10630
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6468	Diode, Signal, BAS316.	3198	010	10630
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6469	Diode, Rect, BYV95C.	9335	001	80133
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6470	Diode, Signal, BAV99	3198	010	10620
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6476	Zener Diode, 15 volt	3198	010	21590
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6481	Zener Diode, 5.6 volt.	3198	010	25680
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6482	Zener Diode, 9.1 volt.	9331	177	80133
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6483	Zener Diode, 33 volt	3198	010	23390
4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6485	Diode, Rect, BYV95C.	9335	001	80133
4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6486	Diode, Rect, EGP20DL-5100.	9322	164	42682
4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6487	Diode, Rect, BYV95A.	9335	000	90133
4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6488	Diode, Rect, EGP20DL-5100.	9322	164	42682
4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667
4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6520	Diode, Rect, BYV95A.	9335	000	90133
4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6523	Diode, Signal, 1N4148.	3198	010	10010
4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6524	Diode, Rect, 1N5062.	3198	010	10120
4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6525	Diode, Rect, 1N5062.	3198	010	10120
4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6526	Zener Diode, 22 volt	3198	020	52290
4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6540	Zener Diode, 6.2 volt.	9331	668	30133
4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6541	Zener Diode, 10 volt	3198	020	51090

S = Safety Part Be sure to use exact replacement part.

27ST421L/17 (continued)

6560	Diode, Rect, BYV29X-500.	9340 555 59127	9528	Wire Jumper.	3198 036 90010
6561	Diode, Rect, SB340L-7010	9322 128 18682	9530	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9611	Coil, 27u, 10%	3198 018 22790
6565	Diode, Signal, BAV70	9331 849 10215	9612	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9613	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9614	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9615	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9618	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85	9336 247 60133	9619	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9622	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9623	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9626	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9627	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9628	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I	4835 310 57626	9631	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9637	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9640	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9642	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9643	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9647	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDT143ZT	9340 547 00215	9648	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9650	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9652	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9654	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9655	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9657	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9658	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9659	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9660	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9661	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDT114ET	9340 310 10215	9662	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9663	Wire Jumper.	3198 036 90010
7560	IC, LE33CZ	9322 106 11676	9664	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDT143ZT	9340 547 00215	9665	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9666	Wire Jumper.	3198 036 90010
7602	IC, M24C16-WBN6.	9322 147 25682	9667	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9668	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9669	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9670	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9123	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9182	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010	9858	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010	9859	Wire Jumper.	3198 036 90010
9510	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9862	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9864	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9865	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010	9867	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010	9869	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010	9873	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010	9874	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010	9875	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010	9877	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010	9901	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

27ST421L/17 (continued)

9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9919	Wire Jumper.	3198	036	90010
9920	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27372
CBA	EPS Module (ITV)	3139	137	22961
CBA	Main Chassis Assembly.	3139	187	26851
CBA	Interface Panel (ITV).	3139	188	04541

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

1002	3 Pin A/V Jack	2422	026	05208
1219	6 Pin Board Connector.	2422	025	10738
2002	Cap, 330p, 50v, Ceramic.	3198	017	03310
2004	Cap, 330p, 50v, Ceramic.	3198	017	03310
3001	Res, 75 ohm, 5%.	3198	021	57590
3002	Res, 150 ohm, 5%	3198	021	51510
3003	Res, 47k, 5%	3198	021	54730
3004	Res, 150 ohm, 5%	3198	021	51510
3005	Res, 47k, 5%	3198	021	54730
6001	Zener Diode, 6.8V.	3198	020	56880
CBA	ITV Front Jack Panel Assembly.	3139	187	26901

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	07161
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45241
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	124	45731
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC20	Cabinet Front Assembly	3121	237	53581
AC20A	Cabinet Front.	3139	177	62021
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	45741
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC26	EPS Bracket.	3119	107	17241
AC27	ITV Card Bracket	3139	124	37933
AC28	ITV Card Slot Cover.	3139	124	30571

28PW6532/85R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Socket Fuse	2422	088	00271	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020 012 93728
0127	IC-Spring	3104	301	22081	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
0136	Spring	3139	121	24583	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
0137	IC-Spring	3104	301	22081	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
0138	Spring for Bracket	3122	121	24786	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
0139	Spring	3139	121	24583	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
0140	IC-Spring	3104	301	22081	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0141	Cable, DIP, 6 Pin, 400mm	3104	301	09421	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222 368 90177
0152	Cable, DIPMate	3104	301	08381	2331	Cap, 10n, +80/-20% 1000v, Ceramic . . .	2020 558 90445
0153	2 Pin Connector	2422	025	16374	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495
0211	2 Pin Connector	2422	025	16375	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0212	5 Pin Connector	2422	025	12481	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
0214	6 Pin Connector	2422	025	12482	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
0219	5 Pin Connector	2422	025	04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
0220	2 Pin Connector	2422	025	15503	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . . .	2020 558 90445
0221	2 Pin Connector	2422	025	10646	2360	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
0222	A/V Jack	2422	026	05236	2362	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210
0225	SVHS Jack	2422	026	04926	2364	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
0239	3 Pin Connector	2422	025	16382	2365	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
0243	6 Pin Connector	2422	025	04854	2367	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
0244	5 Pin Connector	2422	025	04853	2368	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
0245	6 Pin Connector	2422	025	04854	2369	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
0246	5 Pin Connector	2422	025	12481	2372	Cap, 10u, 20%, 160v, Electrolytic	2020 012 93318
0267	3 Pin Connector	2412	020	00725	2373	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
0268	3 Pin Connector	2412	020	00725	2375	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
0269	Jack	2422	026	05182	2378	Cap, 220p, 5%, 50v, Ceramic	3198 019 02210
0278	3 Pin Connector	2412	020	00725	2379	Cap, 10u, 20%, 100v, Electrolytic	3198 025 71090
1002	SAW Filter, 45.75MHz	2422	549	44518	2380	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
1200	Filter, Ceramic, 4MHz5	2422	549	40807	2381	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
S 1500	Fuse, 4A, 250V, IEC	2422	086	10914	2401	Cap, 2u2, 20%, 100v, Electrolytic	2022 031 00138
1660	Crystal, 12MHz000	2422	543	01203	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
1831	Crystal, Resonator, 18MHz432, 12 Pin, H				2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
	C49/U A	2422	543	00842	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
1851	3 Pin Connector	2412	020	00725	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024	44730	2420	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2421	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
2006	Cap, 470u, 20%, 16v, Electrolytic . . .	3198	025	24710	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2007	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023	41040	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
2008	Cap, 100u, 20%, 25v, Electrolytic . . .	3198	025	31010	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2448	Cap, 100p, 10%, 1000v, Ceramic	3198 019 51010
2101	Cap, 470n, +80/-20%, 16v, Ceramic . . .	3198	017	24740	2450	Cap, 47u, 20%, 160v, Electrolytic	2022 031 00103
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2454	Cap, 68n, 5%, 250v, Metalized Polypropy	2222 479 90133
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	2222 479 90023
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2465	Cap, 12n, 5%, 1600v, Polypropylene . . .	2222 375 90156
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2467	Cap, 9n1, 5%, 1000v, Polypropylene . . .	2222 375 90424
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2468	Cap, 9n1, 5%, 1000v, Polypropylene . . .	2222 375 90424
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2469	Cap, 470n, 5%, 250v, Metalized Polyprop	2222 479 90023
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2480	Cap, 47u, 20%, 25v, Electrolytic	2038 035 13301
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2485	Cap, 4u7, 20%, 250v, Electrolytic	2022 031 00137
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2486	Cap, 470u, 20%, 16v, Electrolytic	2022 031 00139
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786	19852	2487	Cap, 47u, 20%, 50v, Electrolytic	2038 035 13508
2172	Cap, 100p, 5%, 50v, Ceramic	3198	016	31010	2488	Cap, 1000u, 20%, 16v, Electrolytic	2022 031 00144
2173	Cap, 220p, 5%, 50v, Ceramic	3198	016	32210	2489	Cap, 470u, 20%, 16v, Electrolytic	2022 031 00139
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2490	Cap, 2u2, 20%, 100v, Electrolytic	2022 031 00138
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2500	Cap, 470n, 20%, 275v, Metalized Polypro	2222 336 29148
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2503	Cap, 330u, 20%, 400v, Electrolytic	2020 024 90592
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017	42240	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017	41050	2509	Cap, 100n, 20%, 275v, Metalized Polypro	2222 336 29144
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017	44740	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90128
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2216	Cap, 2u2, 20%, 10v, Electrolytic	2020	012	93728	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017	42240	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2220	Cap, 470n, 10%, 50v, Polyester	3198	014	04740	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017	31520	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017	41050			
2243	Cap, 10n, 10%, 50v, Ceramic	3198	017	31030			
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370	76104			
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017	42240			
2246	Cap, 10n, 10%, 100v, Metalized Polyeste	2222	365	85103			

S = Safety Part Be sure to use exact replacement part.

28PW6532/85R (continued)

2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374	3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030
2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790	3180	Res, 68K, 5%, 1/16W, Metalized Glass . .	3198 021 36830
2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	3181	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
2590	Cap, 330n, +80/-20%, 25v, Ceramic. . . .	2222 910 19856	3190	Res, 68K, 5%, 1/16W, Metalized Glass . .	3198 021 36830
2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3206	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3248	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3257	Res, 10M, 5%, 1/16W, Metalized Glass . .	3198 021 31060
2851	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2853	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2861	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass . .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3361	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass . .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3378	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3380	Res, 68K, 5%, 1/16W, Metalized Glass . .	3198 021 36830
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3381	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3383	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3443	Res, 1M, 5%, 1/10W, Metalized Glass. . .	3198 021 51050
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210

S = Safety Part Be sure to use exact replacement part.

28PW6532/85R (continued)

3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3452	Res, 47K, 1%, 3/5W, Metal Film	2312 915 14703	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3454	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90020	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3470	Res, 470K, 5%, 1/10W, Metalized Glass. .	3198 021 54740	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720	3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3481	Res, 18K, 1%, 3/5W, Metal Film	2312 915 11803	3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3851	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
3495	Res, 22K, 5%, 1/10W, Metalized Glass .	3198 021 52230	3852	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3496	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198 021 51040	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3497	Res, 100K, 5%, 1/10W, Metalized Glass. .	3198 021 51040	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
S 3504	Res, PTC, 9R 220V.	2120 661 00024	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3507	Surge Protector.	2422 549 43073	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 22 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02290	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 1%, 1/8W, Metalized Glass .	2322 734 63304	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03479	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3526	Res, OR15, 5%, 3/5W, Metal Film. . . .	3198 012 11570	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3527	Res, OR22, 5%, 3/5W, Metal Film. . . .	3198 012 12270	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020	7101	Transistor, NPN, BC847B(COL)	3198	010	42030
4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020	7102	Transistor, PNP, BC857B(COL)	3198	010	42150
5001	Coil, 5u6.	3198	018	25680	7103	Transistor, NPN, BC847B(COL)	3198	010	42030
5002	Coil, 820n, 10%.	3198	018	18270	7201	Transistor, NPN, BC847B(COL)	3198	010	42030
5201	Coil, 6u8, 5%.	3198	018	16880	7204	Transistor, PNP, BC857B(COL)	3198	010	42150
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7205	Transistor, PNP, BC857B(COL)	3198	010	42150
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7360	Transistor, NPN, BC847B(COL)	3198	010	42030
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7366	Transistor, PNP, 2SA965.	9322	167	18676
5242	Coil, 10u, 5%.	3198	018	11090	7369	Transistor, PNP, BC857B(COL)	3198	010	42150
5341	Coil, 22u.	2422	535	97333	7373	Transistor, PNP, BC327-25(COL)	3198	020	43430
5342	Coil, 27u.	2422	535	97334	7380	Transistor, NPN, 2SC2235	9322	167	19676
5376	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7382	Transistor, NPN, BC337-25(COL)	3198	020	43530
5400	Coil, 11u7	2422	535	91027	7400	Power FET, STP3NC60FP.	9322	157	37687
5451	Coil, 22u, 10%.	3198	018	72290	7441	Transistor, PNP, BC857B(COL)	3198	010	42150
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7443	Transistor, PNP, BC557B(COL)	3198	020	40110
5461	Transformer, Signal Driver, SC10015-00	2422	531	02477	7444	Transistor, NPN, BC547B(COL)	3198	020	40030
5464	Coil, Bridge, C946-01 Y.	2422	531	02419	7450	Transistor, NPN, PDTA114ET	3198	010	44010
5471	Coil, 6u8, 20%.	3198	018	76880	7460	Transistor, NPN, BU4508DX.	9340	550	92127
5472	Coil, 3u3, 10%.	3198	018	23380	7461	Transistor, NPN, BC337-25(COL)	3198	020	43530
5480	Coil, 39u, 10%.	2422	535	97336	7462	Transistor, NPN, PPTC143ZT	9340	547	00215
5500	Mains Filter	2422	549	43567	7463	Transistor, PNP, BC327-25(COL)	3198	020	43430
5501	Mains Filter	2422	549	43432	7471	IC, TDA8359J/N2.	9352	701	64112
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7480	Transistor, NPN, BD135	3198	020	41010
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7482	Transistor, NPN, BD135	3198	020	41010
5561	Coil, 27u, 5%.	2422	535	95366	7520	IC, TEA1507P/N1.	9352	673	56112
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7522	Transistor, NPN, BC847B(COL)	3198	010	42030
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7540	Transistor, NPN, BC547B(COL)	3198	020	40030
5602	Coil, 5u6, 5%.	3198	018	15680	7541	Transistor, NPN, PPTC114ET	9340	310	10215
5603	Coil, 5u6, 5%.	3198	018	15680	7542	Transistor, PNP, BC857B(COL)	3198	010	42150
5604	Coil, 5u6, 5%.	3198	018	15680	7560	IC, L78L33ACZ.	9322	134	92676
5831	Coil, 6u8, 5%.	3198	018	16880	7561	Transistor, NPN, PPTC143ZT	9340	547	00215
5832	Coil, 6u8, 5%.	3198	018	16880	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
5833	Coil, 6u8, 5%.	3198	018	16880	7602	IC, M24C08-WBN6.	9322	154	38682
5835	Coil, 12u, 10%.	3198	018	31290	7606	Transistor, NPN, PPTC143ZT	9340	547	00215

S = Safety Part Be sure to use exact replacement part.

28PW6532/85R (continued)

0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198	011	01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198	011	01210
6161	Zener Diode, 6.8 volt.	3198	010	26880
CBA	Side Jack Panel Assembly	3139	187	16211

Subwoofer Panel Parts

Subwoofer Panel Parts				
1901	Connector, 3 Pin	2422	025	09191
1902	Cinch Socket	2422	026	05156
2901	Cap, 100u, 20%, 25v, Electrolytic.	3198	029	31010
2902	Cap, 100p, 10%, 50v, Ceramic	3198	019	11010
3901	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198	011	01510
CBA	Subwoofer Panel Assembly	3139	187	11641

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3139	128	75281
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	44061
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	43031
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, W66ERF022X013	9301	888	10314
S AC12	Degaussing Coil.	3106	101	02381
AC13	Front Interface Panel Bracket.	3139	124	32523
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21141
AC18	Quick Use Guide.	3121	233	44521
AC19	Side Jack Panel Bracket.	3139	124	37662
AC20	Cabinet Front Assembly	3121	237	53381
AC20A	Cabinet Front.	3139	124	44141
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10681
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
AC20J	Top Control Assembly	3139	177	56381
REMOTE	Remote Control Transmitter, RC19335010/01.	3139	238	02791

29DV6931/85R - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0130	Bead, Ferrite, 100MHz	2422	549 45808	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0211	2 Pin Connector	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector	2422	025 16375		er.	2222	368 90177
0214	5 Pin Connector	2422	025 12481	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445
0217	3 Pin Connector	2412	020 00725	2340	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0219	6 Pin Connector	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0221	2 Pin Connector	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0222	2 Pin Connector	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack	2422	026 04926	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
0229	7 Pin Connector	2422	025 11244	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
0239	3 Pin Connector	2422	025 16382	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0240	4 Pin Connector	2422	025 12479	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
0243	6 Pin Connector	2422	025 04854	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
0244	5 Pin Connector	2422	025 04853	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0245	6 Pin Connector	2422	025 04854	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
0246	5 Pin Connector	2422	025 12481	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0251	4 Pin Connector	2422	025 15847	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
S 0254	9 Pin CRT Socket	2422	500 80076	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
0267	3 Pin Connector	2412	020 00725	2452	Cap, 180p, 5%, 50v, Ceramic	3198	016 01810
0269	Jack	2422	026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
S 1000	Tuner, V+U, PLL	2422	542 90108	2457	Cap, 360n, 5%, 250v, Metalized Polyprop		
1002	SAW Filter, 45.75MHz	2422	549 44518		ylene.	2022	333 00163
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
1660	Crystal, 12MHz000	2422	543 01203	S 2463	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
1810	6 Pin Connector	2422	025 15849	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
1831	Crystal, Resonator, 18MHz432, 12 Pin, H				lene	2222	479 90042
	C49/U A	2422	543 00842	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020	301 90255
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2468	Cap, 27n, 10%, 400v, Polyester	2222	347 90232
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2482	Cap, 120n, 5%, 250v, Metalized Polyprop		
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090		ylene.	2222	479 90051
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250		pylene	2022	330 00018
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2525	Cap, 470p, 10%, 500v, Ceramic	3198	017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222	910 19856
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2604	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2606	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
2243	Cap, 2n2, 10%, 50v, Ceramic	3198	017 32220	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198	017 21050
				2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	S 3527	Res, OR33, 5%, 3/5W, Metal Film.	3198 012 13370

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306	204	03109	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	5001	Coil, 27u, 10%	3198	018	22790
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5002	Coil, 820n, 10%	3198	018	18270
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5201	Coil, 6u8, 5%	3198	018	16880
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5202	Wire Jumper.	3198	036	90010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5241	Wire Jumper.	3198	036	90010
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5242	Coil, 10u, 5%	3198	018	11090
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5341	Coil, 22u.	2422	535	97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5342	Coil, 3u9, 10%	2422	535	97323
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5401	Coil, 1mH, 10%	3198	018	71020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5445	Transformer, LOT	2422	531	02574
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5451	Coil, 22u, 10%	3198	018	72290
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	S 5457	Coil, 25u.	2422	535	91028
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5463	Coil, Choke.	3128	138	37021
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 6u8, 20%	3198	018	76880
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5561	Coil, 27u, 5%	2422	535	95366
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	5602	Coil, 5u6, 5%	3198	018	15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5604	Coil, 5u6, 5%	3198	018	15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5831	Coil, 6u8, 5%	3198	018	16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5832	Coil, 6u8, 5%	3198	018	16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5833	Coil, 6u8, 5%	3198	018	16880
3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820	5835	Coil, 12u, 10%	3198	018	31290
3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	6150	Diode, Signal, BAS316.	3198	010	10630
3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730	6201	Diode, Signal, BAS316.	3198	010	10630
3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730	6202	Diode, Signal, BAS316.	3198	010	10630
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198	011	08210	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6445	Zener Diode, 10 volt	3198	020	51090
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6447	Diode, Signal, 1N4148.	3198	010	10010
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6448	Zener Diode, 6.2 volt.	9331	668	30133
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6467	Diode, Signal, BAS316.	3198	010	10630
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6469	Diode, Rect, BYV95C.	9335	001	80133

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

6470	Diode, Signal, BAV99	3198 010 10620	9415	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9416	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9417	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9418	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9419	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9421	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9424	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9518	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9520	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9521	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9522	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9528	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557	9611	Coil, 27u, 10%	3198 018 22790
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9614	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9615	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9618	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9620	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9621	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9622	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTCL43ZT	9340 547 00215	9623	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9624	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9626	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9627	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9629	Wire Jumper.	3198 036 90010
7520	IC, TEAL507P/N1.	9352 673 56112	9631	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9632	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9633	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9637	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCL14ET	9340 310 10215	9638	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9641	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDTCL43ZT	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9644	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PDTCL43ZT	9340 547 00215	9645	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9408	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29DV6931/85R (continued)

9689	Wire Jumper.	3198	036	90010	2113	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9690	Wire Jumper.	3198	036	90010	2114	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9691	Wire Jumper.	3198	036	90010	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9694	Wire Jumper.	3198	036	90010	2185	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9695	Wire Jumper.	3198	036	90010	2263	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040
9697	Wire Jumper.	3198	036	90010	2300	Cap, 10u, 20%, 250v, Electrolytic. . .	2020	012	93495
9698	Wire Jumper.	3198	036	90010	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222	365	55223
9699	Wire Jumper.	3198	036	90010	2302	Cap, 100p, 10%, 1KV, Ceramic	3198	019	51010
9821	Wire Jumper.	3198	036	90010	2310	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9822	Wire Jumper.	3198	036	90010	2311	Cap, 470n, 10%, 25v, Ceramic	2020	552	96465
9825	Wire Jumper.	3198	036	90010	2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
9828	Wire Jumper.	3198	036	90010	2315	Cap, 220p, 10%, 1KV, Ceramic	3198	019	62210
9829	Wire Jumper.	3198	036	90010	2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
9831	Wire Jumper.	3198	036	90010	2319	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198	023	22240
9832	Wire Jumper.	3198	036	90010	2330	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198	026	32220
9837	Wire Jumper.	3198	036	90010	2331	Cap, 470u, 20%, 10v, Electrolytic. . .	3198	025	14710
9838	Wire Jumper.	3198	036	90010	2332	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198	026	32220
9839	Wire Jumper.	3198	036	90010	2333	Cap, 1000u, 20%, 10v, Electrolytic . .	2020	021	91631
9846	Wire Jumper.	3198	036	90010	2337	Cap, 1000u, 20%, 25v, Electrolytic . .	3198	026	31020
9847	Wire Jumper.	3198	036	90010	2338	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710
9849	Wire Jumper.	3198	036	90010	2339	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710
9851	Wire Jumper.	3198	036	90010	2341	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017	42240
9856	Wire Jumper.	3198	036	90010	2342	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
9858	Wire Jumper.	3198	036	90010	2350	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9859	Wire Jumper.	3198	036	90010	2351	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9860	Wire Jumper.	3198	036	90010	2353	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9862	Wire Jumper.	3198	036	90010	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9864	Wire Jumper.	3198	036	90010	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
9865	Wire Jumper.	3198	036	90010	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9867	Wire Jumper.	3198	036	90010	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9868	Wire Jumper.	3198	036	90010	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9869	Wire Jumper.	3198	036	90010	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9873	Wire Jumper.	3198	036	90010	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9874	Wire Jumper.	3198	036	90010	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9875	Wire Jumper.	3198	036	90010	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9876	Wire Jumper.	3198	036	90010	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9877	Wire Jumper.	3198	036	90010	3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9901	Wire Jumper.	3198	036	90010	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9902	Wire Jumper.	3198	036	90010	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9903	Wire Jumper.	3198	036	90010	3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9904	Wire Jumper.	3198	036	90010	3266	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
9911	Wire Jumper.	3198	036	90010	S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108
9913	Wire Jumper.	3198	036	90010	S 3301	Power Resistor, 68K, 5%, 2W.	3198	012	26830
9914	Wire Jumper.	3198	036	90010	3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9915	Wire Jumper.	3198	036	90010	3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9923	Wire Jumper.	3198	036	90010	3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9991	Wire Jumper.	3198	036	90010	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198	021	31810
9996	Wire Jumper.	3198	036	90010	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198	021	31090
9998	Wire Jumper.	3198	036	90010	3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
CBA	Main Chassis Assembly.	3139	187	23581	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01080
CBA	DVD Loader SD5.12.	3139	188	55471	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01080
CBA	DVD MPEG Assembly SD5.12	3139	188	55481	3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835	310	57599	3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
					3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
					3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322	704	61004
					3339	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
					3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
					3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322	704	64702
					3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322	704	64702
					3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198	021	34780
					3361	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020
					4105	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4106	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4185	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4226	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4261	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4265	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4266	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4316	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4342	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4343	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4361	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4363	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					4364	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
					5100	Inductor, Variable, 100uH, 10%	2422	549	41663
					5110	Coil, 220n	3198	018	12270
					5300	Coil, 27u.	3198	018	22790
					5301	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
					S 5315	Transformer, SS25113-00.	2422	531	02596
					5331	Coil, 10u, 5%.	2422	535	95363
					5333	Coil, 10u, 5%.	2422	535	95363
					5337	Coil, 10u, 10%	2422	535	97328
					5339	Coil, 10u, 10%	2422	535	97328
					6100	Diode, Signal, BAS316.	3198	010	10630
					6101	Diode, Signal, BAS316.	3198	010	10630
					6300	Diode, Rect, BYD33J	9337	234	20133
					6311	Diode, Signal, BAS316.	3198	010	10630
					6312	Zener Diode, 22 volt	3198	020	52290
					6330	Diode, Rect, EGP20DL-5100	9322	164	42682
					6332	Diode, Rect, SB340L-7024.	9322	161	76682
					6336	Diode, Rect, BYV27-200.	9335	526	80133
					7110	IC, HEF4053BT.	9333	729	60653

S = Safety Part Be sure to use exact replacement part.

29DV6931/85R (continued)

7262	Transistor, NPN, PDTCL124ET	9340	310	20215	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
7310	Transistor, NPN, PDTCL14ET	3198	010	44110	3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
7311	Transistor, PNP, PDTA114ET	3198	010	44010	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
7312	Transistor, PNP, BC857B.	3198	010	42150	3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
7313	Transistor, NPN, BC847B.	3198	010	42030	3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
7315	IC, TEA1523P/N2.	9352	699	68112	4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 7340	Optical Coupler, TCET1103(G)	9322	140	14667	4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
7341	IC, TL431CLP	9337	711	00676	4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9110	Wire Jumper.	3198	036	90010	6091	Diode, Signal.	9340	453	90115
9111	Wire Jumper.	3198	036	90010	CBA	Top Control Panel Assembly	3139	187	15841
9183	Wire Jumper.	3198	036	90010					
9266	Wire Jumper.	3198	036	90010					
9315	Wire Jumper.	3198	036	90010					
9350	Wire Jumper.	3198	036	90010					
9351	Wire Jumper.	3198	036	90010					
9352	Wire Jumper.	3198	036	90010					
9355	Wire Jumper.	3198	036	90010					
9357	Wire Jumper.	3198	036	90010					
CBA	DVD Interface Panel Assembly	3141	058	64801					

Front Interface Panel Parts

	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

	Side Jack Panel Parts			
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	15849
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210
6161	Zener Diode, 6.8 volt.	3198	010	26880
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	188	03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

	Top Control Panel Parts			
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44931
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	45709
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21341
AC18	Quick Use Guide.	3121	233	44461
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53503
AC20A	Cabinet Front.	3139	177	75451
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	177	56381
AC23	DVD Door	3139	177	63441
AC24	DVD Interface Panel Bracket.	3139	124	43291
REMOTE	Remote Control Transmitter, RC19042007/			
	01.	3128	147	14521

29DV693R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0130	Bead, Ferrite, 100MHz	2422	549 45808	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0211	2 Pin Connector	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector	2422	025 16375		er	2222	368 90177
0214	5 Pin Connector	2422	025 12481	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445
0217	3 Pin Connector	2412	020 00725	2340	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0219	6 Pin Connector	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0221	2 Pin Connector	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0222	2 Pin Connector	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack	2422	026 04926	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
0229	7 Pin Connector	2422	025 11244	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
0239	3 Pin Connector	2422	025 16382	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0240	4 Pin Connector	2422	025 12479	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
0243	6 Pin Connector	2422	025 04854	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
0244	5 Pin Connector	2422	025 04853	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0245	6 Pin Connector	2422	025 04854	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
0246	5 Pin Connector	2422	025 12481	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0251	4 Pin Connector	2422	025 15847	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
S 0254	9 Pin CRT Socket	2422	500 80076	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
0267	3 Pin Connector	2412	020 00725	2452	Cap, 180p, 5%, 50v, Ceramic	3198	016 01810
0269	Jack	2422	026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
S 1000	Tuner, V+U, PLL	2422	542 90108	2457	Cap, 360n, 5%, 250v, Metalized Polyprop		
1002	SAW Filter, 45.75MHz	2422	549 44518		ylene	2022	333 00163
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
1660	Crystal, 12MHz000	2422	543 01203	S 2463	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
1810	6 Pin Connector	2422	025 15849	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
1831	Crystal, Resonator, 18MHz432, 12 Pin, H				lene	2222	479 90042
	C49/U A	2422	543 00842	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020	301 90255
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2468	Cap, 27n, 10%, 400v, Polyester	2222	347 90232
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2482	Cap, 120n, 5%, 250v, Metalized Polyprop		
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090		ylene	2222	479 90051
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250		pylene	2022	330 00018
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222	910 19856
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2604	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2606	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
2243	Cap, 2n2, 10%, 50v, Ceramic	3198	017 32220	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198	017 21050
				2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31740
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34040
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198 012 13370

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306	204	03109	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	5001	Coil, 27u, 10%	3198	018	22790
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5002	Coil, 820n, 10%	3198	018	18270
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5201	Coil, 6u8, 5%	3198	018	16880
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5202	Wire Jumper.	3198	036	90010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5241	Wire Jumper.	3198	036	90010
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5242	Coil, 10u, 5%	3198	018	11090
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5341	Coil, 22u.	2422	535	97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5342	Coil, 3u9, 10%	2422	535	97323
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5401	Coil, 1mH, 10%	3198	018	71020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5445	Transformer, LOT	2422	531	02574
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5451	Coil, 22u, 10%	3198	018	72290
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	S 5457	Coil, 25u.	2422	535	91028
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5463	Coil, Choke.	3128	138	37021
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 6u8, 20%	3198	018	76880
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5561	Coil, 27u, 5%	2422	535	95366
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	5602	Coil, 5u6, 5%	3198	018	15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5604	Coil, 5u6, 5%	3198	018	15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5831	Coil, 6u8, 5%	3198	018	16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5832	Coil, 6u8, 5%	3198	018	16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5833	Coil, 6u8, 5%	3198	018	16880
3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820	5835	Coil, 12u, 10%	3198	018	31290
3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	6150	Diode, Signal, BAS316.	3198	010	10630
3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730	6201	Diode, Signal, BAS316.	3198	010	10630
3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730	6202	Diode, Signal, BAS316.	3198	010	10630
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198	011	08210	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6445	Zener Diode, 10 volt	3198	020	51090
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6447	Diode, Signal, 1N4148.	3198	010	10010
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6448	Zener Diode, 6.2 volt.	9331	668	30133
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6467	Diode, Signal, BAS316.	3198	010	10630
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6469	Diode, Rect, BYV95C.	9335	001	80133

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

6470	Diode, Signal, BAV99	3198 010 10620	9415	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9416	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9417	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9418	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9419	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9421	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9424	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9518	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9520	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9521	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9522	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9528	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557	9611	Coil, 27u, 10%	3198 018 22790
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9614	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9615	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9618	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9620	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9621	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9622	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9623	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9624	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9626	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9627	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9629	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9631	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9632	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9633	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9637	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9638	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9641	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9644	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9645	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9408	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29DV693R85A (continued)

9689	Wire Jumper.	3198	036	90010	2113	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9690	Wire Jumper.	3198	036	90010	2114	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9691	Wire Jumper.	3198	036	90010	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9694	Wire Jumper.	3198	036	90010	2185	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9695	Wire Jumper.	3198	036	90010	2263	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040
9697	Wire Jumper.	3198	036	90010	2300	Cap, 10u, 20%, 250v, Electrolytic. . .	2020	012	93495
9698	Wire Jumper.	3198	036	90010	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222	365	55223
9699	Wire Jumper.	3198	036	90010	2302	Cap, 100p, 10%, 1KV, Ceramic	3198	019	51010
9821	Wire Jumper.	3198	036	90010	2310	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9822	Wire Jumper.	3198	036	90010	2311	Cap, 470n, 10%, 25v, Ceramic	2020	552	96465
9825	Wire Jumper.	3198	036	90010	2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
9828	Wire Jumper.	3198	036	90010	2315	Cap, 220p, 10%, 1KV, Ceramic	3198	019	62210
9829	Wire Jumper.	3198	036	90010	2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
9831	Wire Jumper.	3198	036	90010	2319	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198	023	22240
9832	Wire Jumper.	3198	036	90010	2330	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198	026	32220
9837	Wire Jumper.	3198	036	90010	2331	Cap, 470u, 20%, 10v, Electrolytic. . .	3198	025	14710
9838	Wire Jumper.	3198	036	90010	2332	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198	026	32220
9839	Wire Jumper.	3198	036	90010	2333	Cap, 1000u, 20%, 10v, Electrolytic . .	2020	021	91631
9846	Wire Jumper.	3198	036	90010	2337	Cap, 1000u, 20%, 25v, Electrolytic . .	3198	026	31020
9847	Wire Jumper.	3198	036	90010	2338	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710
9849	Wire Jumper.	3198	036	90010	2339	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710
9851	Wire Jumper.	3198	036	90010	2341	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017	42240
9856	Wire Jumper.	3198	036	90010	2342	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
9858	Wire Jumper.	3198	036	90010	2350	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9859	Wire Jumper.	3198	036	90010	2351	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9860	Wire Jumper.	3198	036	90010	2353	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9862	Wire Jumper.	3198	036	90010	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9864	Wire Jumper.	3198	036	90010	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
9865	Wire Jumper.	3198	036	90010	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9867	Wire Jumper.	3198	036	90010	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9868	Wire Jumper.	3198	036	90010	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9869	Wire Jumper.	3198	036	90010	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9873	Wire Jumper.	3198	036	90010	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9874	Wire Jumper.	3198	036	90010	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9875	Wire Jumper.	3198	036	90010	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9876	Wire Jumper.	3198	036	90010	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9877	Wire Jumper.	3198	036	90010	3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9901	Wire Jumper.	3198	036	90010	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9902	Wire Jumper.	3198	036	90010	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9903	Wire Jumper.	3198	036	90010	3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9904	Wire Jumper.	3198	036	90010	3266	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
9911	Wire Jumper.	3198	036	90010	S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108
9913	Wire Jumper.	3198	036	90010	S 3301	Power Resistor, 68K, 5%, 2W.	3198	012	26830
9914	Wire Jumper.	3198	036	90010	3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9915	Wire Jumper.	3198	036	90010	3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9923	Wire Jumper.	3198	036	90010	3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9991	Wire Jumper.	3198	036	90010	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198	021	31810
9996	Wire Jumper.	3198	036	90010	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198	021	31090
9998	Wire Jumper.	3198	036	90010	3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
CBA	Main Chassis Assembly.	3139	187	23581	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01080
CBA	DVD Loader SD5.12.	3139	188	55471	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01080
CBA	DVD MPEG Assembly SD5.12	3139	188	55481	3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
CBA	DVD Module SD5.12 (contains Loader and				3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
	MPEG Assembly)	4835	310	57599	3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
					3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322	704	61004
Channel One Card Parts					3339	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
Channel One Card Parts					3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2D 3 Line Comb Filter Parts					3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322	704	64702
2D 3 Line Comb Filter Parts					3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322	704	64702
DAF Panel Parts					3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198	021	34780
DAF Panel Parts					3361	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020
DVD Eject Panel Parts					4105	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
DVD Eject Panel Parts					4106	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0267	3 Pin Board Connector.	2422	025	09191	4185	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0361	Eject Button	3139	177	63451	4226	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
1110	Tact Switch.	2422	128	02742	4261	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
CBA	DVD Eject Panel Assembly	3139	187	23311	4265	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
DVD Interface Panel Parts					4266	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
DVD Interface Panel Parts					4316	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0226	Connector, 6 Pin	2422	025	12482	4342	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0228	Connector, 3 Pin	2412	020	00725	4343	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0251	Connector, 4 Pin	2422	025	15847	4361	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0253	Connector, 7 Pin	2422	025	11244	4363	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0254	Connector, 3 Pin	2422	025	16382	4364	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0266	Connector, 6 Pin	2422	025	15849	5100	Inductor, Variable, 100uH, 10%	2422	549	41663
0269	Connector, 5 Pin	2422	025	15848	5110	Coil, 220n	3198	018	12270
1100	Socket, Cinch, 1 Pin	2422	026	04425	5300	Coil, 27u.	3198	018	22790
1101	Connector, 8 Pin	2422	025	12483	5301	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
S 1330	Fuse, 2A, 250V	2422	086	10422	S 5315	Transformer, SS25113-00.	2422	531	02596
S 1331	Fuse, 2A, 250V	2422	086	10422	5331	Coil, 10u, 5%.	2422	535	95363
S 1332	Fuse, 2A, 250V	2422	086	10421	5333	Coil, 10u, 5%.	2422	535	95363
2101	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	5337	Coil, 10u, 10%	2422	535	97328
2102	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090	5339	Coil, 10u, 10%	2422	535	97328
2103	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	6100	Diode, Signal, BAS316.	3198	010	10630
2104	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	41040	6101	Diode, Signal, BAS316.	3198	010	10630
2110	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	41040	6300	Diode, Rect, BYD33J	9337	234	20133
2111	Cap, 2u2, +80/-20%, 10v, Ceramic . .	3198	017	22250	6311	Diode, Signal, BAS316.	3198	010	10630
2112	Cap, 2u2, +80/-20%, 10v, Ceramic . .	3198	017	22250	6312	Zener Diode, 22 volt	3198	020	52290
					6330	Diode, Rect, EGP20DL-5100	9322	164	42682
					6332	Diode, Rect, SB340L-7024.	9322	161	76682
					6336	Diode, Rect, BYV27-200.	9335	526	80133
					7110	IC, HEF4053BT.	9333	729	60653

S = Safety Part Be sure to use exact replacement part.

29DV693R85A (continued)

7262	Transistor, NPN, PDTCL124ET	9340	310	20215	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
7310	Transistor, NPN, PDTCL14ET	3198	010	44110	3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
7311	Transistor, PNP, PDTA114ET	3198	010	44010	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
7312	Transistor, PNP, BC857B.	3198	010	42150	3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
7313	Transistor, NPN, BC847B.	3198	010	42030	3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
7315	IC, TEA1523P/N2.	9352	699	68112	4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 7340	Optical Coupler, TCET1103(G)	9322	140	14667	4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
7341	IC, TL431CLP	9337	711	00676	4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9110	Wire Jumper.	3198	036	90010	6091	Diode, Signal.	9340	453	90115
9111	Wire Jumper.	3198	036	90010	CBA	Top Control Panel Assembly	3139	187	15841
9183	Wire Jumper.	3198	036	90010					
9266	Wire Jumper.	3198	036	90010					
9315	Wire Jumper.	3198	036	90010					
9350	Wire Jumper.	3198	036	90010					
9351	Wire Jumper.	3198	036	90010					
9352	Wire Jumper.	3198	036	90010					
9355	Wire Jumper.	3198	036	90010					
9357	Wire Jumper.	3198	036	90010					
CBA	DVD Interface Panel Assembly	3141	058	64801					

Front Interface Panel Parts

	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

	Side Jack Panel Parts			
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	15849
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210
6161	Zener Diode, 6.8 volt.	3198	010	26880
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	188	03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

	Top Control Panel Parts			
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44931
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	45709
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21341
AC18	Quick Use Guide.	3121	233	44461
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53503
AC20A	Cabinet Front.	3139	177	75451
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	177	56381
AC23	DVD Door	3139	177	63441
AC24	DVD Interface Panel Bracket.	3139	124	43291
REMOTE	Remote Control Transmitter, RC19042007/01.	3128	147	14521

29DV693R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0130	Bead, Ferrite, 100MHz	2422	549 45808	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0211	2 Pin Connector	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector	2422	025 16375		er.	2222	368 90177
0214	5 Pin Connector	2422	025 12481	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445
0217	3 Pin Connector	2412	020 00725	2340	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0219	6 Pin Connector	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0221	2 Pin Connector	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0222	2 Pin Connector	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack	2422	026 04926	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
0229	7 Pin Connector	2422	025 11244	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
0239	3 Pin Connector	2422	025 16382	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0240	4 Pin Connector	2422	025 12479	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
0243	6 Pin Connector	2422	025 04854	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
0244	5 Pin Connector	2422	025 04853	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0245	6 Pin Connector	2422	025 04854	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
0246	5 Pin Connector	2422	025 12481	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0251	4 Pin Connector	2422	025 15847	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
S 0254	9 Pin CRT Socket	2422	500 80076	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
0267	3 Pin Connector	2412	020 00725	2452	Cap, 180p, 5%, 50v, Ceramic	3198	016 01810
0269	Jack	2422	026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
S 1000	Tuner, V+U, PLL	2422	542 90108	2457	Cap, 360n, 5%, 250v, Metalized Polyprop		
1002	SAW Filter, 45.75MHz	2422	549 44518		ylene.	2022	333 00163
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
1660	Crystal, 12MHz000	2422	543 01203	S 2463	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
1810	6 Pin Connector	2422	025 15849	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
1831	Crystal, Resonator, 18MHz432, 12 Pin, H				lene	2222	479 90042
	C49/U A	2422	543 00842	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020	301 90255
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2468	Cap, 27n, 10%, 400v, Polyester	2222	347 90232
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2482	Cap, 120n, 5%, 250v, Metalized Polyprop		
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090		ylene.	2222	479 90051
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250		pylene	2022	330 00018
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2525	Cap, 470p, 10%, 500v, Ceramic	3198	017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222	910 19856
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2604	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2606	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
2243	Cap, 2n2, 10%, 50v, Ceramic	3198	017 32220	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198	017 21050
				2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film.	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198 012 13370

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass	2322	734	64702	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass	3198	021	51020	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film	2306	204	03109	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass	3198	021	52240	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass	3198	021	52240	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film	3198	011	04710	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	5001	Coil, 27u, 10%	3198	018	22790
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5002	Coil, 820n, 10%	3198	018	18270
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5201	Coil, 6u8, 5%	3198	018	16880
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5202	Wire Jumper	3198	036	90010
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5241	Wire Jumper	3198	036	90010
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5242	Coil, 10u, 5%	3198	018	11090
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5341	Coil, 22u	2422	535	97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5342	Coil, 3u9, 10%	2422	535	97323
3636	Res, 1K, 5%, 1/10W, Metalized Glass	3198	021	51020	5401	Coil, 1mH, 10%	3198	018	71020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5445	Transformer, LOT	2422	531	02574
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5451	Coil, 22u, 10%	3198	018	72290
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	S 5457	Coil, 25u	2422	535	91028
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3802	Res, 1K, 5%, 1/16W, Metalized Glass	3198	021	31020	5463	Coil, Choke	3128	138	37021
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 6u8, 20%	3198	018	76880
3814	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3815	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3816	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3817	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3818	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	5561	Coil, 27u, 5%	2422	535	95366
3821	Res, 100K, 5%, 1/16W, Metalized Glass	3198	021	31040	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	5602	Coil, 5u6, 5%	3198	018	15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5604	Coil, 5u6, 5%	3198	018	15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5831	Coil, 6u8, 5%	3198	018	16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film	3198	011	01010	5832	Coil, 6u8, 5%	3198	018	16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5833	Coil, 6u8, 5%	3198	018	16880
3901	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820	5835	Coil, 12u, 10%	3198	018	31290
3903	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	6150	Diode, Signal, BAS316.	3198	010	10630
3909	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730	6201	Diode, Signal, BAS316.	3198	010	10630
3910	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730	6202	Diode, Signal, BAS316.	3198	010	10630
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film	3198	011	08210	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6445	Zener Diode, 10 volt	3198	020	51090
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6447	Diode, Signal, 1N4148.	3198	010	10010
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6448	Zener Diode, 6.2 volt.	9331	668	30133
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP30J-L7004.	9338	617	60682
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6465	Diode, Signal, BAV21	3198	010	10070
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6467	Diode, Signal, BAS316.	3198	010	10630
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6468	Diode, Signal, BAS316.	3198	010	10630
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6469	Diode, Rect, BYV95C.	9335	001	80133

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

6470	Diode, Signal, BAV99	3198 010 10620	9415	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9416	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9417	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9418	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9419	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9421	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9424	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9518	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9520	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9521	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9522	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9528	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557	9611	Coil, 27u, 10%	3198 018 22790
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9614	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9615	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9618	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9620	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9621	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9622	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTCL43ZT	9340 547 00215	9623	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9624	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9626	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9627	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9629	Wire Jumper.	3198 036 90010
7520	IC, TEAL507P/N1.	9352 673 56112	9631	Wire Jumper.	3198 036 90010
7521	Power FET, FQFPFN50.	9322 187 16687	9632	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9633	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9637	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCL14ET	9340 310 10215	9638	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9641	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDTCL43ZT	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9644	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PDTCL43ZT	9340 547 00215	9645	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL)	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9408	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29DV693R85C (continued)

9689	Wire Jumper.	3198	036	90010	2113	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9690	Wire Jumper.	3198	036	90010	2114	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9691	Wire Jumper.	3198	036	90010	2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9694	Wire Jumper.	3198	036	90010	2185	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250
9695	Wire Jumper.	3198	036	90010	2263	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040
9697	Wire Jumper.	3198	036	90010	2300	Cap, 10u, 20%, 250v, Electrolytic. . .	2020	012	93495
9698	Wire Jumper.	3198	036	90010	2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222	365	55223
9699	Wire Jumper.	3198	036	90010	2302	Cap, 100p, 10%, 1KV, Ceramic	3198	019	51010
9821	Wire Jumper.	3198	036	90010	2310	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9822	Wire Jumper.	3198	036	90010	2311	Cap, 470n, 10%, 25v, Ceramic	2020	552	96465
9825	Wire Jumper.	3198	036	90010	2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
9828	Wire Jumper.	3198	036	90010	2315	Cap, 220p, 10%, 1KV, Ceramic	3198	019	62210
9829	Wire Jumper.	3198	036	90010	2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
9831	Wire Jumper.	3198	036	90010	2319	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198	023	22240
9832	Wire Jumper.	3198	036	90010	2330	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198	026	32220
9837	Wire Jumper.	3198	036	90010	2331	Cap, 470u, 20%, 10v, Electrolytic. . .	3198	025	14710
9838	Wire Jumper.	3198	036	90010	2332	Cap, 2u2, 20%, 25v, Electrolytic . . .	3198	026	32220
9839	Wire Jumper.	3198	036	90010	2333	Cap, 1000u, 20%, 10v, Electrolytic . .	2020	021	91631
9846	Wire Jumper.	3198	036	90010	2337	Cap, 1000u, 20%, 25v, Electrolytic . .	3198	026	31020
9847	Wire Jumper.	3198	036	90010	2338	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710
9849	Wire Jumper.	3198	036	90010	2339	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025	24710
9851	Wire Jumper.	3198	036	90010	2341	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017	42240
9856	Wire Jumper.	3198	036	90010	2342	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
9858	Wire Jumper.	3198	036	90010	2350	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9859	Wire Jumper.	3198	036	90010	2351	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9860	Wire Jumper.	3198	036	90010	2353	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
9862	Wire Jumper.	3198	036	90010	3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9864	Wire Jumper.	3198	036	90010	3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
9865	Wire Jumper.	3198	036	90010	3110	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9867	Wire Jumper.	3198	036	90010	3111	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9868	Wire Jumper.	3198	036	90010	3112	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9869	Wire Jumper.	3198	036	90010	3113	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9873	Wire Jumper.	3198	036	90010	3114	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9874	Wire Jumper.	3198	036	90010	3115	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9875	Wire Jumper.	3198	036	90010	3116	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9876	Wire Jumper.	3198	036	90010	3117	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
9877	Wire Jumper.	3198	036	90010	3118	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9901	Wire Jumper.	3198	036	90010	3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9902	Wire Jumper.	3198	036	90010	3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
9903	Wire Jumper.	3198	036	90010	3262	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9904	Wire Jumper.	3198	036	90010	3266	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
9911	Wire Jumper.	3198	036	90010	S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03108
9913	Wire Jumper.	3198	036	90010	S 3301	Power Resistor, 68K, 5%, 2W.	3198	012	26830
9914	Wire Jumper.	3198	036	90010	3308	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9915	Wire Jumper.	3198	036	90010	3309	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9923	Wire Jumper.	3198	036	90010	3310	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9991	Wire Jumper.	3198	036	90010	3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198	021	31810
9996	Wire Jumper.	3198	036	90010	3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198	021	31090
9998	Wire Jumper.	3198	036	90010	3313	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
CBA	Main Chassis Assembly.	3139	187	23581	3314	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01080
CBA	DVD Loader SD5.12.	3139	188	55471	3315	Res, 1 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01080
CBA	DVD MPEG Assembly SD5.12	3139	188	55481	3317	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
CBA	DVD Module SD5.12 (contains Loader and				3318	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720
	MPEG Assembly)	4835	310	57599	3319	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
					3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322	704	61004
Channel One Card Parts					3339	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
Channel One Card Parts					3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
2D 3 Line Comb Filter Parts					3342	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322	704	64702
2D 3 Line Comb Filter Parts					3344	Res, 4K7, 1%, 1/16W, Metalized Glass .	2322	704	64702
DAF Panel Parts					3360	Res, 4R7, 5%, 1/16W, Metalized Glass .	3198	021	34780
DAF Panel Parts					3361	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020
DVD Eject Panel Parts					4105	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
DVD Eject Panel Parts					4106	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0267	3 Pin Board Connector.	2422	025	09191	4185	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0361	Eject Button	3139	177	63451	4226	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
1110	Tact Switch.	2422	128	02742	4261	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
CBA	DVD Eject Panel Assembly	3139	187	23311	4265	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
DVD Interface Panel Parts					4266	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
DVD Interface Panel Parts					4316	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0226	Connector, 6 Pin	2422	025	12482	4342	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0228	Connector, 3 Pin	2412	020	00725	4343	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0251	Connector, 4 Pin	2422	025	15847	4361	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0253	Connector, 7 Pin	2422	025	11244	4363	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0254	Connector, 3 Pin	2422	025	16382	4364	Res, Zero ohm, 'Chip' Jumper	3198	021	90030
0266	Connector, 6 Pin	2422	025	15849	5100	Inductor, Variable, 100uH, 10%	2422	549	41663
0269	Connector, 5 Pin	2422	025	15848	5110	Coil, 220n	3198	018	12270
1100	Socket, Cinch, 1 Pin	2422	026	04425	5300	Coil, 27u.	3198	018	22790
1101	Connector, 8 Pin	2422	025	12483	5301	Fixed, Inductor, 100MHZ, 50R.	3198	018	90010
S 1330	Fuse, 2A, 250V	2422	086	10422	S 5315	Transformer, SS25113-00.	2422	531	02596
S 1331	Fuse, 2A, 250V	2422	086	10422	5331	Coil, 10u, 5%.	2422	535	95363
S 1332	Fuse, 2A, 250V	2422	086	10421	5333	Coil, 10u, 5%.	2422	535	95363
2101	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	5337	Coil, 10u, 10%	2422	535	97328
2102	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090	5339	Coil, 10u, 10%	2422	535	97328
2103	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790	6100	Diode, Signal, BAS316.	3198	010	10630
2104	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040	6101	Diode, Signal, BAS316.	3198	010	10630
2110	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	41040	6300	Diode, Rect, BYD33J	9337	234	20133
2111	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250	6311	Diode, Signal, BAS316.	3198	010	10630
2112	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017	22250	6312	Zener Diode, 22 volt	3198	020	52290
					6330	Diode, Rect, EGP20DL-5100	9322	164	42682
					6332	Diode, Rect, SB340L-7024.	9322	161	76682
					6336	Diode, Rect, BYV27-200.	9335	526	80133
					7110	IC, HEF4053BT.	9333	729	60653

S = Safety Part Be sure to use exact replacement part.

29DV693R85C (continued)

7262	Transistor, NPN, PDTCL124ET	9340	310	20215	3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
7310	Transistor, NPN, PDTCL14ET	3198	010	44110	3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
7311	Transistor, PNP, PDTA114ET	3198	010	44010	3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
7312	Transistor, PNP, BC857B.	3198	010	42150	3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
7313	Transistor, NPN, BC847B.	3198	010	42030	3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
7315	IC, TEA1523P/N2.	9352	699	68112	4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 7340	Optical Coupler, TCET1103(G)	9322	140	14667	4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
7341	IC, TL431CLP	9337	711	00676	4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9110	Wire Jumper.	3198	036	90010	6091	Diode, Signal.	9340	453	90115
9111	Wire Jumper.	3198	036	90010	CBA	Top Control Panel Assembly	3139	187	15841
9183	Wire Jumper.	3198	036	90010					
9266	Wire Jumper.	3198	036	90010					
9315	Wire Jumper.	3198	036	90010					
9350	Wire Jumper.	3198	036	90010					
9351	Wire Jumper.	3198	036	90010					
9352	Wire Jumper.	3198	036	90010					
9355	Wire Jumper.	3198	036	90010					
9357	Wire Jumper.	3198	036	90010					
CBA	DVD Interface Panel Assembly	3141	058	64801					

Front Interface Panel Parts

	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

	Side Jack Panel Parts			
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	15849
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2172	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2173	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2174	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210
3157	Res, 120 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01210
6161	Zener Diode, 6.8 volt.	3198	010	26880
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	188	03541

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

	Top Control Panel Parts			
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610

S = Safety Part Be sure to use exact replacement part.

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44931
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	45709
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	21341
AC18	Quick Use Guide.	3121	233	44461
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53503
AC20A	Cabinet Front.	3139	177	75451
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	177	56381
AC23	DVD Door	3139	177	63441
AC24	DVD Interface Panel Bracket.	3139	124	43291
REMOTE	Remote Control Transmitter, RC19042007/			
	01.	3128	147	14521

29PT543S44A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0212	2 Pin Connector.	2422	025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0219	6 Pin Connector.	2422	025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0220	5 Pin Connector.	2422	025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0221	2 Pin Connector.	2422	025 15503		er.	2222	368 90177
0222	2 Pin Connector.	2422	025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0223	A/V Jack	2422	026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0225	SVHS Jack.	2422	026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0229	3 Pin Connector.	2412	020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0243	6 Pin Connector.	2422	025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0244	5 Pin Connector.	2422	025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0245	6 Pin Connector.	2422	025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0246	5 Pin Connector.	2422	025 15848	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
S 0254	9 Pin CRT Socket	2422	500 80076	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0267	3 Pin Connector.	2412	020 00725	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
0269	Jack	2422	026 05182	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 1000	Tuner, V+U PLL	2422	542 90098	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
1002	SAW Filter, 45.75MHz	2422	549 44518	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
S 1515	Relay, 5 Amp, 12V.	2422	132 07444		ylene.	2022	333 00086
1600	Tact Switch.	2422	128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1601	Tact Switch.	2422	128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1602	Tact Switch.	2422	128 02742	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1603	Tact Switch.	2422	128 02742	2462	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
1606	Tact Switch.	2422	128 02742	2463	Cap, 1nf, 10%, 2000v, Ceramic Only with		
1660	Crystal, 12MHz000	2422	543 01203		5445 (JF0501-21835) Layer Wound.	2020	558 90487
1811	3 Pin Connector.	2412	020 00725	2463	Cap, 680p, 10%, 2000v, Ceramic	2020	558 90485
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	S 2465	Cap, 11n, 5%, 1600v, Polypropylene	2020	301 90251
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only		
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090		with 5445 (JF0501-21835) Layer Wound.	2222	375 90156
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		pylene	2022	330 00018
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2503	Cap, 330u, 20%, 400v, Electrolytic	2020	024 90561
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 46710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2509	Cap, 100n, 20%, 275v, Metalized Polypro		
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		pylene	2222	336 29144
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	019 19856
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
				2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520	
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050	
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530	
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810	
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 47K, 1%, 3/5W, Metal Film	2312 915 14703	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3454	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503	
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880	
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3461	Res, 1K, 5%, 1W, Metal Film.	3198 012 11020	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320	
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720	
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390	
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	S 3504	Res, PTC, 9 ohm, 265V.	2122 663 00021	
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3507	Surge Protector.	2422 549 43073	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3521	Res, 22 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02290	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3522	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610				
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220				

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

3526	Res, OR15, 5%, 3/5W, Metal Film. . . .	3198 012 11570	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3527	Res, OR22, 5%, 3/5W, Metal Film. . . .	3198 012 12270	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322 734 61801	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322 734 62701	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322 734 63901	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3686	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5001	Coil, 27u, 10%	3198 018 22790
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322 734 67509	5002	Coil, 820n, 10%	3198 018 18270
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322 734 66809	5201	Coil, 6u8, 5%	3198 018 16880
3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322 734 62702	5202	Wire Jumper.	3198 036 90010
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5342	Coil, 22u.	2422 535 97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT (JF0501-21835) Layer W	
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040		ound	2422 531 02611
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT	3128 138 21391
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5453	Coil, 22u, 5%	3198 018 12290
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5457	Coil, 42u.	2422 535 94865
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 3u3, 20%	3198 018 73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5480	Coil, 39u, 10%	2422 535 97336
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	S 5500	Mains Filter	2422 549 43567
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	S 5501	Mains Filter	2422 549 43432
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 5520	Transformer, SS42025-03.	2422 531 02462
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5561	Coil, 27u, 5%	2422 535 95366
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5602	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5603	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5604	Coil, 5u6, 5%	3198 018 15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5861	Coil, 10u, 5%	3198 018 11090
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6001	Zener Diode, 33 volt	3198 010 23390
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6150	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6202	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

29PT543S44A (continued)

6206	Zener Diode, 6.8 volt.	3198 020 56880	9179	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21.	3198 010 10070	9181	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9182	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9183	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9184	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt.	3198 020 51090	9192	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9193	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9311	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9312	Wire Jumper.	3198 036 90010
6453	Zener Diode, 6.8 volt.	3198 020 56880	9406	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9407	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9408	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9409	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9415	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9416	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9417	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9418	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9419	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9421	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9423	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9501	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9503	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 9.1 volt.	9322 150 08685	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6567	Zener Diode, 4.7 volt.	3198 020 54780	9518	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9520	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.2 volt.	9322 163 91685	9521	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9522	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9524	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9528	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9530	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9611	Coil, 27u, 10%.	3198 018 22790
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9614	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9615	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9617	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9620	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9621	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9622	Wire Jumper.	3198 036 90010
7450	Transistor, PNP, PDTA114ET.	3198 010 44010	9623	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9624	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9626	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9627	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9628	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9629	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9631	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9632	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1104(G).	9322 175 72667	9633	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9637	Wire Jumper.	3198 036 90010
7521	Power FET, STU9NC80ZI.	9322 163 76687	9638	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9639	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9640	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9641	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9642	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9643	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9648	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9650	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9651	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9652	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9654	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9655	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9657	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9658	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29PT543S44A (continued)

9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58181

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
S = Safety Part. Be sure to use exact replacement part.

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	2422	070	98239
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	35953
S AC09	CRT, A68AJB82X01	9301	787	70612
AC10	Customer Control Buttons	3139	177	60751
S AC12	Degaussing Coil.	2422	549	45506
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20761
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53071
AC20A	Cabinet Front.	3139	177	53551
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	35111
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	177	60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

29PT543S85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422 025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422 025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422 025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222 368 90177
0221	2 Pin Connector.	2422 025 15503	2331	er.	2020 558 90445
0222	2 Pin Connector.	2422 025 10646	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0223	A/V Jack	2422 026 05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0225	SVHS Jack.	2422 026 04926	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0229	3 Pin Connector.	2412 020 00725	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0243	6 Pin Connector.	2422 025 04854	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0244	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0245	6 Pin Connector.	2422 025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0246	5 Pin Connector.	2422 025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 0254	9 Pin CRT Socket	2422 500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0267	3 Pin Connector.	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0269	Jack	2422 026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 1000	Tuner, V+U PLL	2422 542 90098	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
1002	SAW Filter, 45.75MHz	2422 549 44518	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	2222 479 90023
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2458	ylene.	2020 021 91331
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2459	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1600	Tact Switch.	2422 128 02742	2460	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1601	Tact Switch.	2422 128 02742	2462	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1602	Tact Switch.	2422 128 02742	2463	Cap, 330n, 10%, 250v, MPP.	2022 333 00084
1603	Tact Switch.	2422 128 02742		Cap, 1nf, 10%, 2000v, Ceramic Only with	5445 (JF0501-21835) Layer Wound.
1606	Tact Switch.	2422 128 02742	2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
1660	Crystal, 12MHz000	2422 543 01203	S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only	with 5445 (JF0501-21835) Layer Wound
1811	3 Pin Connector.	2412 020 00725		Cap, 11n, 5%, 1600v, Polypropylene	2222 375 90156
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2465	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2471	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2472	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2473	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2475	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2476	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2480	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2481	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2485	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2486	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2487	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2491	Cap, 470n, 20%, 275v, Metalized Polypro	pylene
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2500	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2502	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2503	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2505	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2507	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2508	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2515	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2520	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2521	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2522	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2523	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2525	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2527	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2528	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2562	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2563	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2606	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230			
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280			

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840	
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01010	
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109	
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520	
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050	
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530	
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810	
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	h 5445 (JF0501-21835) Layer Wound. . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	5445 (JF0501-21835) Layer Wound. . . .	2312 915 12002
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902	
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880	
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530	
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3124	Res, 47K, 5%, 1/16W, Metalized Glass . . .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3126	Res, 47K, 5%, 1/16W, Metalized Glass . . .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720	
3132	Res, 47K, 5%, 1/16W, Metalized Glass . . .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3134	Res, 47K, 5%, 1/16W, Metalized Glass . . .	3198 021 34730	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 33390	
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . . .	3198 021 31520	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	
3158	Res, 10K, 5%, 1/16W, Metalized Glass . . .	3198 021 31030	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . . .	2322 242 13335	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . . .	2322 242 13335	
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155	
3206	Res, 33K, 5%, 1/16W, Metalized Glass . . .	3198 021 33330	3507	Surge Protector.	2422 549 43073	
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film . .	3198 013 02210	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3218	Res, 82K, 5%, 1/16W, Metalized Glass . . .	3198 021 38230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306 204 03101	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . . .	3198 021 32220	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
3232	Res, 2K2, 5%, 1/16W, Metalized Glass . . .	3198 021 32220	3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730	
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010				
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230				

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 180 ohm, 1%, 1/8W, Metalized Glass	2322	734	61801	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 270 ohm, 1%, 1/8W, Metalized Glass	2322	734	62701	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 390 ohm, 1%, 1/8W, Metalized Glass	2322	734	63901	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3687	Res, 75 ohm, 1%, 1/8W, Metalized Glass	2322	734	67509	5001	Coil, 27u, 10%	3198	018	22790
3688	Res, 68 ohm, 1%, 1/8W, Metalized Glass	2322	734	66809	5002	Coil, 820n, 10%	3198	018	18270
3689	Res, 2K7, 1%, 1/8W, Metalized Glass. .	2322	734	62702	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040		ound	2422	531	02611
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B).	2422	531	02506
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 3u3, 20%	3198	018	73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5480	Coil, 39u, 10%	2422	535	97336
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

6445	Zener Diode, 10 volt	3198 020 51090	9311	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9312	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9406	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9407	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9408	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9409	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9410	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9425	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9453	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9460	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9500	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9501	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9506	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9507	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9522	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9524	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9528	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9530	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9613	Wire Jumper.	3198 036 90010
7200	IC, TDA9577H/N1/AI/1130.	9352 731 51557	9614	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9620	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9637	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9638	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9639	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9641	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9648	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9651	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9652	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9654	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9184	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9192	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

29PT543S85A (continued)

9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	57971

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

S = Safety Part Be sure to use exact replacement part.

Side Jack Panel Parts

	Side Jack Panel Parts			
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	35953
S AC09	CRT, A68AJB82X11	9301	891	90631
AC10	Customer Control Buttons	3139	177	60751
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20771
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53071
AC20A	Cabinet Front.	3139	177	53551
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	35111
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	177	60761
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

29PT563S85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16269
0212	2 Pin Connector.	2422	025 16375
0219	6 Pin Connector.	2422	025 12482
0220	5 Pin Connector.	2422	025 04853
0221	2 Pin Connector.	2422	025 15503
0222	2 Pin Connector.	2422	025 10646
0223	A/V Jack	2422	026 05236
0225	SVHS Jack.	2422	026 04926
0243	6 Pin Connector.	2422	025 04854
0244	5 Pin Connector.	2422	025 04853
0245	6 Pin Connector.	2422	025 04854
0246	5 Pin Connector.	2422	025 12481
S 0254	9 Pin CRT Socket	2422	500 80076
0267	3 Pin Connector.	2412	020 00725
0269	Jack	2422	026 05182
S 1000	Tuner, V+U PLL	2422	542 90098
1002	SAW Filter, 45.75MHz	2422	549 44518
1200	Filter, Ceramic, 4MHz5	2422	549 40807
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914
S 1515	Relay, 5 Amp, 12V.	2422	132 07444
1600	Tact Switch.	2422	128 02742
1601	Tact Switch.	2422	128 02742
1602	Tact Switch.	2422	128 02742
1603	Tact Switch.	2422	128 02742
1606	Tact Switch.	2422	128 02742
1660	Crystal, 12MHz000	2422	543 01203
1810	6 Pin Connector.	2422	025 16607
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422	543 00842
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222	368 90177

S = Safety Part Be sure to use exact replacement part.

2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2222	479 90023
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46310
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
2462	Cap, 330n, 10%, 250v, MPP.	2022	333 00084
2463	Cap, 1nf, 10%, 2000v, Ceramic Only with 5445 (JF0501-21835) Layer Wound.	2020	558 90487
2463	Cap, 680p, 10%, 2000v, Ceramic	2020	558 90485
S 2465	Cap, 12n, 5%, 1600v, Polypropylene Only with 5445 (JF0501-21835) Layer Wound	2222	375 90156
S 2465	Cap, 11n, 5%, 1600v, Polypropylene	2222	375 90155
2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222	365 75154
2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222	365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2222	336 29148
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198	016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198	016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198	016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
2835	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210

29PT563S85A (continued)

2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3452	Res, 5K6, 1%, 3/5W, Metal Film Only wit	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010		h 5445 (JF0501-21835) Layer Wound. . . .	2312 915 15602
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3452	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3454	Res, 2K, 1%, 3/5W, Metal Film Only with	
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010		5445 (JF0501-21835) Layer Wound.	2312 915 12002
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3454	Res, 3K9, 1%, 3/5W, Metal Film	2312 915 13902
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3470	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 33390
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . . .	2322 734 61202	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3205	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198 021 31020	S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3507	Surge Protector.	2422 549 43073
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	3530	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3531	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710

S = Safety Part Be sure to use exact replacement part.

29PT563S85A (continued)

3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322	730	61274	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198	021	51530	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198	021	51030	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198	021	51230	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198	021	55620	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198	021	52220	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198	021	55620	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198	021	54730	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	04710	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198	021	51020	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198	021	53320	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198	021	51520	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3811	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	5342	Coil, 22u.	2422	535	97333
3812	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	S 5445	Transformer, LOT (JF0501-21835) Layer W			
3813	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020		ound	2422	531	02611
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, LOT (1342.0043B)	2422	531	02506
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5457	Coil, 42u.	2422	535	94865
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5480	Coil, 39u, 10%	2422	535	97336
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5501	Mains Filter	2422	549	43432
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	S 5520	Transformer, SS39009-04.	2422	531	02459
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198	021	31020	5602	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass. . .	3198	021	33320	5603	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass. . .	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5810	Coil, 10u, 10%	3198	018	51090
3905	Res, 3K3, 5%, 1/16W, Metalized Glass. . .	3198	021	33320	5831	Coil, 6u8, 5%	3198	018	16880
3906	Res, 10K, 5%, 1/16W, Metalized Glass. . .	3198	021	31030	5832	Coil, 6u8, 5%	3198	018	16880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198	021	38220	5833	Coil, 6u8, 5%	3198	018	16880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5835	Coil, 12u, 10%	3198	018	31290
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6001	Zener Diode, 33 volt	3198	010	23390
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6150	Diode, Signal, BAS316.	3198	010	10630
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6202	Diode, Signal, BAS316.	3198	010	10630
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6206	Zener Diode, 6.8 volt.	3198	020	56880
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6332	Diode, Signal, BAS316.	3198	010	10630
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6333	Diode, Signal, BAV21.	3198	010	10070
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6335	Diode, Signal, BAV21.	3198	010	10070
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010

S = Safety Part Be sure to use exact replacement part.

29PT563S85A (continued)

6448	Zener Diode, 6.2 volt.	9331	668	30133	9312	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9406	Wire Jumper.	3198	036	90010
6460	Diode, Rect, BY228/24.	9340	559	50112	9407	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9408	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9409	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9410	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9411	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9412	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9413	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYD33J.	9337	234	20133	9415	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9416	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9417	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9418	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9419	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9421	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYD33J.	9337	234	20133	9422	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9423	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYD33D.	9337	234	00133	9425	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9427	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9453	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYD33D.	9337	234	00133	9460	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9500	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9501	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9503	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9506	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9507	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9510	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9511	Wire Jumper.	3198	036	90010
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	9512	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9513	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9514	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9515	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9518	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9520	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85	9336	247	60133	9521	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9522	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9524	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9528	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9530	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9611	Coil, 27u, 10%	3198	018	22790
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9612	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9613	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9614	Wire Jumper.	3198	036	90010
7200	IC, TDA9587H/N1/3I/0990.	9352	725	47557	9615	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9618	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9619	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9620	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9621	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9622	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9623	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9624	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9626	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT	9340	547	00215	9627	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9628	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9629	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9631	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9632	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9633	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9637	Wire Jumper.	3198	036	90010
7521	Power FET, FQFP9N50.	9322	187	16687	9638	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9639	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9640	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET	9340	310	10215	9641	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9642	Wire Jumper.	3198	036	90010
7560	IC, L78L33ACZ.	9322	134	92676	9643	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT	9340	547	00215	9648	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9650	Wire Jumper.	3198	036	90010
7602	IC, M24C08-WBN6.	9322	154	38682	9651	Wire Jumper.	3198	036	90010
7802	IC, HEF4053BT.	9333	729	60653	9652	Wire Jumper.	3198	036	90010
7803	IC, HEF4053BT.	9333	729	60653	9654	Wire Jumper.	3198	036	90010
7804	Transistor, NPN, BC847B(COL)	3198	010	42030	9655	Wire Jumper.	3198	036	90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682	9657	Wire Jumper.	3198	036	90010
7901	IC, AN7522N PH	9322	181	41682	9658	Wire Jumper.	3198	036	90010
9001	Wire Jumper.	3198	036	90010	9659	Wire Jumper.	3198	036	90010
9101	Wire Jumper.	3198	036	90010	9660	Wire Jumper.	3198	036	90010
9102	Wire Jumper.	3198	036	90010	9661	Wire Jumper.	3198	036	90010
9103	Wire Jumper.	3198	036	90010	9662	Wire Jumper.	3198	036	90010
9104	Wire Jumper.	3198	036	90010	9663	Wire Jumper.	3198	036	90010
9123	Wire Jumper.	3198	036	90010	9664	Wire Jumper.	3198	036	90010
9171	Wire Jumper.	3198	036	90010	9665	Wire Jumper.	3198	036	90010
9173	Wire Jumper.	3198	036	90010	9666	Wire Jumper.	3198	036	90010
9175	Wire Jumper.	3198	036	90010	9667	Wire Jumper.	3198	036	90010
9176	Wire Jumper.	3198	036	90010	9668	Wire Jumper.	3198	036	90010
9178	Wire Jumper.	3198	036	90010	9669	Wire Jumper.	3198	036	90010
9179	Wire Jumper.	3198	036	90010	9670	Wire Jumper.	3198	036	90010
9181	Wire Jumper.	3198	036	90010	9671	Wire Jumper.	3198	036	90010
9182	Wire Jumper.	3198	036	90010	9672	Coil, 22u, 10%	3198	018	22290
9183	Wire Jumper.	3198	036	90010	9674	Wire Jumper.	3198	036	90010
9192	Wire Jumper.	3198	036	90010	9675	Wire Jumper.	3198	036	90010
9193	Wire Jumper.	3198	036	90010	9676	Wire Jumper.	3198	036	90010
9311	Wire Jumper.	3198	036	90010	9678	Coil, 22u, 10%	3198	018	22290

S = Safety Part Be sure to use exact replacement part.

29PT563S85A (continued)

9679	Wire Jumper.	3198	036	90010	2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9680	Wire Jumper.	3198	036	90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9681	Wire Jumper.	3198	036	90010	2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9682	Wire Jumper.	3198	036	90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9685	Wire Jumper.	3198	036	90010	2435	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
9686	Wire Jumper.	3198	036	90010	2436	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
9687	Wire Jumper.	3198	036	90010	2440	Cap, 10u, 20%, 16v, Electrolytic. . .	3198	028	21090
9688	Wire Jumper.	3198	036	90010	2442	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9689	Wire Jumper.	3198	036	90010	2443	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9690	Wire Jumper.	3198	036	90010	2450	Cap, 10u, 20%, 16v, Electrolytic. . .	3198	028	21090
9691	Wire Jumper.	3198	036	90010	2452	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9694	Wire Jumper.	3198	036	90010	2453	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9695	Wire Jumper.	3198	036	90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9697	Wire Jumper.	3198	036	90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9698	Wire Jumper.	3198	036	90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
9699	Wire Jumper.	3198	036	90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
9821	Wire Jumper.	3198	036	90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9822	Wire Jumper.	3198	036	90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
9825	Wire Jumper.	3198	036	90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
9828	Wire Jumper.	3198	036	90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9829	Wire Jumper.	3198	036	90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122	118	05951
9831	Wire Jumper.	3198	036	90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9832	Wire Jumper.	3198	036	90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9837	Wire Jumper.	3198	036	90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9838	Wire Jumper.	3198	036	90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
9839	Wire Jumper.	3198	036	90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9846	Wire Jumper.	3198	036	90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9847	Wire Jumper.	3198	036	90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9849	Wire Jumper.	3198	036	90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9851	Wire Jumper.	3198	036	90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9856	Wire Jumper.	3198	036	90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9858	Wire Jumper.	3198	036	90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9859	Wire Jumper.	3198	036	90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9860	Wire Jumper.	3198	036	90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9862	Wire Jumper.	3198	036	90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9863	Wire Jumper.	3198	036	90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9864	Wire Jumper.	3198	036	90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9865	Wire Jumper.	3198	036	90010	3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9867	Wire Jumper.	3198	036	90010	3457	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9869	Wire Jumper.	3198	036	90010	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9870	Wire Jumper.	3198	036	90010	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9871	Wire Jumper.	3198	036	90010	4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9873	Wire Jumper.	3198	036	90010	5401	Coil, 10u, 10%	3198	018	31090
9874	Wire Jumper.	3198	036	90010	5407	Coil, 33u, 5%	3198	018	13390
9875	Wire Jumper.	3198	036	90010	5408	Coil, 33u, 20%	3198	018	33390
9876	Wire Jumper.	3198	036	90010	5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
9877	Wire Jumper.	3198	036	90010	5425	Coil, 10u, 10%	3198	018	31090
9878	Wire Jumper.	3198	036	90010	5428	Coil, 10u, 5%	3198	018	11090
9901	Wire Jumper.	3198	036	90010	5429	Coil, 10u, 10%	3198	018	31090
9902	Wire Jumper.	3198	036	90010	5430	Coil, 10u, 10%	3198	018	31090
9903	Wire Jumper.	3198	036	90010	5440	Coil, 10u, 10%	3198	018	31090
9904	Wire Jumper.	3198	036	90010	5442	Coil, 22u, 5%	3198	018	12290
9905	Wire Jumper.	3198	036	90010	5450	Coil, 10u, 10%	3198	018	31090
9911	Wire Jumper.	3198	036	90010	5452	Coil, 33u, 5%	3198	018	13390
9913	Wire Jumper.	3198	036	90010	7401	Transistor, PNP, BC857B(COL)	3198	010	42150
9914	Wire Jumper.	3198	036	90010	7402	Transistor, NPN, BC847B(COL)	3198	010	42030
9915	Wire Jumper.	3198	036	90010	7403	Transistor, NPN, BC847B(COL)	3198	010	42030
9991	Wire Jumper.	3198	036	90010	7421	IC, TC90A53N	9322	182	18682
9993	Wire Jumper.	3198	036	90010	7440	Transistor, NPN, BC847B(COL)	3198	010	42030
9994	Wire Jumper.	3198	036	90010	7444	Transistor, NPN, BC847B(COL)	3198	010	42030
9996	Wire Jumper.	3198	036	90010	7450	Transistor, NPN, BC847B(COL)	3198	010	42030
9997	Wire Jumper.	3198	036	90010	7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9998	Wire Jumper.	3198	036	90010	9401	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58141	9402	Wire Jumper.	3198	036	90010
					9403	Wire Jumper.	3198	036	90010
					CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts				
0266	6 Pin Connector.	2422	025	16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198	028	44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017	44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025	34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

29PT563S85A (continued)

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	43281
S AC09	CRT, A68AJB82X11	9301	891	90631
S AC12	Degaussing Coil.	2422	549	43967
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01641
AC17	Owner's Manual	3121	235	20791
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53081
AC20A	Cabinet Front.	3139	177	55961
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3121	237	53341
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
REMOTE	Remote Control Transmitter, RC19335004/			
	01.	3139	228	86463

29PT633R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0212	2 Pin Connector.	2422 025 16375	2331	er.	2222 368 90177
0214	5 Pin Connector.	2422 025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0219	6 Pin Connector.	2422 025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0220	5 Pin Connector.	2422 025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0221	2 Pin Connector.	2422 025 15503	2343	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0222	2 Pin Connector.	2422 025 10646	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0223	A/V Jack.	2422 026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0225	SVHS Jack.	2422 026 04926	2401	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0229	3 Pin Connector.	2412 020 00725	2402	Cap, 2u2, 20%, 50v, Electrolytic.	2020 021 90552
0239	3 Pin Connector.	2422 025 16382	2404	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0243	6 Pin Connector.	2422 025 04854	2405	Cap, 47u, 20%, 50v, Electrolytic.	3198 025 54790
0244	5 Pin Connector.	2422 025 04853	2415	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0245	6 Pin Connector.	2422 025 04854	2416	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0246	5 Pin Connector.	2422 025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 0254	9 Pin CRT Socket.	2422 500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0267	3 Pin Connector.	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0269	Jack.	2422 026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 1000	Tuner, V+U PLL.	2422 542 90098	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
1002	SAW Filter, 45.75MHz.	2422 549 44518	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2458	ylene.	2022 333 00163
1660	Crystal, 12MHz000.	2422 543 01203	2459	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1811	3 Pin Connector.	2412 020 00725	2460	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2463	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2464	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090		Cap, 2u2, 5%, 160v, Metalized Polypropy	
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	S 2465	lene.	2222 479 90042
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2466	Cap, 15n, 5%, 1600v, Polypropylene.	2020 301 90255
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2468	Cap, 15n, 10%, 400v, Polyester.	2222 347 90219
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2471	Cap, 27n, 10%, 400v, Polyester.	2222 347 90232
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2472	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2482	Cap, 120n, 5%, 250v, Metalized Polyprop	
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290		ylene.	2222 479 90051
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310		pylene.	2022 330 00018
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
			2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester. . . .	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film. . . .	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film.	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film.	2312 915 14708
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film.	2312 915 12208
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3507	Surge Protector.	2422 549 43073
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film	3198 012 13370	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322 730 61274	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198 021 51530	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198 021 51030	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198 021 51230	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198 021 55620	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198 021 52220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198 021 55620	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198 021 54730	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198 021 31030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198 021 32220	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5001	Coil, 27u, 10%	3198 018 22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5201	Coil, 6u8, 5%	3198 018 16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5202	Wire Jumper.	3198 036 90010
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5341	Coil, 22u.	2422 535 97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 22u.	2422 535 97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5445	Transformer, LOT	2422 531 02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5451	Coil, 22u, 10%	3198 018 72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5457	Coil, 25u.	2422 535 91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 6u8, 20%	3198 018 76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198 021 31530	5480	Coil, 27u, 10%	3198 018 22790
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198 021 31220	S 5501	Mains Filter	2422 549 43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	S 5520	Transformer, SS39009-04.	2422 531 02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	5561	Coil, 27u, 5%	2422 535 95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5602	Coil, 5u6, 5%	3198 018 15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5603	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	5604	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	5861	Coil, 10u, 5%	3198 018 11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198 021 31030	6150	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198 021 31030	6202	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198 021 38220	6206	Zener Diode, 6.8 volt.	3198 020 56880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21.	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21.	3198 010 10070
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21.	3198 010 10070
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148.	3198 010 10010
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

6449	Diode, Signal, BAV99	3198 010 10620	9408	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9409	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9410	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQFPFN50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9407	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

29PT633R85A (continued)

9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58631

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730

2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6092	Diode, Signal.	9340	453	90115
CBA	Top Control Panel.	3139	187	10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part. Be sure to use exact replacement part.

29PT633R85A (continued)

S	AC01	AC Cord.	3135	010	03831
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	36763
	AC08	Chassis Tray	3139	124	31324
S	AC09	CRT, A68QCU754X73(N)	9301	925	60527
S	AC12	Degaussing Coil.	2422	549	43967
	AC13	Front Interface Panel Bracket.	3139	124	32891
	AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
	AC17	Owner's Manual	3121	235	20811
	AC19	Side Jack Panel Bracket.	3139	124	37061
	AC20	Cabinet Front Assembly	3121	237	53091
	AC20A	Cabinet Front.	3139	177	60011
	AC20C	Light Guide.	3139	124	33811
	AC20D	Nameplate.	3141	050	00161
	AC20F	Power Button Cover	3139	124	32921
	AC20G	Power Button Shaft	3139	124	32791
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
	AC20J1	Top Control Bracket.	3139	124	33941
	AC20J3	Top Control Cover.	3139	124	31131
	AC20J4	Top Control Rubber	3139	124	30391
REMOTE		Remote Control Transmitter, RC19335004/			
		01.	3139	228	86463

29PT633R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0211	2 Pin Connector	2422 025 16375	2331	er.	2222 368 90177
0212	5 Pin Connector	2422 025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic . . .	2020 558 90445
0214	6 Pin Connector	2422 025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic . . .	2020 012 93495
0219	5 Pin Connector	2422 025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0220	2 Pin Connector	2422 025 15503	2343	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
0221	2 Pin Connector	2422 025 10646	2344	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559
0222	A/V Jack	2422 026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
0223	SVHS Jack	2422 026 04926	2401	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445
0229	3 Pin Connector	2412 020 00725	2402	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0239	3 Pin Connector	2422 025 16382	2404	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
0243	6 Pin Connector	2422 025 04854	2405	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0244	5 Pin Connector	2422 025 04853	2415	Cap, 220u, 20%, 25v, Electrolytic . . .	3198 025 32210
0245	6 Pin Connector	2422 025 04854	2416	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
0246	5 Pin Connector	2422 025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
S 0254	9 Pin CRT Socket	2422 500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0267	3 Pin Connector	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
0269	Jack	2422 026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic . . .	2020 021 91139
S 1000	Tuner, V+U PLL	2422 542 90098	2451	Cap, 22n, 10%, 50v, Polyester	3198 014 02230
1002	SAW Filter, 45.75MHz	2422 549 44518	2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC	2422 086 10914	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	
S 1510	Relay, 5 Amp, 12V	2422 132 07444	2458	ylene.	2222 479 90019
1650	Crystal, 12MHz000	2422 543 01203	2459	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331
1811	3 Pin Connector	2412 020 00725	2460	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2463	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	2464	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2465	Cap, 2u2, 5%, 160v, Metalized Polypropy	
2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710	2466	lene	2222 479 90042
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2468	Cap, 15n, 5%, 1600v, Polypropylene . . .	2222 375 90158
2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	2471	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2472	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740	2473	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2474	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2475	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2476	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2480	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2481	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2482	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2485	Cap, 120n, 5%, 250v, Metalized Polyprop	
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	ylene.	2222 479 90051
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2489	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2491	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2500	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2501	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2502	Cap, 470n, 20%, 275v, Metalized Polypro	
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2503	pylene	2222 336 29148
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2507	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2508	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2515	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2520	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852	2521	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2525	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2527	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2528	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2540	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2541	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2560	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2561	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2562	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2563	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	2564	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2567	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2568	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2580	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2581	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2590	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2601	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2602	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2606	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010	2607	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	2612	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210	2613	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2615	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	2618	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2619	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220	2802	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester .	2222 370 76104	2803	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2810	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2813	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230		Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230		Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280		Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020		Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020		Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020		Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
				Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic. . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic. . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester. . . .	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 220K, 5%, 1/6W, Carbon Film. . . .	3198 011 02240
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic. . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film. . . .	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3124	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3126	Res, 47 ohm, 5%, 1/16W, Metalized Glass	3198 021 34790	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film.	2312 915 12208
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3507	Surge Protector.	2422 549 43073
3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210
3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3232	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	3523	Res, 100 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03101
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass.	3198	021	54720	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5001	Coil, 27u, 10%	3198	018	22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5002	Coil, 820n, 10%	3198	018	18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5201	Coil, 6u8, 5%	3198	018	16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5202	Wire Jumper.	3198	036	90010
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5241	Wire Jumper.	3198	036	90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5242	Coil, 10u, 5%	3198	018	11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5341	Coil, 22u.	2422	535	97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, LOT	2422	531	02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 22u, 10%	3198	018	72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 6u8, 20%	3198	018	76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198	021	31530	5480	Coil, 47u, 10%	2422	535	97337
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21.	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21.	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21.	3198	010	10070
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6447	Diode, Signal, 1N4148.	3198	010	10010
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133

S = Safety Part Be sure to use exact replacement part.

29PT633R85C (continued)

6449	Diode, Signal, BAV99	3198 010 10620	9408	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9409	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9410	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQFPFN50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9407	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29PT633R85C (continued)

9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	57981

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730

2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6092	Diode, Signal.	9340	453	90115
CBA	Top Control Panel.	3139	187	10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S = Safety Part. Be sure to use exact replacement part.

29PT633R85C (continued)

S	AC01	AC Cord.	3135	010	03831
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	36763
	AC08	Chassis Tray	3139	124	31324
S	AC09	CRT, A68QCP893X001	9322	173	75682
S	AC12	Degaussing Coil	2422	549	43967
	AC13	Front Interface Panel Bracket	3139	124	32891
	AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
	AC17	Owner's Manual	3121	235	20811
	AC19	Side Jack Panel Bracket	3139	124	37061
	AC20	Cabinet Front Assembly	3121	237	53091
	AC20A	Cabinet Front	3139	177	60011
	AC20C	Light Guide	3139	124	33811
	AC20D	Nameplate	3141	050	00161
	AC20F	Power Button Cover	3139	124	32921
	AC20G	Power Button Shaft	3139	124	32791
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
	AC20J1	Top Control Bracket	3139	124	33941
	AC20J3	Top Control Cover	3139	124	31131
	AC20J4	Top Control Rubber	3139	124	30391
REMOTE		Remote Control Transmitter, RC19335004/			
		01.	3139	228	86463

29PT643R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector.	2422 025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0211	2 Pin Connector.	2422 025 16375	2331	er.	2222 368 90177
0212	5 Pin Connector.	2422 025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0214	6 Pin Connector.	2422 025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0219	5 Pin Connector.	2422 025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0220	2 Pin Connector.	2422 025 15503	2343	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0221	2 Pin Connector.	2422 025 10646	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0222	A/V Jack.	2422 026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0223	SVHS Jack.	2422 026 04926	2401	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0229	3 Pin Connector.	2412 020 00725	2402	Cap, 2u2, 20%, 50v, Electrolytic.	2020 021 90552
0239	3 Pin Connector.	2422 025 16382	2404	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0243	6 Pin Connector.	2422 025 04854	2405	Cap, 47u, 20%, 50v, Electrolytic.	3198 025 54790
0244	5 Pin Connector.	2422 025 04853	2415	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0245	6 Pin Connector.	2422 025 04854	2416	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0246	5 Pin Connector.	2422 025 12481	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 0254	9 Pin CRT Socket.	2422 500 80076	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0267	3 Pin Connector.	2412 020 00725	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0269	Jack.	2422 026 05182	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 1000	Tuner, V+U PLL.	2422 542 90141	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
1002	SAW Filter, 45.75MHz.	2422 549 44518	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2457	Cap, 360n, 5%, 250v, Metalized Polyprop	
S 1510	Relay, 5 Amp, 12V.	2422 132 07444	2458	ylene.	2022 333 00163
1600	Crystal, 12MHz000.	2422 543 01203	2459	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1811	3 Pin Connector.	2412 020 00725	2460	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2463	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2464	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2465	Cap, 2u2, 5%, 160v, Metalized Polypropy	
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	S 2466	lene.	2222 479 90042
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2467	Cap, 15n, 5%, 1600v, Polypropylene.	2020 301 90255
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2471	Cap, 15n, 10%, 400v, Polyester.	2222 347 90219
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2472	Cap, 27n, 10%, 400v, Polyester.	2222 347 90232
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2473	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2474	Cap, 150n, 10%, 63v, Metalized Polyeste	
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2475	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75154
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2476	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2480	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2481	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2482	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2485	Cap, 120n, 5%, 250v, Metalized Polyprop	
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2486	ylene.	2222 479 90051
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2487	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2488	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2489	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2491	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	S 2500	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2501	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2502	Cap, 470n, 20%, 275v, Metalized Polypro	
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2503	pylene.	2022 330 00018
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2507	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2508	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2515	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2520	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2521	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2522	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	S 2523	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2525	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2527	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2541	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2561	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2562	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2563	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2564	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2580	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2601	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2602	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2607	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2608	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2609	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2611	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2612	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2613	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2615	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2618	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2619	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2802	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2803	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2810	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 021 21050
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2813	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2816	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020		Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020		Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

29PT643R85A (continued)

2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic . . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic	2238 580 15642	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2907	Cap, 1n2, 10%, 50v, Ceramic	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass .	3198 021 32240	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3470	Res, 470K, 5%, 1/16W, Metalized Glass .	3198 021 34740
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass .	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film	2120 101 74158
3154	Res, 5K6, 5%, 1/6W, Carbon Film	3198 011 05620	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3156	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film . .	3198 012 32290
3159	Res, 1K2, 1%, 1/8W, Metalized Glass . .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	S 3504	Res, PTC, 3 ohm, 144V	2122 663 00019
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3506	Res, 1M5, 5%, 1/2W, Metalized Glass . .	2322 242 13155
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film .	3198 011 05610	3507	Surge Protector	2422 549 43073
3217	Res, 330K, 5%, 1/16W, Metalized Glass .	3198 021 33340	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3510	Res, NTC, 4R7, 20%, 3W1	2122 612 00056
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film .	3198 011 02710
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film .	3198 011 05610	3521	Res, 4R7, 5%, 1/6W, Carbon Film	3198 011 04780
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass .	3198 021 53340
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3524	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070

S = Safety Part Be sure to use exact replacement part.

29PT643R85A (continued)

S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322 734 64702	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322 730 61274	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198 021 32220	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5001	Coil, 27u, 10%	3198 018 22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5201	Coil, 6u8, 5%	3198 018 16880
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5202	Wire Jumper.	3198 036 90010
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5204	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	5205	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198 021 34720	5206	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5341	Coil, 22u.	2422 535 97333
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 3u9, 10%	2422 535 97323
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5445	Transformer, LOT	2422 531 02574
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5451	Coil, 22u, 10%	3198 018 72290
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5452	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5457	Coil, 25u.	2422 535 91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 6u8, 20%	3198 018 76880
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198 021 31530	5480	Coil, 47u, 10%	2422 535 97337
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198 021 31220	S 5501	Mains Filter	2422 549 43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	S 5520	Transformer, SS39009-04.	2422 531 02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320	5561	Coil, 27u, 5%	2422 535 95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5602	Coil, 5u6, 5%	3198 018 15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5603	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	5604	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320	5861	Coil, 10u, 5%	3198 018 11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	6150	Diode, Signal, BAS316.	3198 010 10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198 021 33320	6201	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030	6202	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198 021 38220	6206	Zener Diode, 6.8 volt.	3198 020 56880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21	3198 010 10070
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148.	3198 010 10010
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6449	Diode, Signal, BAV99	3198 010 10620
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6460	Diode, Rect, BY228/24.	9340 559 50112

29PT643R85A (continued)

6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9411	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9412	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9413	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9414	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9415	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9417	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9418	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9419	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9421	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9422	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9423	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9425	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9426	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9427	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9453	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9460	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9500	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9501	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9503	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9506	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9507	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9510	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9512	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9513	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9515	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9641	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9643	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9648	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9652	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%	3198 018 22290
9406	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%	3198 018 22290
9410	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29PT643R85A (continued)

9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58631

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR.	9322	185	69682

S = Safety Part. Be sure to use exact replacement part.

6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack.	2422	026	04747
0250	A/V Jack.	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas.	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly.	3139	177	26231

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glass.	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas.	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass.	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly.	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used).	3135	014	04471
AC04	Batteries for Remote Control Transmitt.	9299	000	65263
AC05	Cabinet Back.	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39301
AC08	Chassis Tray.	3139	124	31325
S AC09	CRT, A68QCU754X73(N).	9301	925	60527

29PT643R85A (continued)

S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual	3121	235	21101
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53302
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 5W (2 Used).	2422	264	00409
AC20J	Top Control Assembly	3139	138	11451
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139	228	86464

29PT6631/44 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0022	Bracket.	3139	124	44421			
0122	Heatsink.	3139	121	62214			
0127	Socket Fuse.	2422	088	00271			
0129	NTC Holder.	3139	120	10151			
0136	IC-Spring.	3104	301	22081			
0137	Spring.	3139	121	24583			
0138	IC-Spring.	3104	301	22081			
0139	Spring for Bracket.	3122	121	24786			
0140	Spring.	3139	121	24583			
0141	IC-Spring.	3104	301	22081			
0152	Cable, DIP, 6 Pin, 400mm.	3104	301	09421			
0153	Cable, DIPMate.	3104	301	08381			
0211	2 Pin Connector.	2422	025	16374			
0214	5 Pin Connector.	2422	025	12481			
0219	6 Pin Connector.	2422	025	12482			
0223	A/V Jack.	2422	026	05236			
0225	SVHS Jack.	2422	026	04926			
0239	3 Pin Connector.	2422	025	16382			
0246	5 Pin Connector.	2422	025	12481			
S 0254	9 Pin CRT Socket.	2422	500	80076			
0269	Jack.	2422	026	05182			
0320	Factory Plate.	3122	120	01701			
S 1000	Tuner, V+U, PLL.	2422	542	90108			
S 1515	Relay, 5 Amp, 12V.	2422	132	07444			
1810	6 Pin Connector.	2422	025	16607			
1831	Crystal, Resonator, 18MHz432, 12 Pin, H						
	C49/U A.	2422	543	00842			
2004	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	024	44730			
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740			
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250			
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250			
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250			
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250			
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016	32290			
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310			
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040			
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786	19852			
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250			
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250			
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040			
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025	54780			
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017	41050			
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230			
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230			
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230			
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026	21020			
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014	04740			
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017	32230			
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017	32220			
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240			
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026	21020			
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558	90445			
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558	90559			
2401	Cap, 2u2, 20%, 50v, Electrolytic.	2020	021	90552			
2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019	44710			
2404	Cap, 47u, 20%, 50v, Electrolytic.	3198	025	54790			
2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310			
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021	91139			
2451	Cap, 22n, 10%, 50v, Polyester.	3198	014	02230			
2452	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810			
2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022	333	00163			
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021	91331			
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019	46810			
S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558	90489			
2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222	479	90042			
S 2465	Cap, 15n, 5%, 1600v, Polypropylene.	2020	301	90255			
2466	Cap, 15n, 10%, 400v, Polyester.	2222	347	90219			
2468	Cap, 22n, 10%, 400v, Polyester.	2222	347	90223			
2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222	365	75154			
2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021	90586			
2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222	479	90051			
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021	90856			
2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021	91577			
2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021	90854			
2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021	91049			
2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021	91577			
S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022	330	00018			
S 2503	Cap, 330u, 20%, 450v, Electrolytic.	2020	024	90774			
2509	Cap, 100n, 20%, 275v, Metalized Polypropylene.	2222	336	29144			
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554	90172			
S 2516	Cap, 330p, 20%, 50v, Ceramic.	2020	554	90121			
2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030			
2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021	91374			
2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910	19856			
2604	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016	31020			
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240			
2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023	22240			
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740			
2831	Cap, 1p, 25%, 50v, Ceramic.	3198	016	31080			
2832	Cap, 1p, 25%, 50v, Ceramic.	3198	016	31080			
2833	Cap, 47p, 5%, 50v, Ceramic.	3198	016	34790			
2834	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710			
2835	Cap, 220p, 5%, 50v, Ceramic.	3198	016	32210			
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198	017	31520			
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025	54780			
2840	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040			
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2842	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040			
2843	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2844	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090			
2845	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040			
2846	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010			
2849	Cap, 1n, 5%, 25v, Ceramic.	3198	016	31020			
2850	Cap, 1n, 5%, 25v, Ceramic.	3198	016	31020			
2852	Cap, 1n, 5%, 25v, Ceramic.	3198	016	31020			
2854	Cap, 1n, 5%, 25v, Ceramic.	3198	016	31020			
2855	Cap, 33p, 5%, 50v, Ceramic.	3198	016	33390			
2856	Cap, 47p, 5%, 50v, Ceramic.	3198	016	34790			
2857	Cap, 150p, 5%, 50v, Ceramic.	3198	016	31510			
2860	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810			
2894	Cap, 220p, 5%, 50v, Ceramic.	3198	016	32210			
2895	Cap, 560p, 5%, 25v, Ceramic.	3198	016	35610			
2897	Cap, 390p, 5%, 50v, Ceramic.	3198	016	33910			
2898	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030			
2902	Cap, 1000u, 20%, 25v, Electrolytic.	3198	026	31020			
2904	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740			
2905	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020			
2906	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017	24740			
2907	Cap, 1n, 10%, 50v, Ceramic.	3198	017	31020			
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film.	3198	011	06890			
3102	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020			
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198	011	01510			
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198	021	32240			
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198	011	01510			
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198	021	32240			
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198	011	07590			
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010			
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198	011	07590			
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010			
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198	011	07590			
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010			
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198	011	01510			
3124	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730			
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198	011	01510			
3126	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730			
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film.	3198	011	01510			
3132	Res, 47K, 5%, 1/10W, Metalized						

29PT6631/44 (continued)

3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3454	Res, 2K, 1%, 3/5W, Metal Film. . . .	2312 915 12002	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	5001	Coil, 27u, 10%	3198 018 22790
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	5202	Wire Jumper.	3198 036 90010
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	5241	Wire Jumper.	3198 036 90010
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290	5341	Coil, 22u, 10%	2422 535 97333
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5342	Coil, 3u9, 10%	2422 535 97323
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5401	Coil, 1mH, 10%	3198 018 71020
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	S 5445	Transformer, LOT	2422 531 02574
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	5451	Coil, 22u, 10%	3198 018 72290
3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear	3128 138 53201
3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	5463	Coil, Choke.	3128 138 37021
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	5471	Coil, 6u8, 20%	3198 018 76880
S 3504	Res, PTC, 9R 220V.	2120 661 00024	5480	Coil, 47u, 10%	2422 535 97337
3521	Res, 22 ohm, 5%, 1/6W, Carbon Film . .	3198 011 02290	S 5500	Mains Filter	2422 549 43567
3522	Res, 330K, 1%, 1/8W, Metalized Glass .	2322 734 63304	S 5520	Transformer, SS49109-00 B.	2422 531 02579
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03479	5810	Coil, 10u, 10%	3198 018 51090
3526	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570	5831	Coil, 6u8, 5%	3198 018 16880
3527	Res, 0R22, 5%, 3/5W, Metal Film. . . .	3198 012 12270	5832	Coil, 6u8, 5%	3198 018 16880
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	5833	Coil, 6u8, 5%	3198 018 16880
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	5835	Coil, 12u, 10%	3198 018 31290
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	6150	Diode, Signal, BAS316.	3198 010 10630
3561	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210	6400	Res, 1K, 1%, 3/5W, Metal Film. . . .	2312 915 11002
3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220	6401	Zener Diode, 47 volt	3198 010 24790
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	6448	Zener Diode, 6.2 volt.	9331 668 30133
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	6460	Diode, Rect, BY228/24.	9340 559 50112
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	6469	Diode, Rect, BYV95C.	9335 001 80133
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	6476	Zener Diode, 15 volt	3198 010 21590
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	6482	Zener Diode, 9.1 volt.	9331 177 80133
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	6485	Diode, Rect, BYV95C.	9335 000 80133
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	6487	Diode, Rect, BYV95A.	9335 000 90133
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	6490	Diode, Rect, BYV95C.	9335 001 80133
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	6500	Diode, Bridge Rect, GBU4JL-7002. . .	9322 132 55667
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	6520	Diode, Rect, BYV95A.	9335 000 90133
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	6541	Zener Diode, 9.1 volt.	9322 150 08685
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	6560	Diode, Rect, BYV29X-500.	9340 555 59127
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	6570	Zener Diode, 6.2 volt.	9322 163 91685
3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	6582	Diode, Rect, STPS10L60D.	9322 175 70667
3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	6831	Diode, Signal, 1N4148.	3198 010 10010
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	7400	Power FET, STP3NC60FP.	9322 157 37687
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 7515	Optical Coupler, TCET1104(G)	9322 175 72667
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	7521	Power FET, STP7NC80ZFP	3139 120 51961
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	7560	IC, L78L33ACZ.	9322 134 92676
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	7602	IC, M24C08-WBN6.	9322 154 38682
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	7606	Transistor, NPN, PDTCT1432T	9340 547 00215
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	7802	IC, HEF4053BT.	9333 729 60653
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	7803	IC, HEF4053BT.	9333 729 60653
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820	7831	IC MSP3425G-PO-B8-V3 (MIAS) L . . .	9322 187 89682
3903	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	7901	IC, AN7580	9322 166 29682
3905	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	9001	Wire Jumper.	3198 036 90010
3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	9101	Wire Jumper.	3198 036 90010
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	9102	Wire Jumper.	3198 036 90010
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9103	Wire Jumper.	3198 036 90010
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9104	Wire Jumper.	3198 036 90010
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9123	Wire Jumper.	3198 036 90010
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9171	Wire Jumper.	3198 036 90010
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9173	Wire Jumper.	3198 036 90010
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9175	Wire Jumper.	3198 036 90010
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9176	Wire Jumper.	3198 036 90010
4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9178	Wire Jumper.	3198 036 90010
4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9179	Wire Jumper.	3198 036 90010
4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9181	Wire Jumper.	3198 036 90010
4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9182	Wire Jumper.	3198 036 90010
4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9183	Wire Jumper.	3198 036 90010
4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9192	Wire Jumper.	3198 036 90010
4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030	9193	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

29PT6631/44 (continued)

9311	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9525	Wire Jumper, 0.58MM.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010

9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis	3141 058 58171

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010

29PT6631/44 (continued)

2432	Cap, 10n, 10%, 50v, Ceramic	3198	017	31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198	017	31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198	017	31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass .	3198	021	31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122	118	05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310

S = Safety Part Be sure to use exact replacement part.

3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3121	231	00081
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39301
AC08	Chassis Tray	3139	124	31325
AC09	CRT, A68QCP893X003	9322	173	76682
S AC12	Degaussing Coil.	2422	549	45505
AC13	Front Interface Panel Bracket.	3139	124	32892
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual	3121	235	20832
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53102
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	177	56381

29PT6631/44 (continued)

REMOTE Remote Control Transmitter, RC19335004/
01. 3139 228 86464

29PT663R85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16374	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0212	2 Pin Connector.	2422 025 16375	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0214	5 Pin Connector.	2422 025 12481	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0219	6 Pin Connector.	2422 025 12482	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0220	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0221	2 Pin Connector.	2422 025 15503	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0222	2 Pin Connector.	2422 025 10646	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0223	A/V Jack	2422 026 05236	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0225	SVHS Jack.	2422 026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0239	3 Pin Connector.	2422 025 16382	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0243	6 Pin Connector.	2422 025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0245	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0246	5 Pin Connector.	2422 025 12481	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 0254	9 Pin CRT Socket	2422 500 80076	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
0267	3 Pin Connector.	2412 020 00725	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
0269	Jack	2422 026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1000	Tuner, V+U PLL	2422 542 90098	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2022 333 00163
1002	SAW Filter, 45.75MHz	2422 549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
1660	Crystal, 12MHz000	2422 543 01203	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042
1810	6 Pin Connector.	2422 025 16607	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2468	Cap, 27n, 10%, 400v, Polyester	2222 347 90232
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part Be sure to use exact replacement part.

29PT663R85A (continued)

2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2120 101 74158
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198 012 13370
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030

S = Safety Part Be sure to use exact replacement part.

29PT663R85A (continued)

3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322	734	64702	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3565	Res, 220 ohm, 5%, 1W, Metal Film	3198	012	12210	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2306	204	03109	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass .	3198	021	52240	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film	3198	011	02220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198	011	04710	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film	3198	011	06820	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5001	Coil, 27u, 10%	3198	018	22790
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198	021	31030	5002	Coil, 820n, 10%	3198	018	18270
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5201	Coil, 6u8, 5%	3198	018	16880
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5202	Wire Jumper	3198	036	90010
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198	011	01010	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021	51020	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper	3198	036	90010
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5242	Coil, 10u, 5%	3198	018	11090
3640	Res, 8K2, 5%, 1/6W, Carbon Film	3198	011	08220	5341	Coil, 22u.	2422	535	97333
3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198	021	34720	5342	Coil, 22u.	2422	535	97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5401	Coil, 1mH, 10%	3198	018	71020
3802	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198	021	31020	S 5445	Transformer, LOT	2422	531	02574
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5451	Coil, 22u, 10%	3198	018	72290
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3812	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198	021	31020	S 5457	Coil, 25u.	2422	535	91028
3813	Res, 1K, 5%, 1/16W, Metalized Glass . . .	3198	021	31020	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3814	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3815	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3816	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3817	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5480	Coil, 27u, 10%	3198	018	22790
3818	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3819	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3820	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3821	Res, 100K, 5%, 1/16W, Metalized Glass . .	3198	021	31040	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5561	Coil, 27u, 5%	2422	535	95366
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198	011	01010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198	011	01010	5602	Coil, 5u6, 5%	3198	018	15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198	011	01010	5604	Coil, 5u6, 5%	3198	018	15680
3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198	021	32220	5810	Coil, 10u, 10%	3198	018	51090
3901	Res, 6K8, 5%, 1/16W, Metalized Glass . .	3198	021	36820	5831	Coil, 6u8, 5%	3198	018	16880
3903	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5832	Coil, 6u8, 5%	3198	018	16880
3905	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198	021	34730	5833	Coil, 6u8, 5%	3198	018	16880
3909	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198	021	32730	5835	Coil, 12u, 10%	3198	018	31290
3910	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198	021	32730	6001	Zener Diode, 33 volt	3198	010	23390
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film . . .	3198	011	08210	6150	Diode, Signal, BAS316.	3198	010	10630
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6332	Diode, Signal, BAS316.	3198	010	10630
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6335	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6401	Zener Diode, 47 volt	3198	010	24790
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6447	Diode, Signal, 1N4148.	3198	010	10010
4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6448	Zener Diode, 6.2 volt.	9331	668	30133
4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6449	Diode, Signal, BAV99	3198	010	10620
4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6460	Diode, Rect, BY228/24.	9340	559	50112
4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6461	Diode, Rect, RGP303-L7004.	9338	617	60682
4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6465	Diode, Signal, BAV21	3198	010	10070
4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6466	Diode, Signal, BAV21	3198	010	10070

S = Safety Part Be sure to use exact replacement part.

29PT663R85A (continued)

6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYD33J.	9337 234 20133	9425	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9426	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9453	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9500	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9501	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9503	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9511	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9512	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9514	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9515	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9516	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9518	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9521	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9522	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9524	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9528	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9530	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9611	Coil, 27u, 10%.	3198 018 22790
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9614	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9615	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9619	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9620	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9621	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9622	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9623	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9624	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9626	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9627	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9628	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9629	Wire Jumper.	3198 036 90010
7521	Power FET, FQFFN50.	9322 187 16687	9631	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9633	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9637	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, PPTC143ZT.	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9639	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9640	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9642	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL).	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L.	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580.	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL).	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%.	3198 018 22290
9311	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9406	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%.	3198 018 22290
9408	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

29PT663R85A (continued)

9682	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9863	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9870	Wire Jumper.	3198	036	90010
9871	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9876	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9878	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9923	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58621

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts				
0266	6 Pin Connector.	2422	025	16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198	028	44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017	44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025	34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030

S = Safety Part. Be sure to use exact replacement part.

2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122	118	05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667

29PT663R85A (continued)

9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

REMOTE	Remote Control Transmitter, RC19335004/			
	01.	3139	228	86463

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	39301
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3139	124	31122
AC17	Owner's Manual	3121	235	20831
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53101
AC20A	Cabinet Front.	3139	177	58401
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J	Top Control Assembly	3139	138	11451
AC20J1	Top Control Bracket.	3139	124	39802
AC20J2	Top Control Buttons.	3139	124	39812

S = Safety Part Be sure to use exact replacement part.

29PT663R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector.	2422 025 16374	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0212	2 Pin Connector.	2422 025 16375	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0214	5 Pin Connector.	2422 025 12481	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0219	6 Pin Connector.	2422 025 12482	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0220	5 Pin Connector.	2422 025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0221	2 Pin Connector.	2422 025 15503	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
0222	2 Pin Connector.	2422 025 10646	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0223	A/V Jack	2422 026 05236	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0225	SVHS Jack.	2422 026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0239	3 Pin Connector.	2422 025 16382	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
0243	6 Pin Connector.	2422 025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0244	5 Pin Connector.	2422 025 04853	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
0245	6 Pin Connector.	2422 025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0246	5 Pin Connector.	2422 025 12481	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 0254	9 Pin CRT Socket	2422 500 80076	2451	Cap, 22n, 10%, 50v, Polyester.	3198 014 02230
0267	3 Pin Connector.	2412 020 00725	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
0269	Jack	2422 026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1000	Tuner, V+U PLL	2422 542 90098	2457	Cap, 360n, 5%, 250v, Metalized Polypropylene.	2222 479 90019
1002	SAW Filter, 45.75MHz	2422 549 44518	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
1660	Crystal, 12MHz000	2422 543 01203	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042
1810	6 Pin Connector.	2422 025 16607	2465	Cap, 15n, 5%, 1600v, Polypropylene	2222 375 90158
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2468	Cap, 22n, 10%, 400v, Polyester	2222 347 90223
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2472	Cap, 150n, 10%, 63v, Metalized Polyester.	2222 365 75154
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2473	Cap, 100n, 10%, 63v, Metalized Polyester.	2222 365 75104
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 120n, 5%, 250v, Metalized Polypropylene.	2222 479 90051
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2222 336 29148
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445	2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109	
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X	34.	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33	0X34	2306 204 03278
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X	34.	2306 204 03108
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34	2306 204 03278
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK33	0X34	2306 204 03278
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34	2306 204 03278
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34	2306 204 03278
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34	2306 204 03278
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520	
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310	
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3401	Res, 220K, 5%, 1/6W, Carbon Film	3198 011 02240	
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478	
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010	
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030	
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050	
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530	
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810	
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102	
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002	
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	S 3455	Res, 6R8, 5%, 1/3W, Metal Film	3198 012 26880	
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	S 3459	Res, 15K, 5%, 1/3W, Metal Film	3198 012 21530	
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390	
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208	
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720	
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	
3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230	
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030	
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155	
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3507	Surge Protector.	2422 549 43073	
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	
3241	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220	
3242	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730	3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	
3245	Res, 39K, 1%, 1/16W, Metalized Glass . .	2322 704 63903	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101	
3246	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630	

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass.	3198	021	54720	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass.	3198	021	54720	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3565	Res, 220 ohm, 5%, 1W, Metal Film	3198	012	12210	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306	204	03109	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	5001	Coil, 27u, 10%	3198	018	22790
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	5002	Coil, 820n, 10%	3198	018	18270
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	5201	Coil, 6u8, 5%	3198	018	16880
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5202	Wire Jumper.	3198	036	90010
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper.	3198	036	90010
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5242	Coil, 10u, 5%	3198	018	11090
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5341	Coil, 22u.	2422	535	97333
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	5342	Coil, 22u for A80QCF340X34	2422	535	97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5342	Coil, 47u for A80QCF330X34	3198	018	24790
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5401	Coil, 1mH, 10%	3198	018	71020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	S 5445	Transformer, LOT	2422	531	02574
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5451	Coil, 22u, 10%	3198	018	72290
3812	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3813	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	S 5457	Coil, 25u.	2422	535	91028
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10015-00	2422	531	02465
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 6u8, 20%	3198	018	76880
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5480	Coil, 47u, 10%	2422	535	97337
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5501	Mains Filter	2422	549	43432
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5520	Transformer, SS42202-00 B.	2422	531	02562
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730	5561	Coil, 27u, 5%	2422	535	95366
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5602	Coil, 5u6, 5%	3198	018	15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5603	Coil, 5u6, 5%	3198	018	15680
3843	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	5604	Coil, 5u6, 5%	3198	018	15680
3901	Res, 6K8, 5%, 1/16W, Metalized Glass.	3198	021	36820	5810	Coil, 10u, 10%	3198	018	51090
3903	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730	5831	Coil, 6u8, 5%	3198	018	16880
3905	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730	5832	Coil, 6u8, 5%	3198	018	16880
3909	Res, 27K, 5%, 1/16W, Metalized Glass.	3198	021	32730	5833	Coil, 6u8, 5%	3198	018	16880
3910	Res, 27K, 5%, 1/16W, Metalized Glass.	3198	021	32730	5835	Coil, 12u, 10%	3198	018	31290
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198	011	08210	6001	Zener Diode, 33 volt	3198	010	23390
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6150	Diode, Signal, BAS316.	3198	010	10630
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6201	Diode, Signal, BAS316.	3198	010	10630
4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6202	Diode, Signal, BAS316.	3198	010	10630
4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6206	Zener Diode, 6.8 volt.	3198	020	56880
4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6331	Diode, Signal, BAV21	3198	010	10070
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6333	Diode, Signal, BAV21	3198	010	10070
4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6335	Diode, Signal, BAV21	3198	010	10070
4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790
4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6445	Zener Diode, 10 volt	3198	020	51090

S = Safety Part Be sure to use exact replacement part.

29PT663R85C (continued)

6447	Diode, Signal, 1N4148.	3198 010 10010	9311	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9312	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9406	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9407	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9408	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYD33J.	9337 234 20133	9425	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9426	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9427	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9453	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9500	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9501	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9503	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9511	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9512	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9514	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9515	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9516	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9518	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9521	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9522	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9524	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9528	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9530	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9611	Coil, 27u, 10%.	3198 018 22790
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9614	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9615	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9619	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9620	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9621	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9622	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9623	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9624	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9626	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9627	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9628	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9629	Wire Jumper.	3198 036 90010
7521	Power FET, FQFFN50.	9322 187 16687	9631	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9633	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9637	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9639	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9640	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9642	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL).	3198 010 42030	9651	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L.	9322 187 89682	9652	Wire Jumper.	3198 036 90010
7901	IC, AN7580.	9322 166 29682	9654	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL).	3198 010 42030	9655	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%.	3198 018 22290

S = Safety Part. Be sure to use exact replacement part.

29PT663R85C (continued)

9674	Wire Jumper.	3198	036	90010	2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9675	Wire Jumper.	3198	036	90010	2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9676	Wire Jumper.	3198	036	90010	2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9678	Coil, 22u, 10%	3198	018	22290	2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9679	Wire Jumper.	3198	036	90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9680	Wire Jumper.	3198	036	90010	2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9681	Wire Jumper.	3198	036	90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9682	Wire Jumper.	3198	036	90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9685	Wire Jumper.	3198	036	90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9686	Wire Jumper.	3198	036	90010	2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
9687	Wire Jumper.	3198	036	90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9688	Wire Jumper.	3198	036	90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9689	Wire Jumper.	3198	036	90010	2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
9690	Wire Jumper.	3198	036	90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9691	Wire Jumper.	3198	036	90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9694	Wire Jumper.	3198	036	90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9695	Wire Jumper.	3198	036	90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9697	Wire Jumper.	3198	036	90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
9698	Wire Jumper.	3198	036	90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
9699	Wire Jumper.	3198	036	90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9821	Wire Jumper.	3198	036	90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
9822	Wire Jumper.	3198	036	90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020
9825	Wire Jumper.	3198	036	90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9828	Wire Jumper.	3198	036	90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122	118	05951
9829	Wire Jumper.	3198	036	90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9831	Wire Jumper.	3198	036	90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9832	Wire Jumper.	3198	036	90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9837	Wire Jumper.	3198	036	90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
9838	Wire Jumper.	3198	036	90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9839	Wire Jumper.	3198	036	90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9846	Wire Jumper.	3198	036	90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9847	Wire Jumper.	3198	036	90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9849	Wire Jumper.	3198	036	90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9851	Wire Jumper.	3198	036	90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9856	Wire Jumper.	3198	036	90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9858	Wire Jumper.	3198	036	90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9859	Wire Jumper.	3198	036	90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9860	Wire Jumper.	3198	036	90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9862	Wire Jumper.	3198	036	90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9863	Wire Jumper.	3198	036	90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9864	Wire Jumper.	3198	036	90010	3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9865	Wire Jumper.	3198	036	90010	3457	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9868	Wire Jumper.	3198	036	90010	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9869	Wire Jumper.	3198	036	90010	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9870	Wire Jumper.	3198	036	90010	4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9871	Wire Jumper.	3198	036	90010	5401	Coil, 10u, 10%	3198	018	31090
9873	Wire Jumper.	3198	036	90010	5407	Coil, 33u, 5%	3198	018	13390
9874	Wire Jumper.	3198	036	90010	5408	Coil, 33u, 20%	3198	018	33390
9875	Wire Jumper.	3198	036	90010	5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
9876	Wire Jumper.	3198	036	90010	5425	Coil, 10u, 10%	3198	018	31090
9877	Wire Jumper.	3198	036	90010	5428	Coil, 10u, 5%	3198	018	11090
9878	Wire Jumper.	3198	036	90010	5429	Coil, 10u, 10%	3198	018	31090
9901	Wire Jumper.	3198	036	90010	5430	Coil, 10u, 10%	3198	018	31090
9902	Wire Jumper.	3198	036	90010	5440	Coil, 10u, 10%	3198	018	31090
9903	Wire Jumper.	3198	036	90010	5442	Coil, 22u, 5%	3198	018	12290
9904	Wire Jumper.	3198	036	90010	5450	Coil, 10u, 10%	3198	018	31090
9911	Wire Jumper.	3198	036	90010	5452	Coil, 33u, 5%	3198	018	13390
9913	Wire Jumper.	3198	036	90010	7401	Transistor, PNP, BC857B(COL)	3198	010	42150
9914	Wire Jumper.	3198	036	90010	7402	Transistor, NPN, BC847B(COL)	3198	010	42030
9915	Wire Jumper.	3198	036	90010	7403	Transistor, NPN, BC847B(COL)	3198	010	42030
9923	Wire Jumper.	3198	036	90010	7421	IC, TC90A53N	9322	182	18682
9991	Wire Jumper.	3198	036	90010	7440	Transistor, NPN, BC847B(COL)	3198	010	42030
9993	Wire Jumper.	3198	036	90010	7444	Transistor, NPN, BC847B(COL)	3198	010	42030
9996	Wire Jumper.	3198	036	90010	7450	Transistor, NPN, BC847B(COL)	3198	010	42030
9997	Wire Jumper.	3198	036	90010	7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9998	Wire Jumper.	3198	036	90010	9401	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	57991	9402	Wire Jumper.	3198	036	90010
					9403	Wire Jumper.	3198	036	90010
					CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts				
0266	6 Pin Connector.	2422	025	16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198	028	44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. .	3198	017	44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025	34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040

29PT663R85C (continued)

S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335	AC20C	Light Guide.	3139	124	39701
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335	AC20D	Nameplate.	3141	050	00161
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610	AC20E	Power Button	3139	138	10881
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210	AC20J	Top Control Assembly	3139	138	11451
6691	LED, LTL-10234WHCR	9322	185	69682	AC20J1	Top Control Bracket.	3139	124	39802
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667	AC20J2	Top Control Buttons.	3139	124	39812
9001	Wire Jumper.	3198	036	90010	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139	228	86463
9002	Wire Jumper.	3198	036	90010					
CBA	Front Interface Panel Assembly	3139	177	26211					

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39301
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A68QCP893X001	9322	173	75682
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3139	124	31122
AC17	Owner's Manual	3121	235	20831
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53101
AC20A	Cabinet Front.	3139	177	58401

S = Safety Part Be sure to use exact replacement part.

29PT663S85A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0127	Socket Fuse.	2422	088 00271	2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
0129	NTC Holder.	3139	120 10151	2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
0136	IC-Spring.	3104	301 22081	2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280
0137	Spring.	3139	121 24583	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0138	IC-Spring.	3104	301 22081	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0139	Spring for Bracket.	3122	121 24786	2254	Res, Zero ohm, "Chip" Jumper.	3198	021 90020
0140	Spring.	3139	121 24583	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0141	IC-Spring.	3104	301 22081		er.	2222	368 90177
0152	Cable, DIP, 6 Pin, 400mm.	3104	301 09421	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0153	Cable, DIPMate, 5 Pin, 480mm.	3139	121 07951	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0211	2 Pin Connector.	2422	025 16374	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0212	2 Pin Connector.	2422	025 16375	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0214	5 Pin Connector.	2422	025 12481	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0219	6 Pin Connector.	2422	025 12482	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0220	5 Pin Connector.	2422	025 04853	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0221	2 Pin Connector.	2422	025 15503	2401	Cap, 2u2, 20%, 50v, Electrolytic.	2020	021 90552
0222	2 Pin Connector.	2422	025 10646	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0223	A/V Jack.	2422	026 05236	2404	Cap, 47u, 20%, 50v, Electrolytic.	3198	025 54790
0225	SVHS Jack.	2422	026 04926	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0239	3 Pin Connector.	2422	025 16382	2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
0243	6 Pin Connector.	2422	025 04854	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0244	5 Pin Connector.	2422	025 04853	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
0245	6 Pin Connector.	2422	025 04854	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0246	5 Pin Connector.	2422	025 12481	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
S 0254	9 Pin CRT Socket.	2422	500 80076	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
0267	3 Pin Connector.	2412	020 00725	2452	Cap, 180p, 5%, 50v, Ceramic.	3198	016 01810
0269	Jack.	2422	026 05182	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
S 1000	Tuner, V+U PLL.	2422	542 90141	2457	Cap, 360n, 5%, 250v, Metalized Polyprop		
1002	SAW Filter, 45.75MHz.	2422	549 44518		ylene.	2022	333 00163
1200	Filter, Ceramic, 4MHz5.	2422	549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1660	Crystal, 12MHz000.	2422	543 01203	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
1810	6 Pin Connector.	2422	025 16607	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
1831	Crystal, Resonator, 18MHz432, 12 Pin, H				lene.	2222	479 90042
	C49/U A.	2422	543 00842	S 2465	Cap, 15n, 5%, 1600v, Polypropylene.	2020	301 90255
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2466	Cap, 15n, 10%, 400v, Polyester.	2222	347 90219
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2468	Cap, 27n, 10%, 400v, Polyester.	2222	347 90232
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2482	Cap, 120n, 5%, 250v, Metalized Polyprop		
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090		ylene.	2222	479 90051
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250		pylene.	2022	330 00018
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91374
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2604	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
				2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
				2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2807	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2902	Cap, 1000u, 20%, 25v, Electrolytic	3198 026 31020	3403	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3452	Res, 5K1, 1%, 3/5W, Metal Film	2312 915 15102
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3472	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2120 101 74158
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 32290
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass . .	3198 021 33330	3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3507	Surge Protector.	2422 549 43073
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film . .	3198 013 02210
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass. .	3198 021 52220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3605	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	5001	Coil, 27u, 10%	3198 018 22790
3630	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	5002	Coil, 820n, 10%	3198 018 18270
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5201	Coil, 6u8, 5%	3198 018 16880
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5202	Wire Jumper.	3198 036 90010
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5241	Wire Jumper.	3198 036 90010
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5242	Coil, 10u, 5%	3198 018 11090
3694	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	5341	Coil, 22u.	2422 535 97333
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5342	Coil, 3u9, 10%	2422 535 97323
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5401	Coil, 1mH, 10%	3198 018 71020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5445	Transformer, LOT	2422 531 02574
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	5451	Coil, 22u, 10%	3198 018 72290
3812	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3813	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 5457	Coil, 25u.	2422 535 91028
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 6u8, 20%	3198 018 76880
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 47u, 10%	2422 535 97337
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5520	Transformer, SS42202-00 B.	2422 531 02562
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	5561	Coil, 27u, 5%	2422 535 95366
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5602	Coil, 5u6, 5%	3198 018 15680
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3843	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	5604	Coil, 5u6, 5%	3198 018 15680
3901	Res, 6K8, 5%, 1/16W, Metalized Glass. .	3198 021 36820	5810	Coil, 10u, 10%	3198 018 51090
3903	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	5831	Coil, 6u8, 5%	3198 018 16880
3905	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	5832	Coil, 6u8, 5%	3198 018 16880
3909	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	5833	Coil, 6u8, 5%	3198 018 16880
3910	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730	5835	Coil, 12u, 10%	3198 018 31290
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	6001	Zener Diode, 33 volt	3198 010 23390
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6150	Diode, Signal, BAS316.	3198 010 10630
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6201	Diode, Signal, BAS316.	3198 010 10630
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6202	Diode, Signal, BAS316.	3198 010 10630
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6206	Zener Diode, 6.8 volt.	3198 020 56880
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6331	Diode, Signal, BAV21	3198 010 10070
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6333	Diode, Signal, BAV21	3198 010 10070

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

6335	Diode, Signal, BAV21	3198 010 10070	9182	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9183	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt	3198 010 24790	9192	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9193	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9311	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9312	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9406	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9407	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9408	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9425	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9426	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9427	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9453	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9463	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9500	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9501	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9503	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9511	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9512	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9514	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9515	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9516	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9518	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9521	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9522	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9524	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9528	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9530	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9614	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9615	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9619	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9620	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9621	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9622	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9623	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9624	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9626	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9627	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9628	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9629	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9631	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9632	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9633	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9637	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9640	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9642	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9643	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9648	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9650	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9651	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL)	3198 010 42030	9652	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9654	Wire Jumper.	3198 036 90010
7901	IC, AN7580	9322 166 29682	9655	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL)	3198 010 42030	9656	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

29PT663S85A (continued)

9670	Wire Jumper.	3198	036	90010	2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9671	Wire Jumper.	3198	036	90010	2428	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010
9672	Coil, 22u, 10%	3198	018	22290	2429	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010
9674	Wire Jumper.	3198	036	90010	2430	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
9675	Wire Jumper.	3198	036	90010	2431	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010
9676	Wire Jumper.	3198	036	90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9678	Coil, 22u, 10%	3198	018	22290	2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9679	Wire Jumper.	3198	036	90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9680	Wire Jumper.	3198	036	90010	2435	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
9681	Wire Jumper.	3198	036	90010	2436	Cap, 100n, 10%, 16v, Ceramic.	3198	017	31040
9682	Wire Jumper.	3198	036	90010	2440	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
9685	Wire Jumper.	3198	036	90010	2442	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9686	Wire Jumper.	3198	036	90010	2443	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9687	Wire Jumper.	3198	036	90010	2450	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090
9688	Wire Jumper.	3198	036	90010	2452	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9689	Wire Jumper.	3198	036	90010	2453	Cap, 56p, 5%, 50v, Ceramic.	3198	016	35690
9690	Wire Jumper.	3198	036	90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9691	Wire Jumper.	3198	036	90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9694	Wire Jumper.	3198	036	90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
9695	Wire Jumper.	3198	036	90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
9697	Wire Jumper.	3198	036	90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9698	Wire Jumper.	3198	036	90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
9699	Wire Jumper.	3198	036	90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
9821	Wire Jumper.	3198	036	90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9822	Wire Jumper.	3198	036	90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122	018	05951
9825	Wire Jumper.	3198	036	90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9828	Wire Jumper.	3198	036	90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9829	Wire Jumper.	3198	036	90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9831	Wire Jumper.	3198	036	90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
9832	Wire Jumper.	3198	036	90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9837	Wire Jumper.	3198	036	90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9838	Wire Jumper.	3198	036	90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9839	Wire Jumper.	3198	036	90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9846	Wire Jumper.	3198	036	90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9847	Wire Jumper.	3198	036	90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9849	Wire Jumper.	3198	036	90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9851	Wire Jumper.	3198	036	90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9856	Wire Jumper.	3198	036	90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9858	Wire Jumper.	3198	036	90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9859	Wire Jumper.	3198	036	90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9860	Wire Jumper.	3198	036	90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9862	Wire Jumper.	3198	036	90010	3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9863	Wire Jumper.	3198	036	90010	3457	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9865	Wire Jumper.	3198	036	90010	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9867	Wire Jumper.	3198	036	90010	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9868	Wire Jumper.	3198	036	90010	4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9869	Wire Jumper.	3198	036	90010	5401	Coil, 10u, 10%	3198	018	31090
9870	Wire Jumper.	3198	036	90010	5407	Coil, 33u, 5%	3198	018	13390
9871	Wire Jumper.	3198	036	90010	5408	Coil, 33u, 20%	3198	018	33390
9873	Wire Jumper.	3198	036	90010	5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
9874	Wire Jumper.	3198	036	90010	5425	Coil, 10u, 10%	3198	018	31090
9875	Wire Jumper.	3198	036	90010	5428	Coil, 10u, 5%	3198	018	11090
9876	Wire Jumper.	3198	036	90010	5429	Coil, 10u, 10%	3198	018	31090
9877	Wire Jumper.	3198	036	90010	5430	Coil, 10u, 10%	3198	018	31090
9878	Wire Jumper.	3198	036	90010	5440	Coil, 10u, 10%	3198	018	31090
9901	Wire Jumper.	3198	036	90010	5442	Coil, 22u, 5%	3198	018	12290
9902	Wire Jumper.	3198	036	90010	5450	Coil, 10u, 10%	3198	018	31090
9903	Wire Jumper.	3198	036	90010	5452	Coil, 33u, 5%	3198	018	13390
9904	Wire Jumper.	3198	036	90010	7401	Transistor, PNP, BC857B(COL)	3198	010	42150
9911	Wire Jumper.	3198	036	90010	7402	Transistor, NPN, BC847B(COL)	3198	010	42030
9913	Wire Jumper.	3198	036	90010	7403	Transistor, NPN, BC847B(COL)	3198	010	42030
9914	Wire Jumper.	3198	036	90010	7421	IC, TC90A53N	9322	182	18682
9915	Wire Jumper.	3198	036	90010	7440	Transistor, NPN, BC847B(COL)	3198	010	42030
9923	Wire Jumper.	3198	036	90010	7444	Transistor, NPN, BC847B(COL)	3198	010	42030
9991	Wire Jumper.	3198	036	90010	7450	Transistor, NPN, BC847B(COL)	3198	010	42030
9996	Wire Jumper.	3198	036	90010	7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9998	Wire Jumper.	3198	036	90010	9401	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58621	9402	Wire Jumper.	3198	036	90010
					9403	Wire Jumper.	3198	036	90010
					CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts				
0266	6 Pin Connector.	2422	025	16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198	028	24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198	028	44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198	025	34790

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730

29PT663S85A (continued)

2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040	AC20A	Cabinet Front.	3139	177	58401
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335	AC20C	Light Guide.	3139	124	39701
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335	AC20D	Nameplate.	3141	050	00161
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610	AC20E	Power Button	3139	138	10881
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210	AC20J	Top Control Assembly	3139	177	56381
6691	LED, LTL-10234WHCR	9322	185	69682	REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139	228	86464
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667					
9001	Wire Jumper.	3198	036	90010					
9002	Wire Jumper.	3198	036	90010					
CBA	Front Interface Panel Assembly	3139	177	26211					

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assem-
bly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assem-
bly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	44711
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	39301
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A68QCU754X73(N)	9301	925	60527
S AC12	Degaussing Coil.	2422	549	43967
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3139	124	31122
AC17	Owner's Manual	3121	235	20832
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53102

S = Safety Part Be sure to use exact replacement part.

30DV693R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16374	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198	025 52280
0212	2 Pin Connector.	2422	025 16375	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0214	5 Pin Connector.	2422	025 12481	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0217	3 Pin Connector.	2412	020 00725	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0219	6 Pin Connector.	2422	025 12482	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0220	5 Pin Connector.	2422	025 04853		er.	2222	368 90177
0221	2 Pin Connector.	2422	025 15503	2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020	558 90445
0222	2 Pin Connector.	2422	025 10646	2340	Cap, 10u, 20%, 250v, Electrolytic. . .	2020	012 93495
0223	A/V Jack	2422	026 05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0225	SVHS Jack.	2422	026 04926	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0229	7 Pin Connector.	2422	025 11244	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0239	3 Pin Connector.	2422	025 16382	2344	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 21040
0240	4 Pin Connector.	2422	025 12479	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020	558 90445
0243	6 Pin Connector.	2422	025 04854	2401	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020	021 91331
0244	5 Pin Connector.	2422	025 04853	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0245	6 Pin Connector.	2422	025 04854	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198	025 54790
0246	5 Pin Connector.	2422	025 12481	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025 32210
0251	4 Pin Connector.	2422	025 15847	2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
S 0254	9 Pin CRT Socket	2422	500 80076	2420	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050
0267	3 Pin Connector.	2412	020 00725	2421	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
0268	3 Pin Connector.	2412	020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025 51080
0269	Jack	2422	026 05182	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198	017 24730
S 1000	Tuner, V+U, PLL	2422	542 90108	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025 51080
1002	SAW Filter, 45.75MHz	2422	549 44518	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020	021 91139
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
S 1400	Relay, 5 Amp, 12V.	2422	132 07543	2454	Cap, 68n, 5%, 250v, Metalized Polypropy		
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914		lene	2222	479 90133
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025 34790
1660	Crystal, 12MHz000	2422	543 01203	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
1810	6 Pin Connector.	2422	025 15849		ylene.	2022	333 00086
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
	C49/U A.	2422	543 00842	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
2005	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	S 2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020	301 90254
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198	025 24710	2467	Cap, 9n1, 5%, 1000v, Polypropylene . .	2222	375 90424
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2468	Cap, 9n1, 5%, 1000v, Polypropylene . .	2222	375 90424
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025 31010	2469	Cap, 430n, 5%, 250v, Metalized Polyprop		
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230		ylene.	2022	333 00164
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198	017 24740	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2105	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2106	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020	021 90586
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic. . .	2020	021 90856
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2486	Cap, 470u, 20%, 16v, Electrolytic. . .	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2487	Cap, 47u, 20%, 50v, Electrolytic . . .	2020	021 90854
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic . .	2020	021 91049
2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic. . .	2020	021 91577
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2490	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020	021 91331
2132	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2134	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250		pylene	2022	330 00018
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic . .	2020	024 90647
2143	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2150	Cap, 150n, +80/-20%, 16v, Ceramic. . .	2238	786 19852	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2172	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2173	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198	017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic . . .	3198	025 52290
2201	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2209	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017 44740	2561	Cap, 100u, 20%, 160v, Electrolytic . .	2020	021 91654
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020	021 91374
2216	Cap, 2u2, 20%, 10v, Electrolytic . . .	2020	012 93728	2567	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025 34790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025 51080
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240	2580	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028 24790
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2581	Cap, 22u, 20%, 50v, Electrolytic . . .	3198	025 52290
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198	023 22240
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050	2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090
2243	Cap, 10n, 10%, 50v, Ceramic.	3198	017 31030	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198	017 42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050
2247	Cap, 2u2, 20%, 10v, Electrolytic . . .	2020	012 93728	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198	017 41050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
				2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
				2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198 025 54780	3247	Res, 560K, 5%, Metalized Glass. . . .	2322 702 60564
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3250	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
2843	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03108
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic. . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3411	Res, 4R7, 5%, 1/3W, Metal Film. . . .	2306 204 03478
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3451	Res, 4R7, 5%, 1/3W, Metal Film. . . .	2306 204 03478
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3452	Res, 5K6, 1%, 3/5W, Metal Film. . . .	2312 915 15602
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3456	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3457	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3473	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3181	Res, 120K, 5%, Metalized Glass.	2322 702 60124	3481	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830	3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320
3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	S 3493	Res, 2R2, 5%, 1/3W, Metal Film.	2306 204 03228
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3507	Surge Protector.	2422 549 43073	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3520	Res, 1K2, 5%, 1/10W, Metalized Glass. . .	3198 021 51220	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film.	2306 204 03479	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass. . .	3198 021 55630	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51020	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3527	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass. . .	3198 021 54730	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass. . .	3198 021 51030	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass. . .	3198 021 54720	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306 204 03222	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass. . .	3198 021 51520	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . . .	2322 734 64702	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 33K, 5%, 1/10W, Metalized Glass. . .	3198 021 53330	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass. . .	3198 021 51530	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass. . .	3198 021 54720	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51020	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass. . .	3198 021 51230	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass. . .	3198 021 58220	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film.	3198 012 13310	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass. . .	3198 021 52220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass. . .	3198 021 55620	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass. . .	3198 021 54730	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass. . .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 04710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3614	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3615	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3617	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3619	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	5001	Coil, 27u, 10%	3198 018 22790
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	5002	Coil, 820n, 10%	3198 018 18270
3623	Res, 4K7, 5%, 1/16W, Metalized Glass. . .	3198 021 34720	5201	Coil, 6u8, 5%	3198 018 16880
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5202	Wire Jumper.	3198 036 90010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass. . .	3198 021 34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass. . .	3198 021 34720	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31030	5241	Wire Jumper.	3198 036 90010
3630	Res, 2K2, 5%, 1/16W, Metalized Glass. . . .	3198 021 32220	5242	Coil, 10u, 5%	3198 018 11090
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5341	Coil, 22u.	2422 535 97333
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5342	Coil, 22u.	2422 535 97333
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5400	Coil, 11u7	2422 535 91027
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51020	S 5445	Transformer, LOT	2422 531 02212
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5451	Coil, 22u, 10%	3198 018 72290
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	5453	Coil, 22u, 5%	3198 018 12290
3694	Res, 4K7, 5%, 1/16W, Metalized Glass. . .	3198 021 34720	S 5457	Coil, 42u.	2422 535 94865
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 5461	Transformer, SD10207-00 B.	2422 531 02568
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31020	5464	Coil, Bridge, C946-01 Y.	2422 531 02419
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5471	Coil, 6u8, 20%	3198 018 76880
3814	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3815	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	5480	Coil, 10u, 10%	2422 535 97328
3816	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	S 5501	Mains Filter	2422 549 43432
3817	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	S 5520	Transformer, SS42204-00 B.	2422 531 02563
3818	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3819	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3820	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	5561	Coil, 27u, 5%	2422 535 95366
3821	Res, 100K, 5%, 1/16W, Metalized Glass. . .	3198 021 31040	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3831	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	5602	Coil, 5u6, 5%	3198 018 15680
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5603	Coil, 5u6, 5%	3198 018 15680
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5604	Coil, 5u6, 5%	3198 018 15680
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5831	Coil, 6u8, 5%	3198 018 16880
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	5832	Coil, 6u8, 5%	3198 018 16880
3843	Res, 2K2, 5%, 1/16W, Metalized Glass. . . .	3198 021 32220	5833	Coil, 6u8, 5%	3198 018 16880
3901	Res, 6K8, 5%, 1/16W, Metalized Glass. . . .	3198 021 36820	5835	Coil, 12u, 10%	3198 018 31290
3903	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	6001	Zener Diode, 33 volt	3198 010 23390
3905	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	6150	Diode, Signal, BAS316.	3198 010 10630
3909	Res, 27K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32730	6201	Diode, Signal, BAS316.	3198 010 10630
3910	Res, 27K, 5%, 1/16W, Metalized Glass. . . .	3198 021 32730	6202	Diode, Signal, BAS316.	3198 010 10630
3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 08210	6206	Zener Diode, 6.8 volt.	3198 020 56880

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

6331	Diode, Signal, BAV21	3198 010 10070	9160	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9171	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21	3198 010 10070	9173	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21	3198 010 10070	9175	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9176	Wire Jumper.	3198 036 90010
6401	Zener Diode, 68 volt	3198 010 26890	9178	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9179	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9181	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9182	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9183	Wire Jumper.	3198 036 90010
6452	Diode, Signal, BAS316.	3198 010 10630	9192	Wire Jumper.	3198 036 90010
6453	Zener Diode, 5.6 volt.	3198 020 55680	9193	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L	9336 436 10682	9311	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9312	Wire Jumper.	3198 036 90010
6462	Zener Diode, 12 volt	3198 010 21290	9406	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9407	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9408	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9409	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9410	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9411	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9412	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9413	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9414	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9415	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9416	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9417	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9418	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9419	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9421	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9422	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9425	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9427	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9453	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9462	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9464	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9500	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9501	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9503	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9506	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9507	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9511	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9512	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9513	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9515	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7000	IC, TDA8941P/N1.	9352 628 51112	9521	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9522	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9524	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9528	Wire Jumper.	3198 036 90010
7200	IC, TDA9569H/N1/4I/1313.	9352 743 94557	9530	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9611	Coil, 27u, 10%	3198 018 22790
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9613	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9614	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9615	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9619	Wire Jumper.	3198 036 90010
7444	Transistor, NPN, BC547B(COL)	3198 020 40030	9620	Wire Jumper.	3198 036 90010
7450	Transistor, PNP, PDTA114ET	3198 010 44010	9621	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9622	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9623	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTA143ZT	9340 547 00215	9624	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9626	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9627	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9628	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9629	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9631	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9632	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9633	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9635	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9636	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTA114ET	9340 310 10215	9637	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9638	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9639	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDTA143ZT	9340 547 00215	9640	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9641	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9642	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PDTA143ZT	9340 547 00215	9643	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9644	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9645	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682	9648	Wire Jumper.	3198 036 90010
7901	IC, AN7580	9322 166 29682	9650	Wire Jumper.	3198 036 90010
7903	Transistor, NPN, BC847B(COL)	3198 010 42030	9652	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

30DV693R37A (continued)

9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9683	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9848	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9855	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9857	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9876	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9923	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	20801
CBA	DVD Loader SD5.12.	3139	188	55471
CBA	DVD MPEG Assembly SD5.12	3139	188	55481
CBA	DVD Module SD5.12 (contains Loader and MPEG Assembly)	4835	310	57599

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

S = Safety Part Be sure to use exact replacement part.

DVD Eject Panel Parts

	DVD Eject Panel Parts			
0267	3 Pin Board Connector.	2422	025	09191
0361	Eject Button	3139	177	63451
1110	Tact Switch.	2422	128	02742
CBA	DVD Eject Panel Assembly	3139	187	23311

DVD Interface Panel Parts

	DVD Interface Panel Parts			
0226	Connector, 6 Pin	2422	025	12482
0228	Connector, 3 Pin	2412	020	00725
0251	Connector, 4 Pin	2422	025	15847
0253	Connector, 7 Pin	2422	025	11244
0254	Connector, 3 Pin	2422	025	16382
0266	Connector, 6 Pin	2422	025	15849
0269	Connector, 5 Pin	2422	025	15848
1100	Socket, Cinch, 1 Pin	2422	026	04425
1101	Connector, 8 Pin	2422	025	12483
S 1330	Fuse, 2A, 250V	2422	086	10422
S 1331	Fuse, 2A, 250V	2422	086	10422
S 1332	Fuse, 2A, 250V	2422	086	10421
2101	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790
2102	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090
2103	Cap, 47p, 5%, 50v, Ceramic	3198	016	34790
2104	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
2110	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
2111	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2112	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2113	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2114	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2185	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2260	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	41040
2262	Cap, 4u7, +80/-20%, 10V, Ceramic	2020	552	96305
2300	Cap, 10u, 20%, 250v, Electrolytic.	2020	012	93495
2301	Cap, 22n, 10%, 400v, Metalized Polyeste	2222	365	55223
2302	Cap, 100p, 10%, 1KV, Ceramic	3198	019	51010
2310	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2311	Cap, 470n, 10%, 25v, Ceramic	2020	552	96465
2313	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2315	Cap, 220p, 10%, 1KV, Ceramic	3198	019	62210
2316	Cap, 33n, 10%, 16v, Ceramic.	3198	017	33330
2319	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023	22240
2330	Cap, 2u2, 20%, 25v, Electrolytic	3198	026	32220
2331	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
2332	Cap, 2u2, 20%, 25v, Electrolytic	3198	026	32220
2333	Cap, 470u, 20%, 10v, Electrolytic.	3198	025	14710
2337	Cap, 1000u, 20%, 25v, Electrolytic	3198	026	31020
2338	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710
2339	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710
2341	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
2342	Cap, 47u, 20%, 16v, Electrolytic	3198	028	24790
2350	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
2351	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
2353	Cap, 1n, 10%, 50v, Ceramic	3198	017	31020
3101	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3102	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198	021	36890
3110	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3111	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3112	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3113	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3114	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3115	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3116	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3117	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3118	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3180	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3182	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3262	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3263	Res, 82K, 5%, 1/16W, Metalized Glass	3198	021	38230
3264	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3265	Res, 27K, 5%, 1/16W, Metalized Glass	3198	021	32730
3271	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3272	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
S 3300	Res, 1 ohm, 5%, 1/3W, Metal Film	2306	204	03108
S 3301	Power Resistor, 68K, 5%, 2W.	3198	012	26830
3308	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3309	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3310	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3311	Res, 180 ohm, 5%, 1/16W, Metalized Glas	3198	021	31810
3312	Res, 10 ohm, 5%, 1/16W, Metalized Glass	3198	021	31090
3313	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3314	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198	011	01080
3315	Res, 1 ohm, 5%, 1/6W, Carbon Film.	3198	011	01080
3317	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3318	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720
3319	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3320	Res, 100K, 1%, 1/16W, Metalized Glass.	2322	704	61004
3339	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
3340	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010
3342	Res, 4K7, 1%, 1/16W, Metalized Glass	2322	704	64702

30DV693R37A (continued)

3344	Res, 4K7, 1%, 1/16W, Metalized Glass	2322	704	64702	0250	A/V Jack	2422	026	04815
3360	Res, 4R7, 5%, 1/16W, Metalized Glass	3198	021	34780	0251	6 Pin Connector.	2422	025	15849
3361	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	0254	5 Pin Connector.	2422	025	12481
4105	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	0255	4 Pin Connector.	2422	025	12479
4106	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2171	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
4185	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2172	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
4226	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2173	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
4261	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2174	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
4265	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2176	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
4316	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
4342	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2178	Cap, 470p, 5%, 50v, Ceramic.	3198	019	14710
4343	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
4361	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	3150	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
4363	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
4364	Res, Zero ohm, 'Chip' Jumper	3198	021	90030	3152	Res, 47k, 5%, 1/6W, Carbon	3198	011	04730
5100	Inductor, Variable, 100uH, 10%	2422	549	41663	3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
5110	Coil, 220n	3198	018	12270	3156	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198	011	01210
5300	Coil, 27u.	3198	018	22790	3157	Res, 120 ohm, 5%, 1/6W, Carbon Film.	3198	011	01210
5301	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	6161	Zener Diode, 6.8 volt.	3198	010	26880
S 5315	Transformer, SS25113-00.	2422	531	02596	9153	Wire Jumper.	3198	036	90010
5331	Coil, 10u, 5%.	2422	535	95363	9170	Wire Jumper.	3198	036	90010
5333	Coil, 10u, 5%.	2422	535	95363	9171	Wire Jumper.	3198	036	90010
5337	Coil, 10u, 10%	2422	535	97328	CBA	Side Jack Panel Assembly	3139	188	03541
5339	Coil, 10u, 10%	2422	535	97328					
6100	Diode, Signal, BAS316.	3198	010	10630					
6101	Diode, Signal, BAS316.	3198	010	10630					
6300	Diode, Rect, BYD33J	9337	234	20133					
6311	Diode, Signal, BAS316.	3198	010	10630					
6312	Zener Diode, 22 volt	3198	020	52290					
6330	Diode, Rect, EGP20DL-5100	9322	164	42682					
6332	Diode, Rect, SB340L-7024.	9322	161	76682					
6336	Diode, Rect, BVV27-200.	9335	526	80133					
7110	IC, HEF4053BT.	9333	729	60653					
7260	Transistor, NPN, BC847B.	3198	010	42030					
7261	Transistor, NPN, BC847B.	3198	010	42030					
7262	Transistor, NPN, PPTC124ET	9340	310	20215					
7310	Transistor, NPN, PPTC114ET	3198	010	44110					
7311	Transistor, PNP, PPTA114ET	3198	010	44010					
7312	Transistor, PNP, BC857B.	3198	010	42150					
7313	Transistor, NPN, BC847B.	3198	010	42030					
7315	IC, TEA1523P/N2.	9352	699	68112					
S 7340	Optical Coupler, TCET1103(G)	9322	140	14667					
7341	IC, TL431CLP	9337	711	00676					
9110	Wire Jumper.	3198	036	90010					
9111	Wire Jumper.	3198	036	90010					
9183	Wire Jumper.	3198	036	90010					
9266	Wire Jumper.	3198	036	90010					
9315	Wire Jumper.	3198	036	90010					
9350	Wire Jumper.	3198	036	90010					
9351	Wire Jumper.	3198	036	90010					
9352	Wire Jumper.	3198	036	90010					
9355	Wire Jumper.	3198	036	90010					
9357	Wire Jumper.	3198	036	90010					
CBA	DVD Interface Panel Assembly	3139	187	20761					

Front Interface Panel Parts

	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
------	--------------------------	------	-----	-------

S = Safety Part Be sure to use exact replacement part.

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

	Top Control Panel Parts			
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitten	9299	000	65263
AC05	Cabinet Back	3139	124	44201
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	45431
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, W76ERF942X013	9301	909	10314
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	21131
AC18	Quick Use Guide.	3121	233	44471
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53511
AC20A	Cabinet Front.	3139	124	44191
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
AC20J	Top Control Assembly	3139	138	11451
AC23	DVD Door	3139	177	63441
AC24	DVD Interface Panel Bracket.	3139	124	43291
REMOTE	Remote Control Transmitter, RC19042007/01.	3128	147	14521

30PW633F35A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16374	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0212	2 Pin Connector.	2422	025 16375	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0214	5 Pin Connector.	2422	025 12481		er.	2222	368 90177
0219	6 Pin Connector.	2422	025 12482	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0220	5 Pin Connector.	2422	025 04853	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0221	2 Pin Connector.	2422	025 15503	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0222	2 Pin Connector.	2422	025 10646	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0223	A/V Jack	2422	026 05236	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0225	SVHS Jack.	2422	026 04926	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0239	3 Pin Connector.	2422	025 16382	S 2346	Cap, 470p, 10%, 2000v, Ceramic.	2020	558 90483
0243	6 Pin Connector.	2422	025 04854	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
0244	5 Pin Connector.	2422	025 04853	2362	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210
0245	6 Pin Connector.	2422	025 04854	2364	Cap, 27p, 5%, 50v, Ceramic.	3198	016 32790
0246	5 Pin Connector.	2422	025 12481	2365	Cap, 27p, 5%, 50v, Ceramic.	3198	016 32790
S 0256	9 Pin CRT Socket	2422	500 80053	2366	Cap, 27p, 5%, 50v, Ceramic.	3198	016 32790
0267	3 Pin Connector.	2412	020 00725	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
0268	3 Pin Connector.	2412	020 00725	2368	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
0269	Jack	2422	026 05182	2369	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
0278	3 Pin Connector.	2412	020 00725	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020	012 93318
S 1000	Tuner, V+U PLL	2422	542 90098	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
1002	SAW Filter, 45.75MHz	2422	549 44518	2375	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
1200	Filter, Ceramic, 4MHz5	2422	549 48087	2378	Cap, 220p, 5%, 50v, Ceramic.	3198	019 02210
S 1400	Relay, 5 Amp, 12V.	2422	132 07543	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198	025 71090
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2380	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
1660	Crystal, 12MHz000	2422	543 01203	2401	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1810	6 Pin Connector.	2422	025 16607	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			2404	Cap, 47u, 20%, 50v, Electrolytic.	3198	025 54790
	C49/U A.	2422	543 00842	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2420	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2421	Cap, 470p, 5%, 50v, Ceramic.	3198	016 34710
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2454	Cap, 68n, 5%, 250v, Metalized Polypropy		
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310		lene	2222	479 90133
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090		ylene.	2022	333 00086
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2463	Cap, 390p, 10%, 2000v, Ceramic.	2020	558 90482
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2465	Cap, 13n, 5%, 1600v, Polypropylene.	2020	301 90254
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2467	Cap, 9n1, 5%, 1000v, Polypropylene.	2222	375 90424
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2468	Cap, 9n1, 5%, 1000v, Polypropylene.	2222	375 90424
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2469	Cap, 430n, 5%, 250v, Metalized Polyprop		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250		ylene.	2222	479 90022
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2172	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2173	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2490	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240		pylene	2022	330 00018
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2209	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2216	Cap, 2u2, 20%, 10v, Electrolytic.	2020	012 93728	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2243	Cap, 10n, 10%, 50v, Ceramic.	3198	017 31030	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2247	Cap, 2u2, 20%, 10v, Electrolytic.	2020	012 93728	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91374
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
				2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
				2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290

S = Safety Part Be sure to use exact replacement part.

30PW633F35A (continued)

2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2604	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3206	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2807	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	3222 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198 025 54780	3247	Res, 560K, 5%, Metalized Glass.	3222 702 60564
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3250	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2843	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3341	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3342	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic. . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3361	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3380	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3381	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3385	Res, 10K, 5%, 5W, Metal Film.	2322 257 41103
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3124	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3407	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3126	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	3408	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3132	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3134	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3451	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3180	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3181	Res, 120K, 5%, Metalized Glass.	2322 702 60124	3456	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3190	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3457	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020

S = Safety Part Be sure to use exact replacement part.

30PW633F35A (continued)

S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3460	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03390	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3465	Res, 27K, 1%, 3/5W, Metal Film . . .	2312 915 12703	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3471	Res, 3R9, 1%, 3/5W, Metal Film . . .	2312 915 13908	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3472	Res, 3R3, 1%, 3/5W, Metal Film . . .	2312 915 13308	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3473	Res, 3R9, 1%, 3/5W, Metal Film . . .	2312 915 13908	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3474	Res, 2K2, 1%, 3/5W, Metal Film . . .	2312 915 12202	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3475	Res, 2K2, 1%, 3/5W, Metal Film . . .	2312 915 12202	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720	3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290	3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3489	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	3903	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025	3905	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3507	Surge Protector.	2422 549 43073	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03479	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5001	Coil, 27u, 10%	3198 018 22790
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5002	Coil, 820n, 10%	3198 018 18270
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5201	Coil, 6u8, 5%	3198 018 16880

S = Safety Part Be sure to use exact replacement part.

30PW633F35A (continued)

5202	Wire Jumper.	3198 036 90010	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7200	IC, TDA9588H/N1/3I/1299.	9352 742 87557
5241	Wire Jumper.	3198 036 90010	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
5242	Coil, 10u, 5%.	3198 018 11090	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
5341	Coil, 22u.	2422 535 97333	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
5342	Coil, 27u, 10%.	3198 018 22790	7330	IC, TDA6107JF/N3	9352 713 37112
5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
5400	Coil, 11u7	2422 535 91027	7366	Transistor, PNP, 2SA965.	9322 167 18676
S 5445	Transformer, LOT	2422 531 02612	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
5451	Coil, 22u, 10%.	3198 018 72290	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7380	Transistor, NPN, 2SC2235	9322 167 19676
5453	Coil, 22u, 5%.	3198 018 12290	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
S 5457	Coil, 42u.	2422 535 94865	7400	Power FET, STP3NC60FP.	9322 157 37687
S 5461	Transformer, SD10207-00 B.	2422 531 02568	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
5464	Coil, Bridge, C946-01 Y.	2422 531 02419	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
5471	Coil, 6u8, 20%.	3198 018 76880	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
5472	Coil, 3u3, 10%.	3198 018 23380	7450	Transistor, PNP, PDA114ET	3198 010 44010
5480	Coil, 10u, 10%.	2422 535 97328	7460	Transistor, NPN, BU4508DX.	9340 550 92127
S 5501	Mains Filter	2422 549 43432	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
S 5520	Transformer, SS42204-00 B.	2422 531 02563	7462	Transistor, NPN, PDTCL143ZT	9340 547 00215
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7471	IC, TDA8359J/N2.	9352 701 64112
5561	Coil, 27u, 5%.	2422 535 95366	7480	Transistor, NPN, BD135	3198 020 41010
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7482	Transistor, NPN, BD135	3198 020 41010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
5602	Coil, 5u6, 5%.	3198 018 15680	7520	IC, TEA1507P/N1.	9352 673 56112
5603	Coil, 5u6, 5%.	3198 018 15680	7521	Power FET, FQPF9N50.	9322 187 16687
5604	Coil, 5u6, 5%.	3198 018 15680	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5810	Coil, 10u, 10%.	3198 018 51090	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5831	Coil, 6u8, 5%.	3198 018 16880	7541	Transistor, NPN, PDTCL14ET	9340 310 10215
5832	Coil, 6u8, 5%.	3198 018 16880	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5833	Coil, 6u8, 5%.	3198 018 16880	7560	IC, L78L33ACZ.	9322 134 92676
5835	Coil, 12u, 10%.	3198 018 31290	7561	Transistor, NPN, PDTCL143ZT	9340 547 00215
6001	Zener Diode, 33 volt	3198 010 23390	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
6150	Diode, Signal, BAS316.	3198 010 10630	7602	IC, M24C08-WBN6.	9322 154 38682
6201	Diode, Signal, BAS316.	3198 010 10630	7606	Transistor, NPN, PDTCL143ZT	9340 547 00215
6202	Diode, Signal, BAS316.	3198 010 10630	7802	IC, HEF4053BT.	9333 729 60653
6206	Zener Diode, 6.8 volt.	3198 020 56880	7803	IC, HEF4053BT.	9333 729 60653
6331	Diode, Signal, BAV21.	3198 010 10070	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
6332	Diode, Signal, BAS316.	3198 010 10630	7831	IC MSP3425G-PO-B8-V3 (MTAS) L	9322 187 89682
6333	Diode, Signal, BAV21.	3198 010 10070	7901	IC, AN7580	9322 166 29682
6335	Diode, Signal, BAV21.	3198 010 10070	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
6365	Diode, Signal, BAT85	9336 247 60133	9001	Wire Jumper.	3198 036 90010
6366	Diode, Signal, BAT85	9336 247 60133	9101	Wire Jumper.	3198 036 90010
6367	Diode, Signal, BAV99	3198 010 10620	9102	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9103	Wire Jumper.	3198 036 90010
6401	Zener Diode, 68 volt	3198 010 26890	9104	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9123	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9160	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9171	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9173	Wire Jumper.	3198 036 90010
6452	Diode, Signal, BAS316.	3198 010 10630	9175	Wire Jumper.	3198 036 90010
6453	Zener Diode, 5.6 volt.	3198 020 55680	9176	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L	9336 436 10682	9178	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9179	Wire Jumper.	3198 036 90010
6462	Zener Diode, 12 volt	3198 010 21290	9181	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9182	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9183	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9192	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9193	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9311	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9312	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9313	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9314	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9406	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9407	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9408	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9409	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9410	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9411	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9412	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9413	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9414	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9415	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9416	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9417	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9418	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9419	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9420	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9421	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9422	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9425	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9427	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9453	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9462	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9464	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9500	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9501	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9503	Wire Jumper.	3198 036 90010
7000	IC, TDA8941P/N1.	9352 628 51112	9506	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

30PW633F35A (continued)

9507	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9635	Wire Jumper.	3198 036 90010
9636	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010

9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3141 058 59221

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts		
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glas	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glas	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glas	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glas	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glas	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210

30PW633F35A (continued)

3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122	118	05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

	Front Interface Panel Parts			
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts
S = Safety Part Be sure to use exact replacement part.

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

	Top Control Panel Parts			
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	46431
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	45431
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, W76ERF942X013	9301	909	10314
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3135	013	01661
AC17	Owner's Manual	3121	235	21291
AC18	Quick Use Guide.	3121	233	44851
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53521
AC20A	Cabinet Front.	3139	124	43361
AC20A	Cabinet Front.	3139	177	56121
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
AC20J	Top Control Assembly	3139	138	11451
REMOTE	Remote Control Transmitter, RC19036002/01A.	3139	238	04313

30PW633R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222	368 90177
0212	2 Pin Connector	2422	025 16375	2331	er.	2020	558 90445
0214	5 Pin Connector	2422	025 12481	2340	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0219	6 Pin Connector	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0221	2 Pin Connector	2422	025 15503	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0222	2 Pin Connector	2422	025 10646	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0223	A/V Jack	2422	026 05236	S 2346	Cap, 470p, 10%, 2000v, Ceramic	2020	558 90483
0225	SVHS Jack	2422	026 04926	2360	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0239	3 Pin Connector	2422	025 16382	2362	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210
0243	6 Pin Connector	2422	025 04854	2364	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0244	5 Pin Connector	2422	025 04853	2365	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0245	6 Pin Connector	2422	025 04854	2366	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0246	5 Pin Connector	2422	025 12481	2367	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 0256	9 Pin CRT Socket	2422	500 80053	2368	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
0267	3 Pin Connector	2412	020 00725	2369	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
0268	3 Pin Connector	2412	020 00725	2372	Cap, 10u, 20%, 160v, Electrolytic	2020	012 93318
0269	Jack	2422	026 05182	2373	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0278	3 Pin Connector	2412	020 00725	2375	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
S 1000	Tuner, V+U, PLL	2422	542 90108	2378	Cap, 220p, 5%, 50v, Ceramic	3198	019 02210
1002	SAW Filter, 45.75MHz	2422	549 44518	2379	Cap, 10u, 20%, 100v, Electrolytic	3198	025 71090
1200	Filter, Ceramic, 4MHz5	2422	549 48087	2380	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
S 1400	Relay, 5 Amp, 12V.	2422	132 07543	2381	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2401	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
1660	Crystal, 12MHz000	2422	543 01203	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
1831	Crystal, Resonator, 18MHz432, 12 Pin, H	2422	543 00842	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2420	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2421	Cap, 470p, 5%, 50v, Ceramic	3198	016 34710
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2454	Cap, 68n, 5%, 250v, Metalized Polypropylene	2222	479 90133
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene	2022	333 00086
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020	301 90254
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2467	Cap, 9n1, 5%, 1000v, Polypropylene	2222	375 90424
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222	375 90424
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2469	Cap, 430n, 5%, 250v, Metalized Polypropylene	2022	333 00164
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222	365 75154
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222	365 75104
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2172	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2173	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210	2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2490	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022	330 00018
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2216	Cap, 2u2, 20%, 10v, Electrolytic	2020	012 93728	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2243	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2247	Cap, 2u2, 20%, 10v, Electrolytic	2020	012 93728	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020				
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020				

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3207	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3247	Res, 560K, 5%, Metalized Glass.	2322 702 60564
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3250	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3341	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3342	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3361	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3380	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3381	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3383	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3385	Res, 10K, 5%, 5W, Metal Film.	2322 257 41103
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3451	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3180	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3181	Res, 120K, 5%, Metalized Glass.	2322 702 60124	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3190	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3470	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322 730 61274	3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720	3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730
3489	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3491	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228	3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3901	Res, 6K8, 5%, 1/16W, Metalized Glass . .	3198 021 36820
3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3903	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730
3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3905	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730
3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3909	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230	3910	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3507	Surge Protector.	2422 549 43073	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03479	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3527	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 33K, 5%, 1/10W, Metalized Glass . .	3198 021 53330	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198 021 51530	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass . .	3198 021 58220	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198 021 52220	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198 021 55620	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3614	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3615	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3617	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3619	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	5001	Coil, 27u, 10%	3198 018 22790
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	5002	Coil, 820n, 10%	3198 018 18270
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	5201	Coil, 6u8, 5%	3198 018 16880
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5202	Wire Jumper.	3198 036 90010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	5241	Wire Jumper.	3198 036 90010
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	5242	Coil, 10u, 5%	3198 018 11090
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5341	Coil, 22u.	2422 535 97333
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5342	Coil, 27u, 10%	3198 018 22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5376	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

5400	Coil, 11u7	2422	535	91027	7369	Transistor, PNP, BC857B(COL)	3198	010	42150
S 5445	Transformer, LOT	2422	531	02612	7373	Transistor, PNP, BC327-25(COL)	3198	020	43430
5451	Coil, 22u, 10%	3198	018	72290	7380	Transistor, NPN, 2SC2235	9322	167	19676
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7382	Transistor, NPN, BC337-25(COL)	3198	020	43530
5453	Coil, 22u, 5%	3198	018	12290	7400	Power FET, STP3NC60FP	9322	157	37687
S 5457	Coil, 42u.	2422	535	94865	7441	Transistor, PNP, BC857B(COL)	3198	010	42150
S 5461	Transformer, SD10207-00 B.	2422	531	02568	7443	Transistor, PNP, BC557B(COL)	3198	020	40110
5464	Coil, Bridge, C946-01 Y.	2422	531	02419	7444	Transistor, NPN, BC547B(COL)	3198	020	40030
5471	Coil, 6u8, 20%	3198	018	76880	7450	Transistor, PNP, PDTA114ET	3198	010	44010
5472	Coil, 3u3, 10%	3198	018	23380	7460	Transistor, NPN, BU4508DX.	9340	550	92127
5480	Coil, 10u, 10%	2422	535	97328	7461	Transistor, NPN, BC337-25(COL)	3198	020	43530
S 5501	Mains Filter	2422	549	43432	7462	Transistor, NPN, PDTCL143ZT	9340	547	00215
S 5520	Transformer, SS42204-00 B.	2422	531	02563	7463	Transistor, PNP, BC327-25(COL)	3198	020	43430
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7471	IC, TDA8359J/N2.	9352	701	64112
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7480	Transistor, NPN, BD135	3198	020	41010
5561	Coil, 27u, 5%	2422	535	95366	7482	Transistor, NPN, BD135	3198	020	41010
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	S 7515	Optical Coupler, TCET1103(G)	9322	140	14667
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7520	IC, TEA1507P/N1.	9352	673	56112
5602	Coil, 5u6, 5%	3198	018	15680	7521	Power FET, FQPF9N50.	9322	187	16687
5603	Coil, 5u6, 5%	3198	018	15680	7522	Transistor, NPN, BC847B(COL)	3198	010	42030
5604	Coil, 5u6, 5%	3198	018	15680	7540	Transistor, NPN, BC547B(COL)	3198	020	40030
5831	Coil, 6u8, 5%	3198	018	16880	7541	Transistor, NPN, PDTCL14ET	9340	310	10215
5832	Coil, 6u8, 5%	3198	018	16880	7542	Transistor, PNP, BC857B(COL)	3198	010	42150
5833	Coil, 6u8, 5%	3198	018	16880	7560	IC, L78L33ACZ.	9322	134	92676
5835	Coil, 12u, 10%	3198	018	31290	7561	Transistor, NPN, PDTCL143ZT	9340	547	00215
6001	Zener Diode, 33 volt	3198	010	23390	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
6150	Diode, Signal, BAS316.	3198	010	10630	7602	IC, M24C08-WBN6.	9322	154	38682
6201	Diode, Signal, BAS316.	3198	010	10630	7606	Transistor, NPN, PDTCL143ZT	9340	547	00215
6202	Diode, Signal, BAS316.	3198	010	10630	7802	IC, HEF4053BT.	9333	729	60653
6206	Zener Diode, 6.8 volt	3198	020	56880	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682
6331	Diode, Signal, BAV21.	3198	010	10070	7901	IC, AN7580	9322	166	29682
6332	Diode, Signal, BAS316.	3198	010	10630	7903	Transistor, NPN, BC847B(COL)	3198	010	42030
6333	Diode, Signal, BAV21.	3198	010	10070	9001	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21.	3198	010	10070	9101	Wire Jumper.	3198	036	90010
6365	Diode, Signal, BAT85	9336	247	60133	9102	Wire Jumper.	3198	036	90010
6366	Diode, Signal, BAT85	9336	247	60133	9103	Wire Jumper.	3198	036	90010
6367	Diode, Signal, BAV99	3198	010	10620	9104	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9123	Wire Jumper.	3198	036	90010
6401	Zener Diode, 68 volt	3198	010	26890	9160	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9171	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9173	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt	9331	668	30133	9175	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9176	Wire Jumper.	3198	036	90010
6452	Diode, Signal, BAS316.	3198	010	10630	9178	Wire Jumper.	3198	036	90010
6453	Zener Diode, 5.6 volt	3198	020	55680	9179	Wire Jumper.	3198	036	90010
6460	Diode, Rect, DG3-7005L	9336	436	10682	9181	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9182	Wire Jumper.	3198	036	90010
6462	Zener Diode, 12 volt	3198	010	21290	9183	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9192	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9193	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9311	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9312	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9313	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9314	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt	3198	010	25680	9406	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt	9331	177	80133	9407	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9408	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9409	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9410	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9411	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9412	Wire Jumper.	3198	036	90010
6490	Diode, Rect, BYV95C.	9335	001	80133	9413	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322	132	55667	9414	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9415	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9416	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9417	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9418	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9419	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt	9331	668	30133	9420	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9421	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9422	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9425	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9427	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9453	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9462	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt	3198	020	56880	9464	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9500	Wire Jumper.	3198	036	90010
6582	Diode, Rect, STPS10L60D.	9322	175	70667	9501	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9503	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9506	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9507	Wire Jumper.	3198	036	90010
7000	IC, TDA8941P/N1.	9352	628	51112	9511	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9512	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9513	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9514	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I/1298.	9352	742	85557	9515	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9516	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9518	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9520	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9521	Wire Jumper.	3198	036	90010
7360	Transistor, NPN, BC847B(COL)	3198	010	42030	9522	Wire Jumper.	3198	036	90010
7366	Transistor, PNP, 2SA965.	9322	167	18676	9524	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

30PW633R37A (continued)

9528	Wire Jumper.	3198	036	90010
9530	Wire Jumper.	3198	036	90010
9611	Coil, 27u, 10%	3198	018	22790
9612	Wire Jumper.	3198	036	90010
9613	Wire Jumper.	3198	036	90010
9614	Wire Jumper.	3198	036	90010
9615	Wire Jumper.	3198	036	90010
9618	Wire Jumper.	3198	036	90010
9619	Wire Jumper.	3198	036	90010
9620	Wire Jumper.	3198	036	90010
9621	Wire Jumper.	3198	036	90010
9622	Wire Jumper.	3198	036	90010
9623	Wire Jumper.	3198	036	90010
9626	Wire Jumper.	3198	036	90010
9627	Wire Jumper.	3198	036	90010
9628	Wire Jumper.	3198	036	90010
9629	Wire Jumper.	3198	036	90010
9631	Wire Jumper.	3198	036	90010
9632	Wire Jumper.	3198	036	90010
9633	Wire Jumper.	3198	036	90010
9635	Wire Jumper.	3198	036	90010
9636	Wire Jumper.	3198	036	90010
9637	Wire Jumper.	3198	036	90010
9638	Wire Jumper.	3198	036	90010
9639	Wire Jumper.	3198	036	90010
9640	Wire Jumper.	3198	036	90010
9641	Wire Jumper.	3198	036	90010
9642	Wire Jumper.	3198	036	90010
9643	Wire Jumper.	3198	036	90010
9648	Wire Jumper.	3198	036	90010
9650	Wire Jumper.	3198	036	90010
9652	Wire Jumper.	3198	036	90010
9654	Wire Jumper.	3198	036	90010
9655	Wire Jumper.	3198	036	90010
9656	Wire Jumper.	3198	036	90010
9657	Wire Jumper.	3198	036	90010
9658	Wire Jumper.	3198	036	90010
9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9683	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9848	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9855	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9857	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010

9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9923	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	59081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510

30PW633R37A (continued)

3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135	010	03831
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC04	Batteries for Remote Control Transmitt	9299	000	65263
	AC05	Cabinet Back	3139	124	46431
	AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	45431
	AC07	Canceller Coil	3128	138	60581
	AC08	Chassis Tray	3139	124	31325
S	AC09	CRT, W76ERF942X013	9301	909	10314
	AC13	Front Interface Panel Bracket.	3139	124	32891
	AC15	Holder, Degaussing Coil (4 Used) . . .	3135	013	01661
	AC17	Owner's Manual	3121	235	21151
	AC18	Quick Use Guide.	3121	233	44531
	AC19	Side Jack Panel Bracket.	3139	124	37061
	AC20	Cabinet Front Assembly	3121	237	53521
	AC20A	Cabinet Front.	3139	124	43361
	AC20C	Light Guide.	3139	124	39701
	AC20D	Nameplate.	3141	050	00161
	AC20E	Power Button	3139	138	10881
	AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
	AC20J	Top Control Assembly	3139	138	11451
REMOTE		Remote Control Transmitter, RC19036002/			
		01A.	3139	238	04311

30PW633R37C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector	2422	025 16375	2331	er.	2222	368 90177
0214	5 Pin Connector	2422	025 12481	2340	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445
0219	6 Pin Connector	2422	025 12482	2341	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0220	5 Pin Connector	2422	025 04853	2342	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0221	2 Pin Connector	2422	025 15503	2343	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0222	2 Pin Connector	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack	2422	026 04926	S 2346	Cap, 470p, 10%, 2000v, Ceramic	2020	558 90483
0239	3 Pin Connector	2422	025 16382	2360	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0243	6 Pin Connector	2422	025 04854	2362	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210
0244	5 Pin Connector	2422	025 04853	2364	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0245	6 Pin Connector	2422	025 04854	2365	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0246	5 Pin Connector	2422	025 12481	2366	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
S 0256	9 Pin CRT Socket	2422	500 80053	2367	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0267	3 Pin Connector	2412	020 00725	2368	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
0268	3 Pin Connector	2412	020 00725	2369	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
0269	Jack	2422	026 05182	2372	Cap, 10u, 20%, 160v, Electrolytic	2020	012 93318
0278	3 Pin Connector	2412	020 00725	2373	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 1000	Tuner, V+U, PLL	2422	542 90108	2375	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
1002	SAW Filter, 45.75MHz	2422	549 44518	2378	Cap, 220p, 5%, 50v, Ceramic	3198	019 02210
1200	Filter, Ceramic, 4MHz5	2422	549 48087	2379	Cap, 10u, 20%, 100v, Electrolytic	3198	025 71090
S 1400	Relay, 5 Amp, 12V.	2422	132 07543	2380	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2381	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2401	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
1660	Crystal, 12MHz000	2422	543 01203	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
	C49/U A.	2422	543 00842	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2420	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2421	Cap, 470p, 5%, 50v, Ceramic	3198	016 34710
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2454	Cap, 68n, 5%, 250v, Metalized Polypropy		
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2455	lene	2222	479 90133
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2457	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090		Cap, 470n, 5%, 250v, Metalized Polyprop		
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2459	ylene.	2022	333 00086
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2460	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2463	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2465	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2467	Cap, 13n, 5%, 1600v, Polypropylene	2020	301 90254
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2468	Cap, 9n1, 5%, 1000v, Polypropylene	2222	375 90424
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2469	Cap, 9n1, 5%, 1000v, Polypropylene	2222	375 90424
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		Cap, 430n, 5%, 250v, Metalized Polyprop		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2471	ylene.	2022	333 00164
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2472	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2476	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2480	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2481	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2482	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2485	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2172	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010	2486	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2173	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210	2487	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2488	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2489	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2490	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2491	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	S 2500	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040		Cap, 470n, 20%, 275v, Metalized Polypro		
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2501	pylene	2022	330 00018
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2503	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2505	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2507	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2508	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	S 2515	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2520	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2216	Cap, 2u2, 20%, 10v, Electrolytic	2020	012 93728	2521	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	S 2522	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2523	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2525	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2527	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2528	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2540	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2243	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2247	Cap, 2u2, 20%, 10v, Electrolytic	2020	012 93728	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
				2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2604	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3207	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3247	Res, 560K, 5%, Metalized Glass.	2322 702 60564
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3250	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3341	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3342	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3361	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3380	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3381	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3383	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3385	Res, 10K, 5%, 5W, Metal Film.	2322 257 41103
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3407	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3408	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3451	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3172	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3180	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3181	Res, 120K, 5%, Metalized Glass.	2322 702 60124	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3190	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703	3636	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3470	Res, 270K, 5%, 1/8W, Metalized Glass . .	2322 730 61274	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3694	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3473	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720	3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3481	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3482	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730
3489	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3491	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228	3843	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3901	Res, 6K8, 5%, 1/16W, Metalized Glass . .	3198 021 36820
3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230	3903	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730
3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3905	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730
3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3909	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
3498	Res, 12K, 5%, 1/16W, Metalized Glass . .	3198 021 31230	3910	Res, 27K, 5%, 1/16W, Metalized Glass . .	3198 021 32730
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3507	Surge Protector.	2422 549 43073	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03479	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass . .	3198 021 55630	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3527	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 33K, 5%, 1/10W, Metalized Glass . .	3198 021 53330	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass . .	3198 021 51530	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass . .	3198 021 58220	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198 021 52220	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass . .	3198 021 55620	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass . .	3198 021 54730	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3614	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3615	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3617	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3619	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	5001	Coil, 27u, 10%	3198 018 22790
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	5002	Coil, 820n, 10%	3198 018 18270
3623	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	5201	Coil, 6u8, 5%	3198 018 16880
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5202	Wire Jumper.	3198 036 90010
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass . .	3198 021 34720	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	5241	Wire Jumper.	3198 036 90010
3630	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	5242	Coil, 10u, 5%	3198 018 11090
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5341	Coil, 22u.	2422 535 97333
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5342	Coil, 27u, 10%	3198 018 22790
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	5376	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

5400	Coil, 11u7	2422	535	91027	7369	Transistor, PNP, BC857B(COL)	3198	010	42150
S 5445	Transformer, LOT	2422	531	02612	7373	Transistor, PNP, BC327-25(COL)	3198	020	43430
5451	Coil, 22u, 10%	3198	018	72290	7380	Transistor, NPN, 2SC2235	9322	167	19676
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7382	Transistor, NPN, BC337-25(COL)	3198	020	43530
5453	Coil, 22u, 5%	3198	018	12290	7400	Power FET, STP3NC60FP	9322	157	37687
S 5457	Coil, 42u.	2422	535	94865	7441	Transistor, PNP, BC857B(COL)	3198	010	42150
S 5461	Transformer, SD10207-00 B.	2422	531	02568	7443	Transistor, PNP, BC557B(COL)	3198	020	40110
5464	Coil, Bridge, C946-01 Y.	2422	531	02419	7444	Transistor, NPN, BC547B(COL)	3198	020	40030
5471	Coil, 6u8, 20%	3198	018	76880	7450	Transistor, PNP, PDTA114ET	3198	010	44010
5472	Coil, 3u3, 10%	3198	018	23380	7460	Transistor, NPN, BU4508DX.	9340	550	92127
5480	Coil, 10u, 10%	2422	535	97328	7461	Transistor, NPN, BC337-25(COL)	3198	020	43530
S 5501	Mains Filter	2422	549	43432	7462	Transistor, NPN, PDTCL143ZT	9340	547	00215
S 5520	Transformer, SS42204-00 B.	2422	531	02563	7463	Transistor, PNP, BC327-25(COL)	3198	020	43430
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7471	IC, TDA8359J/N2.	9352	701	64112
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7480	Transistor, NPN, BD135	3198	020	41010
5561	Coil, 27u, 5%	2422	535	95366	7482	Transistor, NPN, BD135	3198	020	41010
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	S 7515	Optical Coupler, TCET1103(G)	9322	140	14667
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7520	IC, TEA1507P/N1.	9352	673	56112
5602	Coil, 5u6, 5%	3198	018	15680	7521	Power FET, FQPF9N50.	9322	187	16687
5603	Coil, 5u6, 5%	3198	018	15680	7522	Transistor, NPN, BC847B(COL)	3198	010	42030
5604	Coil, 5u6, 5%	3198	018	15680	7540	Transistor, NPN, BC547B(COL)	3198	020	40030
5831	Coil, 6u8, 5%	3198	018	16880	7541	Transistor, NPN, PDTCL14ET	9340	310	10215
5832	Coil, 6u8, 5%	3198	018	16880	7542	Transistor, PNP, BC857B(COL)	3198	010	42150
5833	Coil, 6u8, 5%	3198	018	16880	7560	IC, L78L33ACZ.	9322	134	92676
5835	Coil, 12u, 10%	3198	018	31290	7561	Transistor, NPN, PDTCL143ZT	9340	547	00215
6001	Zener Diode, 33 volt	3198	010	23390	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
6150	Diode, Signal, BAS316.	3198	010	10630	7602	IC, M24C08-WBN6.	9322	154	38682
6201	Diode, Signal, BAS316.	3198	010	10630	7606	Transistor, NPN, PDTCL143ZT	9340	547	00215
6202	Diode, Signal, BAS316.	3198	010	10630	7802	IC, HEF4053BT.	9333	729	60653
6206	Zener Diode, 6.8 volt	3198	020	56880	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682
6331	Diode, Signal, BAV21.	3198	010	10070	7901	IC, AN7580	9322	166	29682
6332	Diode, Signal, BAS316.	3198	010	10630	7903	Transistor, NPN, BC847B(COL)	3198	010	42030
6333	Diode, Signal, BAV21.	3198	010	10070	9001	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21.	3198	010	10070	9101	Wire Jumper.	3198	036	90010
6365	Diode, Signal, BAT85	9336	247	60133	9102	Wire Jumper.	3198	036	90010
6366	Diode, Signal, BAT85	9336	247	60133	9103	Wire Jumper.	3198	036	90010
6367	Diode, Signal, BAV99	3198	010	10620	9104	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9123	Wire Jumper.	3198	036	90010
6401	Zener Diode, 68 volt	3198	010	26890	9160	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9171	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9173	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt	9331	668	30133	9175	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9176	Wire Jumper.	3198	036	90010
6452	Diode, Signal, BAS316.	3198	010	10630	9178	Wire Jumper.	3198	036	90010
6453	Zener Diode, 5.6 volt	3198	020	55680	9179	Wire Jumper.	3198	036	90010
6460	Diode, Rect, DG3-7005L	9336	436	10682	9181	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9182	Wire Jumper.	3198	036	90010
6462	Zener Diode, 12 volt	3198	010	21290	9183	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9192	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9193	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9311	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9312	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9313	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9314	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt	3198	010	25680	9406	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt	9331	177	80133	9407	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9408	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9409	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9410	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9411	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9412	Wire Jumper.	3198	036	90010
6490	Diode, Rect, BYV95C.	9335	001	80133	9413	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322	132	55667	9414	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9415	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9416	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9417	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9418	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9419	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt	9331	668	30133	9420	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9421	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9422	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9425	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9427	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9453	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9462	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt	3198	020	56880	9464	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9500	Wire Jumper.	3198	036	90010
6582	Diode, Rect, STPS10L60D.	9322	175	70667	9501	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9503	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9506	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9507	Wire Jumper.	3198	036	90010
7000	IC, TDA8941P/N1.	9352	628	51112	9511	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9512	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9513	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9514	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I/1298.	9352	742	85557	9515	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9516	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9518	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9520	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9521	Wire Jumper.	3198	036	90010
7360	Transistor, NPN, BC847B(COL)	3198	010	42030	9522	Wire Jumper.	3198	036	90010
7366	Transistor, PNP, 2SA965.	9322	167	18676	9524	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

30PW633R37C (continued)

9528	Wire Jumper.	3198	036	90010
9530	Wire Jumper.	3198	036	90010
9611	Coil, 27u, 10%	3198	018	22790
9612	Wire Jumper.	3198	036	90010
9613	Wire Jumper.	3198	036	90010
9614	Wire Jumper.	3198	036	90010
9615	Wire Jumper.	3198	036	90010
9618	Wire Jumper.	3198	036	90010
9619	Wire Jumper.	3198	036	90010
9620	Wire Jumper.	3198	036	90010
9621	Wire Jumper.	3198	036	90010
9622	Wire Jumper.	3198	036	90010
9623	Wire Jumper.	3198	036	90010
9626	Wire Jumper.	3198	036	90010
9627	Wire Jumper.	3198	036	90010
9628	Wire Jumper.	3198	036	90010
9629	Wire Jumper.	3198	036	90010
9631	Wire Jumper.	3198	036	90010
9632	Wire Jumper.	3198	036	90010
9633	Wire Jumper.	3198	036	90010
9635	Wire Jumper.	3198	036	90010
9636	Wire Jumper.	3198	036	90010
9637	Wire Jumper.	3198	036	90010
9638	Wire Jumper.	3198	036	90010
9639	Wire Jumper.	3198	036	90010
9640	Wire Jumper.	3198	036	90010
9641	Wire Jumper.	3198	036	90010
9642	Wire Jumper.	3198	036	90010
9643	Wire Jumper.	3198	036	90010
9648	Wire Jumper.	3198	036	90010
9650	Wire Jumper.	3198	036	90010
9652	Wire Jumper.	3198	036	90010
9654	Wire Jumper.	3198	036	90010
9655	Wire Jumper.	3198	036	90010
9656	Wire Jumper.	3198	036	90010
9657	Wire Jumper.	3198	036	90010
9658	Wire Jumper.	3198	036	90010
9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9683	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9848	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9855	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9857	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010

9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9923	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	59081

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly.	3139	177	26211

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510

30PW633R37C (continued)

3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	46431
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	45431
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, W76ERF942X013	9301	909	10314
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (2 Used) . . .	3104	304	14414
AC15	Holder, Degaussing Coil (2 Used) . . .	3104	304	14713
AC17	Owner's Manual	3121	235	21151
AC18	Quick Use Guide.	3121	233	44531
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53521
AC20A	Cabinet Front.	3139	124	43361
AC20A	Cabinet Front.	3139	177	56121
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
AC20J	Top Control Assembly	3139	138	11451
REMOTE	Remote Control Transmitter, RC19036002/			
	01A.	3139	238	04311

32LT621L/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16374	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0212	2 Pin Connector.	2422	025 16375	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0214	5 Pin Connector.	2422	025 12481	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0219	6 Pin Connector.	2422	025 12482	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0220	5 Pin Connector.	2422	025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0221	2 Pin Connector.	2422	025 15503	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0222	2 Pin Connector.	2422	025 10646	2360	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0223	A/V Jack	2422	026 05236	2362	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210
0225	SVHS Jack.	2422	026 04926	2364	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0239	3 Pin Connector.	2422	025 16382	2365	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0240	7 Pin Connector.	2422	025 11244	2366	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0243	6 Pin Connector.	2422	025 04854	2367	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0244	5 Pin Connector.	2422	025 04853	2368	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
0245	6 Pin Connector.	2422	025 04854	2369	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
0246	5 Pin Connector.	2422	025 12481	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020	012 93318
0251	3 Pin Connector.	2422	020 00725	2373	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 0256	10 Pin CRT Socket.	2422	500 80063	2375	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0259	5 Pin Connector.	2422	025 15848	2378	Cap, 220p, 5%, 50v, Ceramic	3198	019 02210
0262	3 Pin Connector.	2422	025 16937	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198	025 71090
0267	3 Pin Connector.	2412	020 00725	2380	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0268	3 Pin Connector.	2412	020 00725	2381	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0278	3 Pin Connector.	2412	020 00725	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
S 1000	Tuner, V+U, PLL	2422	542 90108	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
1002	SAW Filter, 45.75MHz	2422	549 44518	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
1660	Crystal, 12MHz000	2422	543 01203	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
1810	6 Pin Connector.	2422	025 16607	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			S 2448	Cap, 100p, 10%, 500v, Ceramic	3198	019 41010
	C49/U A.	2422	543 00842	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2457	Cap, 270n, 5%, 250v, Metalized Polypropylene.	2222	479 90016
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2463	Cap, 820p, 10%, 2000v, Ceramic	2020	558 90486
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222	479 90042
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2465	Cap, 12n, 5%, 1600v, Polypropylene	2020	301 90252
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2466	Cap, 18n, 10%, 400v, Polyester	2222	347 90222
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2468	Cap, 18n, 10%, 400v, Polyester	2222	347 90222
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222	365 75154
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222	365 75104
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2123	Res, Zero ohm, 'Chip' Jumper	3198	021 90020	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2125	Res, Zero ohm, 'Chip' Jumper	3198	021 90020	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2172	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2173	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022	330 00018
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2243	Cap, 6n8, 50v, Ceramic	3198	017 36820	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2604	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2254	Res, Zero ohm, 'Chip' Jumper	3198	021 90020	2606	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222	368 90177	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3250	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3258	Res, 180K, 5%, 1/10W, Metalized Glass.	2120 108 91721
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3385	Res, 10K, 5%, 5W, Metal Film.	2322 257 41103
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3403	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3123	Wire Jumper.	3198 036 90010	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3124	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3125	Wire Jumper.	3198 036 90010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3126	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 3R9, 5%, 1/3W, Metal Film.	2306 204 03398
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312 915 15102
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3172	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3180	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3181	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3190	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3469	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3470	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3473	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 32290	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3490	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
S 3493	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3496	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3497	Res, 100K, 5%, 1/16W, Metalized Glass .	3198 021 31040	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3499	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3507	Surge Protector.	2422 549 43073	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3617	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5001	Coil, 27u, 10%	3198 018 22790
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5002	Coil, 820n, 10%	3198 018 18270
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5201	Coil, 6u8, 5%	3198 018 16880
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5202	Wire Jumper.	3198 036 90010
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5241	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5341	Coil, 22u.	2422 535 97333
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	5342	Coil, 27u, 10%	3198 018 22790
3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5376	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5401	Coil, 1mH, 10%	3198 018 71020
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, LOT	2422 531 02602
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 22u, 10%	3198 018 72290
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5457	Coil, 42u.	2422 535 94865
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5461	Transformer, SC10009-03 B.	2422 531 02446
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 6u8, 20%	3198 018 76880
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5480	Coil, 18u.	2422 535 97332
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	S 5501	Mains Filter	2422 549 43432

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

S 5520	Transformer, SS42202-00 B.	2422	531	02562	7482	Transistor, NPN, BD135	3198	020	41010
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	S 7515	Optical Coupler, TCET1103(G)	9322	140	14667
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7520	IC, TEA1507P/N1.	9352	673	56112
5561	Coil, 27u, 5%.	2422	535	95366	7521	Power FET, FQPF9N50.	9322	187	16687
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7522	Transistor, NPN, BC847B(COL)	3198	010	42030
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7540	Transistor, NPN, BC547B(COL)	3198	020	40030
5602	Coil, 5u6, 5%.	3198	018	15680	7541	Transistor, NPN, PDTCl14ET	9340	310	10215
5603	Coil, 5u6, 5%.	3198	018	15680	7542	Transistor, PNP, BC857B(COL)	3198	010	42150
5604	Coil, 5u6, 5%.	3198	018	15680	7560	IC, LE33CZ	9322	106	11676
5810	Coil, 10u, 10%.	3198	018	51090	7561	Transistor, NPN, PDTCl143ZT	9340	547	00215
5831	Coil, 6u8, 5%.	3198	018	16880	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
5832	Coil, 6u8, 5%.	3198	018	16880	7602	IC, M24C16-WBN6.	9322	147	25682
5833	Coil, 6u8, 5%.	3198	018	16880	7606	Transistor, NPN, PDTCl143ZT	9340	547	00215
5835	Coil, 12u, 10%.	3198	018	31290	7802	IC, HEF4053BT.	9333	729	60653
6001	Zener Diode, 33 volt	3198	010	23390	7803	IC, HEF4053BT.	9333	729	60653
6201	Diode, Signal, BAS316.	3198	010	10630	7804	Transistor, NPN, BC847B(COL)	3198	010	42030
6202	Diode, Signal, BAS316.	3198	010	10630	7831	IC MSP3425G-PO-B8-V3 (MTAS) L	9322	187	89682
6206	Zener Diode, 6.8 volt.	3198	020	56880	7901	IC, AN7580	9322	166	29682
6331	Diode, Signal, BAV21	3198	010	10070	7903	Transistor, NPN, BC847B(COL)	3198	010	42030
6332	Diode, Signal, BAS316.	3198	010	10630	9001	Wire Jumper.	3198	036	90010
6333	Diode, Signal, BAV21	3198	010	10070	9104	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21	3198	010	10070	9123	Wire Jumper.	3198	036	90010
6365	Diode, Signal, BAT85	9336	247	60133	9160	Wire Jumper.	3198	036	90010
6366	Diode, Signal, BAT85	9336	247	60133	9171	Wire Jumper.	3198	036	90010
6367	Diode, Signal, BAV99	3198	010	10620	9173	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9181	Wire Jumper.	3198	036	90010
6401	Zener Diode, 47 volt	3198	010	24790	9182	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9183	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9192	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt.	9331	668	30133	9193	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9311	Wire Jumper.	3198	036	90010
6453	Zener Diode, 6.8 volt.	3198	020	56880	9312	Wire Jumper.	3198	036	90010
6460	Diode, Rect, BY228/24.	9340	559	50112	9313	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9314	Wire Jumper.	3198	036	90010
6464	Diode, Signal, BAS316.	3198	010	10630	9406	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9407	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9408	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9409	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9410	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9411	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9412	Wire Jumper.	3198	036	90010
6476	Zener Diode, 18 volt	3198	010	21890	9413	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9414	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9415	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9416	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9417	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9418	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9419	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9420	Wire Jumper.	3198	036	90010
6490	Diode, Rect, BYV95C.	9335	001	80133	9421	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322	132	55667	9422	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9424	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9425	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9426	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9427	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9453	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9460	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9463	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9500	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9501	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9503	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9506	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9507	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9511	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9512	Wire Jumper.	3198	036	90010
6582	Diode, Rect, STPS10L60D.	9322	175	70667	9513	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9514	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9515	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9516	Wire Jumper.	3198	036	90010
7000	IC, TDA8941P/N1.	9352	628	51112	9518	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9520	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57626	9521	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9522	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9524	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9528	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9530	Wire Jumper.	3198	036	90010
7360	Transistor, NPN, BC847B(COL)	3198	010	42030	9611	Coil, 27u, 10%.	3198	018	22790
7366	Transistor, PNP, 2SA965.	9322	167	18676	9612	Wire Jumper.	3198	036	90010
7369	Transistor, PNP, BC857B(COL)	3198	010	42150	9613	Wire Jumper.	3198	036	90010
7373	Transistor, PNP, BC327-25(COL)	3198	020	43430	9614	Wire Jumper.	3198	036	90010
7380	Transistor, NPN, 2SC2235	9322	167	19676	9615	Wire Jumper.	3198	036	90010
7382	Transistor, NPN, BC337-25(COL)	3198	020	43530	9618	Wire Jumper.	3198	036	90010
7400	Power FET, STP3NC60FP.	9322	157	37687	9619	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9622	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9623	Wire Jumper.	3198	036	90010
7450	Transistor, PNP, PDTA114ET	3198	010	44010	9624	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9626	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9627	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDTCl143ZT	9340	547	00215	9628	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9629	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9631	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9632	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

32LT621L/17 (continued)

9635	Wire Jumper.	3198 036 90010
9636	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9647	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010
9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010

9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
CBA	Main Chassis Assembly.	3139 188 04111

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090

32LT621L/17 (continued)

5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts				
0221	2 Pin Connector.	2422	025	15503
0258	2 Pin Connector.	2422	025	15503
0261	1 Pin Connector.	2422	034	20021
0262	1 Pin Connector.	2422	034	20021
2492	Cap, 390p, 10%, 2000v, Ceramic	2020	558	90482
2493	Cap, 390p, 10%, 2000v, Ceramic	2020	558	90482
3498	Varactor, 1MA/612V, Max 1100V.	2322	592	14217
3499	Varactor, 1MA/612V, Max 1100V.	2322	592	14217
5493	Transformer, Signal, DAF	3128	138	34581
CBA	DAF Panel Assembly	3139	187	10081

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	187	28041

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts				
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030

S = Safety Part Be sure to use exact replacement part.

4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3088	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6092	Diode, Signal.	9340	453	90115
CBA	Top Control Panel.	3139	187	10251

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	07161
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45231
AC07	Canceller Coil	2422	549	45605
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A80ERF042X14.	9301	927	10539
S AC12	Degaussing Coil.	2422	549	44676
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53541
AC20A	Cabinet Front.	3139	177	51891
AC20C	Light Guide.	3139	124	30411
AC20D	Nameplate.	3104	300	11991
AC20F	Power Button Cover	3139	124	32921
AC20G	Power Button Shaft	3139	124	32791
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76521
AC20J1	Top Control Bracket.	3139	124	33941
AC20J3	Top Control Cover.	3139	124	31131
AC20J4	Top Control Rubber	3139	124	30391
AC32	Yoke Wedge (2 Used).	3135	013	00311

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
1000	Tuner, V+U PLL	2422 542 90141	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
1002	SAW Filter, 45.75MHz	2422 549 44518	2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610
1200	Ceramic Filter 4.5 MHZ	2422 549 44609	2343	Cap, 2n2, 10%, 2000v, Ceramic	3198 019 72220
S 1500	Fuse, 4A, 250V, IEC	2422 086 10914	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
1600	Tact Switch.	2422 128 02742	2401	Cap, 2u2, 20%, 50V, Electrolytic	3198 037 52280
1601	Tact Switch.	2422 128 02742	2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
1602	Tact Switch.	2422 128 02742	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
1603	Tact Switch.	2422 128 02742	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
1606	Tact Switch.	2422 128 02742	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
1660	Crystal, 12MHz000	2422 543 01203	243	Connector, 6 Pin	2422 025 04854
1811	3 Pin Connector.	2412 020 00725	244	Connector, 5 Pin	2422 025 04853
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710	245	Connector, 6 Pin	2422 025 04854
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2458	Cap, 2u2, 20%, 100V, Electrolytic.	3198 037 72280
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	246	Connector, 5 Pin	2422 025 12481
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
211	Connector, 2 Pin	2422 025 16269	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
212	Connector, 2 Pin	2422 025 16375	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic	3198 037 34790
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	Cap, 470u, 20%, 16V Electrolytic	3198 037 24710
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50V Electrolytic	3198 037 54790
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	S 2488	Cap, 1000uF, 20%, 16V, Electrolytic.	3198 038 21020
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2489	Cap, 470u, 20%, 16V Electrolytic	3198 037 24710
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238 786 19852	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
219	Connector, 6 Pin	2422 025 12482	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
220	Connector, 5 Pin	2422 025 04853	2503	Cap, 47u, 20%, 200v, Electrolytic	2020 024 90647
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	S 2515	Cap, 1n5, 20%, v, Ceramic	2020 554 90172
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2520	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
221	Connector, 4 Pin	2422 025 15503	2523	Cap, 1n5, 10%, 2000v, Ceramic	3198 019 71520
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	254	SOC CRT V 9P F.	2422 500 80087
2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2560	Cap, 680p, 10%, 1000v, Ceramic	3198 019 66810
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
222	Connector, 2 Pin	2422 025 10646	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2564	Cap, 2200uF, 20%, 25V Electrolytic	3198 038 32220
2226	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2227	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2228	Cap, 820p, 5%, 25v, Ceramic	3198 016 38210	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
223	Socket 9 Pin	2422 026 05236	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856
2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2245	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
225	Socket 10 Pin	2422 026 04926	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	2618	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	267	Connector, 3 Pin	2412 020 00725
229	Connector, 3 Pin	2412 020 00725	269	Socket 3 Pin	2422 026 05182
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445	2802	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	2803	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240

S = Safety Part Be sure to use exact replacement part.

2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3341	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3342	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass . .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3452	Res, 5K6, 1%, 1/16W, Metal Film	3198 039 56020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3454	Res, 2K, 1%, 1/16W, Metal Film	3198 039 20020
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3465	Res, 27K, 1%, 1/16W, Metal Film	3198 039 27030
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3470	Res, 390K, 5%, 1/8W, Metalized Glass . .	2322 730 61394
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3471	Res, 3R9, 1%, 1/16W. Metal Film.	3198 039 39080
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3472	Res, 3R9, 1%, 1/16W. Metal Film.	3198 039 39080
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3473	Res, 5R6, 1%, 1/16W, Metal Film.	3198 039 56080
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3474	Res, 2K2, 1%, 1/16W, Metal Film.	3198 039 22020
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3475	Res, 2K2, 1%, 1/16W, Metal Film.	3198 039 22020
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3481	Res, 15K, 1%, 1/16W, Metal Film.	3198 039 15030
3157	Res, 1K5, 5%, 1/16W, Metalized Glass . .	3198 021 31520	3482	Res, 6K8, 1%, 1/16W, Metal Film.	3198 039 68020
3158	Res, 10K, 5%, 1/16W, Metalized Glass . .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass . . .	2322 734 61202	3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass . .	3198 021 32230
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/10W, Metalized Glass . .	3198 021 51230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . . .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . . .	2322 242 13335
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3218	Res, 82K, 5%, 1/16W, Metalized Glass . .	3198 021 38230	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . . .	2322 242 13155
3219	Res, 2K2, 5%, 1/16W, Metalized Glass . .	3198 021 32220	3507	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film . .	3198 013 02210
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	S 3510	NTC, 4R7, 20%.	2122 612 00065
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02710
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass . .	3198 021 51220

3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4122	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4123	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4127	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K ohm, 1%, 1/16W, Metal Film. .	3198 039 82030	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5001	Coil, 27u, 10%	3198 018 22790
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5002	Coil, 820n, 10%	3198 018 18270
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5201	Coil, 6u8, 5%	3198 018 16880
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5342	Coil, 47u.	3198 018 24790
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5445	Transformer, LOT	3128 138 21421
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 33u.	3198 018 73390
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . .	3198 018 90020
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Choke.	3128 138 55881
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Driver.	2422 531 02478
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 3u3.	3198 018 73380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5472	Coil, 3u3, 10%	3198 018 23380
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 4u7, 5%	2422 535 94213
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	S 5501	Mains Filter	2422 549 43432
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	S 5520	Transformer, SS39009-04.	2422 531 02459
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5521	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5561	Coil, 27u, 5%	2422 535 95366
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5562	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5564	Fixed, Inductor, 100MHz, 50R. . . .	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5602	Coil, 5u6, 5%	3198 018 15680
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5603	Coil, 5u6, 5%	3198 018 15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5604	Coil, 5u6, 5%	3198 018 15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5861	Coil, 10u, 5%	3198 018 11090
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6150	Diode, Signal, BAS316.	3198 010 10630
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630

6202	Diode, Signal, BAS316.	3198	010	10630	CBA	2D 3 Line Comb Filter Parts.	3139	177	26561
6206	Zener Diode, 6.8 volt.	3198	020	56880					
6331	Diode, Signal, BAV21.	3198	010	10070	DAF Panel Parts				
6332	Diode, Signal, BAS316.	3198	010	10630	DAF Panel Parts				
6333	Diode, Signal, BAV21.	3198	010	10070					
6335	Diode, Signal, BAV21.	3198	010	10070	DVD Eject Panel Parts				
6400	Res, 1K, 1%, 1/16W. Metal Film	3198	039	10020	DVD Eject Panel Parts				
6401	Zener Diode, 47 volt.	3198	010	24790					
6445	Zener Diode, 10 volt.	3198	020	51090	DVD Interface Panel Parts				
6447	Diode, Signal, 1N4148.	3198	010	10010	DVD Interface Panel Parts				
6448	Zener Diode, 6.2 volt.	9331	668	30133					
6449	Diode, Signal, BAV99.	3198	010	10620					
6460	Diode, Rect, DG3-7005L.	9336	436	10682	Front Interface Panel Parts				
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	Front Interface Panel Parts				
6462	Zener Diode, 9.1 volt.	9331	177	80133					
6465	Diode, Signal, BAV21.	3198	010	10070	ITV Front Jack Panel Parts				
6466	Diode, Signal, BAV21.	3198	010	10070	ITV Front Jack Panel Parts				
6467	Diode, Signal, BAS316.	3198	010	10630					
6468	Diode, Signal, BAS316.	3198	010	10630	Net 1 Panel (part of Scan 4 Card Assembly)				
6469	Diode, Rect, BYV95C.	9335	001	80133	Net 1 Panel (part of Scan 4 Card Assembl				
6470	Diode, Signal, BAV99.	3198	010	10620	ly)				
6476	Zener Diode, 15 volt.	3198	010	21590					
6481	Zener Diode, 5.6 volt.	3198	010	25680	Scan 4 Card (part of Scan 4 Card Assembly)				
6482	Zener Diode, 9.1 volt.	9331	177	80133	Scan 4 Card (part of Scan 4 Card Assembl				
6483	Zener Diode, 33 volt.	3198	010	23390	ly)				
6485	Diode, Rect, BYV95C.	9335	001	80133					
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	Side A/V Panel				
6487	Diode, Rect, BYV95A.	9335	000	90133	Side A/V Panel				
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	1810	3 Pin Connector.	2412	020	00725
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	1811	3 Pin Connector.	2412	020	00725
6520	Diode, Rect, BYV95A.	9335	000	90133	2171	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
6523	Diode, Signal, 1N4148.	3198	010	10010	2172	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
6524	Diode, Rect, 1N5062A.	3198	010	10120	2173	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
6525	Diode, Rect, 1N5062.	3198	010	10120	2174	Cap, 330p, 10%, 50v, Ceramic.	3198	017	33310
6526	Zener Diode, 22 volt.	3198	020	52290	2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
6540	Zener Diode, 6.2 volt.	9331	668	30133	2177	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
6541	Zener Diode, 10 volt.	3198	020	51090	2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
6560	Diode, Rect, BYV29X-500.	9340	555	59127	2179	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
6562	Diode, Rect, EGP20DL-5100.	9322	164	42682	2180	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
6563	Diode, Signal, BAS316.	3198	010	10630	2181	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017	22250
6565	Diode, Signal, BAV70.	9331	849	10215	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
6566	Diode, Signal, 1N4148.	3198	010	10010	3150	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
6569	Diode, Signal, BAS316.	3198	010	10630	3151	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
6570	Zener Diode, 6.8 volt.	3198	020	56880	3152	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730
6580	Diode, Signal, BAS316.	3198	010	10630	3153	Res, 150 ohm, 5%, 1/6W, Carbon.	3198	011	01510
6681	Diode, Signal, BAT85.	9336	247	60133	3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
6691	LED, LTL-10234WHCR.	9322	185	69682	3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
6692	IR Receiver.	9322	206	78667	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
6901	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
6904	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
7101	Transistor, NPN, BC847B(COL).	3198	010	42030	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
7102	Transistor, PNP, BC857B(COL).	3198	010	42150	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
7103	Transistor, NPN, BC847B(COL).	3198	010	42030	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
7200	IC, TDA9588H/N1/3I/1129.	9352	731	49557	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
7201	Transistor, NPN, BC847B(COL).	3198	010	42030	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
7204	Transistor, PNP, BC857B(COL).	3198	010	42150	4820	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
7205	Transistor, PNP, BC857B(COL).	3198	010	42150	6161	Zener Diode, 6.8 volt.	3198	010	26880
7330	IC, TDA6107JF/N3.	9352	713	37112	7802	IC, HEF4053BT.	9333	729	60653
7400	Power FET, IR.	9322	053	35687	CBA	Side Jack Panel Assembly.	3139	177	26231
7441	Transistor, PNP, BC857B(COL).	3198	010	42150					
7443	Transistor, PNP, BC557B(COL).	3198	020	40110	Subwoofer Panel Parts				
7460	Transistor, NPN, BU4508DX.	9340	550	92127	Subwoofer Panel Parts				
7461	Transistor, NPN, BC337-25(COL).	3198	020	43530					
7462	Transistor, NPN, PDTC143ZT.	9340	547	00215	Top Control Panel Parts				
7463	Transistor, PNP, BC327-25(COL).	3198	020	43430	Top Control Panel Parts				
7471	IC, TDA8359J/N2.	9352	701	64112					
7480	Transistor, NPN, BD135.	3198	020	41010	Cabinet & Accessory Parts				
7482	Transistor, NPN, BD135.	3198	020	41010	Cabinet & Accessory Parts				
7515	Optic Coupler, TCET1103(G).	9322	140	14667	AC01	AC Cord.	3135	010	03831
7520	IC, TEA1507P/N1.	9352	673	56112	AC04	Batteries for Remote Control Transmitt	2422	526	00163
7521	Transistor, FET, PQFP9N50.	9322	187	16687	AC09	CRT A80QCF330X34(N).	9301	955	90463
7522	Transistor, NPN, BC847B(COL).	3198	010	42030	AC12	Degaussing Coil.	2422	549	45334
7540	Transistor, NPN, BC547B(COL).	3198	020	40030	AC17	Owner's Manual, English.	3121	235	22421
7541	Transistor, NPN, PDTC114ET.	3198	010	44110	AC17	Owner's Manual, Spanish.	3121	235	22441
7542	Transistor, PNP, BC857B(COL).	3198	010	42150	AC20	Cabinet Front.	3139	177	53591
7560	IC, L78L33ACZ.	9322	134	92676	AC20C	Light Guide.	3139	124	43141
7561	Transistor, NPN, PDTC143ZT.	9340	547	00215	AC20D	Nameplate.	3141	050	00431
7580	Transistor, PNP, BC857B(COL).	3198	010	42150	AC20H	Speaker, 16 ohm, 5W (2 Used).	2422	264	00411
7602	IC, M24C08-WBN6P.	9322	154	38682	CBA	Side Jack Panell.	3139	177	26231
7606	Transistor, NPN, PDTC143ZT.	9340	547	00215	CBA	Main Chassis Assy.	3141	058	58232
7802	IC, HEF4053BT.	9333	729	60653	REMOTE	Remote Control Transmitter, RC1112813/1	3139	238	05781
7861	IC, TDA9853H/V1.	9352	671	19557					
7891	Transistor, NPN, BC847B(COL).	3198	010	42030					
7892	Transistor, NPN, BC847B(COL).	3198	010	42030					
7901	IC, AN7522N PH.	9322	181	41682					
9611	Coil, 27u, 10%.	3198	018	22790					
9672	Coil, 22u, 10%.	3198	018	22290					
9678	Coil, 22u, 10%.	3198	018	22290					
CBA	Main Chassis Assy.	3141	058	58232					

Channel One Card Parts

Channel One Card Parts

S = Safety Part Be sure to use exact replacement part.

32PT541S37G - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	2 Pin Connector.	2422 025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0212	2 Pin Connector.	2422 025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
0219	6 Pin Connector.	2422 025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0220	5 Pin Connector.	2422 025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222 368 90177
0221	2 Pin Connector.	2422 025 15503		er.	
0222	2 Pin Connector.	2422 025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0223	A/V Jack	2422 026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0225	SVHS Jack.	2422 026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
0229	3 Pin Connector.	2412 020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0243	6 Pin Connector.	2422 025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0244	5 Pin Connector.	2422 025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0245	6 Pin Connector.	2422 025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
0246	5 Pin Connector.	2422 025 12481	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
S 0254	9 Pin CRT Socket	2422 500 80076	2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0267	3 Pin Connector.	2412 020 00725	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0269	Jack	2422 026 05182	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
S 1000	Tuner, V+U PLL	2422 542 90141	2415	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310
1002	SAW Filter, 45.75MHz	2422 549 44518	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
1600	Tact Switch.	2422 128 02742	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
1601	Tact Switch.	2422 128 02742	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
1602	Tact Switch.	2422 128 02742	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	2022 333 00086
1603	Tact Switch.	2422 128 02742		ylene.	
1606	Tact Switch.	2422 128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1660	Crystal, 12MHz000	2422 543 01203	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1811	3 Pin Connector.	2412 020 00725	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	S 2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020 558 90488
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy	2222 479 90042
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	2022 330 00018
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310		pylene	
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
			2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3507	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306	204	03101	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198	021	55630	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198	012	13370	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5002	Coil, 820n, 10%	3198	018	18270
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5201	Coil, 6u8, 5%	3198	018	16880
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper.	3198	036	90010
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5205	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5206	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, PSLOT	3128	138	21421
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5457	Coil, Linear, DC12	3128	138	55881
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5463	Coil, Choke.	3128	138	37021
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5472	Coil, 3u3, 10%	3198	018	23380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5480	Coil, 4u7, 5%	2422	535	94213
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5501	Mains Filter	2422	549	43432
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5560	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5603	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6150	Diode, Signal, BAS316.	3198	010	10630

S = Safety Part Be sure to use exact replacement part.

32PT541S37G (continued)

6201	Diode, Signal, BAS316.	3198 010 10630	9171	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9173	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9175	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21.	3198 010 10070	9176	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9178	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9179	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9181	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9182	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt.	3198 010 24790	9183	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt.	3198 020 51090	9192	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9193	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9311	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9312	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L.	9336 436 10682	9406	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9407	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9408	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9423	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9424	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9425	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9426	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9427	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9453	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9460	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9463	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9500	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9501	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9503	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9506	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9507	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9510	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9512	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9514	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9515	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

32PT541S37G (continued)

9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

S = Safety Part. Be sure to use exact replacement part.

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	28141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	47111
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A80QCF340X34(N)	9301	904	59463
AC10	Customer Control Buttons	3139	124	32711
S AC12	Degaussing Coil.	2422	549	45334
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	21361
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	53611
AC20A	Cabinet Front.	3139	137	71501
AC20C	Light Guide.	3139	124	32681
AC20D	Nameplate.	3139	120	01301
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

32PT543S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0212	2 Pin Connector.	2422	025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0219	6 Pin Connector.	2422	025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0220	5 Pin Connector.	2422	025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0221	2 Pin Connector.	2422	025 15503		er.	2222	368 90177
0222	2 Pin Connector.	2422	025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0223	A/V Jack	2422	026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0225	SVHS Jack.	2422	026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0229	3 Pin Connector.	2412	020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0243	6 Pin Connector.	2422	025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0244	5 Pin Connector.	2422	025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0245	6 Pin Connector.	2422	025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0246	5 Pin Connector.	2422	025 12481	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
S 0254	9 Pin CRT Socket	2422	500 80076	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0267	3 Pin Connector.	2412	020 00725	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0269	Jack	2422	026 05182	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
S 1000	Tuner, V+U PLL	2422	542 90098	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
1002	SAW Filter, 45.75MHz	2422	549 44518	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
1600	Tact Switch.	2422	128 02742	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
1601	Tact Switch.	2422	128 02742	2457	Cap, 430n, 5%, 250v, Metalized Polyprop		
1602	Tact Switch.	2422	128 02742		ylene.	2222	479 90022
1603	Tact Switch.	2422	128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1606	Tact Switch.	2422	128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1660	Crystal, 12MHz000	2422	543 01203	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1811	3 Pin Connector.	2412	020 00725	2463	Cap, 680p, 10%, 2000v, Ceramic	2020	558 90485
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730		lene	2222	479 90042
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020	301 90254
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2466	Cap, 10n, 10%, 400v, Polyester	2222	347 90218
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2468	Cap, 18n, 10%, 400v, Polyester	2222	347 90222
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		pylene	2022	330 00018
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
				2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3507	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306	204	03101	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198	021	55630	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198	012	13370	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5002	Coil, 820n, 10%	3198	018	18270
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5201	Coil, 6u8, 5%	3198	018	16880
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper.	3198	036	90010
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5205	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5206	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5445	Transformer, PSLOT	3128	138	21421
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5463	Coil, Choke.	3128	138	37021
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5472	Coil, 3u3, 10%	3198	018	23380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5480	Coil, 47u, 10%	2422	535	97337
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5501	Mains Filter	2422	549	43432
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5560	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5561	Coil, 27u, 5%	2422	535	95366
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5562	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5564	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5602	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5603	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5604	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	6001	Zener Diode, 33 volt	3198	010	23390
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	6150	Diode, Signal, BAS316.	3198	010	10630

S = Safety Part Be sure to use exact replacement part.

32PT543S37A (continued)

6201	Diode, Signal, BAS316.	3198 010 10630	9171	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9173	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9175	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21.	3198 010 10070	9176	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9178	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9179	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9181	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9182	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt.	3198 010 24790	9183	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt.	3198 020 51090	9192	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9193	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9311	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9312	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L.	9336 436 10682	9406	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9407	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9408	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9423	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9424	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9425	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9426	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9427	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9453	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9460	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9463	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9500	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9501	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9503	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9506	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9507	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9510	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9512	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9514	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9515	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010

32PT543S37A (continued)

9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	23241

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	28141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44871
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A80ECK272X56.	9301	795	00428
AC10	Customer Control Buttons	3139	124	32711
S AC12	Degaussing Coil.	2422	549	43977
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	20681
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	53111
AC20A	Cabinet Front.	3139	177	59541
AC20C	Light Guide.	3139	124	32681
AC20D	Nameplate.	3141	050	00141
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86463

32PT543S37G - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0212	2 Pin Connector.	2422	025 16375	2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
0219	6 Pin Connector.	2422	025 12482	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0220	5 Pin Connector.	2422	025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0221	2 Pin Connector.	2422	025 15503		er.	2222	368 90177
0222	2 Pin Connector.	2422	025 10646	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0223	A/V Jack	2422	026 05236	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0225	SVHS Jack.	2422	026 04926	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0229	3 Pin Connector.	2412	020 00725	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0243	6 Pin Connector.	2422	025 04854	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0244	5 Pin Connector.	2422	025 04853	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0245	6 Pin Connector.	2422	025 04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0246	5 Pin Connector.	2422	025 12481	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
S 0254	9 Pin CRT Socket	2422	500 80076	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0267	3 Pin Connector.	2412	020 00725	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0269	Jack	2422	026 05182	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
S 1000	Tuner, V+U PLL	2422	542 90098	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
1002	SAW Filter, 45.75MHz	2422	549 44518	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
1600	Tact Switch.	2422	128 02742	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
1601	Tact Switch.	2422	128 02742	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
1602	Tact Switch.	2422	128 02742		ylene.	2022	333 00086
1603	Tact Switch.	2422	128 02742	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1606	Tact Switch.	2422	128 02742	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1660	Crystal, 12MHz000	2422	543 01203	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1811	3 Pin Connector.	2412	020 00725	S 2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020	558 90488
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730		lene	2222	479 90042
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020	301 90254
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2468	Cap, 10n, 10%, 400v, Polyester	2222	347 90218
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		pylene	2022	330 00018
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2525	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
				2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X	34. 2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33	0X34 2306 204 03278
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X	34. 2306 204 03108
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34 2306 204 03278
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film	3198 011 03390
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3137	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 33390
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. . .	2322 242 13335
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. . .	2322 242 13155
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610			
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010			
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610			
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220			

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

3507	Surge Protector.	2422	549	43073	3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198	013	02210	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02710	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198	021	51220	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198	011	04780	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3522	Res, 330K, 5%, 1/10W, Metalized Glass..	3198	021	53340	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306	204	03101	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198	021	55630	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198	012	13370	4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass..	3198	021	52240	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass..	3198	021	52240	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5002	Coil, 820n, 10%.	3198	018	18270
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5201	Coil, 6u8, 5%.	3198	018	16880
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5202	Wire Jumper.	3198	036	90010
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5242	Coil, 10u, 5%.	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5342	Coil, 22u for A80QCF340X34	2422	535	97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5342	Coil, 47u for A80QCF330X34	2422	518	24790
3817	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3818	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	S 5445	Transformer, PSLOT	3128	138	21421
3819	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198	018	90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5457	Coil, Linear, DC12	3128	138	55881
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3861	Res, 100K, 5%, 1/16W, Metalized Glass..	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198	021	31530	5471	Coil, 3u3, 20%	3198	018	73380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198	021	31220	5472	Coil, 3u3, 10%	3198	018	23380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5480	Coil, 4u7, 5%.	2422	535	94213
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5501	Mains Filter	2422	549	43432
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5561	Coil, 27u, 5%.	2422	535	95366
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7901	IC, AN7522N PH	9322 181 41682
5602	Coil, 5u6, 5%.	3198 018 15680	9001	Wire Jumper.	3198 036 90010
5603	Coil, 5u6, 5%.	3198 018 15680	9101	Wire Jumper.	3198 036 90010
5604	Coil, 5u6, 5%.	3198 018 15680	9102	Wire Jumper.	3198 036 90010
5861	Coil, 10u, 5%.	3198 018 11090	9103	Wire Jumper.	3198 036 90010
6001	Zener Diode, 33 volt	3198 010 23390	9104	Wire Jumper.	3198 036 90010
6150	Diode, Signal, BAS316.	3198 010 10630	9123	Wire Jumper.	3198 036 90010
6201	Diode, Signal, BAS316.	3198 010 10630	9171	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9173	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9175	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21	3198 010 10070	9176	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9178	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21	3198 010 10070	9179	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21	3198 010 10070	9181	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9182	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt	3198 010 24790	9183	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9192	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9193	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9311	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9312	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L	9336 436 10682	9406	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9407	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9408	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9413	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9414	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9415	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9416	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9417	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9418	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9419	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9421	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9422	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9423	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9424	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9425	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9426	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9427	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9453	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9460	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9463	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9500	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9501	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9503	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9506	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9507	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9510	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9511	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9512	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9513	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85	9336 247 60133	9514	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9515	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT543S37G (continued)

9651	Wire Jumper.	3198	036	90010
9652	Wire Jumper.	3198	036	90010
9654	Wire Jumper.	3198	036	90010
9655	Wire Jumper.	3198	036	90010
9656	Wire Jumper.	3198	036	90010
9657	Wire Jumper.	3198	036	90010
9658	Wire Jumper.	3198	036	90010
9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58231

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

S = Safety Part Be sure to use exact replacement part.

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	28141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44871
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A80QCF340X34(N)	9301	904	59463
AC10	Customer Control Buttons	3139	124	32711
S AC12	Degaussing Coil.	2422	549	43977
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	20681
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	53111

32PT543S37G (continued)

AC20A	Cabinet Front.	3139	177	59541
AC20C	Light Guide.	3139	124	32681
AC20D	Nameplate.	3141	050	00141
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
REMOTE	Remote Control Transmitter, RC19335004/ 01.	3139	228	86463

32PT553S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2330	Cap, 100n, 10%, 250v, Metalized Polyest	
0212	2 Pin Connector.	2422 025 16375	2331	er.	2222 368 90177
0219	6 Pin Connector.	2422 025 12482	2340	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
0220	5 Pin Connector.	2422 025 04853	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
0221	2 Pin Connector.	2422 025 15503	2342	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320
0222	2 Pin Connector.	2422 025 10646	2343	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
0223	A/V Jack.	2422 026 05236	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
0225	SVHS Jack.	2422 026 04926	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
0229	3 Pin Connector.	2412 020 00725	2401	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020 558 90445
0239	3 Pin Connector.	2422 025 16382	2402	Cap, 2u2, 20%, 50v, Electrolytic.	2020 021 90552
0243	6 Pin Connector.	2422 025 04854	2404	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
0244	5 Pin Connector.	2422 025 04853	2405	Cap, 47u, 20%, 50v, Electrolytic.	3198 025 54790
0245	6 Pin Connector.	2422 025 04854	2441	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
0246	5 Pin Connector.	2422 025 12481	2443	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
S 0254	9 Pin CRT Socket.	2422 500 80076	2444	Cap, 47n, +80/-20%, 50v, Ceramic.	3198 017 24730
0267	3 Pin Connector.	2412 020 00725	2450	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
0269	Jack.	2422 026 05182	2451	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
S 1000	Tuner, V+U PLL.	2422 542 90098	2455	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
1002	SAW Filter, 45.75MHz.	2422 549 44518	2457	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
1200	Filter, Ceramic, 4MHz5.	2422 549 40807	2458	Cap, 430n, 5%, 250v, Metalized Polyprop	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2459	ylene.	2222 479 90022
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2460	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
1606	Tact Switch.	2422 128 02742	2461	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
1660	Crystal, 12MHz000.	2422 543 01203	2463	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
1811	3 Pin Connector.	2412 020 00725	2464	Cap, 680p, 10%, 2000v, Ceramic.	2020 558 90485
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344		Cap, 2u2, 5%, 160v, Metalized Polypropy	
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	S 2465	lene.	2222 479 90042
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2466	Cap, 13n, 5%, 1600v, Polypropylene.	2020 301 90254
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	2468	Cap, 10n, 10%, 400v, Polyester.	2222 347 90218
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2471	Cap, 18n, 10%, 400v, Polyester.	2222 347 90222
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	2472	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2476	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 04720
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020 021 90586
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2482	Cap, 68n, 10%, 250v, Polyester.	2222 347 90234
2111	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2112	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2113	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020 021 90854
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020 021 91049
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250		pylene.	2022 330 00018
2131	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2133	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020 024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020 021 91654
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91353
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198 028 24790
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198 025 52290
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222 370 76104	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198 026 21020	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198 025 52280	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250
2254	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
			2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3134	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3507	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass.	3198	021	54720	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5001	Coil, 27u, 10%	3198	018	22790
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5002	Coil, 820n, 10%	3198	018	18270
3685	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, PSL0T	3128	138	21421
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5457	Coil, 25u.	2422	535	91028
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 3u3, 20%	3198	018	73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198	021	31530	5480	Coil, 47u, 10%	2422	535	97337
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

6445	Zener Diode, 10 volt	3198 020 51090	9193	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9311	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9312	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9406	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DGP30J-L7004.	9336 436 10682	9407	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9408	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9409	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9414	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9415	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9416	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9417	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9418	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9419	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9421	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9423	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9425	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9426	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9427	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9453	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9463	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9500	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9501	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9503	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9510	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9511	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9512	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9513	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9515	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT553S37A (continued)

9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	187	21111

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

S = Safety Panel Part of Scan 4 Card Assembly part.
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	21501

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	20991

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	2422	070	98202
AC02	AC Cord Strain Relief.	3139	124	26301
AC03	Anode Lead Spacer (3 Used).	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	42311
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A80ECK272X56.	9301	795	00428
S AC12	Degaussing Coil.	2422	549	43977
AC15	Holder, Degaussing Coil (4 Used).	3135	013	01661
AC16	Jack Panel Bracket	3139	124	42321
AC17	Owner's Manual	3121	235	20691
AC18	Quick Use Guide.	3121	233	43511
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	53121
AC20A	Cabinet Front.	3139	177	56061
AC20C	Light Guide.	3139	124	26361
AC20D	Nameplate.	3141	050	00141

32PT553S37A (continued)

AC20E	Power Button	3139	124	29441
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC20J	Top Control Assembly	3139	137	95721
AC20J1	Top Control Bracket.	3139	124	22802
AC20J3	Top Control Cover.	3139	137	77561
REMOTE	Remote Control Transmitter, RC19036001/ 01.	3139	228	86493

32PT553S37G - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0211	2 Pin Connector.	2422	025 16269	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0212	2 Pin Connector.	2422	025 16375	2331	er.	2222	368 90177
0219	6 Pin Connector.	2422	025 12482	2340	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0220	5 Pin Connector.	2422	025 04853	2341	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0221	2 Pin Connector.	2422	025 15503	2342	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0222	2 Pin Connector.	2422	025 10646	2343	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0223	A/V Jack.	2422	026 05236	2344	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0225	SVHS Jack.	2422	026 04926	2345	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0229	3 Pin Connector.	2412	020 00725	2401	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0239	3 Pin Connector.	2422	025 16382	2402	Cap, 2u2, 20%, 50v, Electrolytic.	2020	021 90552
0243	6 Pin Connector.	2422	025 04854	2404	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
0244	5 Pin Connector.	2422	025 04853	2405	Cap, 47u, 20%, 50v, Electrolytic.	3198	025 54790
0245	6 Pin Connector.	2422	025 04854	2441	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
0246	5 Pin Connector.	2422	025 12481	2443	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
S 0254	9 Pin CRT Socket.	2422	500 80076	2444	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
0267	3 Pin Connector.	2412	020 00725	2450	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
0269	Jack.	2422	026 05182	2451	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
S 1000	Tuner, V+U PLL.	2422	542 90098	2455	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
1002	SAW Filter, 45.75MHz.	2422	549 44518	2457	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
1200	Filter, Ceramic, 4MHz5.	2422	549 40807	2458	Cap, 470n, 5%, 250v, Metalized Polyprop		
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2459	ylene.	2022	333 00086
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2460	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
1606	Tact Switch.	2422	128 02742	S 2463	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
1660	Crystal, 12MHz000.	2422	543 01203	2464	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
1811	3 Pin Connector.	2412	020 00725	2465	Cap, 1n2, 10%, 2000v, Ceramic.	2020	558 90488
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422	540 98344	2466	Cap, 2u2, 5%, 160v, Metalized Polypropy		
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	S 2465	lene.	2222	479 90042
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2466	Cap, 13n, 5%, 1600v, Polypropylene.	2020	301 90254
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2467	Cap, 15n, 10%, 400v, Polyester.	2222	347 90219
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2471	Cap, 10n, 10%, 400v, Polyester.	2222	347 90218
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2472	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2476	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 04720
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2482	Cap, 68n, 10%, 250v, Polyester.	2222	347 90234
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2501	pylene.	2022	330 00018
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2503	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2505	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2507	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2508	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2515	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2520	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2521	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2522	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	S 2523	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2525	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2527	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2528	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2540	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2209	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91353
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2607	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198	016 38210	2609	Cap, 33p, 5%, 50v, Ceramic.	3198	016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2612	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2613	Cap, 68p, 5%, 50v, Ceramic.	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2615	Cap, 1n, 10%, 50v, Ceramic.	3198	017 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2619	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 21050
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2803	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2254	Res, Zero ohm, "Chip" Jumper.	3198	021 90020	2862	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

2864	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2865	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2874	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2875	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3507	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198	012	11070	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4613	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3557	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4812	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4814	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4825	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4827	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4861	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4863	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	5001	Coil, 27u, 10%	3198	018	22790
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	5002	Coil, 820n, 10%	3198	018	18270
3685	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, PSLOT	3128	138	21421
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear, DC12	3128	138	55881
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5471	Coil, 3u3, 20%	3198	018	73380
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3862	Res, 15K, 5%, 1/16W, Metalized Glass	3198	021	31530	5480	Coil, 4u7, 5%	2422	535	94213
3863	Res, 1K2, 5%, 1/16W, Metalized Glass	3198	021	31220	S 5501	Mains Filter	2422	549	43432
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	S 5520	Transformer, SS39009-04.	2422	531	02459
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3867	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	5602	Coil, 5u6, 5%	3198	018	15680
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5603	Coil, 5u6, 5%	3198	018	15680
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5604	Coil, 5u6, 5%	3198	018	15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5861	Coil, 10u, 5%	3198	018	11090
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6001	Zener Diode, 33 volt	3198	010	23390
3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6150	Diode, Signal, BAS316.	3198	010	10630
3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	6201	Diode, Signal, BAS316.	3198	010	10630
3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	6202	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220	6206	Zener Diode, 6.8 volt.	3198	020	56880
4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6331	Diode, Signal, BAV21	3198	010	10070
4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6332	Diode, Signal, BAS316.	3198	010	10630
4122	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6333	Diode, Signal, BAV21	3198	010	10070
4123	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6335	Diode, Signal, BAV21	3198	010	10070
4127	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002
4214	Res, Zero ohm, "Chip" Jumper	3198	021	90030	6401	Zener Diode, 47 volt	3198	010	24790

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

6445	Zener Diode, 10 volt	3198 020 51090	9193	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9311	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9312	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9406	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DGP30J-L7004.	9336 436 10682	9407	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9408	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9409	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9410	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9411	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9412	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9413	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9414	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9415	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9416	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9417	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9418	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9419	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9421	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 00133	9423	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9424	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9425	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 00133	9426	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9427	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9453	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9460	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9463	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9500	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9501	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9503	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9506	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9507	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9510	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9511	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9512	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9513	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9515	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1053.	9352 728 40557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9617	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9618	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9619	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT	9340 547 00215	9620	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9621	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9622	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9623	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9624	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9626	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1	9352 673 56112	9627	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9628	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9629	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9631	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET	9340 310 10215	9632	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9633	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9637	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT	9340 547 00215	9638	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9639	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9640	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT	9340 547 00215	9641	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9642	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9643	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL)	3198 010 42030	9648	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH	9322 181 41682	9651	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9652	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9661	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9662	Wire Jumper.	3198 036 90010
9178	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9179	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9192	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT553S37G (continued)

9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9994	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58241

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

S = Safety Panel Part of Scan 4 Card Assembly part.
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
1810	3 Pin Connector.	2412	020	00725
1811	3 Pin Connector.	2412	020	00725
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2180	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2181	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017	42240
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3816	Res, 100K, 5%, 1/10W, Metalized Glass.	3198	021	51040
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040
4820	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
7802	IC, HEF4053BT.	9333	729	60653
9150	Wire Jumper.	3198	036	90010
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9154	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	21501

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

0215	3 Pin Connector.	2422	025	09191
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4092	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	20991

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	2422	070	98202
AC02	AC Cord Strain Relief.	3139	124	26301
AC03	Anode Lead Spacer (3 Used).	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	42311
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A80QCF340X34(N)	9301	904	59463
S AC12	Degaussing Coil.	2422	549	43977
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC16	Jack Panel Bracket	3139	124	42321
AC17	Owner's Manual	3121	235	20691
AC18	Quick Use Guide.	3121	233	43511
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	53121
AC20A	Cabinet Front.	3139	177	56061
AC20C	Light Guide.	3139	124	26361
AC20D	Nameplate.	3141	050	00141

32PT553S37G (continued)

AC20E	Power Button	3139	177	66921
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC20J	Top Control Assembly	3139	137	95721
AC20J1	Top Control Bracket.	3139	124	22802
AC20J3	Top Control Cover.	3139	137	77561
REMOTE	Remote Control Transmitter, RC19036001/			
	01.	3139	228	86493

32PT563R85G - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Socket Fuse	2422	088 00271	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
0127	NTC Holder	3139	120 10151	2245	Cap, 470n, +80/-20%, 10v, Ceramic . . .	3198	017 44740
0136	IC-Spring	3104	301 22081	2247	Cap, 1000u, 20%, 16v, Electrolytic . .	3198	026 21020
0137	Spring	3139	121 24583	2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0138	IC-Spring	3104	301 22081	2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0139	Spring for Bracket	3122	121 24786	2250	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198	025 52280
0140	Spring	3139	121 24583	2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
0141	IC-Spring	3104	301 22081	2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
0152	Cable, DIPMate, 6 Pin, 560mm	3139	121 08951	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0153	Cable, 5 Pin, 560mm	3139	121 09041	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222	368 90177
0211	2 Pin Connector	2422	025 16269	2331	Cap, 10n, +80/-20% 1000v, Ceramic . . .	2020	558 90445
0212	2 Pin Connector	2422	025 16375	2340	Cap, 10u, 20%, 250v, Electrolytic . . .	2020	012 93495
0219	6 Pin Connector	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0221	2 Pin Connector	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0222	2 Pin Connector	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020	558 90445
0225	SVHS Jack	2422	026 04926	2401	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020	021 90552
0243	6 Pin Connector	2422	025 04854	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
0244	5 Pin Connector	2422	025 04853	2404	Cap, 47u, 20%, 50v, Electrolytic . . .	3198	025 54790
0245	6 Pin Connector	2422	025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic . . .	3198	025 32210
0246	5 Pin Connector	2422	025 12481	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
S 0254	9 Pin CRT Socket	2422	500 80076	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0267	3 Pin Connector	2412	020 00725	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198	017 24730
0269	Jack	2422	026 05182	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
S 1000	Tuner, V+U, PLL	2422	542 90108	2450	Cap, 47u, 20%, 160v, Electrolytic . . .	2020	021 91139
1002	SAW Filter, 45.75MHz	2422	549 44518	2451	Cap, 15n, 10%, 50v, Polyester	3198	014 01530
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025 34790
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	2022	333 00086
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2458	Cap, 2u2, 20%, 100v, Electrolytic . . .	2020	021 91331
1600	Tact Switch	2422	128 02742	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
1601	Tact Switch	2422	128 02742	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
1602	Tact Switch	2422	128 02742	S 2463	Cap, 1n2, 10%, 2000v, Ceramic	2020	558 90488
1603	Tact Switch	2422	128 02742	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy	2022	479 90042
1606	Tact Switch	2422	128 02742	S 2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020	301 90254
1660	Crystal, 12MHz000	2422	543 01203	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
1810	6 Pin Connector	2422	025 16607	2468	Cap, 10n, 10%, 400v, Polyester	2222	347 90218
1831	Crystal, Resonator, 18MHz432, 12 Pin, H	2422	543 00842	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2006	Cap, 470u, 20%, 16v, Electrolytic . . .	3198	025 24710	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2007	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 41040	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2008	Cap, 100u, 20%, 25v, Electrolytic . . .	3198	025 31010	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2480	Cap, 47u, 20%, 25v, Electrolytic . . .	2020	021 90586
2101	Cap, 470n, +80/-20%, 16v, Ceramic . . .	3198	017 24740	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2485	Cap, 4u7, 20%, 250v, Electrolytic . . .	2020	021 90856
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2486	Cap, 470u, 20%, 16v, Electrolytic . . .	2020	021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020	021 91049
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2489	Cap, 470u, 20%, 16v, Electrolytic . . .	2020	021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	2022	330 00018
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020	024 90647
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020	021 91654
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic . . .	2222	910 19856
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic . . .	3198	023 22240
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2606	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2608	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2611	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic	3198	017 32220				

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2807	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2843	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2844	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3451	Res, 2R7, 5%, 1/3W, Metal Film.	2306 204 03278
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3472	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3473	Res, 5R6, 1%, 3/5W, Metal Film.	2312 915 15608
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3481	Res, 15K, 1%, 3/5W, Metal Film.	2312 915 11503
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3482	Res, 6K8, 1%, 3/5W, Metal Film.	2312 915 16802
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film.	2306 204 03228
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3507	Surge Protector.	2422 549 43073	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070	4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. . .	2322 734 64702	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5001	Coil, 27u, 10%	3198 018 22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5002	Coil, 820n, 10%	3198 018 18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5201	Coil, 6u8, 5%	3198 018 16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5202	Wire Jumper.	3198 036 90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5241	Wire Jumper.	3198 036 90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5242	Coil, 10u, 5%	3198 018 11090
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	5342	Coil, 22u.	2422 535 97333
3812	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	5401	Coil, 1mH, 10%	3198 018 71020
3813	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 5445	Transformer, PSLOT	3128 138 21421
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear, DC12	3128 138 55881
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 3u3, 20%	3198 018 73380
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 4u7, 5%	2422 535 94213
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5501	Mains Filter	2422 549 43432
3831	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	S 5520	Transformer, SS39009-04.	2422 531 02459
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5561	Coil, 27u, 5%	2422 535 95366
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7606	Transistor, NPN, PDTCl432T	9340 547 00215
5602	Coil, 5u6, 5%.	3198 018 15680	7802	IC, HEF4053BT.	9333 729 60653
5603	Coil, 5u6, 5%.	3198 018 15680	7803	IC, HEF4053BT.	9333 729 60653
5604	Coil, 5u6, 5%.	3198 018 15680	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
5810	Coil, 10u, 10%.	3198 018 51090	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
5831	Coil, 6u8, 5%.	3198 018 16880	7901	IC, AN7522N PH	9322 181 41682
5832	Coil, 6u8, 5%.	3198 018 16880	9001	Wire Jumper.	3198 036 90010
5833	Coil, 6u8, 5%.	3198 018 16880	9101	Wire Jumper.	3198 036 90010
5835	Coil, 12u, 10%.	3198 018 31290	9102	Wire Jumper.	3198 036 90010
6001	Zener Diode, 33 volt	3198 010 23390	9103	Wire Jumper.	3198 036 90010
6150	Diode, Signal, BAS316.	3198 010 10630	9104	Wire Jumper.	3198 036 90010
6201	Diode, Signal, BAS316.	3198 010 10630	9123	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9171	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9173	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21.	3198 010 10070	9175	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9176	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9178	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9179	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9181	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt	3198 010 24790	9182	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9183	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9192	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9193	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9311	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L	9336 436 10682	9312	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9406	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9407	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9408	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9410	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9412	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9413	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9414	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9415	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9416	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9417	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9418	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9419	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9421	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9423	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9424	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9425	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9426	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9427	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9453	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9460	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9463	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9500	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9501	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9503	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9506	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9507	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9510	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9511	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9512	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9513	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9514	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9515	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9618	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9619	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9620	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTCl432T	9340 547 00215	9621	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9622	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9623	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9626	Wire Jumper.	3198 036 90010
7515	Optical Coupler, TCERT1103(G)	9322 140 14667	9627	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9628	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9629	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9631	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9632	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCl14ET	9340 310 10215	9633	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9637	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9638	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDTCl432T	9340 547 00215	9639	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9641	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT563R85G (continued)

9642	Wire Jumper.	3198 036 90010	CBA	Main Chassis Assembly.	3141 058 59431
9643	Wire Jumper.	3198 036 90010			
9648	Wire Jumper.	3198 036 90010		Channel One Card Parts	
9650	Wire Jumper.	3198 036 90010		Channel One Card Parts	
9651	Wire Jumper.	3198 036 90010			
9652	Wire Jumper.	3198 036 90010		2D 3 Line Comb Filter Parts	
9654	Wire Jumper.	3198 036 90010		2D 3 Line Comb Filter Parts	
9655	Wire Jumper.	3198 036 90010	0266	6 Pin Connector.	2422 025 16609
9656	Wire Jumper.	3198 036 90010	2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
9657	Wire Jumper.	3198 036 90010	2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
9658	Wire Jumper.	3198 036 90010	2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9659	Wire Jumper.	3198 036 90010	2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
9660	Wire Jumper.	3198 036 90010	2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9661	Wire Jumper.	3198 036 90010	2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
9662	Wire Jumper.	3198 036 90010	2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
9663	Wire Jumper.	3198 036 90010	2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
9664	Wire Jumper.	3198 036 90010	2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9665	Wire Jumper.	3198 036 90010	2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9666	Wire Jumper.	3198 036 90010	2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9667	Wire Jumper.	3198 036 90010	2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9668	Wire Jumper.	3198 036 90010	2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9669	Wire Jumper.	3198 036 90010	2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
9670	Wire Jumper.	3198 036 90010	2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9671	Wire Jumper.	3198 036 90010	2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
9672	Coil, 22u, 10%	3198 018 22290	2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9674	Wire Jumper.	3198 036 90010	2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9675	Wire Jumper.	3198 036 90010	2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9676	Wire Jumper.	3198 036 90010	2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9678	Coil, 22u, 10%	3198 018 22290	2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9679	Wire Jumper.	3198 036 90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9680	Wire Jumper.	3198 036 90010	2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9681	Wire Jumper.	3198 036 90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9682	Wire Jumper.	3198 036 90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9685	Wire Jumper.	3198 036 90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9686	Wire Jumper.	3198 036 90010	2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
9687	Wire Jumper.	3198 036 90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9688	Wire Jumper.	3198 036 90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9689	Wire Jumper.	3198 036 90010	2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
9690	Wire Jumper.	3198 036 90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9691	Wire Jumper.	3198 036 90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9694	Wire Jumper.	3198 036 90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9695	Wire Jumper.	3198 036 90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9697	Wire Jumper.	3198 036 90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
9698	Wire Jumper.	3198 036 90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
9699	Wire Jumper.	3198 036 90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9821	Wire Jumper.	3198 036 90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
9822	Wire Jumper.	3198 036 90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
9825	Wire Jumper.	3198 036 90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9828	Wire Jumper.	3198 036 90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122 118 05951
9829	Wire Jumper.	3198 036 90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9831	Wire Jumper.	3198 036 90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9832	Wire Jumper.	3198 036 90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9837	Wire Jumper.	3198 036 90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
9838	Wire Jumper.	3198 036 90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9839	Wire Jumper.	3198 036 90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9846	Wire Jumper.	3198 036 90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9847	Wire Jumper.	3198 036 90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9849	Wire Jumper.	3198 036 90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9851	Wire Jumper.	3198 036 90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9856	Wire Jumper.	3198 036 90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9858	Wire Jumper.	3198 036 90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9859	Wire Jumper.	3198 036 90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9860	Wire Jumper.	3198 036 90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9862	Wire Jumper.	3198 036 90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9863	Wire Jumper.	3198 036 90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9864	Wire Jumper.	3198 036 90010	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9865	Wire Jumper.	3198 036 90010	3457	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9868	Wire Jumper.	3198 036 90010	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9869	Wire Jumper.	3198 036 90010	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9870	Wire Jumper.	3198 036 90010	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9871	Wire Jumper.	3198 036 90010	5401	Coil, 10u, 10%	3198 018 31090
9873	Wire Jumper.	3198 036 90010	5407	Coil, 33u, 5%.	3198 018 13390
9874	Wire Jumper.	3198 036 90010	5408	Coil, 33u, 20%	3198 018 33390
9875	Wire Jumper.	3198 036 90010	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
9876	Wire Jumper.	3198 036 90010	5425	Coil, 10u, 10%	3198 018 31090
9877	Wire Jumper.	3198 036 90010	5428	Coil, 10u, 5%.	3198 018 11090
9878	Wire Jumper.	3198 036 90010	5429	Coil, 10u, 10%.	3198 018 31090
9901	Wire Jumper.	3198 036 90010	5430	Coil, 10u, 10%.	3198 018 31090
9902	Wire Jumper.	3198 036 90010	5440	Coil, 10u, 10%.	3198 018 31090
9903	Wire Jumper.	3198 036 90010	5442	Coil, 22u, 5%.	3198 018 12290
9904	Wire Jumper.	3198 036 90010	5450	Coil, 10u, 10%.	3198 018 31090
9905	Wire Jumper.	3198 036 90010	5452	Coil, 33u, 5%.	3198 018 13390
9911	Wire Jumper.	3198 036 90010	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
9913	Wire Jumper.	3198 036 90010	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
9914	Wire Jumper.	3198 036 90010	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
9915	Wire Jumper.	3198 036 90010	7421	IC, TC90A53N	9322 182 18682
9991	Wire Jumper.	3198 036 90010	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
9993	Wire Jumper.	3198 036 90010	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
9996	Wire Jumper.	3198 036 90010	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
9997	Wire Jumper.	3198 036 90010	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9998	Wire Jumper.	3198 036 90010	9401	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

32PT563R85G (continued)

9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3139	128	75281
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	43611
S AC09	CRT, A80QCF340X34(N)	9301	904	59463
S AC12	Degaussing Coil.	2422	549	45334
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	21371
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53131
AC20A	Cabinet Front.	3139	177	53591
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	43141
AC20D	Nameplate.	3141	050	00141
AC20E	Power Button	3121	237	53341
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC29	Plastic Facade	3139	177	60071
REMOTE	Remote Control Transmitter, RC19335004/01.	3139	228	86464

32PT563S37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
	2 Pin Connector.	2422 025 16269	
0212	2 Pin Connector.	2422 025 16375	
0219	6 Pin Connector.	2422 025 12482	
0220	5 Pin Connector.	2422 025 04853	
0221	2 Pin Connector.	2422 025 15503	
0222	2 Pin Connector.	2422 025 10646	
0223	A/V Jack	2422 026 05236	
0225	SVHS Jack.	2422 026 04926	
0243	6 Pin Connector.	2422 025 04854	
0244	5 Pin Connector.	2422 025 04853	
0245	6 Pin Connector.	2422 025 04854	
0246	5 Pin Connector.	2422 025 12481	
S 0254	9 Pin CRT Socket	2422 500 80076	
0267	3 Pin Connector.	2412 020 00725	
0269	Jack	2422 026 05182	
S 1000	Tuner, V+U PLL	2422 542 90098	
1002	SAW Filter, 45.75MHz	2422 549 44518	
1200	Filter, Ceramic, 4MHz5	2422 549 40807	
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	
1600	Tact Switch.	2422 128 02742	
1601	Tact Switch.	2422 128 02742	
1602	Tact Switch.	2422 128 02742	
1603	Tact Switch.	2422 128 02742	
1606	Tact Switch.	2422 128 02742	
1660	Crystal, 12MHz000	2422 543 01203	
1810	6 Pin Connector.	2422 025 16607	
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422 543 00842	
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198 025 24710	
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010	
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198 017 24740	
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2121	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2122	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2124	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2141	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238 786 19852	
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 41040	
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740	
2213	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2214	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2215	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240	
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	

S = Safety Part Be sure to use exact replacement part.

2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020 558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445
2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552
2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020 021 91139
2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2457	Cap, 430n, 5%, 250v, Metalized Polypropylene.	2222 479 90022
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020 021 91331
2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2463	Cap, 680p, 10%, 2000v, Ceramic	2020 558 90485
2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042
S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254
2466	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
2468	Cap, 18n, 10%, 400v, Polyester	2222 347 90222
2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020 021 90856
2486	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2489	Cap, 470u, 20%, 16v, Electrolytic.	2020 021 91577
2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198 017 42240
2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198 023 22240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710

32PT563S37A (continued)

2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3247	Res, 680K, 5%, 1/16W, Metalized Glass.	3198 021 36840
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3451	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3124	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3126	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3471	Res, 4R7, 1%, 3/5W, Metal Film	2312 915 14708
3132	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3134	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3206	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3507	Surge Protector.	2422 549 43073
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3524	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55630
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070

S = Safety Part Be sure to use exact replacement part.

32PT563S37A (continued)

S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5001	Coil, 27u, 10%	3198 018 22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5002	Coil, 820n, 10%	3198 018 18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5201	Coil, 6u8, 5%	3198 018 16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5202	Wire Jumper.	3198 036 90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5241	Wire Jumper.	3198 036 90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5242	Coil, 10u, 5%	3198 018 11090
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	5342	Coil, 22u.	2422 535 97333
3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5401	Coil, 1mH, 10%	3198 018 71020
3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	S 5445	Transformer, PSL0T	3128 138 21421
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5457	Coil, 25u.	2422 535 91028
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5461	Transformer, Signal Driver, SC10027-00	2422 531 02478
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5471	Coil, 3u3, 20%	3198 018 73380
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5472	Coil, 3u3, 10%	3198 018 23380
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5480	Coil, 47u, 10%	2422 535 97337
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	S 5501	Mains Filter	2422 549 43432
3831	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	S 5520	Transformer, SS39009-04.	2422 531 02459
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5561	Coil, 27u, 5%	2422 535 95366
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5602	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5603	Coil, 5u6, 5%	3198 018 15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5604	Coil, 5u6, 5%	3198 018 15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5810	Coil, 10u, 10%	3198 018 51090
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5831	Coil, 6u8, 5%	3198 018 16880
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5832	Coil, 6u8, 5%	3198 018 16880
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	5833	Coil, 6u8, 5%	3198 018 16880
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5835	Coil, 12u, 10%	3198 018 31290
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6001	Zener Diode, 33 volt	3198 010 23390
4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6150	Diode, Signal, BAS316.	3198 010 10630
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6201	Diode, Signal, BAS316.	3198 010 10630
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6202	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

32PT563S37A (continued)

6206	Zener Diode, 6.8 volt.	3198 020 56880	9173	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21.	3198 010 10070	9175	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9176	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9178	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9179	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9181	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt.	3198 010 24790	9182	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt.	3198 020 51090	9183	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9192	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9193	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9311	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L.	9336 436 10682	9312	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9406	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9407	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9408	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9410	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9412	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9413	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt.	3198 010 21590	9414	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9415	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9416	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt.	3198 010 23390	9417	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9418	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9419	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9421	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9423	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9424	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9425	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9426	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9427	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9453	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9460	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9463	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9500	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9501	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9503	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9506	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9507	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9510	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9511	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9512	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9513	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9514	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9515	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL).	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL).	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9611	Coil, 27u, 10%.	3198 018 22790
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9618	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9619	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9620	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9621	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9622	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9623	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9626	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9627	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9628	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9629	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9631	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9632	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9633	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9637	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9638	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9639	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9641	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9643	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL).	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L.	9322 187 89682	9651	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9652	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9654	Wire Jumper.	3198 036 90010
9101	Wire Jumper.	3198 036 90010	9655	Wire Jumper.	3198 036 90010
9102	Wire Jumper.	3198 036 90010	9656	Wire Jumper.	3198 036 90010
9103	Wire Jumper.	3198 036 90010	9657	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9658	Wire Jumper.	3198 036 90010
9123	Wire Jumper.	3198 036 90010	9659	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

32PT563S37A (continued)

9661	Wire Jumper.	3198 036 90010	2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
9662	Wire Jumper.	3198 036 90010	2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
9663	Wire Jumper.	3198 036 90010	2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
9664	Wire Jumper.	3198 036 90010	2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9665	Wire Jumper.	3198 036 90010	2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9666	Wire Jumper.	3198 036 90010	2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9667	Wire Jumper.	3198 036 90010	2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9668	Wire Jumper.	3198 036 90010	2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9669	Wire Jumper.	3198 036 90010	2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
9670	Wire Jumper.	3198 036 90010	2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9671	Wire Jumper.	3198 036 90010	2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
9672	Coil, 22u, 10%	3198 018 22290	2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9674	Wire Jumper.	3198 036 90010	2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9675	Wire Jumper.	3198 036 90010	2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9676	Wire Jumper.	3198 036 90010	2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9678	Coil, 22u, 10%	3198 018 22290	2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9679	Wire Jumper.	3198 036 90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9680	Wire Jumper.	3198 036 90010	2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9681	Wire Jumper.	3198 036 90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9682	Wire Jumper.	3198 036 90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9685	Wire Jumper.	3198 036 90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9686	Wire Jumper.	3198 036 90010	2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
9687	Wire Jumper.	3198 036 90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9688	Wire Jumper.	3198 036 90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9689	Wire Jumper.	3198 036 90010	2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
9690	Wire Jumper.	3198 036 90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9691	Wire Jumper.	3198 036 90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9694	Wire Jumper.	3198 036 90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9695	Wire Jumper.	3198 036 90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9697	Wire Jumper.	3198 036 90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
9698	Wire Jumper.	3198 036 90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
9699	Wire Jumper.	3198 036 90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9821	Wire Jumper.	3198 036 90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
9822	Wire Jumper.	3198 036 90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
9825	Wire Jumper.	3198 036 90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9828	Wire Jumper.	3198 036 90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122 118 05951
9829	Wire Jumper.	3198 036 90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9831	Wire Jumper.	3198 036 90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9832	Wire Jumper.	3198 036 90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9837	Wire Jumper.	3198 036 90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
9838	Wire Jumper.	3198 036 90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9839	Wire Jumper.	3198 036 90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9846	Wire Jumper.	3198 036 90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9847	Wire Jumper.	3198 036 90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9849	Wire Jumper.	3198 036 90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9851	Wire Jumper.	3198 036 90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9856	Wire Jumper.	3198 036 90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9858	Wire Jumper.	3198 036 90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9859	Wire Jumper.	3198 036 90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9860	Wire Jumper.	3198 036 90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9862	Wire Jumper.	3198 036 90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9863	Wire Jumper.	3198 036 90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9864	Wire Jumper.	3198 036 90010	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9865	Wire Jumper.	3198 036 90010	3457	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9868	Wire Jumper.	3198 036 90010	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9869	Wire Jumper.	3198 036 90010	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9870	Wire Jumper.	3198 036 90010	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9871	Wire Jumper.	3198 036 90010	5401	Coil, 10u, 10%	3198 018 31090
9873	Wire Jumper.	3198 036 90010	5407	Coil, 33u, 5%	3198 018 13390
9874	Wire Jumper.	3198 036 90010	5408	Coil, 33u, 20%	3198 018 33390
9875	Wire Jumper.	3198 036 90010	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
9876	Wire Jumper.	3198 036 90010	5425	Coil, 10u, 10%	3198 018 31090
9877	Wire Jumper.	3198 036 90010	5428	Coil, 10u, 5%	3198 018 11090
9878	Wire Jumper.	3198 036 90010	5429	Coil, 10u, 10%	3198 018 31090
9901	Wire Jumper.	3198 036 90010	5430	Coil, 10u, 10%	3198 018 31090
9902	Wire Jumper.	3198 036 90010	5440	Coil, 10u, 10%	3198 018 31090
9903	Wire Jumper.	3198 036 90010	5442	Coil, 22u, 5%	3198 018 12290
9904	Wire Jumper.	3198 036 90010	5450	Coil, 10u, 10%	3198 018 31090
9905	Wire Jumper.	3198 036 90010	5452	Coil, 33u, 5%	3198 018 13390
9911	Wire Jumper.	3198 036 90010	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
9913	Wire Jumper.	3198 036 90010	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
9914	Wire Jumper.	3198 036 90010	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
9915	Wire Jumper.	3198 036 90010	7421	IC, TC90A53N	9322 182 18682
9991	Wire Jumper.	3198 036 90010	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
9993	Wire Jumper.	3198 036 90010	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
9996	Wire Jumper.	3198 036 90010	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
9997	Wire Jumper.	3198 036 90010	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
9998	Wire Jumper.	3198 036 90010	9401	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 177 26261	9402	Wire Jumper.	3198 036 90010
			9403	Wire Jumper.	3198 036 90010
			CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

	2D 3 Line Comb Filter Parts	
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

32PT563S37A (continued)

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

	Side Jack Panel Parts			
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	03831
AC02	AC Cord Strain Relief.	3122	224	04623
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	43611
S AC09	CRT, A80ECK272X56.	9301	795	00428
S AC12	Degaussing Coil.	2422	549	43977
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	20701
AC18	Quick Use Guide.	3121	233	43521
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53131
AC20A	Cabinet Front.	3139	177	53591
AC20B	Chassis Guide (2 Used)	3139	124	31381
AC20C	Light Guide.	3139	124	43141
AC20D	Nameplate.	3141	050	00141
AC20E	Power Button	3121	237	53341
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
AC29	Plastic Facade	3139	177	60071
REMOTE	Remote Control Transmitter, RC19036001/01.	3139	228	86493

32PT563S37G - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16269
0212	2 Pin Connector.	2422	025 16375
0219	6 Pin Connector.	2422	025 12482
0220	5 Pin Connector.	2422	025 04853
0221	2 Pin Connector.	2422	025 15503
0222	2 Pin Connector.	2422	025 10646
0223	A/V Jack	2422	026 05236
0225	SVHS Jack.	2422	026 04926
0243	6 Pin Connector.	2422	025 04854
0244	5 Pin Connector.	2422	025 04853
0245	6 Pin Connector.	2422	025 04854
0246	5 Pin Connector.	2422	025 12481
S 0254	9 Pin CRT Socket	2422	500 80076
0267	3 Pin Connector.	2412	020 00725
0269	Jack	2422	026 05182
S 1000	Tuner, V+U PLL	2422	542 90141
1002	SAW Filter, 45.75MHz	2422	549 44518
1200	Filter, Ceramic, 4MHz5	2422	549 40807
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914
S 1515	Relay, 5 Amp, 12V.	2422	132 07444
1600	Tact Switch.	2422	128 02742
1601	Tact Switch.	2422	128 02742
1602	Tact Switch.	2422	128 02742
1603	Tact Switch.	2422	128 02742
1606	Tact Switch.	2422	128 02742
1660	Crystal, 12MHz000	2422	543 01203
1810	6 Pin Connector.	2422	025 16607
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A.	2422	543 00842
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
2245	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222	368 90177

S = Safety Part Be sure to use exact replacement part.

2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2415	Cap, 330p, 5%, 50v, Ceramic.	3198	016 03310
2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
2451	Cap, 15n, 10%, 50v, Polyester.	3198	014 01530
2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022	333 00086
2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
S 2463	Cap, 1n2, 10%, 2000v, Ceramic.	2020	558 90488
2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222	479 90042
S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020	301 90254
2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2468	Cap, 10n, 10%, 400v, Polyester	2222	347 90218
2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222	365 75154
2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222	365 75104
2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022	330 00018
2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020
2607	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2609	Cap, 33p, 5%, 50v, Ceramic	3198	016 33390
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2612	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198	016 36890
2615	Cap, 1n, 10%, 50v, Ceramic	3198	017 31020
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017 21050
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2802	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240
2807	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250
2816	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740
2831	Cap, 1p, 25%, 50v, Ceramic	3198	016 31080
2832	Cap, 1p, 25%, 50v, Ceramic	3198	016 31080
2833	Cap, 47p, 5%, 50v, Ceramic	3198	016 34790

32PT563S37G (continued)

2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2837	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2841	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2843	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2844	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2846	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X	
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210		34.	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33	
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910		0X34.	2306 204 03278
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X	
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020		34.	2306 204 03108
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740		0X34.	2306 204 03278
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. .	2322 734 61202	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3504	Res, PTC, 3R0, Degaussing.	2120 661 00025
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3507	Surge Protector.	2422 549 43073
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710

S = Safety Part Be sure to use exact replacement part.

32PT563S37G (continued)

3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198	021	51220	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198	011	04780	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198	021	38220
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306	204	03101	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198	021	55630	4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198	021	51020	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, OR1, 5%, 3/5W, Metal Film	3198	012	11070	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198	012	13370	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4601	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	18203	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322	734	64702	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322	730	61274	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198	021	51530	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198	021	51230	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198	012	13310	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198	021	52220	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198	021	55620	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198	021	54730	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4837	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4838	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198	011	02220	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198	011	04710	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198	011	01020	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198	011	06820	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198	011	08220	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198	021	53320	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5001	Coil, 27u, 10%	3198	018	22790
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5002	Coil, 820n, 10%	3198	018	18270
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	5201	Coil, 6u8, 5%	3198	018	16880
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5202	Wire Jumper.	3198	036	90010
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5204	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198	021	34720	5205	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5206	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5242	Coil, 10u, 5%	3198	018	11090
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5342	Coil, 22u for A80QCF340X34	2422	535	97333
3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5342	Coil, 47u for A80QCF330X34	3198	018	24790
3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5401	Coil, 1mH, 10%	3198	018	71020
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, PSLOT	3128	138	21421
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . .	3198	018	90020
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear, DC12	3128	138	55881
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5463	Coil, Choke.	3128	138	37021
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5471	Coil, 3u3, 20%	3198	018	73380
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5472	Coil, 3u3, 10%	3198	018	23380
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5480	Coil, 4u7, 5%	2422	535	94213
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730	S 5501	Mains Filter	2422	549	43432
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5521	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5560	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198	011	01010	5561	Coil, 27u, 5%	2422	535	95366
3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198	021	32220	5562	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020	5564	Fixed, Inductor, 100MHz, 50R. . . .	3198	018	90010
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5602	Coil, 5u6, 5%	3198	018	15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5603	Coil, 5u6, 5%	3198	018	15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030	5604	Coil, 5u6, 5%	3198	018	15680
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320	5810	Coil, 10u, 10%	3198	018	51090

S = Safety Part Be sure to use exact replacement part.

32PT563S37G (continued)

5831	Coil, 6u8, 5%	3198 018 16880	7901	IC, AN7522N PH	9322 181 41682
5832	Coil, 6u8, 5%	3198 018 16880	9001	Wire Jumper.	3198 036 90010
5833	Coil, 6u8, 5%	3198 018 16880	9101	Wire Jumper.	3198 036 90010
5835	Coil, 12u, 10%	3198 018 31290	9102	Wire Jumper.	3198 036 90010
6001	Zener Diode, 33 volt	3198 010 23390	9103	Wire Jumper.	3198 036 90010
6150	Diode, Signal, BAS316.	3198 010 10630	9104	Wire Jumper.	3198 036 90010
6201	Diode, Signal, BAS316.	3198 010 10630	9123	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9171	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9173	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21.	3198 010 10070	9175	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9176	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21.	3198 010 10070	9178	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21.	3198 010 10070	9179	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9181	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt	3198 010 24790	9182	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9183	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9192	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9193	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99.	3198 010 10620	9311	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L.	9336 436 10682	9312	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9406	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9407	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9408	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9409	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9410	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9411	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9412	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99.	3198 010 10620	9413	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9414	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9415	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9416	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9417	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9418	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9419	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9421	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9422	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9423	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9424	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9425	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9426	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9427	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9453	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9460	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9463	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9500	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9501	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9503	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9506	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9507	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9510	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9511	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9512	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9513	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9514	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9515	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9518	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9520	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9521	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9522	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9524	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9528	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9530	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9611	Coil, 27u, 10%	3198 018 22790
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9612	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9613	Wire Jumper.	3198 036 90010
7400	Power FET, STP3NC60FP.	9322 157 37687	9614	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9615	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9618	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9619	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9620	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PPTC143ZT.	9340 547 00215	9621	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9622	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9623	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9624	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9626	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9627	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9628	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9629	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9631	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9632	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PPTC114ET.	9340 310 10215	9633	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL)	3198 010 42150	9637	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9638	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PPTC143ZT.	9340 547 00215	9639	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL)	3198 010 42150	9640	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9641	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PPTC143ZT.	9340 547 00215	9642	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9643	Wire Jumper.	3198 036 90010
7803	IC, HEF4053BT.	9333 729 60653	9648	Wire Jumper.	3198 036 90010
7804	Transistor, NPN, BC847B(COL)	3198 010 42030	9650	Wire Jumper.	3198 036 90010
7831	IC MSP3425G-PO-B8-V3 (MIAS) L.	9322 187 89682	9651	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT563S37G (continued)

9652	Wire Jumper.	3198	036	90010	0266	6 Pin Connector.	2422	025	16609
9654	Wire Jumper.	3198	036	90010	2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
9655	Wire Jumper.	3198	036	90010	2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198	028	44780
9656	Wire Jumper.	3198	036	90010	2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9657	Wire Jumper.	3198	036	90010	2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
9658	Wire Jumper.	3198	036	90010	2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9659	Wire Jumper.	3198	036	90010	2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
9660	Wire Jumper.	3198	036	90010	2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017	44740
9661	Wire Jumper.	3198	036	90010	2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
9662	Wire Jumper.	3198	036	90010	2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9663	Wire Jumper.	3198	036	90010	2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9664	Wire Jumper.	3198	036	90010	2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9665	Wire Jumper.	3198	036	90010	2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9666	Wire Jumper.	3198	036	90010	2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9667	Wire Jumper.	3198	036	90010	2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
9668	Wire Jumper.	3198	036	90010	2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9669	Wire Jumper.	3198	036	90010	2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025	34790
9670	Wire Jumper.	3198	036	90010	2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9671	Wire Jumper.	3198	036	90010	2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9672	Coil, 22u, 10%	3198	018	22290	2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9674	Wire Jumper.	3198	036	90010	2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9675	Wire Jumper.	3198	036	90010	2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
9676	Wire Jumper.	3198	036	90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9678	Coil, 22u, 10%	3198	018	22290	2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9679	Wire Jumper.	3198	036	90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
9680	Wire Jumper.	3198	036	90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9681	Wire Jumper.	3198	036	90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
9682	Wire Jumper.	3198	036	90010	2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
9685	Wire Jumper.	3198	036	90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9686	Wire Jumper.	3198	036	90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9687	Wire Jumper.	3198	036	90010	2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
9688	Wire Jumper.	3198	036	90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9689	Wire Jumper.	3198	036	90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
9690	Wire Jumper.	3198	036	90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9691	Wire Jumper.	3198	036	90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9694	Wire Jumper.	3198	036	90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
9695	Wire Jumper.	3198	036	90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
9697	Wire Jumper.	3198	036	90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9698	Wire Jumper.	3198	036	90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
9699	Wire Jumper.	3198	036	90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
9821	Wire Jumper.	3198	036	90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9822	Wire Jumper.	3198	036	90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122	118	05951
9825	Wire Jumper.	3198	036	90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9828	Wire Jumper.	3198	036	90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9829	Wire Jumper.	3198	036	90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
9831	Wire Jumper.	3198	036	90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
9832	Wire Jumper.	3198	036	90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9837	Wire Jumper.	3198	036	90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9838	Wire Jumper.	3198	036	90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9839	Wire Jumper.	3198	036	90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9846	Wire Jumper.	3198	036	90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9847	Wire Jumper.	3198	036	90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9849	Wire Jumper.	3198	036	90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
9851	Wire Jumper.	3198	036	90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
9856	Wire Jumper.	3198	036	90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
9858	Wire Jumper.	3198	036	90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
9859	Wire Jumper.	3198	036	90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
9860	Wire Jumper.	3198	036	90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9862	Wire Jumper.	3198	036	90010	3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9863	Wire Jumper.	3198	036	90010	3457	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
9865	Wire Jumper.	3198	036	90010	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9867	Wire Jumper.	3198	036	90010	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9868	Wire Jumper.	3198	036	90010	4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
9869	Wire Jumper.	3198	036	90010	5401	Coil, 10u, 10%	3198	018	31090
9870	Wire Jumper.	3198	036	90010	5407	Coil, 33u, 5%	3198	018	13390
9871	Wire Jumper.	3198	036	90010	5408	Coil, 33u, 20%	3198	018	33390
9873	Wire Jumper.	3198	036	90010	5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
9874	Wire Jumper.	3198	036	90010	5425	Coil, 10u, 10%	3198	018	31090
9875	Wire Jumper.	3198	036	90010	5428	Coil, 10u, 5%	3198	018	11090
9876	Wire Jumper.	3198	036	90010	5429	Coil, 10u, 10%	3198	018	31090
9877	Wire Jumper.	3198	036	90010	5430	Coil, 10u, 10%	3198	018	31090
9878	Wire Jumper.	3198	036	90010	5440	Coil, 10u, 10%	3198	018	31090
9901	Wire Jumper.	3198	036	90010	5442	Coil, 22u, 5%	3198	018	12290
9902	Wire Jumper.	3198	036	90010	5450	Coil, 10u, 10%	3198	018	31090
9903	Wire Jumper.	3198	036	90010	5452	Coil, 33u, 5%	3198	018	13390
9904	Wire Jumper.	3198	036	90010	7401	Transistor, PNP, BC857B(COL)	3198	010	42150
9905	Wire Jumper.	3198	036	90010	7402	Transistor, NPN, BC847B(COL)	3198	010	42030
9911	Wire Jumper.	3198	036	90010	7403	Transistor, NPN, BC847B(COL)	3198	010	42030
9913	Wire Jumper.	3198	036	90010	7421	IC, TC90A53N	9322	182	18682
9914	Wire Jumper.	3198	036	90010	7440	Transistor, NPN, BC847B(COL)	3198	010	42030
9915	Wire Jumper.	3198	036	90010	7444	Transistor, NPN, BC847B(COL)	3198	010	42030
9991	Wire Jumper.	3198	036	90010	7450	Transistor, NPN, BC847B(COL)	3198	010	42030
9993	Wire Jumper.	3198	036	90010	7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9996	Wire Jumper.	3198	036	90010	9401	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010	9402	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010	9403	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	58251	CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

Channel One Card Parts

Channel One Card Parts

DAF Panel Parts

DAF Panel Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

32PT563S37G (continued)

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135	010	03831
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC04	Batteries for Remote Control Transmitter	9299	000	65263
	AC05	Cabinet Back	3139	124	43611
S	AC09	CRT, A80QCF340X34(N)	9301	904	59463
S	AC12	Degaussing Coil.	2422	549	45334
	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
	AC17	Owner's Manual	3121	235	20701
	AC18	Quick Use Guide.	3121	233	43521
	AC19	Side Jack Panel Bracket.	3139	124	37061
	AC20	Cabinet Front Assembly	3121	237	53131
	AC20A	Cabinet Front.	3139	177	53591
	AC20B	Chassis Guide (2 Used)	3139	124	31381
	AC20C	Light Guide.	3139	124	43141
	AC20D	Nameplate.	3141	050	00141
	AC20E	Power Button	3121	237	53341
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00411
	AC29	Plastic Facade	3139	177	60071
REMOTE		Remote Control Transmitter, RC19036001/01.	3139	228	86493

32PT633R37D - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector.	2422	025 16374	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0212	2 Pin Connector.	2422	025 16375	2330	Cap, 100n, 10%, 250v, Metalized Polyest		
0214	5 Pin Connector.	2422	025 12481		er.	2222	368 90177
0219	6 Pin Connector.	2422	025 12482	2331	Cap, 10n, +80/-20% 1000v, Ceramic.	2020	558 90445
0220	5 Pin Connector.	2422	025 04853	2340	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495
0221	2 Pin Connector.	2422	025 15503	2341	Cap, 3n3, 10%, 500v, Ceramic.	3198	019 43320
0222	2 Pin Connector.	2422	025 10646	2342	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
0223	A/V Jack	2422	026 05236	2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020	558 90559
0225	SVHS Jack.	2422	026 04926	2344	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 21040
0239	3 Pin Connector.	2422	025 16382	2345	Cap, 10n, +80/-20%, 1000v, Ceramic.	2020	558 90445
0243	6 Pin Connector.	2422	025 04854	2360	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
0244	5 Pin Connector.	2422	025 04853	2362	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210
0245	6 Pin Connector.	2422	025 04854	2364	Cap, 27p, 5%, 50v, Ceramic.	3198	016 32790
0246	5 Pin Connector.	2422	025 12481	2365	Cap, 27p, 5%, 50v, Ceramic.	3198	016 32790
S 0254	9 Pin CRT Socket	2422	500 80058	2366	Cap, 27p, 5%, 50v, Ceramic.	3198	016 32790
S 0256	10 Pin CRT Socket.	2422	500 80063	2367	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
0267	3 Pin Connector.	2412	020 00725	2368	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
0268	3 Pin Connector.	2412	020 00725	2369	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290
0269	Jack	2422	026 05182	2372	Cap, 10u, 20%, 160v, Electrolytic.	2020	012 93318
0278	3 Pin Connector.	2412	020 00725	2373	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
S 1000	Tuner, V+U PLL	2422	542 90098	2375	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
1002	SAW Filter, 45.75MHz	2422	549 44518	2378	Cap, 220p, 5%, 50v, Ceramic.	3198	019 02210
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2379	Cap, 10u, 20%, 100v, Electrolytic.	3198	025 71090
S 1500	Fuse, 4A, 250V, IEC.	2422	086 10914	2380	Cap, 560p, 5%, 50v, Ceramic.	3198	016 05610
S 1515	Relay, 5 Amp, 12V.	2422	132 07444	2381	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 34720
1660	Crystal, 12MHz000	2422	543 01203	2401	Cap, 2u2, 20%, 50v, Electrolytic.	2020	021 90552
1810	6 Pin Connector.	2422	025 16607	2402	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			2404	Cap, 47u, 20%, 50v, Electrolytic.	3198	025 54790
	C49/U A.	2422	543 00842	2405	Cap, 220u, 20%, 25v, Electrolytic.	3198	025 32210
2004	Cap, 47n, 10%, 50v, Ceramic.	3198	024 44730	2441	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2005	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2443	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017 24730
2006	Cap, 470u, 20%, 16v, Electrolytic.	3198	025 24710	2444	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2450	Cap, 47u, 20%, 160v, Electrolytic.	2020	021 91139
2008	Cap, 100u, 20%, 25v, Electrolytic.	3198	025 31010	2451	Cap, 22n, 10%, 50v, Polyester.	3198	014 02230
2009	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2455	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2101	Cap, 470n, +80/-20%, 16v, Ceramic.	3198	017 24740	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
2102	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290		ylene.	2022	333 00086
2103	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2458	Cap, 2u2, 20%, 100v, Electrolytic.	2020	021 91331
2104	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2459	Cap, 680p, 10%, 500v, Ceramic.	3198	019 46810
2105	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	2460	Cap, 100p, 5%, 50v, Ceramic.	3198	016 01010
2106	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090	S 2463	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2111	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy		
2112	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290		lene	2222	479 90042
2113	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020	301 90255
2121	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2468	Cap, 33n, 10%, 400v, Polyester.	2222	347 90227
2122	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2471	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2123	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2124	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2125	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2131	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2132	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198	017 04720
2133	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2480	Cap, 47u, 20%, 25v, Electrolytic.	2020	021 90586
2134	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2481	Cap, 470p, 10%, 500v, Ceramic.	3198	019 44710
2135	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290	2482	Cap, 120n, 5%, 250v, Metalized Polyprop		
2136	Cap, 22p, 5%, 50v, Ceramic.	3198	016 32290		ylene.	2222	479 90051
2141	Cap, 330p, 10%, 50v, Ceramic.	3198	017 33310	2485	Cap, 4u7, 20%, 250v, Electrolytic.	2020	021 90856
2143	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2486	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2150	Cap, 150n, +80/-20%, 16v, Ceramic.	2238	786 19852	2487	Cap, 47u, 20%, 50v, Electrolytic.	2020	021 90854
2172	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010	2488	Cap, 1000u, 20%, 16v, Electrolytic.	2020	021 91049
2173	Cap, 220p, 5%, 50v, Ceramic.	3198	016 32210	2489	Cap, 470u, 20%, 16v, Electrolytic.	2020	021 91577
2184	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	2491	Cap, 1n, 10%, 500v, Ceramic.	3198	019 41020
2187	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198	017 22250	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2201	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040		pylene	2022	330 00018
2202	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2203	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2204	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2503	Cap, 470u, 20%, 200v, Electrolytic.	2020	024 90647
2205	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198	019 52220
2208	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023 41040	2507	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2209	Cap, 4u7, 20%, 50v, Electrolytic.	3198	025 54780	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198	019 64710
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020	554 90172
2211	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017 44740	2520	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2213	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2521	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2214	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2522	Cap, 100n, 10%, 16v, Ceramic.	3198	017 01040
2215	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020	558 90489
2216	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2525	Cap, 470p, 10%, 50v, Ceramic.	3198	017 04710
2217	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 02220
2219	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2528	Cap, 1n, 10%, 50v, Ceramic.	3198	017 01020
2220	Cap, 470n, 10%, 50v, Polyester.	3198	014 04740	2540	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2221	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2541	Cap, 10n, 10%, 50v, Ceramic.	3198	017 01030
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198	017 31520	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020	558 90472
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198	017 41050	2561	Cap, 100u, 20%, 160v, Electrolytic.	2020	021 91654
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198	017 32220	2562	Cap, 1n, 10%, 50v, Ceramic.	3198	019 11020
2244	Cap, 100n, 5%, 63v, Metalized Polyester.	2222	370 76104	2563	Cap, 100n, 10%, 50v, Polyester.	3198	014 01040
2245	Cap, 220n, +80/-20%, 16v, Ceramic.	3198	017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic.	2020	021 91374
2247	Cap, 1000u, 20%, 16v, Electrolytic.	3198	026 21020	2567	Cap, 47u, 20%, 25v, Electrolytic.	3198	025 34790
2248	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198	025 51080
2249	Cap, 22n, 10%, 25v, Ceramic.	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic.	3198	028 24790
2250	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025 52280	2581	Cap, 22u, 20%, 50v, Electrolytic.	3198	025 52290
2252	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2590	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910 19856
2253	Cap, 1n, 5%, 25v, Ceramic.	3198	016 31020	2601	Cap, 220n, +80/-20%, 25v, Ceramic.	3198	023 22240
				2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016 31010
				2604	Cap, 10u, 20%, 50v, Electrolytic.	3198	025 51090

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2807	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
2843	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film.	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film.	2306 204 03108
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film.	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic. . . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3361	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film.	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06890	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3380	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3381	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3383	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3384	Res, 2R2, 5%, 1/6W, Carbon Film.	3198 011 02280
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3385	Res, 10K, 5%, 5W, Metal Film.	2322 257 41103
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3403	Res, 100K, 5%, 1/6W, Carbon Film.	3198 011 01040
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	S 3451	Res, 3R9, 5%, 1/3W, Metal Film.	2306 204 03398
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3452	Res, 5K1, 1%, 3/5W, Metal Film.	2312 915 15102
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3454	Res, 1K8, 1%, 3/5W, Metal Film.	2312 915 11802
3172	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film.	3198 012 26880
3180	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3181	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film.	3198 012 21530
3190	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3468	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

3470	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740	3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3472	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3473	Res, 2R2, 1%, 3/5W, Metal Film	2312 915 12208	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720	3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3831	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730
3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3491	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3843	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
3495	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230	3901	Res, 6K8, 5%, 1/16W, Metalized Glass. .	3198 021 36820
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3903	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3905	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730
3498	Res, 12K, 5%, 1/16W, Metalized Glass. .	3198 021 31230	3909	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3910	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3507	Surge Protector.	2422 549 43073	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film. .	3198 013 02210	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass. .	3198 021 51220	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03479	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass. .	3198 021 55630	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3527	Res, 0R15, 5%, 3/5W, Metal Film. . . .	3198 012 11570	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass. .	3198 021 51030	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass. .	3198 021 51520	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3545	Res, 33K, 5%, 1/10W, Metalized Glass. .	3198 021 53330	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass. .	3198 021 51530	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass. .	3198 021 54720	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass. .	3198 021 51230	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass. .	3198 021 58220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass. .	3198 021 52220	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass. .	3198 021 55620	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass. .	3198 021 54730	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5001	Coil, 27u, 10%	3198 018 22790
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5002	Coil, 820n, 10%	3198 018 18270
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5201	Coil, 6u8, 5%	3198 018 16880
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5202	Wire Jumper.	3198 036 90010
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3694	Res, 4K7, 5%, 1/16W, Metalized Glass. .	3198 021 34720	5241	Wire Jumper.	3198 036 90010
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5242	Coil, 10u, 5%	3198 018 11090

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

5341	Coil, 22u.	2422	535	97333	7366	Transistor, PNP, 2SA965.	9322	167	18676
5342	Coil, 22u.	2422	535	97333	7369	Transistor, PNP, BC857B(COL)	3198	010	42150
5376	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7373	Transistor, PNP, BC327-25(COL)	3198	020	43430
5401	Coil, 1mH, 10%	3198	018	71020	7380	Transistor, NPN, 2SC2235	9322	167	19676
S 5445	Transformer, LOT	2422	531	02573	7382	Transistor, NPN, BC337-25(COL)	3198	020	43530
5451	Coil, 22u, 10%	3198	018	72290	7400	Power FET, STP3NC60FP.	9322	157	37687
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020	7441	Transistor, PNP, BC857B(COL)	3198	010	42150
S 5457	Coil, 33u.	2422	535	91021	7443	Transistor, PNP, BC557B(COL)	3198	020	40110
5461	Transformer, Signal Driver, SC10015-00	2422	531	02465	7460	Transistor, NPN, BU4522AX.	9340	547	93127
5463	Coil, Choke.	3128	138	37021	7461	Transistor, NPN, BC337-25(COL)	3198	020	43530
5471	Coil, 6u8, 20%	3198	018	76880	7462	Transistor, NPN, PDTCT143ZT	9340	547	00215
5472	Coil, 3u3, 10%	3198	018	23380	7463	Transistor, PNP, BC327-25(COL)	3198	020	43430
5480	Coil, 22u.	2422	535	97333	7471	IC, TDA8359J/N2.	9352	701	64112
S 5501	Mains Filter	2422	549	43432	7480	Transistor, NPN, BD135	3198	020	41010
S 5520	Transformer, SS42204-00 B.	2422	531	02563	7482	Transistor, NPN, BD135	3198	020	41010
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	S 7515	Optical Coupler, TCET1103(G)	9322	140	14667
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7520	IC, TEA1507P/N1.	9352	673	56112
5561	Coil, 27u, 5%.	2422	535	95366	7521	Power FET, FQPF9N50.	9322	187	16687
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7522	Transistor, NPN, BC847B(COL)	3198	010	42030
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7540	Transistor, NPN, BC547B(COL)	3198	020	40030
5602	Coil, 5u6, 5%.	3198	018	15680	7541	Transistor, NPN, PDTCT144ET	9340	310	10215
5603	Coil, 5u6, 5%.	3198	018	15680	7542	Transistor, PNP, BC857B(COL)	3198	010	42150
5604	Coil, 5u6, 5%.	3198	018	15680	7560	IC, L78L33ACZ.	9322	134	92676
5810	Coil, 10u, 10%	3198	018	51090	7561	Transistor, NPN, PDTCT143ZT	9340	547	00215
5831	Coil, 6u8, 5%.	3198	018	16880	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
5832	Coil, 6u8, 5%.	3198	018	16880	7602	IC, M24C08-WB6.	9322	154	38682
5833	Coil, 6u8, 5%.	3198	018	16880	7606	Transistor, NPN, PDTCT143ZT	9340	547	00215
5835	Coil, 12u, 10%	3198	018	31290	7802	IC, HEF4053BT.	9333	729	60653
6001	Zener Diode, 33 volt	3198	010	23390	7803	IC, HEF4053BT.	9333	729	60653
6150	Diode, Signal, BAS316.	3198	010	10630	7804	Transistor, NPN, BC847B(COL)	3198	010	42030
6201	Diode, Signal, BAS316.	3198	010	10630	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682
6202	Diode, Signal, BAS316.	3198	010	10630	7901	IC, AN7580	9322	166	29682
6206	Zener Diode, 6.8 volt.	3198	020	56880	7903	Transistor, NPN, BC847B(COL)	3198	010	42030
6331	Diode, Signal, BAV21.	3198	010	10070	9001	Wire Jumper.	3198	036	90010
6332	Diode, Signal, BAS316.	3198	010	10630	9101	Wire Jumper.	3198	036	90010
6333	Diode, Signal, BAV21.	3198	010	10070	9102	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21.	3198	010	10070	9103	Wire Jumper.	3198	036	90010
6365	Diode, Signal, BAT85	9336	247	60133	9104	Wire Jumper.	3198	036	90010
6366	Diode, Signal, BAT85	9336	247	60133	9123	Wire Jumper.	3198	036	90010
6367	Diode, Signal, BAV99	3198	010	10620	9160	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9171	Wire Jumper.	3198	036	90010
6401	Zener Diode, 47 volt	3198	010	24790	9173	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9175	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9176	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt.	9331	668	30133	9178	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9179	Wire Jumper.	3198	036	90010
6460	Diode, Rect, BY228/24.	9340	559	50112	9181	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9182	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt	9331	177	80133	9183	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9192	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9193	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9311	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9312	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYD33J.	9337	234	20133	9313	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9314	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9406	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9407	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9408	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYD33J.	9337	234	20133	9409	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9410	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYD33D.	9337	234	00133	9411	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9412	Wire Jumper.	3198	036	90010
6490	Diode, Rect, BYD33J.	9337	234	20133	9413	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322	132	55667	9414	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYD33D.	9337	234	00133	9415	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9416	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9417	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9418	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9419	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9420	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9421	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9422	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9424	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9425	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9426	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9427	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9453	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9460	Wire Jumper.	3198	036	90010
6582	Diode, Rect, STPS10L60D.	9322	175	70667	9463	Wire Jumper.	3198	036	90010
6831	Diode, Signal, 1N4148.	3198	010	10010	9500	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9501	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9503	Wire Jumper.	3198	036	90010
7000	IC, TDA8941P/N1.	9352	628	51112	9506	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9507	Wire Jumper.	3198	036	90010
7102	Transistor, PNP, BC857B(COL)	3198	010	42150	9511	Wire Jumper.	3198	036	90010
7103	Transistor, NPN, BC847B(COL)	3198	010	42030	9512	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I/1298.	9352	742	85557	9513	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9514	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9515	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9516	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9518	Wire Jumper.	3198	036	90010
7360	Transistor, NPN, BC847B(COL)	3198	010	42030	9520	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

32PT633R37D (continued)

9521	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790
9612	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010
9639	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010
9650	Wire Jumper.	3198 036 90010
9651	Wire Jumper.	3198 036 90010
9652	Wire Jumper.	3198 036 90010
9654	Wire Jumper.	3198 036 90010
9655	Wire Jumper.	3198 036 90010
9656	Wire Jumper.	3198 036 90010
9657	Wire Jumper.	3198 036 90010
9658	Wire Jumper.	3198 036 90010
9659	Wire Jumper.	3198 036 90010
9660	Wire Jumper.	3198 036 90010
9661	Wire Jumper.	3198 036 90010
9662	Wire Jumper.	3198 036 90010
9663	Wire Jumper.	3198 036 90010
9664	Wire Jumper.	3198 036 90010
9665	Wire Jumper.	3198 036 90010
9666	Wire Jumper.	3198 036 90010
9667	Wire Jumper.	3198 036 90010
9668	Wire Jumper.	3198 036 90010
9669	Wire Jumper.	3198 036 90010
9670	Wire Jumper.	3198 036 90010
9671	Wire Jumper.	3198 036 90010
9672	Coil, 22u, 10%	3198 018 22290
9674	Wire Jumper.	3198 036 90010
9675	Wire Jumper.	3198 036 90010
9676	Wire Jumper.	3198 036 90010
9678	Coil, 22u, 10%	3198 018 22290
9679	Wire Jumper.	3198 036 90010
9680	Wire Jumper.	3198 036 90010
9681	Wire Jumper.	3198 036 90010
9682	Wire Jumper.	3198 036 90010
9683	Wire Jumper.	3198 036 90010
9685	Wire Jumper.	3198 036 90010
9686	Wire Jumper.	3198 036 90010
9687	Wire Jumper.	3198 036 90010
9688	Wire Jumper.	3198 036 90010
9689	Wire Jumper.	3198 036 90010
9690	Wire Jumper.	3198 036 90010
9691	Wire Jumper.	3198 036 90010
9694	Wire Jumper.	3198 036 90010
9695	Wire Jumper.	3198 036 90010
9697	Wire Jumper.	3198 036 90010
9698	Wire Jumper.	3198 036 90010
9699	Wire Jumper.	3198 036 90010
9821	Wire Jumper.	3198 036 90010
9822	Wire Jumper.	3198 036 90010
9825	Wire Jumper.	3198 036 90010
9828	Wire Jumper.	3198 036 90010
9829	Wire Jumper.	3198 036 90010
9831	Wire Jumper.	3198 036 90010
9832	Wire Jumper.	3198 036 90010
9837	Wire Jumper.	3198 036 90010
9838	Wire Jumper.	3198 036 90010
9839	Wire Jumper.	3198 036 90010
9846	Wire Jumper.	3198 036 90010
9847	Wire Jumper.	3198 036 90010
9848	Wire Jumper.	3198 036 90010
9849	Wire Jumper.	3198 036 90010
9851	Wire Jumper.	3198 036 90010
9855	Wire Jumper.	3198 036 90010
9856	Wire Jumper.	3198 036 90010

9857	Wire Jumper.	3198 036 90010
9858	Wire Jumper.	3198 036 90010
9859	Wire Jumper.	3198 036 90010
9860	Wire Jumper.	3198 036 90010
9862	Wire Jumper.	3198 036 90010
9863	Wire Jumper.	3198 036 90010
9864	Wire Jumper.	3198 036 90010
9865	Wire Jumper.	3198 036 90010
9867	Wire Jumper.	3198 036 90010
9868	Wire Jumper.	3198 036 90010
9869	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010
9871	Wire Jumper.	3198 036 90010
9873	Wire Jumper.	3198 036 90010
9874	Wire Jumper.	3198 036 90010
9875	Wire Jumper.	3198 036 90010
9876	Wire Jumper.	3198 036 90010
9877	Wire Jumper.	3198 036 90010
9878	Wire Jumper.	3198 036 90010
9901	Wire Jumper.	3198 036 90010
9902	Wire Jumper.	3198 036 90010
9903	Wire Jumper.	3198 036 90010
9904	Wire Jumper.	3198 036 90010
9911	Wire Jumper.	3198 036 90010
9913	Wire Jumper.	3198 036 90010
9914	Wire Jumper.	3198 036 90010
9915	Wire Jumper.	3198 036 90010
9923	Wire Jumper.	3198 036 90010
9991	Wire Jumper.	3198 036 90010
9993	Wire Jumper.	3198 036 90010
9996	Wire Jumper.	3198 036 90010
9997	Wire Jumper.	3198 036 90010
9998	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 187 14441

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts		
0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610

32PT633R37D (continued)

3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts				
0221	2 Pin Connector.	2422	025	15503
0258	2 Pin Connector.	2422	025	15503
0261	1 Pin Connector.	2422	034	20021
0262	1 Pin Connector.	2422	034	20021
2492	Cap, 390p, 10%, 2000v, Ceramic	2020	558	90482
2493	Cap, 390p, 10%, 2000v, Ceramic	2020	558	90482
3498	Varactor, 1MA/612V, Max 1100V.	2322	592	14217
3499	Varactor, 1MA/612V, Max 1100V.	2322	592	14217
5493	Transformer, Signal, DAF	3128	138	34581
CBA	DAF Panel Assembly	3139	187	10081

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	187	28041

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

S = Safety Part Be sure to use exact replacement part.

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44171
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39241
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A80AJZ90X05	9322	188	82682
AC11	DAF Panel Bracket.	3139	124	25402
S AC12	Degaussing Coil.	2422	549	44676
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	20711
AC18	Quick Use Guide.	3121	233	43531
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53141
AC20A	Cabinet Front.	3139	138	10961
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00141
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
AC20J	Top Control Assembly	3139	138	11451
AC20J1	Top Control Bracket.	3139	124	39802
AC20J2	Top Control Buttons.	3139	124	39812
REMOTE	Remote Control Transmitter, RC19036002/01.	3139	228	88003

32PT663R37A - Manual no. 7638

Main Chassis Parts

Main Chassis Parts				Main Chassis Parts			
0211	2 Pin Connector	2422	025 16374	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222	368 90177
0212	2 Pin Connector	2422	025 16375	2331	er.	2020	558 90445
0214	5 Pin Connector	2422	025 12481	2340	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0219	6 Pin Connector	2422	025 12482	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0220	5 Pin Connector	2422	025 04853	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0221	2 Pin Connector	2422	025 15503	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0222	2 Pin Connector	2422	025 10646	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0225	SVHS Jack	2422	026 04926	2360	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0239	3 Pin Connector	2422	025 16382	2362	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210
0243	6 Pin Connector	2422	025 04854	2364	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0244	5 Pin Connector	2422	025 04853	2365	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0245	6 Pin Connector	2422	025 04854	2366	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0246	5 Pin Connector	2422	025 12481	2367	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 0254	9 Pin CRT Socket	2422	500 80058	2368	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
0267	3 Pin Connector	2412	020 00725	2369	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
0268	3 Pin Connector	2412	020 00725	2372	Cap, 10u, 20%, 160v, Electrolytic	2020	012 93318
0269	Jack	2422	026 05182	2373	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0278	3 Pin Connector	2412	020 00725	2375	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
S 1000	Tuner, V+U PLL	2422	542 90098	2378	Cap, 220p, 5%, 50v, Ceramic	3198	019 02210
1002	SAW Filter, 45.75MHz	2422	549 44518	2379	Cap, 10u, 20%, 100v, Electrolytic	3198	025 71090
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2380	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2381	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
1660	Crystal, 12MHz000	2422	543 01203	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
1810	6 Pin Connector	2422	025 16607	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
1831	Crystal, Resonator, 18MHz432, 12 Pin, H	2422	543 00842	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	S 2448	Cap, 100p, 10%, 500v, Ceramic	3198	019 41010
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2457	Cap, 390n, 5%, 250v, Metalized Polyprop	2022	333 00085
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2458	ylene.	2020	021 91331
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2459	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2460	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	S 2463	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2464	Cap, 470p, 10%, 2000v, Ceramic	2020	558 90483
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2466	Cap, 2u2, 5%, 160v, Metalized Polypropy	2222	479 90042
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2465	lene	2222	375 90157
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2466	Cap, 13n, 5%, 1600v, Polypropylene	2222	375 90157
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2468	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2471	Cap, 18n, 10%, 400v, Polyester	2222	347 90222
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2472	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2473	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2474	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 2n2, 10%, 50v, Ceramic	3198	017 04720
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2480	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2481	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2482	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2485	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2486	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2487	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2172	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010	2488	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2173	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210	2489	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2491	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2500	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2501	Cap, 470n, 20%, 275v, Metalized Polypro	2022	330 00018
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2502	pylene	2022	330 00018
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2503	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2507	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2508	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2209	Cap, 4u7, 20%, 50v, Electrolytic	3198	025 54780	2515	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2243	Cap, 2n2, 10%, 50v, Ceramic	3198	017 32220	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91374
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222	910 19856
2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
				2604	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3206	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glass	3198 021 34710
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2807	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2810	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 05610
2813	Cap, 2u2, +80/-20%, 10v, Ceramic.	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3250	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720
2843	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 180K, 5%, 1/10W, Metalized Glass. .	2120 108 91721
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film.	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film.	2306 204 03108
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film.	2306 204 03108
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film.	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic. . . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3361	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass. .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper.	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film.	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06890	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 04710
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3380	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3381	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3383	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3384	Res, 2R2, 5%, 1/6W, Carbon Film.	3198 011 02280
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3385	Res, 10K, 5%, 5W, Metal Film.	2322 257 41103
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film.	2306 204 03109
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3403	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
3126	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3442	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 07590	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3141	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3149	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3150	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3154	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3156	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	S 3451	Res, 3R9, 5%, 1/3W, Metal Film.	2306 204 03398
3157	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3452	Res, 47K, 1%, 3/5W, Metal Film.	2312 915 14703
3158	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202	3454	Res, 15K, 1%, 3/5W, Metal Film.	2312 915 11503
3172	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film.	3198 012 26880
3180	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3456	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3181	Res, 150K, 5%, 1/16W, Metalized Glass. .	3198 021 31540	3457	Res, Zero ohm, "Chip" Jumper.	3198 021 90030
3190	Res, 68K, 5%, 1/16W, Metalized Glass. .	3198 021 36830	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film.	3198 012 21530
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

3468	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3469	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3470	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3473	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202	3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720	3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083	3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203	3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003	3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920	3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3490	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3491	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3507	Surge Protector.	2422 549 43073	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03101	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3565	Res, 220 ohm, 5%, 1W, Metal Film . . .	3198 012 12210	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2306 204 03109	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	5001	Coil, 27u, 10%	3198 018 22790
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5002	Coil, 820n, 10%	3198 018 18270
3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5201	Coil, 6u8, 5%	3198 018 16880
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5202	Wire Jumper.	3198 036 90010
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	5241	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

5242	Coil, 10u, 5%	3198 018 11090	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
5341	Coil, 22u.	2422 535 97333	7330	IC, TDA6107JF/N3	9352 713 37112
5342	Coil, 27u, 10%	3198 018 22790	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7366	Transistor, PNP, 2SA965.	9322 167 18676
5401	Coil, 1mH, 10%	3198 018 71020	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
S 5445	Transformer, LOT	2422 531 02602	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
5451	Coil, 22u, 10%	3198 018 72290	7380	Transistor, NPN, 2SC2235	9322 167 19676
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
S 5457	Coil, 25u.	2422 535 91028	7400	Power FET, STP3NC60FP.	9322 157 37687
5461	Transformer, Signal Driver, SC10015-00	2422 531 02465	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
5463	Coil, Choke.	3128 138 37021	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
5471	Coil, 6u8, 20%	3198 018 76880	7450	Transistor, PNP, PDTA114ET	3198 010 44010
5472	Coil, 3u3, 10%	3198 018 23380	7460	Transistor, NPN, BU4508DX.	9340 550 92127
5480	Coil, 18u.	2422 535 97332	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
S 5501	Mains Filter	2422 549 43432	7462	Transistor, NPN, PDTA114ET	9340 547 00215
S 5520	Transformer, SS42202-00 B.	2422 531 02562	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7471	IC, TDA8359J/N2.	9352 701 64112
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7480	Transistor, NPN, BD135	3198 020 41010
5561	Coil, 27u, 5%	2422 535 95366	7482	Transistor, NPN, BD135	3198 020 41010
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7520	IC, TEA1507P/N1.	9352 673 56112
5602	Coil, 5u6, 5%	3198 018 15680	7521	Power FET, FQPF9N50.	9322 187 16687
5603	Coil, 5u6, 5%	3198 018 15680	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5604	Coil, 5u6, 5%	3198 018 15680	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5810	Coil, 10u, 10%	3198 018 51090	7541	Transistor, NPN, PDTA114ET	9340 310 10215
5831	Coil, 6u8, 5%	3198 018 16880	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5832	Coil, 6u8, 5%	3198 018 16880	7560	IC, L78L33ACZ.	9322 134 92676
5833	Coil, 6u8, 5%	3198 018 16880	7561	Transistor, NPN, PDTA114ET	9340 547 00215
5835	Coil, 12u, 10%	3198 018 31290	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
6001	Zener Diode, 33 volt	3198 010 23390	7602	IC, M24C08-WBN6.	9322 154 38682
6150	Diode, Signal, BAS316.	3198 010 10630	7606	Transistor, NPN, PDTA114ET	9340 547 00215
6201	Diode, Signal, BAS316.	3198 010 10630	7802	IC, HEF4053BT.	9333 729 60653
6202	Diode, Signal, BAS316.	3198 010 10630	7803	IC, HEF4053BT.	9333 729 60653
6206	Zener Diode, 6.8 volt.	3198 020 56880	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
6331	Diode, Signal, BAV21.	3198 010 10070	7831	IC MSP3425G-PO-B8-V3 (MTAS) L	9322 187 89682
6332	Diode, Signal, BAS316.	3198 010 10630	7901	IC, AN7580	9322 166 29682
6333	Diode, Signal, BAV21.	3198 010 10070	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
6335	Diode, Signal, BAV21.	3198 010 10070	9001	Wire Jumper.	3198 036 90010
6365	Diode, Signal, BAT85	9336 247 60133	9101	Wire Jumper.	3198 036 90010
6366	Diode, Signal, BAT85	9336 247 60133	9102	Wire Jumper.	3198 036 90010
6367	Diode, Signal, BAV99	3198 010 10620	9103	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/SW, Metal Film.	2312 915 11002	9104	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt	3198 010 24790	9123	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9160	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9171	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9173	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9175	Wire Jumper.	3198 036 90010
6453	Zener Diode, 6.8 volt.	3198 020 56880	9176	Wire Jumper.	3198 036 90010
6460	Diode, Rect, BY228/24.	9340 559 50112	9178	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP307-L7004.	9338 617 60682	9179	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9181	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21.	3198 010 10070	9182	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21.	3198 010 10070	9183	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9192	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9193	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYD33J.	9337 234 20133	9311	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9312	Wire Jumper.	3198 036 90010
6476	Zener Diode, 18 volt	3198 010 21890	9313	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9314	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9406	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9407	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYD33J.	9337 234 20133	9408	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9409	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYD33D.	9337 234 20133	9410	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9411	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYD33J.	9337 234 20133	9412	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9413	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYD33D.	9337 234 20133	9414	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9415	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9416	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9417	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9418	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9419	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9420	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9421	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9422	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9424	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9425	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9426	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9427	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9453	Wire Jumper.	3198 036 90010
6582	Diode, Rect, STPS10L60D.	9322 175 70667	9460	Wire Jumper.	3198 036 90010
6831	Diode, Signal, 1N4148.	3198 010 10010	9463	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9500	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9501	Wire Jumper.	3198 036 90010
7000	IC, TDA8941P/N1.	9352 628 51112	9503	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9506	Wire Jumper.	3198 036 90010
7102	Transistor, PNP, BC857B(COL)	3198 010 42150	9507	Wire Jumper.	3198 036 90010
7103	Transistor, NPN, BC847B(COL)	3198 010 42030	9511	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557	9512	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9513	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9514	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PT663R37A (continued)

9515	Wire Jumper.	3198	036	90010
9516	Wire Jumper.	3198	036	90010
9518	Wire Jumper.	3198	036	90010
9520	Wire Jumper.	3198	036	90010
9521	Wire Jumper.	3198	036	90010
9522	Wire Jumper.	3198	036	90010
9524	Wire Jumper.	3198	036	90010
9528	Wire Jumper.	3198	036	90010
9530	Wire Jumper.	3198	036	90010
9611	Coil, 27u, 10%	3198	018	22790
9612	Wire Jumper.	3198	036	90010
9613	Wire Jumper.	3198	036	90010
9614	Wire Jumper.	3198	036	90010
9615	Wire Jumper.	3198	036	90010
9618	Wire Jumper.	3198	036	90010
9619	Wire Jumper.	3198	036	90010
9620	Wire Jumper.	3198	036	90010
9621	Wire Jumper.	3198	036	90010
9622	Wire Jumper.	3198	036	90010
9623	Wire Jumper.	3198	036	90010
9624	Wire Jumper.	3198	036	90010
9626	Wire Jumper.	3198	036	90010
9627	Wire Jumper.	3198	036	90010
9628	Wire Jumper.	3198	036	90010
9629	Wire Jumper.	3198	036	90010
9631	Wire Jumper.	3198	036	90010
9632	Wire Jumper.	3198	036	90010
9633	Wire Jumper.	3198	036	90010
9637	Wire Jumper.	3198	036	90010
9638	Wire Jumper.	3198	036	90010
9639	Wire Jumper.	3198	036	90010
9640	Wire Jumper.	3198	036	90010
9641	Wire Jumper.	3198	036	90010
9642	Wire Jumper.	3198	036	90010
9643	Wire Jumper.	3198	036	90010
9648	Wire Jumper.	3198	036	90010
9650	Wire Jumper.	3198	036	90010
9651	Wire Jumper.	3198	036	90010
9652	Wire Jumper.	3198	036	90010
9654	Wire Jumper.	3198	036	90010
9655	Wire Jumper.	3198	036	90010
9656	Wire Jumper.	3198	036	90010
9657	Wire Jumper.	3198	036	90010
9658	Wire Jumper.	3198	036	90010
9659	Wire Jumper.	3198	036	90010
9660	Wire Jumper.	3198	036	90010
9661	Wire Jumper.	3198	036	90010
9662	Wire Jumper.	3198	036	90010
9663	Wire Jumper.	3198	036	90010
9664	Wire Jumper.	3198	036	90010
9665	Wire Jumper.	3198	036	90010
9666	Wire Jumper.	3198	036	90010
9667	Wire Jumper.	3198	036	90010
9668	Wire Jumper.	3198	036	90010
9669	Wire Jumper.	3198	036	90010
9670	Wire Jumper.	3198	036	90010
9671	Wire Jumper.	3198	036	90010
9672	Coil, 22u, 10%	3198	018	22290
9674	Wire Jumper.	3198	036	90010
9675	Wire Jumper.	3198	036	90010
9676	Wire Jumper.	3198	036	90010
9678	Coil, 22u, 10%	3198	018	22290
9679	Wire Jumper.	3198	036	90010
9680	Wire Jumper.	3198	036	90010
9681	Wire Jumper.	3198	036	90010
9682	Wire Jumper.	3198	036	90010
9683	Wire Jumper.	3198	036	90010
9685	Wire Jumper.	3198	036	90010
9686	Wire Jumper.	3198	036	90010
9687	Wire Jumper.	3198	036	90010
9688	Wire Jumper.	3198	036	90010
9689	Wire Jumper.	3198	036	90010
9690	Wire Jumper.	3198	036	90010
9691	Wire Jumper.	3198	036	90010
9694	Wire Jumper.	3198	036	90010
9695	Wire Jumper.	3198	036	90010
9697	Wire Jumper.	3198	036	90010
9698	Wire Jumper.	3198	036	90010
9699	Wire Jumper.	3198	036	90010
9821	Wire Jumper.	3198	036	90010
9822	Wire Jumper.	3198	036	90010
9825	Wire Jumper.	3198	036	90010
9828	Wire Jumper.	3198	036	90010
9829	Wire Jumper.	3198	036	90010
9831	Wire Jumper.	3198	036	90010
9832	Wire Jumper.	3198	036	90010
9837	Wire Jumper.	3198	036	90010
9838	Wire Jumper.	3198	036	90010
9839	Wire Jumper.	3198	036	90010
9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9848	Wire Jumper.	3198	036	90010

9849	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9855	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9857	Wire Jumper.	3198	036	90010
9858	Wire Jumper.	3198	036	90010
9859	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9863	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9867	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9869	Wire Jumper.	3198	036	90010
9870	Wire Jumper.	3198	036	90010
9871	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9876	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9878	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9923	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3139	188	02181

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts				
0266	6 Pin Connector.	2422	025	16609
2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198	028	24790
2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198	028	44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198	017	44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198	025	34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040
2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198	021	31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122	118	05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322	704	68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210

32PT663R37A (continued)

3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts				
0221	2 Pin Connector.	2422	025	15503
0258	2 Pin Connector.	2422	025	15503
0261	1 Pin Connector.	2422	034	20021
0262	1 Pin Connector.	2422	034	20021
2492	Cap, 390p, 10%, 2000v, Ceramic	2020	558	90482
2493	Cap, 390p, 10%, 2000v, Ceramic	2020	558	90482
3498	Varactor, 1MA/612V, Max 1100V.	2322	592	14217
3499	Varactor, 1MA/612V, Max 1100V.	2322	592	14217
5493	Transformer, Signal, DAF	3128	138	34581
CBA	DAF Panel Assembly	3139	187	10081

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic.	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film.	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	187	28041

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)
ly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)
ly)

S = Safety Part Be sure to use exact replacement part.

Side Jack Panel Parts

Side Jack Panel Parts				
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass.	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	44171
AC06	Cabinet Back Screw Cover (2 Used).	3139	124	39241
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31324
S AC09	CRT, A80ERF042X14.	9301	927	10539
S AC12	Degaussing Coil.	2422	549	44676
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
AC17	Owner's Manual	3121	235	20711
AC18	Quick Use Guide.	3121	233	43531
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53321
AC20A	Cabinet Front.	3139	177	65811
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00141
AC20E	Power Button	3139	138	10881
AC20J	Top Control Assembly	3139	138	11451
AC20J1	Top Control Bracket.	3139	124	39802
AC20J2	Top Control Buttons.	3139	124	39812
REMOTE	Remote Control Transmitter, RC19036002/01.	3139	228	88003

32PW633R85C - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0127	Socket Fuse	2422	088 00271	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
0129	NTC Holder	3139	120 10151	2243	Cap, 10n, 10%, 50v, Ceramic	3198	017 31030
0136	IC-Spring	3104	301 22081	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
0137	Spring	3139	121 24583	2245	Cap, 470n, +80/-20%, 10v, Ceramic . . .	3198	017 44740
0138	IC-Spring	3104	301 22081	2247	Cap, 2u2, 20%, 10v, Electrolytic	2020	012 93728
0139	Spring for Bracket	3122	121 24786	2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0140	Spring	3139	121 24583	2249	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0141	IC-Spring	3104	301 22081	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
0152	Cable, DIPMate, 6 Pin, 560mm	3139	121 08951	2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
0153	Cable, 5 Pin, 560mm	3139	121 09041	2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
0211	2 Pin Connector	2422	025 16374	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0212	2 Pin Connector	2422	025 16375	2330	Cap, 100n, 10%, 250v, Metalized Polyest	2222	368 90177
0214	5 Pin Connector	2422	025 12481	2331	er	2020	558 90445
0219	6 Pin Connector	2422	025 12482	2340	Cap, 10n, +80/-20% 1000v, Ceramic . . .	2020	012 93495
0220	5 Pin Connector	2422	025 04853	2341	Cap, 10u, 20%, 250v, Electrolytic	3198	019 43320
0221	2 Pin Connector	2422	025 15503	2342	Cap, 3n3, 10%, 500v, Ceramic	3198	016 05610
0222	2 Pin Connector	2422	025 10646	2344	Cap, 560p, 5%, 50v, Ceramic	3198	023 21040
0223	A/V Jack	2422	026 05236	2345	Cap, 100n, +80/-20%, 25v, Ceramic . . .	2020	558 90445
0225	SVHS Jack	2422	026 04926	2345	Cap, 10n, +80/-20%, 1000v, Ceramic . . .	2020	558 90445
0239	3 Pin Connector	2422	025 16382	S 2346	Cap, 470p, 10%, 2000v, Ceramic	2020	558 90483
0243	6 Pin Connector	2422	025 04854	2360	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0244	5 Pin Connector	2422	025 04853	2362	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210
0245	6 Pin Connector	2422	025 04854	2364	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0246	5 Pin Connector	2422	025 12481	2365	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
S 0254	9 Pin CRT Socket	2422	500 80076	2366	Cap, 27p, 5%, 50v, Ceramic	3198	016 32790
0267	3 Pin Connector	2412	020 00725	2367	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
0268	3 Pin Connector	2412	020 00725	2368	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
0269	Jack	2422	026 05182	2369	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290
0278	3 Pin Connector	2412	020 00725	2372	Cap, 10u, 20%, 160v, Electrolytic	2020	012 93318
S 1000	Tuner, V+U, PLL	2422	542 90108	2373	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
1002	SAW Filter, 45.75MHz	2422	549 44518	2375	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2378	Cap, 220p, 5%, 50v, Ceramic	3198	019 02210
S 1400	Relay, 5 Amp, 12V	2422	132 07543	2379	Cap, 10u, 20%, 100v, Electrolytic	3198	025 71090
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2380	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2381	Cap, 4n7, 10%, 50v, Ceramic	3198	017 34720
1660	Crystal, 12MHz000	2422	543 01203	2401	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
1810	6 Pin Connector	2422	025 16607	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
	C49/U A	2422	543 00842	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2415	Cap, 330p, 5%, 50v, Ceramic	3198	016 03310
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2420	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2421	Cap, 470p, 5%, 50v, Ceramic	3198	016 34710
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2451	Cap, 22n, 10%, 50v, Polyester	3198	014 02230
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2454	Cap, 68n, 5%, 250v, Metalized Polypropy		
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		lene	2222	479 90133
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2457	Cap, 470n, 5%, 250v, Metalized Polyprop		
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290		ylene	2022	333 00086
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
2121	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
2122	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	S 2465	Cap, 13n, 5%, 1600v, Polypropylene . . .	2020	301 90254
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2467	Cap, 9n1, 5%, 1000v, Polypropylene . . .	2222	375 90424
2124	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2468	Cap, 9n1, 5%, 1000v, Polypropylene . . .	2222	375 90424
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2469	Cap, 430n, 5%, 250v, Metalized Polyprop		
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310		ylene	2022	333 00164
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2141	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2143	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2150	Cap, 150n, +80/-20%, 16v, Ceramic	2238	786 19852	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2172	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010	2482	Cap, 33n, 10%, 250v, Polyester	2222	347 90213
2173	Cap, 220p, 5%, 50v, Ceramic	3198	016 32210	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2490	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro		
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040		ylene	2022	330 00018
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2216	Cap, 2u2, 20%, 10v, Electrolytic	2020	012 93728	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
				2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3149	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3150	Res, 150K, 5%, 1/16W, Metalized Glass.	3198 021 31540
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472	3154	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2561	Cap, 100u, 20%, 160v, Electrolytic . . .	2020 021 91654	3156	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020	3157	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	3158	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91374	3159	Res, 1K2, 1%, 1/8W, Metalized Glass. . .	2322 734 61202
2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	3172	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3180	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790	3181	Res, 120K, 5%, Metalized Glass	2322 702 60124
2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	3190	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
2590	Cap, 330n, +80/-20%, 25v, Ceramic. . . .	2222 910 19856	3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910
2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2604	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230
2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3205	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3206	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
2807	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3250	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3341	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3342	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2902	Cap, 1000u, 20%, 25v, Electrolytic . . .	3198 026 31020	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3360	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3361	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3362	Res, 39K, 5%, 1/16W, Metalized Glass .	3198 021 33930
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3363	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3367	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3368	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3369	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3373	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3374	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3375	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3376	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3377	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3378	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3380	Res, 68K, 5%, 1/16W, Metalized Glass .	3198 021 36830
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3381	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3383	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3384	Res, 2R2, 5%, 1/6W, Carbon Film. . . .	3198 011 02280
3111	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3385	Res, 10K, 5%, 5W, Metal Film	2322 257 41103
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3386	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109
3113	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3401	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
3115	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3124	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3407	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3126	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3408	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3132	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
3134	Res, 47K, 5%, 1/16W, Metalized Glass . .	3198 021 34730	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620	3614	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810	3615	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3617	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820
3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	3619	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3451	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478	3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602	3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002	3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880	3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3457	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530	3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3634	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390	3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703	3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3468	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310	3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320	3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908	3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308	3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210
3473	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908	3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202	3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202	3811	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720	3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083	3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3481	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003	3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3482	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203	3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
S 3486	Res, 22 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 32290	3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478	3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3489	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590
3491	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3492	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3493	Res, 2R2, 5%, 1/3W, Metal Film.	2306 204 03228	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3901	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	3903	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3905	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3909	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3507	Surge Protector.	2422 549 43073	3910	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	3912	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340	4311	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3523	Res, 47 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03479	4312	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4313	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198 012 11070	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3527	Res, 0R15, 5%, 3/5W, Metal Film.	3198 012 11570	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306 204 03222	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3543	Res, 82K, 1%, 3/5W, Metal Film.	2312 915 18203	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 33K, 5%, 1/10W, Metalized Glass .	3198 021 53330	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3552	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 8K2, 5%, 1/10W, Metalized Glass .	3198 021 58220	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3565	Res, 330 ohm, 5%, 1W, Metal Film.	3198 012 13310	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4837	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4838	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3591	Res, 10 ohm, 5%, 1/3W, Metal Film. . . .	2306 204 03109	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3601	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290
4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6540	Zener Diode, 6.2 volt.	9331 668 30133
4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6541	Zener Diode, 10 volt	3198 020 51090
4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6560	Diode, Rect, BYV29X-500.	9340 555 59127
4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6563	Diode, Signal, BAS316.	3198 010 10630
4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6565	Diode, Signal, BAV70	9331 849 10215
4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6566	Diode, Signal, 1N4148.	3198 010 10010
4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6569	Diode, Signal, BAS316.	3198 010 10630
4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6570	Zener Diode, 6.8 volt.	3198 020 56880
4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6580	Diode, Signal, BAS316.	3198 010 10630
4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6582	Diode, Rect, STPS10L60D.	9322 175 70667
4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6831	Diode, Signal, 1N4148.	3198 010 10010
5001	Coil, 27u, 10%	3198 018 22790	6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5002	Coil, 820n, 10%	3198 018 18270	6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020
5201	Coil, 6u8, 5%	3198 018 16880	7000	IC, TDA8941P/N1.	9352 628 51112
5202	Wire Jumper.	3198 036 90010	7101	Transistor, NPN, BC847B(COL)	3198 010 42030
5204	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7102	Transistor, PNP, BC857B(COL)	3198 010 42150
5205	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7103	Transistor, NPN, BC847B(COL)	3198 010 42030
5206	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7200	IC, TDA9588H/N1/3I/1298.	9352 742 85557
5241	Wire Jumper.	3198 036 90010	7201	Transistor, NPN, BC847B(COL)	3198 010 42030
5242	Coil, 10u, 5%	3198 018 11090	7204	Transistor, PNP, BC857B(COL)	3198 010 42150
5341	Coil, 22u.	2422 535 97333	7205	Transistor, PNP, BC857B(COL)	3198 010 42150
5342	Coil, 27u, 10%	3198 018 22790	7330	IC, TDA6107JF/N3	9352 713 37112
5376	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7360	Transistor, NPN, BC847B(COL)	3198 010 42030
5400	Coil, 11u7	2422 535 91027	7366	Transistor, PNP, 2SA965.	9322 167 18676
S 5445	Transformer, LOT	2422 531 02612	7369	Transistor, PNP, BC857B(COL)	3198 010 42150
5451	Coil, 22u, 10%	3198 018 72290	7373	Transistor, PNP, BC327-25(COL)	3198 020 43430
5452	Fixed, Inductor, 100MHz, 80 ohm.	3198 018 90020	7380	Transistor, NPN, 2SC2235	9322 167 19676
5453	Coil, 22u, 5%	3198 018 12290	7382	Transistor, NPN, BC337-25(COL)	3198 020 43530
S 5457	Coil, 42u.	2422 535 94865	7400	Power FET, STP3NC60FP.	9322 157 37687
S 5461	Transformer, SD10207-00 B.	2422 531 02568	7441	Transistor, PNP, BC857B(COL)	3198 010 42150
5464	Coil, Bridge, C946-01 Y.	2422 531 02419	7443	Transistor, PNP, BC557B(COL)	3198 020 40110
5471	Coil, 6u8, 20%	3198 018 76880	7444	Transistor, NPN, BC547B(COL)	3198 020 40030
5472	Coil, 3u3, 10%	3198 018 23380	7450	Transistor, PNP, PDTA114ET	3198 010 44010
5480	Coil, 10u, 10%	2422 535 97328	7460	Transistor, NPN, BU4508DX.	9340 550 92127
S 5501	Mains Filter	2422 549 43432	7461	Transistor, NPN, BC337-25(COL)	3198 020 43530
S 5520	Transformer, SS42204-00 B.	2422 531 02563	7462	Transistor, NPN, PDTCL143ZT	9340 547 00215
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7463	Transistor, PNP, BC327-25(COL)	3198 020 43430
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7471	IC, TDA8359J/N2.	9352 701 64112
5561	Coil, 27u, 5%	2422 535 95366	7480	Transistor, NPN, BD135	3198 020 41010
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7482	Transistor, NPN, BD135	3198 020 41010
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	S 7515	Optical Coupler, TCET1103(G)	9322 140 14667
5602	Coil, 5u6, 5%	3198 018 15680	7520	IC, TEA1507P/N1.	9352 673 56112
5603	Coil, 5u6, 5%	3198 018 15680	7521	Power FET, FQPF9N50.	9322 187 16687
5604	Coil, 5u6, 5%	3198 018 15680	7522	Transistor, NPN, BC847B(COL)	3198 010 42030
5810	Coil, 10u, 10%	3198 018 51090	7540	Transistor, NPN, BC547B(COL)	3198 020 40030
5831	Coil, 6u8, 5%	3198 018 16880	7541	Transistor, NPN, PDTCL14ET	9340 310 10215
5832	Coil, 6u8, 5%	3198 018 16880	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5833	Coil, 6u8, 5%	3198 018 16880	7560	IC, L78L33ACZ.	9322 134 92676
5835	Coil, 12u, 10%	3198 018 31290	7561	Transistor, NPN, PDTCL143ZT	9340 547 00215
6001	Zener Diode, 33 volt	3198 010 23390	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
6150	Diode, Signal, BAS316.	3198 010 10630	7602	IC, M24C08-WBN6.	9322 154 38682
6201	Diode, Signal, BAS316.	3198 010 10630	7606	Transistor, NPN, PDTCL143ZT	9340 547 00215
6202	Diode, Signal, BAS316.	3198 010 10630	7802	IC, HEF4053BT.	9333 729 60653
6206	Zener Diode, 6.8 volt.	3198 020 56880	7803	IC, HEF4053BT.	9333 729 60653
6331	Diode, Signal, BAV21	3198 010 10070	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
6332	Diode, Signal, BAS316.	3198 010 10630	7831	IC MSP3425G-PO-B8-V3 (MTAS) L	9322 187 89682
6333	Diode, Signal, BAV21	3198 010 10070	7901	IC, AN7580	9322 166 29682
6335	Diode, Signal, BAV21	3198 010 10070	7903	Transistor, NPN, BC847B(COL)	3198 010 42030
6365	Diode, Signal, BAT85	9336 247 60133	9001	Wire Jumper.	3198 036 90010
6366	Diode, Signal, BAT85	9336 247 60133	9101	Wire Jumper.	3198 036 90010
6367	Diode, Signal, BAV99	3198 010 10620	9102	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9103	Wire Jumper.	3198 036 90010
6401	Zener Diode, 68 volt	3198 010 26890	9104	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9123	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9160	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt	9331 668 30133	9171	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9173	Wire Jumper.	3198 036 90010
6452	Diode, Signal, BAS316.	3198 010 10630	9175	Wire Jumper.	3198 036 90010
6453	Zener Diode, 5.6 volt.	3198 020 55680	9176	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DG3-7005L	9336 436 10682	9178	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9179	Wire Jumper.	3198 036 90010
6462	Zener Diode, 12 volt	3198 010 21290	9181	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9182	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9183	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9192	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9193	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9311	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9312	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9313	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt	9331 177 80133	9314	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9406	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9407	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9408	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9409	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9410	Wire Jumper.	3198 036 90010
6490	Diode, Rect, BYV95C.	9335 001 80133	9411	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU4JL-7002.	9322 132 55667	9412	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9413	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9414	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9415	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9416	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

32PW633R85C (continued)

9417	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9420	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9462	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9464	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9511	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9512	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9513	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9514	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9515	Wire Jumper.	3198 036 90010	9848	Wire Jumper.	3198 036 90010
9516	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9518	Wire Jumper.	3198 036 90010	9851	Wire Jumper.	3198 036 90010
9520	Wire Jumper.	3198 036 90010	9855	Wire Jumper.	3198 036 90010
9521	Wire Jumper.	3198 036 90010	9856	Wire Jumper.	3198 036 90010
9522	Wire Jumper.	3198 036 90010	9857	Wire Jumper.	3198 036 90010
9524	Wire Jumper.	3198 036 90010	9858	Wire Jumper.	3198 036 90010
9528	Wire Jumper.	3198 036 90010	9859	Wire Jumper.	3198 036 90010
9530	Wire Jumper.	3198 036 90010	9860	Wire Jumper.	3198 036 90010
9611	Coil, 27u, 10%	3198 018 22790	9862	Wire Jumper.	3198 036 90010
9612	Wire Jumper.	3198 036 90010	9863	Wire Jumper.	3198 036 90010
9613	Wire Jumper.	3198 036 90010	9864	Wire Jumper.	3198 036 90010
9614	Wire Jumper.	3198 036 90010	9865	Wire Jumper.	3198 036 90010
9615	Wire Jumper.	3198 036 90010	9867	Wire Jumper.	3198 036 90010
9618	Wire Jumper.	3198 036 90010	9868	Wire Jumper.	3198 036 90010
9619	Wire Jumper.	3198 036 90010	9869	Wire Jumper.	3198 036 90010
9620	Wire Jumper.	3198 036 90010	9870	Wire Jumper.	3198 036 90010
9621	Wire Jumper.	3198 036 90010	9871	Wire Jumper.	3198 036 90010
9622	Wire Jumper.	3198 036 90010	9873	Wire Jumper.	3198 036 90010
9623	Wire Jumper.	3198 036 90010	9874	Wire Jumper.	3198 036 90010
9624	Wire Jumper.	3198 036 90010	9875	Wire Jumper.	3198 036 90010
9626	Wire Jumper.	3198 036 90010	9876	Wire Jumper.	3198 036 90010
9627	Wire Jumper.	3198 036 90010	9877	Wire Jumper.	3198 036 90010
9628	Wire Jumper.	3198 036 90010	9878	Wire Jumper.	3198 036 90010
9629	Wire Jumper.	3198 036 90010	9901	Wire Jumper.	3198 036 90010
9631	Wire Jumper.	3198 036 90010	9902	Wire Jumper.	3198 036 90010
9632	Wire Jumper.	3198 036 90010	9903	Wire Jumper.	3198 036 90010
9633	Wire Jumper.	3198 036 90010	9904	Wire Jumper.	3198 036 90010
9635	Wire Jumper.	3198 036 90010	9911	Wire Jumper.	3198 036 90010
9636	Wire Jumper.	3198 036 90010	9913	Wire Jumper.	3198 036 90010
9637	Wire Jumper.	3198 036 90010	9914	Wire Jumper.	3198 036 90010
9638	Wire Jumper.	3198 036 90010	9915	Wire Jumper.	3198 036 90010
9640	Wire Jumper.	3198 036 90010	9923	Wire Jumper.	3198 036 90010
9641	Wire Jumper.	3198 036 90010	9991	Wire Jumper.	3198 036 90010
9642	Wire Jumper.	3198 036 90010	9996	Wire Jumper.	3198 036 90010
9643	Wire Jumper.	3198 036 90010	9998	Wire Jumper.	3198 036 90010
9648	Wire Jumper.	3198 036 90010	CBA	Main Chassis Assembly.	3141 058 59081
9650	Wire Jumper.	3198 036 90010			
9651	Wire Jumper.	3198 036 90010			
9652	Wire Jumper.	3198 036 90010			
9654	Wire Jumper.	3198 036 90010			
9655	Wire Jumper.	3198 036 90010			
9656	Wire Jumper.	3198 036 90010			
9657	Wire Jumper.	3198 036 90010			
9658	Wire Jumper.	3198 036 90010			
9659	Wire Jumper.	3198 036 90010			
9660	Wire Jumper.	3198 036 90010			
9661	Wire Jumper.	3198 036 90010			
9662	Wire Jumper.	3198 036 90010			
9663	Wire Jumper.	3198 036 90010			
9664	Wire Jumper.	3198 036 90010			
9665	Wire Jumper.	3198 036 90010			
9666	Wire Jumper.	3198 036 90010			
9667	Wire Jumper.	3198 036 90010			
9668	Wire Jumper.	3198 036 90010			
9669	Wire Jumper.	3198 036 90010			
9670	Wire Jumper.	3198 036 90010			
9671	Wire Jumper.	3198 036 90010			
9672	Coil, 22u, 10%	3198 018 22290			
9674	Wire Jumper.	3198 036 90010			
9675	Wire Jumper.	3198 036 90010			
9676	Wire Jumper.	3198 036 90010			
9678	Coil, 22u, 10%	3198 018 22290			
9679	Wire Jumper.	3198 036 90010			
9680	Wire Jumper.	3198 036 90010			
9681	Wire Jumper.	3198 036 90010			
9682	Wire Jumper.	3198 036 90010			
9683	Wire Jumper.	3198 036 90010			
9685	Wire Jumper.	3198 036 90010			
9686	Wire Jumper.	3198 036 90010			
9687	Wire Jumper.	3198 036 90010			
9688	Wire Jumper.	3198 036 90010			

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690

32PW633R85C (continued)

2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198	028	21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198	021	31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198	021	36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass . .	3198	021	31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass .	2122	118	05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198	021	31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass . .	2322	704	68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198	021	31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198	021	32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3456	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3457	Wire Jumper.	3198	036	90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4402	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4403	Res, Zero ohm, "Chip" Jumper	3198	021	90030
5401	Coil, 10u, 10%	3198	018	31090
5407	Coil, 33u, 5%	3198	018	13390
5408	Coil, 33u, 20%	3198	018	33390
5421	Inductor, 100 MHz, 120 ohm	3198	018	90070
5425	Coil, 10u, 10%	3198	018	31090
5428	Coil, 10u, 5%	3198	018	11090
5429	Coil, 10u, 10%	3198	018	31090
5430	Coil, 10u, 10%	3198	018	31090
5440	Coil, 10u, 10%	3198	018	31090
5442	Coil, 22u, 5%	3198	018	12290
5450	Coil, 10u, 10%	3198	018	31090
5452	Coil, 33u, 5%	3198	018	13390
7401	Transistor, PNP, BC857B(COL)	3198	010	42150
7402	Transistor, NPN, BC847B(COL)	3198	010	42030
7403	Transistor, NPN, BC847B(COL)	3198	010	42030
7421	IC, TC90A53N	9322	182	18682
7440	Transistor, NPN, BC847B(COL)	3198	010	42030
7444	Transistor, NPN, BC847B(COL)	3198	010	42030
7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts				
S 0211	2 Pin Connector.	2422	025	16268
S 0212	2 Pin Connector.	2422	025	16559
0214	5 Pin Connector.	2422	025	06353
1606	Tact Switch.	2422	128	02742
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198	025	32210
2692	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2693	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2694	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2695	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730
2698	Cap, 100n, 10%, 50v, Polyester	3198	014	01040
S 3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
S 3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322	242	13335
3685	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198	011	05610
3691	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198	011	03310
3693	Res, 220 ohm, 5%, 1/6W, Carbon Film. .	3198	011	02210
6691	LED, LTL-10234WHCR	9322	185	69682
6692	IR Receiver, TSOP1836UH3V.	9322	127	54667
9001	Wire Jumper.	3198	036	90010
9002	Wire Jumper.	3198	036	90010
CBA	Front Interface Panel Assembly	3139	177	26211

ITV Front Jack Panel Parts

S = Safety Part, Exact Replacement Part.

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts				
0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass .	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3139	187	15141

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts				
0215	3 Pin Connector.	2422	025	16601
1091	Tact Switch.	2422	128	02742
1092	Tact Switch.	2422	128	02742
1093	Tact Switch.	2422	128	02742
1094	Tact Switch.	2422	128	02742
3091	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3092	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3093	Res, 560 ohm, 5%, Metalized Glass. . .	3198	021	35610
3094	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198	021	33910
3095	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198	021	33320
3096	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198	021	31520
4085	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4089	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4090	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6091	Diode, Signal.	9340	453	90115
CBA	Top Control Panel Assembly	3139	187	15841

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitt	9299	000	65263
AC05	Cabinet Back	3139	124	46431
AC06	Cabinet Back Screw Cover (2 Used). . .	3139	124	45431
AC07	Canceller Coil	3128	138	60581
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, W76ERF022X013	9301	888	30314
S AC12	Degaussing Coil.	2422	549	45797
AC13	Front Interface Panel Bracket.	3139	124	32891
AC15	Holder, Degaussing Coil (4 Used) . . .	3135	013	01661
AC17	Owner's Manual	3121	235	21391
AC19	Side Jack Panel Bracket.	3139	124	37061
AC20	Cabinet Front Assembly	3121	237	53521
AC20A	Cabinet Front.	3139	124	43361
AC20C	Light Guide.	3139	124	39701
AC20D	Nameplate.	3141	050	00161
AC20E	Power Button	3139	138	10881
AC20H	Speaker, 8 ohm, 10W (2 Used)	3139	128	76081
AC20J	Top Control Assembly	3139	177	56381
AC32	Yoke Wedge (2 Used).	3135	013	00311
REMOTE	Remote Control Transmitter, RC19036002/01A.	3139	238	04313

32ST220P/17 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Socket Fuse	2422	088	00271			
0127	NTC Holder	3139	120	10151	2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
0129	IC-Spring	3104	301	22081	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240
0136	Spring	3139	121	24583	2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740
0137	IC-Spring	3104	301	22081	2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
0138	Spring for Bracket	3122	121	24786	2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520
0139	Spring	3139	121	24583	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050
0140	IC-Spring	3104	301	22081	2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220
0141	Cable, DIPMate, 6 Pin, 560mm	3104	301	08411	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104
0152	Cable, 5 Pin, 560mm	3139	121	09041	2245	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740
0211	2 Pin Connector	2422	025	16269	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020
0212	2 Pin Connector	2422	025	16375	2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
0213	2 Pin Connector	2422	025	16374	2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230
0217	6 Pin Connector	2422	025	12482	2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
0218	A/V Jack	2422	026	04742	2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
0220	5 Pin Connector	2422	025	04853	2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020
0221	2 Pin Connector	2422	025	15503	2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020
0222	2 Pin Connector	2422	025	10646	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er
0223	A/V Jack	2422	026	05236	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2222 368 90177
0225	SVHS Jack	2422	026	04926	2340	Cap, 10u, 20%, 250v, Electrolytic	2020 558 90445
0227	6 Pin Connector	2422	025	15849	2341	Cap, 3n3, 10%, 500v, Ceramic	2020 012 93495
0229	3 Pin Connector	2412	020	00725	2342	Cap, 560p, 5%, 50v, Ceramic	3198 019 43320
0240	7 Pin Connector	2422	025	11244	2343	Cap, 2n2, 10%, 2000v, Ceramic	3198 016 05610
0242	7 Pin Connector	2422	025	17042	2344	Cap, 100n, +80/-20%, 25v, Ceramic	2020 558 90559
0243	6 Pin Connector	2422	025	04854	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	3198 023 21040
0244	5 Pin Connector	2422	025	04853	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 558 90445
0245	6 Pin Connector	2422	025	04854	2402	Cap, 470p, 10%, 500v, Ceramic	2020 021 90552
0251	3 Pin Connector	2412	020	00725	2403	Cap, 47u, 20%, 50v, Electrolytic	3198 019 44710
S 0254	9 Pin CRT Socket	2422	500	80076	2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790
0259	5 Pin Connector	2422	025	15848	2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210
0262	3 Pin Connector	2422	025	16937	2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310
0267	3 Pin Connector	2412	020	00725	2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
0280	4 Pin Connector	2422	025	15847	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
S 1000	Tuner, V+U, PLL	2422	542	90108	2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
1002	SAW Filter, 45.75MHz	2422	549	44518	2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139
1200	Filter, Ceramic, 4MHz5	2422	549	40807	2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530
S 1500	Fuse, 4A, 250V, IEC	2422	086	10914	2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
S 1515	Relay, 5 Amp, 12V	2422	132	07444	2457	Cap, 470n, 5%, 250v, Metalized Polyprop	ylene
1600	Tact Switch	2422	128	02742	2458	Cap, 2u2, 20%, 100v, Electrolytic	2022 333 00086
1601	Tact Switch	2422	128	02742	2459	Cap, 680p, 10%, 500v, Ceramic	2020 021 91331
1602	Tact Switch	2422	128	02742	2460	Cap, 100p, 5%, 50v, Ceramic	3198 019 46810
1603	Tact Switch	2422	128	02742	S 2463	Cap, 1n2, 10%, 2000v, Ceramic	3198 016 01010
1606	Tact Switch	2422	128	02742	2464	Cap, 2u2, 5%, 160v, Metalized Polyprop	ylene
1660	Crystal, 12MHz000	2422	543	01203	S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2222 479 90042
1810	6 Pin Connector	2422	025	16607	2466	Cap, 15n, 10%, 400v, Polyester	2020 301 90254
1831	Crystal, Resonator, 18MHz432, 12 Pin, H				2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
	C49/U A	2422	543	00842	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024	44730	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025	24710	2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025	31010	2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017	24740	2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene
2123	Res, Zero ohm, "Chip" Jumper	3198	021	90020	2501	Cap, 2n2, 10%, 1000v, Ceramic	2022 330 00018
2125	Res, Zero ohm, "Chip" Jumper	3198	021	90020	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590	2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040
2181	Cap, 22p, 5%, 50v, Ceramic	3198	016	32290	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489
2182	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710
2183	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310	2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017	22250	2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017	42240	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023	41040	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017	41050	2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017	44740	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017	32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026	21020	2606	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

2607	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass.	3198 021 33340
2609	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
2612	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2613	Cap, 68p, 5%, 50v, Ceramic	3198 016 36890	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2615	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210	3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3245	Res, 39K, 1%, 1/16W, Metalized Glass .	3222 704 63903
2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3247	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2831	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330
2832	Cap, 1p, 25%, 50v, Ceramic	3198 016 31080	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2833	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060
2837	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	3258	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass.	3198 021 34740
2841	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2843	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3343	Res, 1K5, 20%, 1/2W, Carbon Film	3198 013 01520
2855	Cap, 33p, 5%, 50v, Ceramic	3198 016 33390	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2856	Cap, 47p, 5%, 50v, Ceramic	3198 016 34790	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3403	Res, 100K, 5%, 1/6W, Carbon Film	3198 011 01040
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2902	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2905	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2907	Cap, 1n, 10%, 50v, Ceramic	3198 017 31020	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 06890	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film	3198 012 26880
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3104	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film	3198 012 21530
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3106	Res, 220K, 5%, 1/16W, Metalized Glass.	3198 021 32240	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 03390
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3132	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3134	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3182	Wire Jumper.	3198 036 90010	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3184	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3186	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . . .	3198 012 33390
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 270K, 5%, 1/16W, Metalized Glass.	2322 702 60274	3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335	3904	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
S 3504	Res, PTC, 3 ohm, 144V.	2122	663	00019	3905	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320
3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322	242	13155	3906	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030
3507	Surge Protector.	2422	549	43073	3907	Res, 8K2, 5%, 1/16W, Metalized Glass	3198	021	38220
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film	3198	013	02210	4001	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122	612	00056	4002	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198	011	02710	4101	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220	4102	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198	011	04780	4104	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	4126	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film	2306	204	03101	4128	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass	3198	021	55630	4181	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4209	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3526	Res, OR1, 5%, 3/5W, Metal Film	3198	012	11070	4216	Res, Zero ohm, "Chip" Jumper	3198	021	90030
S 3527	Res, OR33, 5%, 3/5W, Metal Film.	3198	012	13370	4341	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper	3198	021	90020	4388	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4401	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4402	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	4430	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306	204	03222	4431	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4604	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4608	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312	915	8203	4609	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4614	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass	2322	730	61274	4615	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021	51530	4616	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	4617	Res, Zero ohm, "Chip" Jumper	3198	021	90020
S 3558	Res, 330 ohm, 5%, 1W, Metal Film	3198	012	13310	4619	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4622	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	4623	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	4692	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass	3198	021	55620	4693	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	4696	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4824	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4826	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4830	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4831	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4835	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4839	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4840	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4866	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	4867	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4869	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4870	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4871	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4872	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4874	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4882	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4884	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper	3198	021	90030	4885	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4892	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4901	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021	53320	4903	Res, Zero ohm, "Chip" Jumper	3198	021	90030
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4906	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4924	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	4982	Res, Zero ohm, "Chip" Jumper	3198	021	90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5001	Coil, 27u, 10%	3198	018	22790
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5002	Coil, 820n, 10%	3198	018	18270
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%	3198	018	16880
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5202	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5204	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198	011	01020	5205	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3812	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5206	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3813	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5242	Coil, 10u, 5%	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u.	2422	535	97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%	3198	018	71020
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, PSLOT	3128	138	21421
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%	3198	018	73390
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHz, 80 ohm.	3198	018	90020
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear, DC12	3128	138	55881
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5463	Coil, Choke.	3128	138	37021
3831	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730	5471	Coil, 3u3, 20%	3198	018	73380
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5472	Coil, 3u3, 10%	3198	018	23380
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5480	Coil, 4u7, 5%	2422	535	94213
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	S 5501	Mains Filter	2422	549	43432
3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	S 5520	Transformer, SS39009-04.	2422	531	02459
3843	Res, 2K2, 5%, 1/16W, Metalized Glass	3198	021	32220	5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010
3902	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5561	Coil, 27u, 5%	2422	535	95366
3903	Res, 3K3, 5%, 1/16W, Metalized Glass	3198	021	33320	5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7804	Transistor, NPN, BC847B(COL)	3198	010	42030
5602	Coil, 5u6, 5%.	3198	018	15680	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682
5603	Coil, 5u6, 5%.	3198	018	15680	7901	IC, AN7522N PH	9322	181	41682
5604	Coil, 5u6, 5%.	3198	018	15680	9001	Wire Jumper.	3198	036	90010
5810	Coil, 10u, 10%.	3198	018	51090	9104	Wire Jumper.	3198	036	90010
5831	Coil, 6u8, 5%.	3198	018	16880	9171	Wire Jumper.	3198	036	90010
5832	Coil, 6u8, 5%.	3198	018	16880	9173	Wire Jumper.	3198	036	90010
5833	Coil, 6u8, 5%.	3198	018	16880	9175	Wire Jumper.	3198	036	90010
5835	Coil, 12u, 10%.	3198	018	31290	9181	Wire Jumper.	3198	036	90010
6001	Zener Diode, 33 volt	3198	010	23390	9182	Wire Jumper.	3198	036	90010
6201	Diode, Signal, BAS316.	3198	010	10630	9183	Wire Jumper.	3198	036	90010
6202	Diode, Signal, BAS316.	3198	010	10630	9192	Wire Jumper.	3198	036	90010
6206	Zener Diode, 6.8 volt.	3198	020	56880	9193	Wire Jumper.	3198	036	90010
6331	Diode, Signal, BAV21.	3198	010	10070	9311	Wire Jumper.	3198	036	90010
6332	Diode, Signal, BAS316.	3198	010	10630	9312	Wire Jumper.	3198	036	90010
6333	Diode, Signal, BAV21.	3198	010	10070	9406	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21.	3198	010	10070	9407	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9408	Wire Jumper.	3198	036	90010
6401	Zener Diode, 47 volt	3198	010	24790	9409	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9410	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9411	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt.	9331	668	30133	9412	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99.	3198	010	10620	9413	Wire Jumper.	3198	036	90010
6460	Diode, Rect, DG3-7005L	9336	436	10682	9414	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP307-L7004.	9338	617	60682	9415	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9416	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21.	3198	010	10070	9417	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21.	3198	010	10070	9418	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9419	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9421	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9422	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99.	3198	010	10620	9423	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9424	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9425	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9426	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9427	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9460	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9463	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9500	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9501	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9503	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9506	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9507	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9510	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9511	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9512	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9513	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9514	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010.	9322	128	18682	9515	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70.	9331	849	10215	9518	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9520	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9521	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9522	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9524	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85.	9336	247	60133	9528	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9530	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9611	Coil, 27u, 10%.	3198	018	22790
6831	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9613	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9614	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9615	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57626	9616	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9618	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9619	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9622	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9623	Wire Jumper.	3198	036	90010
7400	Power FET, STP3NC60FP.	9322	157	37687	9624	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9626	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9627	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9628	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9629	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PPTC143ZT	9340	547	00215	9631	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9632	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9634	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9637	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9638	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9639	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9640	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9641	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9642	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9643	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PPTC114ET	9340	310	10215	9647	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9648	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ	9322	106	11676	9650	Wire Jumper.	3198	036	90010
7561	Transistor, NPN, PPTC143ZT	9340	547	00215	9651	Wire Jumper.	3198	036	90010
7580	Transistor, PNP, BC857B(COL)	3198	010	42150	9652	Wire Jumper.	3198	036	90010
7602	IC, M24C16-WBN6.	9322	147	25682	9654	Wire Jumper.	3198	036	90010
7606	Transistor, NPN, PPTC143ZT	9340	547	00215	9655	Wire Jumper.	3198	036	90010
7802	IC, HEP4053BT.	9333	729	60653	9656	Wire Jumper.	3198	036	90010
7803	IC, HEP4053BT.	9333	729	60653	9657	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

32ST220P/17 (continued)

9658	Wire Jumper.	3198 036 90010	0266	6 Pin Connector.	2422 025 16609
9659	Wire Jumper.	3198 036 90010	2401	Cap, 47u, 20%, 16v, Electrolytic . . .	3198 028 24790
9660	Wire Jumper.	3198 036 90010	2402	Cap, 4u7, 20%, 35v, Electrolytic . . .	3198 028 44780
9661	Wire Jumper.	3198 036 90010	2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9662	Wire Jumper.	3198 036 90010	2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
9663	Wire Jumper.	3198 036 90010	2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9664	Wire Jumper.	3198 036 90010	2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
9665	Wire Jumper.	3198 036 90010	2411	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
9666	Wire Jumper.	3198 036 90010	2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
9667	Wire Jumper.	3198 036 90010	2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9668	Wire Jumper.	3198 036 90010	2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9669	Wire Jumper.	3198 036 90010	2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9670	Wire Jumper.	3198 036 90010	2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9671	Wire Jumper.	3198 036 90010	2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9672	Coil, 22u, 10%	3198 018 22290	2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
9674	Wire Jumper.	3198 036 90010	2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9675	Wire Jumper.	3198 036 90010	2426	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
9676	Wire Jumper.	3198 036 90010	2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9678	Coil, 22u, 10%	3198 018 22290	2428	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9679	Wire Jumper.	3198 036 90010	2429	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9680	Wire Jumper.	3198 036 90010	2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9681	Wire Jumper.	3198 036 90010	2431	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010
9682	Wire Jumper.	3198 036 90010	2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9685	Wire Jumper.	3198 036 90010	2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9686	Wire Jumper.	3198 036 90010	2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
9687	Wire Jumper.	3198 036 90010	2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9688	Wire Jumper.	3198 036 90010	2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
9689	Wire Jumper.	3198 036 90010	2440	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
9690	Wire Jumper.	3198 036 90010	2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9691	Wire Jumper.	3198 036 90010	2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9694	Wire Jumper.	3198 036 90010	2450	Cap, 10u, 20%, 16v, Electrolytic . . .	3198 028 21090
9695	Wire Jumper.	3198 036 90010	2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9697	Wire Jumper.	3198 036 90010	2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
9698	Wire Jumper.	3198 036 90010	3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9699	Wire Jumper.	3198 036 90010	3402	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9821	Wire Jumper.	3198 036 90010	3403	Res, 1K8, 5%, 1/16W, Metalized Glass .	3198 021 31820
9822	Wire Jumper.	3198 036 90010	3404	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520
9825	Wire Jumper.	3198 036 90010	3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9828	Wire Jumper.	3198 036 90010	3406	Res, 6K8, 5%, 1/16W, Metalized Glass .	3198 021 36820
9829	Wire Jumper.	3198 036 90010	3407	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
9831	Wire Jumper.	3198 036 90010	3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9832	Wire Jumper.	3198 036 90010	3412	Res, 510K, 5%, 1/10W, Metalized Glass. .	2122 118 05951
9837	Wire Jumper.	3198 036 90010	3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9838	Wire Jumper.	3198 036 90010	3425	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9839	Wire Jumper.	3198 036 90010	3427	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
9846	Wire Jumper.	3198 036 90010	3431	Res, 8K2, 1%, 1/16W, Metalized Glass .	2322 704 68202
9847	Wire Jumper.	3198 036 90010	3432	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9849	Wire Jumper.	3198 036 90010	3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9851	Wire Jumper.	3198 036 90010	3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9856	Wire Jumper.	3198 036 90010	3442	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9858	Wire Jumper.	3198 036 90010	3443	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9859	Wire Jumper.	3198 036 90010	3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9860	Wire Jumper.	3198 036 90010	3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
9862	Wire Jumper.	3198 036 90010	3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
9863	Wire Jumper.	3198 036 90010	3452	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
9864	Wire Jumper.	3198 036 90010	3453	Res, 2K7, 5%, 1/16W, Metalized Glass .	3198 021 32720
9865	Wire Jumper.	3198 036 90010	3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
9867	Wire Jumper.	3198 036 90010	3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9868	Wire Jumper.	3198 036 90010	3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9869	Wire Jumper.	3198 036 90010	3457	Wire Jumper.	3198 036 90010
9870	Wire Jumper.	3198 036 90010	3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
9871	Wire Jumper.	3198 036 90010	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9873	Wire Jumper.	3198 036 90010	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9874	Wire Jumper.	3198 036 90010	4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
9875	Wire Jumper.	3198 036 90010	5401	Coil, 10u, 10%	3198 018 31090
9876	Wire Jumper.	3198 036 90010	5407	Coil, 33u, 5%	3198 018 13390
9877	Wire Jumper.	3198 036 90010	5408	Coil, 33u, 20%	3198 018 33390
9878	Wire Jumper.	3198 036 90010	5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
9901	Wire Jumper.	3198 036 90010	5425	Coil, 10u, 10%	3198 018 31090
9902	Wire Jumper.	3198 036 90010	5428	Coil, 10u, 5%	3198 018 11090
9903	Wire Jumper.	3198 036 90010	5429	Coil, 10u, 10%	3198 018 31090
9904	Wire Jumper.	3198 036 90010	5430	Coil, 10u, 10%	3198 018 31090
9905	Wire Jumper.	3198 036 90010	5440	Coil, 10u, 10%	3198 018 31090
9911	Wire Jumper.	3198 036 90010	5442	Coil, 22u, 5%	3198 018 12290
9913	Wire Jumper.	3198 036 90010	5450	Coil, 10u, 10%	3198 018 31090
9914	Wire Jumper.	3198 036 90010	5452	Coil, 33u, 5%	3198 018 13390
9915	Wire Jumper.	3198 036 90010	7401	Transistor, PNP, BC857B(COL)	3198 010 42150
9919	Wire Jumper.	3198 036 90010	7402	Transistor, NPN, BC847B(COL)	3198 010 42030
9920	Wire Jumper.	3198 036 90010	7403	Transistor, NPN, BC847B(COL)	3198 010 42030
9991	Wire Jumper.	3198 036 90010	7421	IC, TC90A53N	9322 182 18682
9993	Wire Jumper.	3198 036 90010	7440	Transistor, NPN, BC847B(COL)	3198 010 42030
9996	Wire Jumper.	3198 036 90010	7444	Transistor, NPN, BC847B(COL)	3198 010 42030
9997	Wire Jumper.	3198 036 90010	7450	Transistor, NPN, BC847B(COL)	3198 010 42030
9998	Wire Jumper.	3198 036 90010	7454	Transistor, NPN, BC847B(COL)	3198 010 42030
CBA	SP/LS Module (Vertical) (ITV)	3139 127 27374	9401	Wire Jumper.	3198 036 90010
CBA	EPS Module (ITV)	3139 137 22961	9402	Wire Jumper.	3198 036 90010
CBA	Main Chassis Assembly.	3139 188 04091	9403	Wire Jumper.	3198 036 90010
CBA	Interface Panel (ITV)	3139 188 04541	CBA	2D 3 Line Comb Filter Assembly	3139 177 26561

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

32ST220P/17 (continued)

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts

S	AC01	AC Cord.	3135	010	04323
	AC02	AC Cord Strain Relief.	3135	010	02841
	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
	AC05	Cabinet Back	3139	124	45221
	AC08	Chassis Tray	3139	124	31325
S	AC09	CRT, A80QCF340X34(N)	9301	904	59463
	AC10	Customer Control Buttons	3139	124	26472
S	AC12	Degaussing Coil.	2422	549	45334
	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
	AC16	Jack Panel Bracket	3139	124	45161
	AC17	ITV Safety/Warranty Instructions	3135	125	21431
	AC20	Cabinet Front Assembly	3121	237	53561
	AC20A	Cabinet Front.	3135	127	50031
	AC20C	Light Guide.	3139	124	26461
	AC20D	Nameplate.	3135	015	03571
	AC20E	Power Button	3139	124	26444
	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
	AC26	EPS Bracket.	3135	014	09221
	AC28	ITV Card Slot Cover.	3139	124	30571

32ST230P/35 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
0127	Socket Fuse	2422 088 00271	
0129	NTC Holder	3139 120 10151	
0136	IC-Spring	3104 301 22081	
0137	Spring	3139 121 24583	
0138	IC-Spring	3104 301 22081	
0139	Spring for Bracket	3122 121 24786	
0140	Spring	3139 121 24583	
0141	IC-Spring	3104 301 22081	
0152	Cable, DIPMate, 6 Pin, 560mm	3104 301 08411	
0153	Cable, 5 Pin, 560mm	3139 121 09041	
0211	2 Pin Connector	2422 025 16269	
0212	2 Pin Connector	2422 025 16375	
0213	2 Pin Connector	2422 025 16374	
0217	6 Pin Connector	2422 025 12482	
0218	A/V Jack	2422 026 04742	
0220	5 Pin Connector	2422 025 04853	
0221	2 Pin Connector	2422 025 15503	
0222	2 Pin Connector	2422 025 10646	
0223	A/V Jack	2422 026 05236	
0225	SVHS Jack	2422 026 04926	
0227	6 Pin Connector	2422 025 15849	
0229	3 Pin Connector	2412 020 00725	
0240	7 Pin Connector	2422 025 11244	
0242	7 Pin Connector	2422 025 17042	
0243	6 Pin Connector	2422 025 04854	
0244	5 Pin Connector	2422 025 04853	
0245	6 Pin Connector	2422 025 04854	
0251	3 Pin Connector	2412 020 00725	
S 0254	9 Pin CRT Socket	2422 500 80076	
0259	5 Pin Connector	2422 025 15848	
0262	3 Pin Connector	2422 025 16937	
0267	3 Pin Connector	2412 020 00725	
0280	4 Pin Connector	2422 025 15847	
S 1000	Tuner, V+U, PLL	2422 542 90108	
1002	SAW Filter, 45.75MHz	2422 549 44518	
1200	Filter, Ceramic, 4MHz5	2422 549 40807	
S 1500	Fuse, 4A, 250V, IEC	2422 086 10914	
S 1515	Relay, 5 Amp, 12V	2422 132 07444	
1600	Tact Switch	2422 128 02742	
1601	Tact Switch	2422 128 02742	
1602	Tact Switch	2422 128 02742	
1603	Tact Switch	2422 128 02742	
1606	Tact Switch	2422 128 02742	
1660	Crystal, 12MHz000	2422 543 01203	
1810	6 Pin Connector	2422 025 16607	
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A	2422 543 00842	
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710	
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	
2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740	
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	
2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	
2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	
2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220	
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	
2245	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	
2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	
2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2330	Cap, 100n, 10%, 250v, Metalized Polyest er	2222 368 90177	
2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445	
2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495	
2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320	
2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610	
2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559	
2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040	
2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445	
2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552	
2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710	
2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	
2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210	
2415	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	
2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	
2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730	
2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	
2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139	
2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530	
2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
2457	Cap, 470n, 5%, 250v, Metalized Polyprop ylene	2022 333 00086	
2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331	
2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810	
2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	
S 2463	Cap, 1n2, 10%, 2000v, Ceramic	2020 558 90488	
2464	Cap, 2u2, 5%, 160v, Metalized Polyprop ylene	2222 479 90042	
S 2465	Cap, 13n, 5%, 1600v, Polypropylene	2020 301 90254	
2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219	
2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218	
2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222 365 75154	
2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222 365 75104	
2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220	
2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220	
2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720	
2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586	
2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710	
2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234	
2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856	
2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577	
2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854	
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049	
2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577	
2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020	
S 2500	Cap, 470n, 20%, 275v, Metalized Polypro pylene	2022 330 00018	
2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220	
2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220	
2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647	
2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220	
2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710	
2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710	
S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172	
2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	
2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	
2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	
S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489	
2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710	
2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220	
2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	
2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	
2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472	
2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654	
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020	
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353	
2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	
2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790	
2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	
2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856	
2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240	
2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010	

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glass	3198 021 35610
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3250	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2837	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2841	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2843	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3334	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film.	3198 013 01020
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X	34. 2306 204 03108
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X	34. 2306 204 03108
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34 2306 204 03278
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3343	Res, 1K5, 20%, 1/2W, Carbon Film.	3198 013 01520
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03390
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03310
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3401	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3403	Res, 100K, 5%, 1/6W, Carbon Film.	3198 011 01040
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . . .	3198 021 31050
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01810
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 08210
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film.	3198 011 06890
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. . .	3198 021 31520	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film.	3198 011 03390
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. . .	3198 021 38220	3451	Res, 2R7, 5%, 1/3W, Metal Film.	2306 204 03278
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06890	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . . .	3198 021 31020	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	S 3455	Res, 6R8, 5%, 1/3W, Metal Film.	3198 012 26880
3104	Res, 220K, 5%, 1/16W, Metalized Glass. . .	3198 021 32240	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	S 3459	Res, 15K, 5%, 1/3W, Metal Film.	3198 012 21530
3106	Res, 220K, 5%, 1/16W, Metalized Glass. . .	3198 021 32240	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film.	3198 011 03390
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01810
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198 011 07590	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06810	3470	Res, 390K, 5%, 1/8W, Metalized Glass. . . .	2322 730 61394
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06810	3471	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 06810	3472	Res, 3R9, 1%, 3/5W, Metal Film.	2312 915 13908
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3473	Res, 5R6, 1%, 3/5W, Metal Film.	2312 915 15608
3132	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film.	3198 011 07590	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. . . .	3198 021 52720
3182	Wire Jumper.	3198 036 90010	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3184	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3481	Res, 15K, 1%, 3/5W, Metal Film.	2312 915 11503
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	3482	Res, 6K8, 1%, 3/5W, Metal Film.	2312 915 16802
3186	Res, 47K, 5%, 1/16W, Metalized Glass. . . .	3198 021 34730	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01510	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film.	3198 012 33390
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 03910	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . . .	3198 021 51020
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . . .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film.	2306 204 03228
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3494	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3206	Res, 270K, 5%, 1/16W, Metalized Glass. . .	2322 702 60274	3495	Res, 22K, 5%, 1/16W, Metalized Glass. . .	3198 021 32230
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020			
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210			
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890			

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	3843	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220
3498	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020
3499	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3500	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335	3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3501	Res, 3M3, 5%, 1/2W, Metalized Glass.	2322	242	13335	3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030
S 3504	Res, PTC, 3 ohm, 144V.	2122	663	00019	3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198	021	33320
3506	Res, 1M5, 5%, 1/2W, Metalized Glass.	2322	242	13155	3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030
3507	Surge Protector.	2422	549	43073	3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198	021	38220
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film.	3198	013	02210	4001	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
S 3510	Res, NTC, 4R7, 20%, 3W.	2122	612	00056	4002	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film.	3198	011	02710	4101	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass.	3198	021	51220	4102	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film.	3198	011	04780	4104	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198	021	53340	4126	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film.	2306	204	03101	4128	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass.	3198	021	55630	4181	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4209	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3526	Res, 0R1, 5%, 3/5W, Metal Film.	3198	012	11070	4216	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
S 3527	Res, 0R33, 5%, 3/5W, Metal Film.	3198	012	13370	4341	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3528	Res, Zero ohm, "Chip" Jumper.	3198	021	90020	4388	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3529	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4401	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3530	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4402	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass.	3198	021	54720	4430	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3532	Res, 2K2, 5%, 1/3W, Metal Film.	2306	204	03222	4431	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198	021	54710	4604	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	4608	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3543	Res, 82K, 1%, 3/5W, Metal Film.	2312	915	18203	4609	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass.	2322	734	64702	4614	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass.	2322	730	61274	4615	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass.	3198	021	51530	4616	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3552	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030	4617	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
S 3558	Res, 330 ohm, 5%, 1W, Metal Film.	3198	012	13310	4619	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4622	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3562	Res, 12K, 5%, 1/10W, Metalized Glass.	3198	021	51230	4623	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3563	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4691	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass.	3198	021	52220	4692	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass.	3198	021	55620	4693	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass.	3198	021	54730	4696	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198	021	53310	4824	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4826	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198	021	52240	4830	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4831	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4835	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4839	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4840	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220	4865	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710	4866	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	4867	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4869	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198	021	31010	4870	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198	011	06820	4871	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710	4872	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4873	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4874	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	4875	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4876	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198	021	34720	4879	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198	021	31030	4880	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198	021	32220	4881	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3632	Res, Zero ohm, "Chip" Jumper.	3198	021	90030	4882	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	4883	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	4884	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3639	Res, Zero ohm, "Chip" Jumper.	3198	021	90030	4885	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198	011	08220	4892	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4901	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass.	3198	021	53320	4903	Res, Zero ohm, "Chip" Jumper.	3198	021	90030
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	4906	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4924	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	4925	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520	4982	Res, Zero ohm, "Chip" Jumper.	3198	021	90020
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198	021	33310	5001	Coil, 27u, 10%.	3198	018	22790
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5002	Coil, 820n, 10%.	3198	018	18270
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198	021	32210	5201	Coil, 6u8, 5%.	3198	018	16880
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5202	Wire Jumper.	3198	036	90010
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5204	Fixed, Inductor, 100MHZ, 80 ohm.	3198	018	90020
3811	Res, 1K, 5%, 1/6W, Carbon Film.	3198	011	01020	5205	Fixed, Inductor, 100MHZ, 80 ohm.	3198	018	90020
3812	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5206	Fixed, Inductor, 100MHZ, 80 ohm.	3198	018	90020
3813	Res, 1K, 5%, 1/16W, Metalized Glass.	3198	021	31020	5241	Wire Jumper.	3198	036	90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5242	Coil, 10u, 5%.	3198	018	11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 22u for A80QCF340X34.	2422	535	97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5342	Coil, 47u for A80QCF330X34.	3198	018	24790
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5401	Coil, 1mH, 10%.	3198	018	71020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	S 5445	Transformer, PSLOT.	3128	138	21421
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5451	Coil, 33u, 10%.	3198	018	73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5452	Fixed, Inductor, 100MHZ, 80 ohm.	3198	018	90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198	021	31040	5457	Coil, Linear, DC12.	3128	138	55881
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198	021	37590	5461	Transformer, Signal Driver, SC10027-00	2422	531	02478
3831	Res, 47K, 5%, 1/16W, Metalized Glass.	3198	021	34730	5463	Coil, Choke.	3128	138	37021
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5471	Coil, 3u3, 20%.	3198	018	73380
3833	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5472	Coil, 3u3, 10%.	3198	018	23380
3837	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5480	Coil, 4u7, 5%.	2422	535	94213

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

S 5501	Mains Filter	2422	549	43432	7561	Transistor, NPN, PDTCL43ZT	9340	547	00215
S 5520	Transformer, SS39009-04.	2422	531	02459	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7602	IC, M24C16-WBN6.	9322	147	25682
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7606	Transistor, NPN, PDTCL43ZT	9340	547	00215
5561	Coil, 27u, 5%.	2422	535	95366	7802	IC, HEF4053BT.	9333	729	60653
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7803	IC, HEF4053BT.	9333	729	60653
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7804	Transistor, NPN, BC847B(COL)	3198	010	42030
5602	Coil, 5u6, 5%.	3198	018	15680	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682
5603	Coil, 5u6, 5%.	3198	018	15680	7901	IC, AN7522N PH	9322	181	41682
5604	Coil, 5u6, 5%.	3198	018	15680	9001	Wire Jumper.	3198	036	90010
5810	Coil, 10u, 10%.	3198	018	51090	9104	Wire Jumper.	3198	036	90010
5831	Coil, 6u8, 5%.	3198	018	16880	9171	Wire Jumper.	3198	036	90010
5832	Coil, 6u8, 5%.	3198	018	16880	9173	Wire Jumper.	3198	036	90010
5833	Coil, 6u8, 5%.	3198	018	16880	9175	Wire Jumper.	3198	036	90010
5835	Coil, 12u, 10%.	3198	018	31290	9181	Wire Jumper.	3198	036	90010
6001	Zener Diode, 33 volt	3198	010	23390	9182	Wire Jumper.	3198	036	90010
6201	Diode, Signal, BAS316.	3198	010	10630	9183	Wire Jumper.	3198	036	90010
6202	Diode, Signal, BAS316.	3198	010	10630	9192	Wire Jumper.	3198	036	90010
6206	Zener Diode, 6.8 volt	3198	020	56880	9193	Wire Jumper.	3198	036	90010
6331	Diode, Signal, BAV21	3198	010	10070	9311	Wire Jumper.	3198	036	90010
6332	Diode, Signal, BAS316.	3198	010	10630	9312	Wire Jumper.	3198	036	90010
6333	Diode, Signal, BAV21	3198	010	10070	9406	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21	3198	010	10070	9407	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9408	Wire Jumper.	3198	036	90010
6401	Zener Diode, 47 volt	3198	010	24790	9409	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9410	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9411	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt.	9331	668	30133	9412	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9413	Wire Jumper.	3198	036	90010
6460	Diode, Rect, DG3-7005L	9336	436	10682	9414	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9415	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9416	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9417	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9418	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9419	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9421	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9422	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9423	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9424	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9425	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9426	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9427	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9460	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9463	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9500	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9501	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9503	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9506	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9507	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9510	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9511	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9512	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9513	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9514	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010	9322	128	18682	9515	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9518	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9520	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9521	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9522	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9524	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85	9336	247	60133	9528	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9530	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9611	Coil, 27u, 10%.	3198	018	22790
6831	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9613	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9614	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9615	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57626	9616	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9618	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9619	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9622	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9623	Wire Jumper.	3198	036	90010
7400	Power FET, STP3NC60FP.	9322	157	37687	9624	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9626	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9627	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9628	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9629	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDTCL43ZT	9340	547	00215	9631	Wire Jumper.	3198	036	90010
7463	Transistor, NPN, BC327-25(COL)	3198	020	43430	9632	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9634	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9637	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9638	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9639	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1	9352	673	56112	9640	Wire Jumper.	3198	036	90010
7521	Power FET, QFPF9N50.	9322	187	16687	9641	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9642	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9643	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDTCL14ET	9340	310	10215	9647	Wire Jumper.	3198	036	90010
7542	Transistor, PNP, BC857B(COL)	3198	010	42150	9648	Wire Jumper.	3198	036	90010
7560	IC, LE33CZ	9322	106	11676	9650	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

9651	Wire Jumper.	3198	036	90010	CBA	EPS Module (ITV)	3139	137	22961
9652	Wire Jumper.	3198	036	90010	CBA	Main Chassis Assembly.	3139	188	04091
9654	Wire Jumper.	3198	036	90010	CBA	Interface Panel (ITV).	3139	188	04541
9655	Wire Jumper.	3198	036	90010					
9656	Wire Jumper.	3198	036	90010					
9657	Wire Jumper.	3198	036	90010					
9658	Wire Jumper.	3198	036	90010					
9659	Wire Jumper.	3198	036	90010					
9660	Wire Jumper.	3198	036	90010					
9661	Wire Jumper.	3198	036	90010					
9662	Wire Jumper.	3198	036	90010					
9663	Wire Jumper.	3198	036	90010					
9664	Wire Jumper.	3198	036	90010					
9665	Wire Jumper.	3198	036	90010					
9666	Wire Jumper.	3198	036	90010					
9667	Wire Jumper.	3198	036	90010					
9668	Wire Jumper.	3198	036	90010					
9669	Wire Jumper.	3198	036	90010					
9670	Wire Jumper.	3198	036	90010					
9671	Wire Jumper.	3198	036	90010					
9672	Coil, 22u, 10%	3198	018	22290					
9674	Wire Jumper.	3198	036	90010					
9675	Wire Jumper.	3198	036	90010					
9676	Wire Jumper.	3198	036	90010					
9678	Coil, 22u, 10%	3198	018	22290					
9679	Wire Jumper.	3198	036	90010					
9680	Wire Jumper.	3198	036	90010					
9681	Wire Jumper.	3198	036	90010					
9682	Wire Jumper.	3198	036	90010					
9685	Wire Jumper.	3198	036	90010					
9686	Wire Jumper.	3198	036	90010					
9687	Wire Jumper.	3198	036	90010					
9688	Wire Jumper.	3198	036	90010					
9689	Wire Jumper.	3198	036	90010					
9690	Wire Jumper.	3198	036	90010					
9691	Wire Jumper.	3198	036	90010					
9694	Wire Jumper.	3198	036	90010					
9695	Wire Jumper.	3198	036	90010					
9697	Wire Jumper.	3198	036	90010					
9698	Wire Jumper.	3198	036	90010					
9699	Wire Jumper.	3198	036	90010					
9821	Wire Jumper.	3198	036	90010					
9822	Wire Jumper.	3198	036	90010					
9825	Wire Jumper.	3198	036	90010					
9828	Wire Jumper.	3198	036	90010					
9829	Wire Jumper.	3198	036	90010					
9831	Wire Jumper.	3198	036	90010					
9832	Wire Jumper.	3198	036	90010					
9837	Wire Jumper.	3198	036	90010					
9838	Wire Jumper.	3198	036	90010					
9839	Wire Jumper.	3198	036	90010					
9846	Wire Jumper.	3198	036	90010					
9847	Wire Jumper.	3198	036	90010					
9849	Wire Jumper.	3198	036	90010					
9851	Wire Jumper.	3198	036	90010					
9856	Wire Jumper.	3198	036	90010					
9858	Wire Jumper.	3198	036	90010					
9859	Wire Jumper.	3198	036	90010					
9860	Wire Jumper.	3198	036	90010					
9862	Wire Jumper.	3198	036	90010					
9863	Wire Jumper.	3198	036	90010					
9864	Wire Jumper.	3198	036	90010					
9865	Wire Jumper.	3198	036	90010					
9867	Wire Jumper.	3198	036	90010					
9868	Wire Jumper.	3198	036	90010					
9869	Wire Jumper.	3198	036	90010					
9870	Wire Jumper.	3198	036	90010					
9871	Wire Jumper.	3198	036	90010					
9873	Wire Jumper.	3198	036	90010					
9874	Wire Jumper.	3198	036	90010					
9875	Wire Jumper.	3198	036	90010					
9876	Wire Jumper.	3198	036	90010					
9877	Wire Jumper.	3198	036	90010					
9878	Wire Jumper.	3198	036	90010					
9901	Wire Jumper.	3198	036	90010					
9902	Wire Jumper.	3198	036	90010					
9903	Wire Jumper.	3198	036	90010					
9904	Wire Jumper.	3198	036	90010					
9905	Wire Jumper.	3198	036	90010					
9911	Wire Jumper.	3198	036	90010					
9913	Wire Jumper.	3198	036	90010					
9914	Wire Jumper.	3198	036	90010					
9915	Wire Jumper.	3198	036	90010					
9919	Wire Jumper.	3198	036	90010					
9920	Wire Jumper.	3198	036	90010					
9991	Wire Jumper.	3198	036	90010					
9993	Wire Jumper.	3198	036	90010					
9996	Wire Jumper.	3198	036	90010					
9997	Wire Jumper.	3198	036	90010					
9998	Wire Jumper.	3198	036	90010					
CBA	Scan 4 Card Assembly	3121	237	53761					
CBA	SP/LS Module (Vertical) (ITV).	3139	127	27374					
Channel One Card Parts									
Channel One Card Parts									
2D 3 Line Comb Filter Parts									
2D 3 Line Comb Filter Parts									
0266	6 Pin Connector.	2422	025	16609					
2401	Cap, 47u, 20%, 16v, Electrolytic	3198	028	24790					
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198	028	44780					
2403	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040					
2407	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590					
2408	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690					
2409	Cap, 15p, 5%, 50v, Ceramic	3198	016	31590					
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198	017	44740					
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	34720					
2413	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2414	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2415	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2416	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2419	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2420	Cap, 180p, 5%, 50v, Ceramic.	3198	016	31810					
2425	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2426	Cap, 47u, 20%, 25v, Electrolytic	3198	025	34790					
2427	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010					
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010					
2430	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040					
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010					
2432	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2433	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2434	Cap, 10n, 10%, 50v, Ceramic.	3198	017	31030					
2435	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040					
2436	Cap, 100n, 10%, 16v, Ceramic	3198	017	31040					
2440	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090					
2442	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690					
2443	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690					
2450	Cap, 10u, 20%, 16v, Electrolytic	3198	028	21090					
2452	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690					
2453	Cap, 56p, 5%, 50v, Ceramic	3198	016	35690					
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610					
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030					
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198	021	31820					
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198	021	31520					
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210					
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198	021	36820					
3407	Res, 1K, 5%, 1/16W, Metalized Glass	3198	021	31020					
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210					
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122	118	05951					
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210					
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030					
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198	021	31030					
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322	704	68202					
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198	021	31230					
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210					
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710					
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198	021	31230					
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198	021	32720					
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198	021	35610					
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198	021	38210					
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198	021	34710					

32ST230P/35 (continued)

7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

	Net 1 Panel (part of Scan 4 Card Assembly)			
1000	F-Connector.	2422	031	10792
1001	Socket, Cinch, 1 Pin	2422	026	05003
1002	5 Pin Connector.	2422	025	12708
2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2001	Cap, 39p, 5%, 50v, Ceramic	3198	016	03990
2002	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2003	Cap, 39p, 5%, 50v, Ceramic	3198	016	03990
2004	Cap, 100n, 10%, 25v, Ceramic	2238	910	15649
2005	Cap, 270p, 5%, 50v, Ceramic	3198	016	02710
2006	Cap, 390p, 5%, 50v, Ceramic	3198	016	03910
2007	Cap, 33p, 5%, 50v, Ceramic	3198	016	03390
2008	Cap, 100p, 5%, 50v, Ceramic	3198	016	01010
2009	Cap, 10p, 5%, 50v, Ceramic	3198	016	01090
2010	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2011	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2012	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2013	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2015	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
3000	Res, 10k, 5%	3198	021	51030
3001	Res, 10k, 5%	3198	021	51030
3002	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198	021	54790
3003	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3004	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3005	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3006	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3007	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3008	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720
3009	Res, 47k, 5%	3198	021	54730
3011	Res, 10k, 5%	3198	021	51030
3012	Res, 47 ohm, 5%, 1/10W, Metalized Glass	3198	021	54790
5000	Fixed Inductor, 0.15uH, 10%.	3198	018	31570
5001	Fixed Inductor, 0.15uH, 10%.	3198	018	31570
5002	Fixed Inductor, 0.68uH, 10%.	3198	018	36870
5003	Fixed Inductor, 2.2uH, 5%.	2422	535	96509
5004	Fixed Inductor, 10uH, 10%.	3198	018	31090
5005	Inductor, Fixed 22U, 20%	3198	018	32290
5006	Fixed Inductor, 4.7uH., 10%.	3198	018	34780
6000	Diode, Signal, BAS216.	9340	255	30115
6001	Diode, Signal, BAS216.	9340	255	30115
6002	Diode, Signal, BAS216.	9340	255	30115
7000	IC, NE592/N8	9337	334	80602
7001	Transistor, Signal, BC847B	9335	895	90215
CBA	Net 1 Panel (part of Scan 4 Card Assembly).	3135	127	10151

Scan 4 Card (part of Scan 4 Card Assembly)

	Scan 4 Card (part of Scan 4 Card Assembly)			
1000	Connector, 15 Pin.	2422	025	16857
1001	Crystal, Resonator, 20M140	2422	543	01196
1002	SOC MDIN H 4P F YKF51 B	2422	026	05133
1003	SOC CINCH H 4P F WHRD B	2422	026	04402
1005	Resonator Crystal, 14M31818, 20P	2422	543	00904
1010	Connector, 32 Pin.	3135	010	03541
1011	Crystal, Resonator, 12MHz, 20 Pin.	2422	543	00488
1012	Connector, 5 Pin	2422	025	12708
2000	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2001	Cap, 82p, 5%, 50v, Ceramic	3198	016	08290
2002	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2003	Cap, 15p, 5%, 50v, Ceramic	3198	016	01590
2004	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2005	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2006	Cap, 82p, 5%, 50v, Ceramic	3198	016	08290
2007	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2008	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2009	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510
2010	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080

2011	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2012	Cap, 15p, 5%, 50v, Ceramic	3198	016	01590
2013	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2014	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510
2015	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2016	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2017	Cap, 10u, 20%, 25V, Electrolytic	2020	004	90288
2018	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2019	Cap, 15p, 5%, 50v, Ceramic	3198	016	01590
2020	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2021	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2022	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510
2023	Cap, 270p, 5%, 50v, Ceramic.	3198	016	02710
2024	Cap, 82p, 5%, 50v, Ceramic	3198	016	08290
2025	Cap, 47p, 5%, 50v, Ceramic	3198	016	04790
2026	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2059	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2060	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2061	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2062	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2063	Cap, 4u7, +80/-20%, 10v, Ceramic	2020	552	96305
2064	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2065	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2066	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2067	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2068	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2070	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2071	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2072	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2073	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2074	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2075	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2076	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2077	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2078	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2079	Cap, 1n, 10%, 50v, Ceramic	3198	017	01020
2080	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2081	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2082	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2083	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2084	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2085	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2086	Cap, 1n, 10%, 50v, Ceramic	3198	017	01020
2087	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2088	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2089	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2090	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2091	Cap, 4u7, 20%, 35v, Electrolytic	3198	030	74780
2092	Cap, 1n, 10%, 50v, Ceramic	3198	017	01020
2093	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2094	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2095	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2096	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2097	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2098	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2099	Cap, 470u, 20%, 16v, Electrolytic.	3198	025	24710
2100	Cap, 47u, 20%, 25v, Electrolytic	3198	025	34790
2101	Cap, 1u, 20%, 35v, Electrolytic.	2020	004	90282
2102	Cap, 1u, 20%, 35v, Electrolytic.	2020	004	90282
2106	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2107	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2111	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2112	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2113	Cap, 1u, 20%, 50v, Electrolytic.	3198	030	81080
2114	Cap, 470u, 20%, 25v, Electrolytic.	2020	012	93457
2115	Cap, 10u, 20%, 10v, Electrolytic	3198	032	34130
2116	Cap, 10u, 20%, 10v, Electrolytic	3198	032	34130
2118	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2119	Cap, 22p, 5%, 50v, Ceramic	3198	016	02290
2120	Cap, 680p, 10%, 50v, Ceramic	3198	017	06810
2121	Cap, 680p, 10%, 50v, Ceramic	3198	017	06810
2122	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2123	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2124	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2125	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2126	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2127	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2129	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2130	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2131	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2132	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2134	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2135	Cap, 100n, 10%, 16v, Ceramic	3198	017	01040
2136	Cap, 100p, 5%, 50v, Ceramic	3198	016	01010
2137	Cap, 100p, 5%, 50v, Ceramic	3198	016	01010
2139	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2140	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2141	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810
2142	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810
3001	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030
3002	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198	021	52210
3003	Res, 1M, 5%, 1/10W, Metalized Glass.	3198	021	51050

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

3004	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	5001	Coil, 820n	3198	018	38270
3005	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590	5002	Coil, 1u2.	3198	018	31280
3006	Res, 1K8, 5%, 1/10W, Metalized Glass .	3198	021	51820	5003	Coil, 1u2.	3198	018	31280
3007	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	5004	Coil, 1u2.	3198	018	31280
3008	Res, 150K, 5%, 1/10W, Metalized Glass..	3198	021	51540	5010	Coil, 820n	3198	018	38270
3009	Res, 13K, 5%, 1/8W, Metalized Glass. .	2322	730	61133	5012	Coil, 820n	3198	018	38270
3010	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	5014	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590
3011	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	5015	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3012	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5016	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3013	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	5017	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3014	Res, 150K, 5%, 1/10W, Metalized Glass..	3198	021	51540	5018	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3015	Res, 13K, 5%, 1/8W, Metalized Glass. .	2322	730	61133	5019	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3016	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	5020	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3017	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	5021	Coil, 82u.	2422	535	95408
3018	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	5023	Inductor, Fixed, 100MHz, 30 ohm. . . .	3198	018	90060
3019	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	5024	Coil, 1u8.	3198	018	31880
3020	Res, 150K, 5%, 1/10W, Metalized Glass..	3198	021	51540	6001	Diode, Signal, BAV99	3198	010	10620
3021	Res, 13K, 5%, 1/8W, Metalized Glass. .	2322	730	61133	6002	Diode, Signal, BAV99	3198	010	10620
3022	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	6003	Diode, Signal, BAV99	3198	010	10620
3023	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198	021	55610	6004	Diode, Signal, BAV99	3198	010	10620
3024	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	6005	Diode, Signal, BAV99	3198	010	10620
3025	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	6006	Diode, Signal, BAV99	3198	010	10620
3026	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	6009	Diode, Signal, BAV99	3198	010	10620
3027	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	6010	Diode, Signal, BAV99	3198	010	10620
3028	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	6011	Diode, Signal, BAS16WS	9322	031	99685
3029	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	6012	Diode, Signal, BAS16WS	9322	031	99685
3030	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	6013	Diode, Signal, BAS16WS	9322	031	99685
3031	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	6014	Diode, Signal, BAS16WS	9322	031	99685
3033	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	6015	Diode, Signal, BAS16WS	9322	031	99685
3049	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590	6016	Diode, Signal, BAS16WS	9322	031	99685
3052	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	6017	Diode, Rect, MBRS140.	9322	070	26668
3053	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	6018	Zener Diode, 6.8 volt.	9340	386	40115
3056	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	6019	Diode, Signal, BAS316.	3198	010	10630
3057	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590	7000	F.E.T. Signal, BSN20	9340	125	00235
3058	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198	021	53910	7001	IC, LM393D	9339	575	30668
3059	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	7002	IC, LM393D	9339	575	30668
3060	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	7003	Transistor, NPN, BC847B.	3198	010	42030
3061	Res, 1M, 5%, 1/10W, Metalized Glass. .	3198	021	51050	7004	Transistor, NPN, BC847B.	3198	010	42030
3062	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198	021	52210	7005	Transistor, NPN, BC847B.	3198	010	42030
3063	Res, 820 ohm, 5%, 1/10W, Metalized Glas	3198	021	58210	7006	Transistor, PNP, BC857B.	3198	010	42150
3064	Res, 220 ohm, 5%, 1/10W, Metalized Glas	3198	021	52210	7007	FET Signal, BSN20.	9340	125	00235
3065	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7010	FET Signal, BSN20.	9340	125	00235
3066	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7011	IC, FS401AC.	9322	107	99671
3073	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7012	IC, HY57V161610DTC-10.	9322	161	58668
3074	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7013	FET Signal, BSN20.	9340	125	00235
3082	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7014	IC SM P87C51RD+4A SCAN 4	3135	120	50111
3085	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7016	IC, 74HC4066D.	9337	144	20653
3089	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	7018	IC, M24C04-WMN6.	9322	122	33668
3090	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7020	Transistor, PNP, BC857B.	3198	010	42150
3091	Res, Network, 33 ohm X 4, 5%, SM AVR24	2350	035	10339	7021	Transistor, NPN, BC847B.	3198	010	42030
3097	Res, 150 ohm, 5%, 1/10W, Metalized Glas	3198	021	51510	7022	IC, MC33269D-3.3	9322	106	88668
3099	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	7023	IC, MC33269D-3.3	9322	106	88668
3100	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	7024	IC, LM2596S-ADJ.	9322	130	86685
3101	Res, 10K, 5%, 1/10W, Metalized Glass .	3198	021	51030	7028	FET Signal, BSH103	9340	547	13215
3102	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021	57590	7036	FET Signal, BSH103	9340	547	13215
3103	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	7037	Transistor, NPN, BC847B.	3198	010	42030
3104	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	CBA	Scan 4 Card (part of Scan 4 Card Assemb ly).	3135	127	10281
3105	Res, 150 ohm, 5%, 1/10W, Metalized Glas	3198	021	51510	Side Jack Panel Parts				
3106	Res, 270 ohm, 5%, 1/10W, Metalized Glas	3198	021	52710	Side Jack Panel Parts				
3108	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	Subwoofer Panel Parts				
3109	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	Subwoofer Panel Parts				
3110	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	Top Control Panel Parts				
3111	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	Top Control Panel Parts				
3112	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198	021	54720	Cabinet & Accessory Parts				
3113	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	Cabinet & Accessory Parts				
3114	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198	021	52720	S AC01	AC Cord.	3135	010	04323
3116	Res, 1K8, 5%, 1/10W, Metalized Glass .	3198	021	51820	AC02	AC Cord Strain Relief.	3135	010	02841
3117	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
3118	Res, 6K8, 5%, 1/10W, Metalized Glass .	3198	021	56820	AC04	Batteries for Remote Control Transmitt	9299	000	65263
3119	Res, 100K, 5%, 1/10W, Metalized Glass..	3198	021	51040	AC05	Cabinet Back	3139	124	45221
3120	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	AC08	Chassis Tray	3139	124	31325
3121	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	S AC09	CRT, A80QCF340X34(N)	9301	904	59463
3122	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	AC10	Customer Control Buttons	3139	124	26472
3124	Res, 910 ohm, 1%, 1/8W, Metalized Glass	2322	734	69101	S AC12	Degaussing Coil.	2422	549	45334
3129	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC15	Holder, Degaussing Coil (4 Used) . . .	3135	013	01661
3130	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC16	Jack Panel Bracket	3139	124	45161
3132	Res, 100K, 5%, 1/10W, Metalized Glass..	3198	021	51040	AC17	Owner's Manual, Scan 4 Card.	3135	125	21341
3133	Res, 100K, 5%, 1/10W, Metalized Glass..	3198	021	51040	AC17	ITV Safety/Warranty Instructions . . .	3135	125	21431
3135	Res, 22K, 5%, 1/10W, Metalized Glass .	3198	021	52230	AC20	Cabinet Front Assembly	3121	237	53561
3136	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC20A	Cabinet Front.	3135	127	50031
3137	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC20C	Light Guide.	3139	124	26461
3138	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC20D	Nameplate.	3135	015	03571
3139	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC20E	Power Button	3139	124	26444
3140	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
3141	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198	021	51020	AC26	EPS Bracket.	3135	014	09221
3142	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198	021	51520	AC30	Scan 3 VGA Adapter	3135	017	07401
3143	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198	021	51010	AC31	Scan 4 Card Cover.	3139	124	47461
4004	Res, Zero ohm, 'Chip' Jumper	3198	021	90020					
4005	Res, Zero ohm, 'Chip' Jumper	3198	021	90020					
4006	Res, Zero ohm, 'Chip' Jumper	3198	021	90020					
4007	Res, Zero ohm, 'Chip' Jumper	3198	021	90020					
4008	Res, Zero ohm, 'Chip' Jumper	3198	021	90020					

S = Safety Part Be sure to use exact replacement part.

32ST230P/35 (continued)

REMOTE Remote Control Transmitter, RC2572/01. 3139 228 88691

36ST220P/35 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts			
	Socket Fuse	2422 088 00271	
0127	NTC Holder	3139 120 10151	
0129	IC-Spring	3104 301 22081	
0136	Spring	3139 121 24583	
0137	IC-Spring	3104 301 22081	
0138	Spring for Bracket	3122 121 24786	
0139	Spring	3139 121 24583	
0140	IC-Spring	3104 301 22081	
0141	Cable, DIPMate, 6 Pin, 560mm	3104 301 08411	
0152	Cable, 5 Pin, 560mm	3139 121 09041	
0153	2 Pin Connector	2422 025 16269	
0211	2 Pin Connector	2422 025 16375	
0212	2 Pin Connector	2422 025 16374	
0213	6 Pin Connector	2422 025 12482	
0217	A/V Jack	2422 026 04742	
0218	5 Pin Connector	2422 025 04853	
0220	2 Pin Connector	2422 025 15503	
0221	2 Pin Connector	2422 025 10646	
0222	A/V Jack	2422 026 05236	
0223	SVHS Jack	2422 026 04926	
0225	6 Pin Connector	2422 025 15849	
0227	3 Pin Connector	2412 020 00725	
0229	7 Pin Connector	2422 025 11244	
0240	7 Pin Connector	2422 025 17042	
0242	6 Pin Connector	2422 025 04854	
0243	5 Pin Connector	2422 025 04853	
0244	6 Pin Connector	2422 025 04854	
0245	3 Pin Connector	2412 020 00725	
0251	10 Pin CRT Socket	2422 500 80079	
S 0254	5 Pin Connector	2422 025 15848	
0259	3 Pin Connector	2422 025 16937	
0262	3 Pin Connector	2412 020 00725	
0267	4 Pin Connector	2422 025 15847	
0280	Tuner, V+U, PLL	2422 542 90108	
S 1000	SAW Filter, 45.75MHz	2422 549 44518	
1002	Filter, Ceramic, 4MHz5	2422 549 40807	
1200	Fuse, 4A, 250V, IEC	2422 086 10914	
S 1500	Relay, 5 Amp, 12V	2422 132 07444	
S 1515	Tact Switch	2422 128 02742	
1600	Tact Switch	2422 128 02742	
1601	Tact Switch	2422 128 02742	
1602	Tact Switch	2422 128 02742	
1603	Tact Switch	2422 128 02742	
1606	Tact Switch	2422 128 02742	
1660	Crystal, 12MHz000	2422 543 01203	
1810	6 Pin Connector	2422 025 16607	
1831	Crystal, Resonator, 18MHz432, 12 Pin, H C49/U A	2422 543 00842	
2004	Cap, 47n, 10%, 50v, Ceramic	3198 024 44730	
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2006	Cap, 470u, 20%, 16v, Electrolytic	3198 025 24710	
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2008	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	
2009	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198 017 24740	
2102	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2103	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2104	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2111	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2112	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2113	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2123	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198 021 57590	
2131	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2133	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2135	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2136	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2181	Cap, 22p, 5%, 50v, Ceramic	3198 016 32290	
2182	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2183	Cap, 330p, 10%, 50v, Ceramic	3198 017 33310	
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 41040	
2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198 017 44740	
2213	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2214	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2215	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2217	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	
2221	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2241	Cap, 1n5, 10%, 50v, Ceramic	3198 017 31520	
2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198 017 41050	
2243	Cap, 2n2, 10%, 50v, Ceramic	3198 017 32220	
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	
2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198 017 42240	
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2248	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2249	Cap, 22n, 10%, 25v, Ceramic	3198 017 32230	
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	
2252	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	
2253	Cap, 1n, 5%, 25v, Ceramic	3198 016 31020	
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	
2330	Cap, 100n, 10%, 250v, Metalized Polyester	2222 368 90177	
2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020 558 90445	
2340	Cap, 10u, 20%, 250v, Electrolytic	2020 012 93495	
2341	Cap, 3n3, 10%, 500v, Ceramic	3198 019 43320	
2342	Cap, 560p, 5%, 50v, Ceramic	3198 016 05610	
2343	Cap, 2n2, 10%, 2000v, Ceramic	2020 558 90559	
2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198 023 21040	
2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020 558 90445	
2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552	
2402	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710	
2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	
2405	Cap, 220u, 20%, 25v, Electrolytic	3198 025 32210	
2441	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	
2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730	
2444	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	
2450	Cap, 47u, 20%, 160v, Electrolytic	2020 021 91139	
2451	Cap, 15n, 10%, 50v, Polyester	3198 014 01530	
2452	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810	
2455	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
2456	Cap, 560n, 5%, 250v, Metalized Polypropylene	2022 333 00088	
2458	Cap, 2u2, 20%, 100v, Electrolytic	2020 021 91331	
2459	Cap, 680p, 10%, 500v, Ceramic	3198 019 46810	
2460	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	
S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482	
2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene	2222 479 90042	
S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020 301 90255	
2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219	
2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219	
2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154	
2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104	
2474	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220	
2475	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220	
2476	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720	
2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586	
2481	Cap, 470p, 10%, 500v, Ceramic	3198 019 44710	
2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234	
2485	Cap, 4u7, 20%, 250v, Electrolytic	2020 021 90856	
2486	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577	
2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854	
2488	Cap, 1000u, 20%, 16v, Electrolytic	2020 021 91049	
2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577	
2491	Cap, 1n, 10%, 500v, Ceramic	3198 019 41020	
S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene	2022 330 00018	
2501	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220	
2502	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220	
2503	Cap, 470u, 20%, 200v, Electrolytic	2020 024 90647	
2505	Cap, 2n2, 10%, 1000v, Ceramic	3198 019 52220	
2507	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710	
2508	Cap, 470p, 10%, 1000v, Ceramic	3198 019 64710	
S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020 554 90172	
2520	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	
2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	
2522	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	
S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020 558 90489	
2525	Cap, 470p, 10%, 50v, Ceramic	3198 017 04710	
2527	Cap, 2n2, 10%, 50v, Ceramic	3198 017 02220	
2528	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	
2540	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	
2541	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	
2560	Cap, 680p, 10%, 1000v, Ceramic	2020 558 90472	
2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654	
2562	Cap, 1n, 10%, 50v, Ceramic	3198 019 11020	
2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353	
2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
2568	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080	
2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790	
2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	
2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222 910 19856	
2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198 023 22240	
2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 31010	

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2837	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198 025 54780	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2841	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2843	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X	2306 204 03108
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33	2306 204 03278
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X	2306 204 03108
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	2306 204 03278
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
2902	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2908	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3451	Res, 8R2, 5%, Metal Film.	2306 204 03828
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3470	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. .	3198 011 06810	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3473	Res, 5R6, 1%, 3/5W, Metal Film.	2312 915 15608
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3182	Wire Jumper.	3198 036 90010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274			
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020			
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210			
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890			

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3507	Surge Protector	2422 549 43073	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5001	Coil, 27u, 10%	3198 018 22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5002	Coil, 820n, 10%	3198 018 18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5201	Coil, 6u8, 5%	3198 018 16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5202	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5241	Wire Jumper.	3198 036 90010
3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5341	Coil, 22u.	2422 535 97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 22u for A80QCF340X34	2422 535 97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 47u for A80QCF330X34	3198 018 24790
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5445	Transformer, PSLOT	3128 138 21421
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5457	Coil, Linear, DC12	3128 138 55881
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5461	Transformer, Signal Driver, SCI0015-00	2422 531 02465
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	5463	Coil, Choke.	3128 138 37021
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5471	Coil, 4u7, 20%	3198 018 74780

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

5472	Coil, 3u3, 10%	3198	018	23380	7542	Transistor, PNP, BC857B(COL)	3198	010	42150
5480	Coil, 39u, 10%	2422	535	97336	7560	IC, LE33CZ	9322	106	11676
S 5501	Mains Filter	2422	549	43432	7561	Transistor, NPN, PDMC143ZT	9340	547	00215
S 5520	Transformer, SS39009-04.	2422	531	02459	7580	Transistor, PNP, BC857B(COL)	3198	010	42150
5521	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7602	IC, M24C16-WBN6.	9322	147	25682
5560	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7606	Transistor, NPN, PDMC143ZT	9340	547	00215
5561	Coil, 27u, 5%.	2422	535	95366	7802	IC, HEF4053BT.	9333	729	60653
5562	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7803	IC, HEF4053BT.	9333	729	60653
5564	Fixed, Inductor, 100MHz, 50R.	3198	018	90010	7804	Transistor, NPN, BC847B(COL)	3198	010	42030
5602	Coil, 5u6, 5%.	3198	018	15680	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322	187	89682
5603	Coil, 5u6, 5%.	3198	018	15680	7901	IC, AN7522N PH	9322	181	41682
5604	Coil, 5u6, 5%.	3198	018	15680	9001	Wire Jumper.	3198	036	90010
5810	Coil, 10u, 10%	3198	018	51090	9104	Wire Jumper.	3198	036	90010
5831	Coil, 6u8, 5%.	3198	018	16880	9171	Wire Jumper.	3198	036	90010
5832	Coil, 6u8, 5%.	3198	018	16880	9173	Wire Jumper.	3198	036	90010
5833	Coil, 6u8, 5%.	3198	018	16880	9175	Wire Jumper.	3198	036	90010
5835	Coil, 12u, 10%	3198	018	31290	9181	Wire Jumper.	3198	036	90010
6001	Zener Diode, 33 volt	3198	010	23390	9182	Wire Jumper.	3198	036	90010
6201	Diode, Signal, BAS316.	3198	010	10630	9183	Wire Jumper.	3198	036	90010
6202	Diode, Signal, BAS316.	3198	010	10630	9192	Wire Jumper.	3198	036	90010
6206	Zener Diode, 6.8 volt.	3198	020	56880	9193	Wire Jumper.	3198	036	90010
6331	Diode, Signal, BAV21	3198	010	10070	9311	Wire Jumper.	3198	036	90010
6332	Diode, Signal, BAS316.	3198	010	10630	9312	Wire Jumper.	3198	036	90010
6333	Diode, Signal, BAV21	3198	010	10070	9406	Wire Jumper.	3198	036	90010
6335	Diode, Signal, BAV21	3198	010	10070	9407	Wire Jumper.	3198	036	90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312	915	11002	9408	Wire Jumper.	3198	036	90010
6401	Zener Diode, 47 volt	3198	010	24790	9409	Wire Jumper.	3198	036	90010
6445	Zener Diode, 10 volt	3198	020	51090	9410	Wire Jumper.	3198	036	90010
6447	Diode, Signal, 1N4148.	3198	010	10010	9411	Wire Jumper.	3198	036	90010
6448	Zener Diode, 6.2 volt.	9331	668	30133	9412	Wire Jumper.	3198	036	90010
6449	Diode, Signal, BAV99	3198	010	10620	9413	Wire Jumper.	3198	036	90010
6460	Diode, Rect, DGS-7005L	9336	436	10682	9414	Wire Jumper.	3198	036	90010
6461	Diode, Rect, RGP30J-L7004.	9338	617	60682	9415	Wire Jumper.	3198	036	90010
6462	Zener Diode, 9.1 volt.	9331	177	80133	9416	Wire Jumper.	3198	036	90010
6465	Diode, Signal, BAV21	3198	010	10070	9417	Wire Jumper.	3198	036	90010
6466	Diode, Signal, BAV21	3198	010	10070	9418	Wire Jumper.	3198	036	90010
6467	Diode, Signal, BAS316.	3198	010	10630	9419	Wire Jumper.	3198	036	90010
6468	Diode, Signal, BAS316.	3198	010	10630	9421	Wire Jumper.	3198	036	90010
6469	Diode, Rect, BYV95C.	9335	001	80133	9422	Wire Jumper.	3198	036	90010
6470	Diode, Signal, BAV99	3198	010	10620	9423	Wire Jumper.	3198	036	90010
6476	Zener Diode, 15 volt	3198	010	21590	9424	Wire Jumper.	3198	036	90010
6481	Zener Diode, 5.6 volt.	3198	010	25680	9425	Wire Jumper.	3198	036	90010
6482	Zener Diode, 9.1 volt.	9331	177	80133	9426	Wire Jumper.	3198	036	90010
6483	Zener Diode, 33 volt	3198	010	23390	9427	Wire Jumper.	3198	036	90010
6485	Diode, Rect, BYV95C.	9335	001	80133	9453	Wire Jumper.	3198	036	90010
6486	Diode, Rect, EGP20DL-5100.	9322	164	42682	9460	Wire Jumper.	3198	036	90010
6487	Diode, Rect, BYV95A.	9335	000	90133	9463	Wire Jumper.	3198	036	90010
6488	Diode, Rect, EGP20DL-5100.	9322	164	42682	9500	Wire Jumper.	3198	036	90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322	138	08667	9501	Wire Jumper.	3198	036	90010
6520	Diode, Rect, BYV95A.	9335	000	90133	9503	Wire Jumper.	3198	036	90010
6523	Diode, Signal, 1N4148.	3198	010	10010	9506	Wire Jumper.	3198	036	90010
6524	Diode, Rect, 1N5062.	3198	010	10120	9507	Wire Jumper.	3198	036	90010
6525	Diode, Rect, 1N5062.	3198	010	10120	9510	Wire Jumper.	3198	036	90010
6526	Zener Diode, 22 volt	3198	020	52290	9511	Wire Jumper.	3198	036	90010
6540	Zener Diode, 6.2 volt.	9331	668	30133	9512	Wire Jumper.	3198	036	90010
6541	Zener Diode, 10 volt	3198	020	51090	9513	Wire Jumper.	3198	036	90010
6560	Diode, Rect, BYV29X-500.	9340	555	59127	9514	Wire Jumper.	3198	036	90010
6561	Diode, Rect, SB340L-7010	9322	128	18682	9515	Wire Jumper.	3198	036	90010
6563	Diode, Signal, BAS316.	3198	010	10630	9516	Wire Jumper.	3198	036	90010
6565	Diode, Signal, BAV70	9331	849	10215	9518	Wire Jumper.	3198	036	90010
6566	Diode, Signal, 1N4148.	3198	010	10010	9520	Wire Jumper.	3198	036	90010
6569	Diode, Signal, BAS316.	3198	010	10630	9521	Wire Jumper.	3198	036	90010
6570	Zener Diode, 6.8 volt.	3198	020	56880	9522	Wire Jumper.	3198	036	90010
6580	Diode, Signal, BAS316.	3198	010	10630	9524	Wire Jumper.	3198	036	90010
6681	Diode, Signal, BAT85	9336	247	60133	9528	Wire Jumper.	3198	036	90010
6691	LED, LTL-10234WHCR	9322	185	69682	9530	Wire Jumper.	3198	036	90010
6692	IR Receiver.	9322	127	54667	9611	Coil, 27u, 10%	3198	018	22790
6831	Diode, Signal, 1N4148.	3198	010	10010	9612	Wire Jumper.	3198	036	90010
6901	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9613	Wire Jumper.	3198	036	90010
6904	Res, Zero ohm, "Chip" Jumper	3198	021	90020	9614	Wire Jumper.	3198	036	90010
7101	Transistor, NPN, BC847B(COL)	3198	010	42030	9615	Wire Jumper.	3198	036	90010
7200	IC, TDA9588H/N1/3I	4835	310	57626	9616	Wire Jumper.	3198	036	90010
7201	Transistor, NPN, BC847B(COL)	3198	010	42030	9618	Wire Jumper.	3198	036	90010
7204	Transistor, PNP, BC857B(COL)	3198	010	42150	9619	Wire Jumper.	3198	036	90010
7205	Transistor, PNP, BC857B(COL)	3198	010	42150	9622	Wire Jumper.	3198	036	90010
7330	IC, TDA6107JF/N3	9352	713	37112	9623	Wire Jumper.	3198	036	90010
7400	Power FET, IR.	9322	053	35687	9624	Wire Jumper.	3198	036	90010
7441	Transistor, PNP, BC857B(COL)	3198	010	42150	9626	Wire Jumper.	3198	036	90010
7443	Transistor, PNP, BC557B(COL)	3198	020	40110	9627	Wire Jumper.	3198	036	90010
7460	Transistor, NPN, BU4508DX.	9340	550	92127	9628	Wire Jumper.	3198	036	90010
7461	Transistor, NPN, BC337-25(COL)	3198	020	43530	9629	Wire Jumper.	3198	036	90010
7462	Transistor, NPN, PDMC143ZT	9340	547	00215	9631	Wire Jumper.	3198	036	90010
7463	Transistor, PNP, BC327-25(COL)	3198	020	43430	9632	Wire Jumper.	3198	036	90010
7471	IC, TDA8359J/N2.	9352	701	64112	9634	Wire Jumper.	3198	036	90010
7480	Transistor, NPN, BD135	3198	020	41010	9637	Wire Jumper.	3198	036	90010
7482	Transistor, NPN, BD135	3198	020	41010	9638	Wire Jumper.	3198	036	90010
S 7515	Optical Coupler, TCET1103(G)	9322	140	14667	9639	Wire Jumper.	3198	036	90010
7520	IC, TEA1507P/N1.	9352	673	56112	9640	Wire Jumper.	3198	036	90010
7521	Power FET, FQPF9N50.	9322	187	16687	9641	Wire Jumper.	3198	036	90010
7522	Transistor, NPN, BC847B(COL)	3198	010	42030	9642	Wire Jumper.	3198	036	90010
7540	Transistor, NPN, BC547B(COL)	3198	020	40030	9643	Wire Jumper.	3198	036	90010
7541	Transistor, NPN, PDMC114ET	9340	310	10215	9647	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

36ST220P/35 (continued)

9648	Wire Jumper.	3198 036 90010	CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
9650	Wire Jumper.	3198 036 90010	CBA	EPS Module (ITV)	3139 137 22961
9651	Wire Jumper.	3198 036 90010	CBA	Main Chassis Assembly.	3139 187 26761
9652	Wire Jumper.	3198 036 90010	CBA	Interface Panel (ITV).	3139 188 04541
9654	Wire Jumper.	3198 036 90010			
9655	Wire Jumper.	3198 036 90010			
9656	Wire Jumper.	3198 036 90010			
9657	Wire Jumper.	3198 036 90010			
9658	Wire Jumper.	3198 036 90010			
9659	Wire Jumper.	3198 036 90010			
9660	Wire Jumper.	3198 036 90010			
9661	Wire Jumper.	3198 036 90010			
9662	Wire Jumper.	3198 036 90010			
9663	Wire Jumper.	3198 036 90010			
9664	Wire Jumper.	3198 036 90010			
9665	Wire Jumper.	3198 036 90010			
9666	Wire Jumper.	3198 036 90010			
9667	Wire Jumper.	3198 036 90010			
9668	Wire Jumper.	3198 036 90010			
9669	Wire Jumper.	3198 036 90010			
9670	Wire Jumper.	3198 036 90010			
9671	Wire Jumper.	3198 036 90010			
9672	Coil, 22u, 10%	3198 018 22290			
9674	Wire Jumper.	3198 036 90010			
9675	Wire Jumper.	3198 036 90010			
9676	Wire Jumper.	3198 036 90010			
9678	Coil, 22u, 10%	3198 018 22290			
9679	Wire Jumper.	3198 036 90010			
9680	Wire Jumper.	3198 036 90010			
9681	Wire Jumper.	3198 036 90010			
9682	Wire Jumper.	3198 036 90010			
9685	Wire Jumper.	3198 036 90010			
9686	Wire Jumper.	3198 036 90010			
9687	Wire Jumper.	3198 036 90010			
9688	Wire Jumper.	3198 036 90010			
9689	Wire Jumper.	3198 036 90010			
9690	Wire Jumper.	3198 036 90010			
9691	Wire Jumper.	3198 036 90010			
9694	Wire Jumper.	3198 036 90010			
9695	Wire Jumper.	3198 036 90010			
9697	Wire Jumper.	3198 036 90010			
9698	Wire Jumper.	3198 036 90010			
9699	Wire Jumper.	3198 036 90010			
9821	Wire Jumper.	3198 036 90010			
9822	Wire Jumper.	3198 036 90010			
9825	Wire Jumper.	3198 036 90010			
9828	Wire Jumper.	3198 036 90010			
9829	Wire Jumper.	3198 036 90010			
9831	Wire Jumper.	3198 036 90010			
9832	Wire Jumper.	3198 036 90010			
9837	Wire Jumper.	3198 036 90010			
9838	Wire Jumper.	3198 036 90010			
9839	Wire Jumper.	3198 036 90010			
9846	Wire Jumper.	3198 036 90010			
9847	Wire Jumper.	3198 036 90010			
9849	Wire Jumper.	3198 036 90010			
9851	Wire Jumper.	3198 036 90010			
9856	Wire Jumper.	3198 036 90010			
9858	Wire Jumper.	3198 036 90010			
9859	Wire Jumper.	3198 036 90010			
9860	Wire Jumper.	3198 036 90010			
9862	Wire Jumper.	3198 036 90010			
9863	Wire Jumper.	3198 036 90010			
9864	Wire Jumper.	3198 036 90010			
9865	Wire Jumper.	3198 036 90010			
9867	Wire Jumper.	3198 036 90010			
9868	Wire Jumper.	3198 036 90010			
9869	Wire Jumper.	3198 036 90010			
9870	Wire Jumper.	3198 036 90010			
9871	Wire Jumper.	3198 036 90010			
9873	Wire Jumper.	3198 036 90010			
9874	Wire Jumper.	3198 036 90010			
9875	Wire Jumper.	3198 036 90010			
9876	Wire Jumper.	3198 036 90010			
9877	Wire Jumper.	3198 036 90010			
9878	Wire Jumper.	3198 036 90010			
9901	Wire Jumper.	3198 036 90010			
9902	Wire Jumper.	3198 036 90010			
9903	Wire Jumper.	3198 036 90010			
9904	Wire Jumper.	3198 036 90010			
9905	Wire Jumper.	3198 036 90010			
9911	Wire Jumper.	3198 036 90010			
9913	Wire Jumper.	3198 036 90010			
9914	Wire Jumper.	3198 036 90010			
9915	Wire Jumper.	3198 036 90010			
9919	Wire Jumper.	3198 036 90010			
9920	Wire Jumper.	3198 036 90010			
9991	Wire Jumper.	3198 036 90010			
9993	Wire Jumper.	3198 036 90010			
9996	Wire Jumper.	3198 036 90010			
9997	Wire Jumper.	3198 036 90010			
9998	Wire Jumper.	3198 036 90010			

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030

36ST220P/35 (continued)

7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	04323
AC02	AC Cord Strain Relief.	3135	010	02841
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45211
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A90AKB50X07(V).	9322	186	37682
AC10	Customer Control Buttons	3139	124	26472
S AC12	Degaussing Coil.	2422	549	43972
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01651
AC16	Jack Panel Bracket	3139	124	45161
AC17	ITV Safety/Warranty Instructions	3135	125	21431
AC20	Cabinet Front Assembly	3121	237	52412
AC20A	Cabinet Front.	3135	127	50041
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	26444
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC26	EPS Bracket.	3135	014	09221
AC28	ITV Card Slot Cover.	3139	124	30571
ITV	Institutional Interconnect Device (Model 1 36ST230P/35 Only).	00SC	N4N	FN/35

36ST230P/35 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts							
	Main Chassis Parts						
0127	Socket Fuse	2422	088 00271	2217	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0129	NTC Holder	3139	120 10151	2219	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
0136	IC-Spring	3104	301 22081	2220	Cap, 470n, 10%, 50v, Polyester	3198	014 04740
0137	Spring	3139	121 24583	2221	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0138	IC-Spring	3104	301 22081	2241	Cap, 1n5, 10%, 50v, Ceramic	3198	017 31520
0139	Spring for Bracket	3122	121 24786	2242	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050
0140	Spring	3139	121 24583	2243	Cap, 2n2, 10%, 50v, Ceramic	3198	017 32220
0141	IC-Spring	3104	301 22081	2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222	370 76104
0152	Cable, DIPMate, 6 Pin, 560mm	3104	301 08411	2245	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240
0153	Cable, 5 Pin, 560mm	3139	121 09041	2247	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
0211	2 Pin Connector	2422	025 16269	2248	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230
0212	2 Pin Connector	2422	025 16375	2249	Cap, 2u2, 20%, 50v, Electrolytic	3198	025 52280
0213	2 Pin Connector	2422	025 16374	2252	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
0217	6 Pin Connector	2422	025 12482	2253	Cap, 1n, 5%, 25v, Ceramic	3198	016 31020
0218	A/V Jack	2422	026 04742	2254	Res, Zero ohm, "Chip" Jumper	3198	021 90020
0220	5 Pin Connector	2422	025 04853	2330	Cap, 100n, 10%, 250v, Metalized Polyest	er	2222 368 90177
0221	2 Pin Connector	2422	025 15503	2331	Cap, 10n, +80/-20% 1000v, Ceramic	2020	558 90445
0222	2 Pin Connector	2422	025 10646	2340	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495
0223	A/V Jack	2422	026 05236	2341	Cap, 3n3, 10%, 500v, Ceramic	3198	019 43320
0225	SVHS Jack	2422	026 04926	2342	Cap, 560p, 5%, 50v, Ceramic	3198	016 05610
0227	6 Pin Connector	2422	025 15849	2343	Cap, 2n2, 10%, 2000v, Ceramic	2020	558 90559
0229	3 Pin Connector	2412	020 00725	2344	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 21040
0240	7 Pin Connector	2422	025 11244	2345	Cap, 10n, +80/-20%, 1000v, Ceramic	2020	558 90445
0242	7 Pin Connector	2422	025 17042	2401	Cap, 2u2, 20%, 50v, Electrolytic	2020	021 90552
0243	6 Pin Connector	2422	025 04854	2402	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
0244	5 Pin Connector	2422	025 04853	2404	Cap, 47u, 20%, 50v, Electrolytic	3198	025 54790
0245	6 Pin Connector	2422	025 04854	2405	Cap, 220u, 20%, 25v, Electrolytic	3198	025 32210
0251	3 Pin Connector	2412	020 00725	2441	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
S 0254	10 Pin CRT Socket	2422	500 80079	2443	Cap, 47n, +80/-20%, 50v, Ceramic	3198	017 24730
0259	5 Pin Connector	2422	025 15848	2444	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
0262	3 Pin Connector	2422	025 16937	2450	Cap, 47u, 20%, 160v, Electrolytic	2020	021 91139
0267	3 Pin Connector	2412	020 00725	2451	Cap, 15n, 10%, 50v, Polyester	3198	014 01530
0280	4 Pin Connector	2422	025 15847	2452	Cap, 180p, 5%, 50v, Ceramic	3198	016 01810
S 1000	Tuner, V+U, PLL	2422	542 90108	2455	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
1002	SAW Filter, 45.75MHz	2422	549 44518	2456	Cap, 560n, 5%, 250v, Metalized Polyprop	ylene	2022 333 00088
1200	Filter, Ceramic, 4MHz5	2422	549 40807	2458	Cap, 2u2, 20%, 100v, Electrolytic	2020	021 91331
S 1500	Fuse, 4A, 250V, IEC	2422	086 10914	2459	Cap, 680p, 10%, 500v, Ceramic	3198	019 46810
S 1515	Relay, 5 Amp, 12V	2422	132 07444	2460	Cap, 100p, 5%, 50v, Ceramic	3198	016 01010
1600	Tact Switch	2422	128 02742	S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020	558 90482
1601	Tact Switch	2422	128 02742	2464	Cap, 2u2, 5%, 160v, Metalized Polypropy	lene	2222 479 90042
1602	Tact Switch	2422	128 02742	S 2465	Cap, 15n, 5%, 1600v, Polypropylene	2020	301 90255
1603	Tact Switch	2422	128 02742	2466	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
1606	Tact Switch	2422	128 02742	2468	Cap, 15n, 10%, 400v, Polyester	2222	347 90219
1660	Crystal, 12MHz000	2422	543 01203	2471	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
1810	6 Pin Connector	2422	025 16607	2472	Cap, 150n, 10%, 63v, Metalized Polyeste	2222	365 75154
1831	Crystal, Resonator, 18MHz432, 12 Pin, H			2473	Cap, 100n, 10%, 63v, Metalized Polyeste	2222	365 75104
	C49/U A	2422	543 00842	2474	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2004	Cap, 47n, 10%, 50v, Ceramic	3198	024 44730	2475	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2005	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2476	Cap, 4n7, 10%, 50v, Ceramic	3198	017 04720
2006	Cap, 470u, 20%, 16v, Electrolytic	3198	025 24710	2480	Cap, 47u, 20%, 25v, Electrolytic	2020	021 90586
2007	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2481	Cap, 470p, 10%, 500v, Ceramic	3198	019 44710
2008	Cap, 100u, 20%, 25v, Electrolytic	3198	025 31010	2482	Cap, 68n, 10%, 250v, Polyester	2222	347 90234
2009	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2485	Cap, 4u7, 20%, 250v, Electrolytic	2020	021 90856
2101	Cap, 470n, +80/-20%, 16v, Ceramic	3198	017 24740	2486	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2102	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2487	Cap, 47u, 20%, 50v, Electrolytic	2020	021 90854
2103	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2488	Cap, 1000u, 20%, 16v, Electrolytic	2020	021 91049
2104	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2489	Cap, 470u, 20%, 16v, Electrolytic	2020	021 91577
2105	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2491	Cap, 1n, 10%, 500v, Ceramic	3198	019 41020
2106	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	S 2500	Cap, 470n, 20%, 275v, Metalized Polypro	pylene	2022 330 00018
2111	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2501	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2112	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2113	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2503	Cap, 470u, 20%, 200v, Electrolytic	2020	024 90647
2123	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2505	Cap, 2n2, 10%, 1000v, Ceramic	3198	019 52220
2125	Res, Zero ohm, "Chip" Jumper	3198	021 90020	2507	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2127	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021 57590	2508	Cap, 470p, 10%, 1000v, Ceramic	3198	019 64710
2128	Res, 75 ohm, 5%, 1/10W, Metalized Glass	3198	021 57590	S 2515	Cap, 1n5, 20%, 50v, Ceramic	2020	554 90172
2131	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2520	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2132	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2133	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2522	Cap, 100n, 10%, 16v, Ceramic	3198	017 01040
2134	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic	2020	558 90489
2135	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2525	Cap, 470p, 10%, 50v, Ceramic	3198	017 04710
2136	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2527	Cap, 2n2, 10%, 50v, Ceramic	3198	017 02220
2181	Cap, 22p, 5%, 50v, Ceramic	3198	016 32290	2528	Cap, 1n, 10%, 50v, Ceramic	3198	017 01020
2182	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2540	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2183	Cap, 330p, 10%, 50v, Ceramic	3198	017 33310	2541	Cap, 10n, 10%, 50v, Ceramic	3198	017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic	2020	558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198	017 22250	2561	Cap, 100u, 20%, 160v, Electrolytic	2020	021 91654
2201	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2562	Cap, 1n, 10%, 50v, Ceramic	3198	019 11020
2202	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2203	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020	021 91353
2204	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2567	Cap, 47u, 20%, 25v, Electrolytic	3198	025 34790
2205	Cap, 220n, +80/-20%, 16v, Ceramic	3198	017 42240	2568	Cap, 1u, 20%, 50v, Electrolytic	3198	025 51080
2208	Cap, 100n, +80/-20%, 25v, Ceramic	3198	023 41040	2580	Cap, 47u, 20%, 16v, Electrolytic	3198	028 24790
2209	Cap, 10u, 20%, 50v, Electrolytic	3198	025 51090	2581	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2210	Cap, 1u, +80/-20%, 10v, Ceramic	3198	017 41050	2590	Cap, 330n, +80/-20%, 25v, Ceramic	2222	910 19856
2211	Cap, 470n, +80/-20%, 10v, Ceramic	3198	017 44740	2601	Cap, 220n, +80/-20%, 25v, Ceramic	3198	023 22240
2213	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230	2602	Cap, 100p, 5%, 50v, Ceramic	3198	016 31010
2214	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230				
2215	Cap, 22n, 10%, 25v, Ceramic	3198	017 32230				
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020				

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340
2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	3218	Res, 82K, 5%, 1/16W, Metalized Glass. .	3198 021 38230
2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3219	Res, 2K2, 5%, 1/16W, Metalized Glass. .	3198 021 32220
2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890	3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610
2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2616	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3223	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050	3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2691	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210	3241	Res, 22K, 5%, 1/16W, Metalized Glass. .	3198 021 32230
2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3242	Res, 27K, 5%, 1/16W, Metalized Glass. .	3198 021 32730
2807	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2810	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3245	Res, 39K, 1%, 1/16W, Metalized Glass. .	2322 704 63903
2813	Cap, 2u2, +80/-20%, 10v, Ceramic. . . .	3198 017 22250	3246	Res, 10K, 5%, 1/16W, Metalized Glass. .	3198 021 31030
2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840
2831	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3248	Res, 33K, 5%, 1/16W, Metalized Glass. .	3198 021 33330
2832	Cap, 1p, 25%, 50v, Ceramic.	3198 016 31080	3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2833	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
2834	Cap, 470p, 5%, 50v, Ceramic.	3198 016 34710	3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2835	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
2836	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	3257	Res, 10M, 5%, 1/16W, Metalized Glass. .	3198 021 31060
2837	Cap, 4u7, 20%, 50v, Electrolytic. . . .	3198 025 54780	3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
2840	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740
2841	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2842	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2843	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2844	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2845	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2846	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020
2849	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109
2850	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3341	Res, 1 ohm, 5%, 1/3W, MF for A80QCF340X	34. 2306 204 03108
2852	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33	0X34 2306 204 03278
2854	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	S 3342	Res, 1 ohm, 5%, 1/3W, MF for A80ECK340X	34. 2306 204 03108
2855	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390	S 3342	Res, 2R7 ohm, 5%, 1/3W, MF for A80ECK33	0X34 2306 204 03278
2856	Cap, 47p, 5%, 50v, Ceramic.	3198 016 34790	3343	Res, 1K5, 20%, 1/2W, Carbon Film. . . .	3198 013 01520
2857	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510	3344	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2860	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810	S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507
2894	Cap, 220p, 5%, 50v, Ceramic.	3198 016 32210	3346	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
2895	Cap, 560p, 5%, 25v, Ceramic.	3198 016 35610	3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03310
2897	Cap, 390p, 5%, 50v, Ceramic.	3198 016 33910	3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330
2898	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3403	Res, 100K, 5%, 1/6W, Carbon Film. . . .	3198 011 01040
2902	Cap, 1000u, 20%, 16v, Electrolytic. . . .	3198 026 21020	3404	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
2903	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	3405	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2904	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3406	Res, 4R7, 5%, 1/6W, Carbon Film.	3198 011 04780
2905	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010
2906	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	3410	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
2907	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020	3411	Res, 4R7, 5%, 1/3W, Metal Film.	2306 204 03478
2908	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2910	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2911	Cap, 3n3, 10%, 50v, Ceramic.	3198 017 33320	3443	Res, 1M, 5%, 1/16W, Metalized Glass. . .	3198 021 31050
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3445	Res, 15K, 5%, 1/6W, Carbon Film.	3198 011 01530
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3446	Res, 5K6, 5%, 1/6W, Carbon Film.	3198 011 05620
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 08210
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890
3004	Res, 8K2, 5%, 1/16W, Metalized Glass. .	3198 021 38220	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	S 3451	Res, 8R2, 5%, Metal Film.	2306 204 03828
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06890	S 3452	Res, 5K6, 1%, 3/5W, Metal Film.	2312 915 15602
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3453	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film. . . .	3198 012 26880
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3458	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film. . . .	3198 012 21530
3112	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3114	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03390
3116	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film.	2312 915 12703
3121	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01810
3122	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3469	Res, 3K3, 5%, 1/6W, Carbon Film.	3198 011 03320
3123	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3470	Res, 270K, 5%, 1/8W, Metalized Glass. .	2322 730 61274
3125	Res, 680 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 06810	3471	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3131	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film.	2312 915 13308
3132	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3473	Res, 5R6, 1%, 3/5W, Metal Film.	2312 915 15608
3133	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3134	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3475	Res, 2K2, 1%, 3/5W, Metal Film.	2312 915 12202
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510
3182	Wire Jumper.	3198 036 90010	3479	Res, 2K7, 5%, 1/10W, Metalized Glass. .	3198 021 52720
3184	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film.	2122 101 02083
3185	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3481	Res, 12K, 1%, 3/5W, Metal Film.	2312 915 11203
3186	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3482	Res, 10K, 1%, 3/5W, Metal Film.	2312 915 11003
3187	Res, 150 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01510	3484	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 03910	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. . .	3198 012 33390
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film.	2306 207 03478
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. . .	3198 021 51020
3204	Res, 22K, 5%, 1/6W, Carbon Film.	3198 011 02230	3493	Res, 6R8, 5%, 1/3W, Metal Film.	2306 204 03688
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274			
3207	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020			
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210			
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890			

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478	3833	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3837	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3496	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3839	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3497	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	3843	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220
3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230	3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020
3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335	3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019	3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320
3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155	3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030
3507	Surge Protector	2422 549 43073	3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220
3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210	4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056	4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710	4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220	4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3522	Res, 330K, 5%, 1/10W, Metalized Glass.	3198 021 53340	4126	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101	4128	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630	4181	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4209	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3526	Res, OR1, 5%, 3/5W, Metal Film	3198 012 11070	4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3527	Res, OR33, 5%, 3/5W, Metal Film. . . .	3198 012 13370	4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020	4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720	4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222	4604	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710	4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203	4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702	4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274	4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530	4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030	4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030
S 3558	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310	4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230	4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220	4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620	4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730	4824	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310	4826	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3595	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3596	Res, 220K, 5%, 1/10W, Metalized Glass.	3198 021 52240	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4835	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4839	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4840	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4872	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4874	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4875	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4882	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4884	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3638	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5001	Coil, 27u, 10%	3198 018 22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5002	Coil, 820n, 10%	3198 018 18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5201	Coil, 6u8, 5%	3198 018 16880
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5202	Wire Jumper.	3198 036 90010
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5204	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5205	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3811	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	5206	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3812	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5241	Wire Jumper.	3198 036 90010
3813	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5242	Coil, 10u, 5%	3198 018 11090
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5341	Coil, 22u.	2422 535 97333
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 22u for A80QCF340X34	2422 535 97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 47u for A80QCF330X34	3198 018 24790
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5445	Transformer, PSLOT	3128 138 21421
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5452	Fixed, Inductor, 100MHz, 80 ohm. . . .	3198 018 90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5457	Coil, Linear, DC12	3128 138 55881
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5461	Transformer, Signal Driver, SCI0015-00	2422 531 02465
3831	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	5463	Coil, Choke.	3128 138 37021
3832	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	5471	Coil, 4u7, 20%	3198 018 74780

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

5472	Coil, 3u3, 10%	3198 018 23380	7542	Transistor, PNP, BC857B(COL)	3198 010 42150
5480	Coil, 39u, 10%	2422 535 97336	7560	IC, LE33CZ	9322 106 11676
S 5501	Mains Filter	2422 549 43432	7561	Transistor, NPN, PDTCL43ZT	9340 547 00215
S 5520	Transformer, SS39009-04.	2422 531 02459	7580	Transistor, PNP, BC857B(COL)	3198 010 42150
5521	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7602	IC, M24C16-WBN6.	9322 147 25682
5560	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7606	Transistor, NPN, PDTCL43ZT	9340 547 00215
5561	Coil, 27u, 5%	2422 535 95366	7802	IC, HEF4053BT.	9333 729 60653
5562	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7803	IC, HEF4053BT.	9333 729 60653
5564	Fixed, Inductor, 100MHz, 50R.	3198 018 90010	7804	Transistor, NPN, BC847B(COL)	3198 010 42030
5602	Coil, 5u6, 5%	3198 018 15680	7831	IC MSP3425G-PO-B8-V3 (MIAS) L	9322 187 89682
5603	Coil, 5u6, 5%	3198 018 15680	7901	IC, AN7522N PH	9322 181 41682
5604	Coil, 5u6, 5%	3198 018 15680	9001	Wire Jumper.	3198 036 90010
5810	Coil, 10u, 10%	3198 018 51090	9104	Wire Jumper.	3198 036 90010
5831	Coil, 6u8, 5%	3198 018 16880	9171	Wire Jumper.	3198 036 90010
5832	Coil, 6u8, 5%	3198 018 16880	9173	Wire Jumper.	3198 036 90010
5833	Coil, 6u8, 5%	3198 018 16880	9175	Wire Jumper.	3198 036 90010
5835	Coil, 12u, 10%	3198 018 31290	9181	Wire Jumper.	3198 036 90010
6001	Zener Diode, 33 volt	3198 010 23390	9182	Wire Jumper.	3198 036 90010
6201	Diode, Signal, BAS316.	3198 010 10630	9183	Wire Jumper.	3198 036 90010
6202	Diode, Signal, BAS316.	3198 010 10630	9192	Wire Jumper.	3198 036 90010
6206	Zener Diode, 6.8 volt.	3198 020 56880	9193	Wire Jumper.	3198 036 90010
6331	Diode, Signal, BAV21	3198 010 10070	9311	Wire Jumper.	3198 036 90010
6332	Diode, Signal, BAS316.	3198 010 10630	9312	Wire Jumper.	3198 036 90010
6333	Diode, Signal, BAV21	3198 010 10070	9406	Wire Jumper.	3198 036 90010
6335	Diode, Signal, BAV21	3198 010 10070	9407	Wire Jumper.	3198 036 90010
6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002	9408	Wire Jumper.	3198 036 90010
6401	Zener Diode, 47 volt	3198 010 24790	9409	Wire Jumper.	3198 036 90010
6445	Zener Diode, 10 volt	3198 020 51090	9410	Wire Jumper.	3198 036 90010
6447	Diode, Signal, 1N4148.	3198 010 10010	9411	Wire Jumper.	3198 036 90010
6448	Zener Diode, 6.2 volt.	9331 668 30133	9412	Wire Jumper.	3198 036 90010
6449	Diode, Signal, BAV99	3198 010 10620	9413	Wire Jumper.	3198 036 90010
6460	Diode, Rect, DGP3-7005L	9336 436 10682	9414	Wire Jumper.	3198 036 90010
6461	Diode, Rect, RGP30J-L7004.	9338 617 60682	9415	Wire Jumper.	3198 036 90010
6462	Zener Diode, 9.1 volt.	9331 177 80133	9416	Wire Jumper.	3198 036 90010
6465	Diode, Signal, BAV21	3198 010 10070	9417	Wire Jumper.	3198 036 90010
6466	Diode, Signal, BAV21	3198 010 10070	9418	Wire Jumper.	3198 036 90010
6467	Diode, Signal, BAS316.	3198 010 10630	9419	Wire Jumper.	3198 036 90010
6468	Diode, Signal, BAS316.	3198 010 10630	9421	Wire Jumper.	3198 036 90010
6469	Diode, Rect, BYV95C.	9335 001 80133	9422	Wire Jumper.	3198 036 90010
6470	Diode, Signal, BAV99	3198 010 10620	9423	Wire Jumper.	3198 036 90010
6476	Zener Diode, 15 volt	3198 010 21590	9424	Wire Jumper.	3198 036 90010
6481	Zener Diode, 5.6 volt.	3198 010 25680	9425	Wire Jumper.	3198 036 90010
6482	Zener Diode, 9.1 volt.	9331 177 80133	9426	Wire Jumper.	3198 036 90010
6483	Zener Diode, 33 volt	3198 010 23390	9427	Wire Jumper.	3198 036 90010
6485	Diode, Rect, BYV95C.	9335 001 80133	9453	Wire Jumper.	3198 036 90010
6486	Diode, Rect, EGP20DL-5100.	9322 164 42682	9460	Wire Jumper.	3198 036 90010
6487	Diode, Rect, BYV95A.	9335 000 90133	9463	Wire Jumper.	3198 036 90010
6488	Diode, Rect, EGP20DL-5100.	9322 164 42682	9500	Wire Jumper.	3198 036 90010
6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667	9501	Wire Jumper.	3198 036 90010
6520	Diode, Rect, BYV95A.	9335 000 90133	9503	Wire Jumper.	3198 036 90010
6523	Diode, Signal, 1N4148.	3198 010 10010	9506	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9507	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9510	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt	3198 020 52290	9511	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9512	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt	3198 020 51090	9513	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9514	Wire Jumper.	3198 036 90010
6561	Diode, Rect, SB340L-7010	9322 128 18682	9515	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9516	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70	9331 849 10215	9518	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9520	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9522	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9524	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85	9336 247 60133	9528	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR	9322 185 69682	9530	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9611	Coil, 27u, 10%	3198 018 22790
6831	Diode, Signal, 1N4148.	3198 010 10010	9612	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9613	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper	3198 021 90020	9614	Wire Jumper.	3198 036 90010
7101	Transistor, NPN, BC847B(COL)	3198 010 42030	9615	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I	4835 310 57626	9616	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL)	3198 010 42030	9618	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL)	3198 010 42150	9619	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL)	3198 010 42150	9622	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3	9352 713 37112	9623	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9624	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL)	3198 010 42150	9626	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL)	3198 020 40110	9627	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9628	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL)	3198 020 43530	9629	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTCL43ZT	9340 547 00215	9631	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL)	3198 020 43430	9632	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9634	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135	3198 020 41010	9637	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135	3198 020 41010	9638	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G)	9322 140 14667	9639	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9640	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9641	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL)	3198 010 42030	9642	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL)	3198 020 40030	9643	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCL14ET	9340 310 10215	9647	Wire Jumper.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

36ST230P/35 (continued)

9648	Wire Jumper.	3198 036 90010	CBA	SP/LS Module (Vertical) (ITV).	3139 127 27374
9650	Wire Jumper.	3198 036 90010	CBA	EPS Module (ITV).	3139 137 22961
9651	Wire Jumper.	3198 036 90010	CBA	Main Chassis Assembly.	3139 187 26761
9652	Wire Jumper.	3198 036 90010	CBA	Interface Panel (ITV).	3139 188 04541
9654	Wire Jumper.	3198 036 90010			
9655	Wire Jumper.	3198 036 90010			
9656	Wire Jumper.	3198 036 90010			
9657	Wire Jumper.	3198 036 90010			
9658	Wire Jumper.	3198 036 90010			
9659	Wire Jumper.	3198 036 90010			
9660	Wire Jumper.	3198 036 90010			
9661	Wire Jumper.	3198 036 90010			
9662	Wire Jumper.	3198 036 90010			
9663	Wire Jumper.	3198 036 90010			
9664	Wire Jumper.	3198 036 90010			
9665	Wire Jumper.	3198 036 90010			
9666	Wire Jumper.	3198 036 90010			
9667	Wire Jumper.	3198 036 90010			
9668	Wire Jumper.	3198 036 90010			
9669	Wire Jumper.	3198 036 90010			
9670	Wire Jumper.	3198 036 90010			
9671	Wire Jumper.	3198 036 90010			
9672	Coil, 22u, 10%	3198 018 22290			
9674	Wire Jumper.	3198 036 90010			
9675	Wire Jumper.	3198 036 90010			
9676	Wire Jumper.	3198 036 90010			
9678	Coil, 22u, 10%	3198 018 22290			
9679	Wire Jumper.	3198 036 90010			
9680	Wire Jumper.	3198 036 90010			
9681	Wire Jumper.	3198 036 90010			
9682	Wire Jumper.	3198 036 90010			
9685	Wire Jumper.	3198 036 90010			
9686	Wire Jumper.	3198 036 90010			
9687	Wire Jumper.	3198 036 90010			
9688	Wire Jumper.	3198 036 90010			
9689	Wire Jumper.	3198 036 90010			
9690	Wire Jumper.	3198 036 90010			
9691	Wire Jumper.	3198 036 90010			
9694	Wire Jumper.	3198 036 90010			
9695	Wire Jumper.	3198 036 90010			
9697	Wire Jumper.	3198 036 90010			
9698	Wire Jumper.	3198 036 90010			
9699	Wire Jumper.	3198 036 90010			
9821	Wire Jumper.	3198 036 90010			
9822	Wire Jumper.	3198 036 90010			
9825	Wire Jumper.	3198 036 90010			
9828	Wire Jumper.	3198 036 90010			
9829	Wire Jumper.	3198 036 90010			
9831	Wire Jumper.	3198 036 90010			
9832	Wire Jumper.	3198 036 90010			
9837	Wire Jumper.	3198 036 90010			
9838	Wire Jumper.	3198 036 90010			
9839	Wire Jumper.	3198 036 90010			
9846	Wire Jumper.	3198 036 90010			
9847	Wire Jumper.	3198 036 90010			
9849	Wire Jumper.	3198 036 90010			
9851	Wire Jumper.	3198 036 90010			
9856	Wire Jumper.	3198 036 90010			
9858	Wire Jumper.	3198 036 90010			
9859	Wire Jumper.	3198 036 90010			
9860	Wire Jumper.	3198 036 90010			
9862	Wire Jumper.	3198 036 90010			
9863	Wire Jumper.	3198 036 90010			
9864	Wire Jumper.	3198 036 90010			
9865	Wire Jumper.	3198 036 90010			
9867	Wire Jumper.	3198 036 90010			
9868	Wire Jumper.	3198 036 90010			
9869	Wire Jumper.	3198 036 90010			
9870	Wire Jumper.	3198 036 90010			
9871	Wire Jumper.	3198 036 90010			
9873	Wire Jumper.	3198 036 90010			
9874	Wire Jumper.	3198 036 90010			
9875	Wire Jumper.	3198 036 90010			
9876	Wire Jumper.	3198 036 90010			
9877	Wire Jumper.	3198 036 90010			
9878	Wire Jumper.	3198 036 90010			
9901	Wire Jumper.	3198 036 90010			
9902	Wire Jumper.	3198 036 90010			
9903	Wire Jumper.	3198 036 90010			
9904	Wire Jumper.	3198 036 90010			
9905	Wire Jumper.	3198 036 90010			
9911	Wire Jumper.	3198 036 90010			
9913	Wire Jumper.	3198 036 90010			
9914	Wire Jumper.	3198 036 90010			
9915	Wire Jumper.	3198 036 90010			
9919	Wire Jumper.	3198 036 90010			
9920	Wire Jumper.	3198 036 90010			
9991	Wire Jumper.	3198 036 90010			
9993	Wire Jumper.	3198 036 90010			
9996	Wire Jumper.	3198 036 90010			
9997	Wire Jumper.	3198 036 90010			
9998	Wire Jumper.	3198 036 90010			

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

0266	6 Pin Connector.	2422 025 16609
2401	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2402	Cap, 4u7, 20%, 35v, Electrolytic	3198 028 44780
2403	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2407	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2408	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2409	Cap, 15p, 5%, 50v, Ceramic	3198 016 31590
2411	Cap, 470n, +80/-20%, 10v, Ceramic.	3198 017 44740
2412	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720
2413	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2414	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2415	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2416	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2419	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2420	Cap, 180p, 5%, 50v, Ceramic.	3198 016 31810
2425	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2426	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2427	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2428	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2429	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2430	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2431	Cap, 100u, 20%, 25v, Electrolytic.	3198 025 31010
2432	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2433	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2434	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030
2435	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2436	Cap, 100n, 10%, 16v, Ceramic	3198 017 31040
2440	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2442	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2443	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2450	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
2452	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
2453	Cap, 56p, 5%, 50v, Ceramic	3198 016 35690
3401	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3402	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3403	Res, 1K8, 5%, 1/16W, Metalized Glass	3198 021 31820
3404	Res, 1K5, 5%, 1/16W, Metalized Glass	3198 021 31520
3405	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3406	Res, 6K8, 5%, 1/16W, Metalized Glass	3198 021 36820
3407	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020
3408	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3412	Res, 510K, 5%, 1/10W, Metalized Glass.	2122 118 05951
3419	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3425	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3427	Res, 10K, 5%, 1/16W, Metalized Glass	3198 021 31030
3431	Res, 8K2, 1%, 1/16W, Metalized Glass	2322 704 68202
3432	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3440	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3441	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3442	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3443	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3444	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3450	Res, 820 ohm, 5%, 1/16W, Metalized Glas	3198 021 38210
3451	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710
3452	Res, 12K, 5%, 1/16W, Metalized Glass	3198 021 31230
3453	Res, 2K7, 5%, 1/16W, Metalized Glass	3198 021 32720
3454	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610
3455	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
3456	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3457	Wire Jumper.	3198 036 90010
3458	Res, 390 ohm, 5%, 1/16W, Metalized Glas	3198 021 33910
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90030
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90030
5401	Coil, 10u, 10%	3198 018 31090
5407	Coil, 33u, 5%.	3198 018 13390
5408	Coil, 33u, 20%	3198 018 33390
5421	Inductor, 100 MHz, 120 ohm	3198 018 90070
5425	Coil, 10u, 10%	3198 018 31090
5428	Coil, 10u, 5%.	3198 018 11090
5429	Coil, 10u, 10%	3198 018 31090
5430	Coil, 10u, 10%	3198 018 31090
5440	Coil, 10u, 10%	3198 018 31090
5442	Coil, 22u, 5%.	3198 018 12290
5450	Coil, 10u, 10%	3198 018 31090
5452	Coil, 33u, 5%.	3198 018 13390
7401	Transistor, PNP, BC857B(COL)	3198 010 42150
7402	Transistor, NPN, BC847B(COL)	3198 010 42030
7403	Transistor, NPN, BC847B(COL)	3198 010 42030
7421	IC, TC90A53N	9322 182 18682
7440	Transistor, NPN, BC847B(COL)	3198 010 42030
7444	Transistor, NPN, BC847B(COL)	3198 010 42030

36ST230P/35 (continued)

7450	Transistor, NPN, BC847B(COL)	3198	010	42030
7454	Transistor, NPN, BC847B(COL)	3198	010	42030
9401	Wire Jumper.	3198	036	90010
9402	Wire Jumper.	3198	036	90010
9403	Wire Jumper.	3198	036	90010
CBA	2D 3 Line Comb Filter Assembly	3139	177	26561

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

	Cabinet & Accessory Parts			
S AC01	AC Cord.	3135	010	04323
AC02	AC Cord Strain Relief.	3135	010	02841
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC05	Cabinet Back	3139	124	45211
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A90AKB50X07(V).	9322	186	37682
AC10	Customer Control Buttons	3139	124	26472
S AC12	Degaussing Coil.	2422	549	43972
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01651
AC16	Jack Panel Bracket	3139	124	45161
AC17	ITV Safety/Warranty Instructions	3135	125	21431
AC20	Cabinet Front Assembly	3121	237	52412
AC20A	Cabinet Front.	3135	127	50041
AC20C	Light Guide.	3139	124	26461
AC20D	Nameplate.	3135	015	03571
AC20E	Power Button	3139	124	26444
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00401
AC26	EPS Bracket.	3135	014	09221
AC28	ITV Card Slot Cover.	3139	124	30571
ITV	Institutional Interconnect Device (Model 1 36ST230P/35 Only).	00SC	N4N	FN/35

MS3252S431 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0212	2 Pin Connector.	2422 025 16375	2441	Cap, 1u, 20%, 50v, Electrolytic. . .	3198 025 51080
0219	6 Pin Connector.	2422 025 12482	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0220	5 Pin Connector.	2422 025 04853	2444	Cap, 1u, 20%, 50v, Electrolytic. . .	3198 025 51080
0221	2 Pin Connector.	2422 025 15503	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
0222	2 Pin Connector.	2422 025 10646	2451	Cap, 15n, 10%, 50v, Polyester. . . .	3198 014 01530
0223	6 Pin Cinch Jack	2422 026 05184	2455	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025 34790
0225	SVHS Jack.	2422 026 04926	2457	Cap, 470n, 5%, 250v, Metalized Polypropylene.	2022 333 00086
0243	6 Pin Connector.	2422 025 04854	2458	Cap, 2u2, 20%, 100v, Electrolytic. . .	2020 021 91331
0244	5 Pin Connector.	2422 025 04853	2459	Cap, 680p, 10%, 500v, Ceramic. . . .	3198 019 46810
0245	6 Pin Connector.	2422 025 04854	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
0246	5 Pin Connector.	2422 025 12481	S 2463	Cap, 1n2, 10%, 2000v, Ceramic. . . .	2020 558 90488
S 0254	9 Pin CRT Socket	2422 500 80076	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042
0267	3 Pin Connector.	2412 020 00725	S 2465	Cap, 13n, 5%, 1600v, Polypropylene . .	2020 301 90254
S 1000	Tuner, V+U, PLL	2422 542 90108	2468	Cap, 10n, 10%, 400v, Polyester	2222 347 90218
1002	SAW Filter, 45.75MHz	2422 549 44518	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1600	Tact Switch.	2422 128 02742	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1601	Tact Switch.	2422 128 02742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
1602	Tact Switch.	2422 128 02742	2480	Cap, 47u, 20%, 25v, Electrolytic	2020 021 90586
1603	Tact Switch.	2422 128 02742	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
1606	Tact Switch.	2422 128 02742	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
1660	Crystal, 12MHz000	2422 543 01203	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
1811	3 Pin Connector.	2412 020 00725	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2487	Cap, 47u, 20%, 50v, Electrolytic	2020 021 90854
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2488	Cap, 1000u, 20%, 16v, Electrolytic . . .	2020 021 91049
2005	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2489	Cap, 470u, 20%, 16v, Electrolytic	2020 021 91577
2006	Cap, 470u, 20%, 16v, Electrolytic. . . .	3198 025 24710	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2008	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . . .	3198 017 24740	2503	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 024 90647
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2105	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2106	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2521	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2123	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2125	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2184	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2560	Cap, 680p, 10%, 1000v, Ceramic.	2020 558 90472
2187	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250	2561	Cap, 100u, 20%, 160v, Electrolytic	2020 021 91654
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2563	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic	2020 021 91353
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2567	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 41040	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2209	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2580	Cap, 47u, 20%, 16v, Electrolytic	3198 028 24790
2210	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2581	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . . .	2222 910 19856
2216	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . . .	3198 023 22240
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2220	Cap, 470n, 10%, 50v, Polyester	3198 014 04740	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2608	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2611	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2229	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2242	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050	2618	Cap, 1u, +80/-20%, 10v, Ceramic.	3198 017 41050
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198 017 21050
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210
2245	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2247	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . . .	3198 017 42240
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2810	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2813	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2250	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . . .	3198 017 44740
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2862	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2864	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2865	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2866	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2331	Cap, 10n, +80/-20% 1000v, Ceramic. . . .	2020 558 90445	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2340	Cap, 10u, 20%, 250v, Electrolytic. . . .	2020 012 93495	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2344	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 21040	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2345	Cap, 10n, +80/-20%, 1000v, Ceramic . . .	2020 558 90445	2873	Cap, 2u2, +80/-20%, 10v, Ceramic	3198 017 22250
2401	Cap, 2u2, 20%, 50v, Electrolytic	2020 021 90552	2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010
2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710	2875	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010
2404	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	2876	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780

S = Safety Part Be sure to use exact replacement part.

MS3252S431 (continued)

2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2878	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3410	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3411	Res, 4R7, 5%, 1/3W, Metal Film	2306 204 03478
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glass	3198 021 51010
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3445	Res, 15K, 5%, 1/6W, Carbon Film. . . .	3198 011 01530
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . . .	3198 011 05620
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2902	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3451	Res, 2R7, 5%, 1/3W, Metal Film	2306 204 03278
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15020
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
2908	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3003	Res, 1K5, 5%, 1/16W, Metalized Glass .	3198 021 31520	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3470	Res, 390K, 5%, 1/8W, Metalized Glass .	2322 730 61394
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3471	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3472	Res, 3R9, 1%, 3/5W, Metal Film	2312 915 13908
3102	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3124	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3481	Res, 15K, 1%, 3/5W, Metal Film	2312 915 11503
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3482	Res, 6K8, 1%, 3/5W, Metal Film	2312 915 16802
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3493	Res, 2R2, 5%, 1/3W, Metal Film	2306 204 03228
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3498	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3507	Surge Protector.	2422 549 43073
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	S 3510	Res, NTC, 4R7, 20%, 3W.	2122 612 00056
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3524	Res, 56K, 5%, 1/10W, Metalized Glass .	3198 021 55630
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3247	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3544	Res, 4K7, 1%, 1/8W, Metalized Glass. .	2322 734 64702
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . . .	2306 207 03109	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	S 3565	Res, 330 ohm, 5%, 1W, Metal Film	3198 012 13310
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film	2306 204 03108	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310	3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330	3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040	3603	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3404	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3604	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
3405	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	3605	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720
3406	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780	3606	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220

S = Safety Part Be sure to use exact replacement part.

MS3252S431 (continued)

3607	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film. .	3198 011 04710	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film. . . .	3198 011 01020	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film. . . .	3198 011 06820	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3630	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3636	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3682	Res, 3K3, 5%, 1/10W, Metalized Glass .	3198 021 53320	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3686	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520	5001	Coil, 27u, 10%	3198 018 22790
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5002	Coil, 820n, 10%	3198 018 18270
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5201	Coil, 6u8, 5%	3198 018 16880
3694	Res, 4K7, 5%, 1/16W, Metalized Glass .	3198 021 34720	5202	Wire Jumper.	3198 036 90010
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5204	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5205	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5206	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3814	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5241	Wire Jumper.	3198 036 90010
3815	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5242	Coil, 10u, 5%	3198 018 11090
3816	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5342	Coil, 22u.	2422 535 97333
3817	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3818	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	S 5445	Transformer, PSLOT	3128 138 21421
3819	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5452	Fixed, Inductor, 100MHZ, 80 ohm. . . .	3198 018 90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5457	Coil, Linear, DC12	3128 138 55881
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5461	Transformer, Signal Driver, SCI0027-00	2422 531 02478
3861	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3862	Res, 15K, 5%, 1/16W, Metalized Glass .	3198 021 31530	5471	Coil, 3u3, 20%	3198 018 73380
3863	Res, 1K2, 5%, 1/16W, Metalized Glass .	3198 021 31220	5472	Coil, 3u3, 10%	3198 018 23380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5480	Coil, 4u7, 5%	2422 535 94213
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 5501	Mains Filter	2422 549 43432
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 5520	Transformer, SS39009-04.	2422 531 02459
3867	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5561	Coil, 27u, 5%	2422 535 95366
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	5602	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5603	Coil, 5u6, 5%	3198 018 15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	5604	Coil, 5u6, 5%	3198 018 15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	5861	Coil, 10u, 5%	3198 018 11090
3905	Res, 3K3, 5%, 1/16W, Metalized Glass .	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3906	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	6202	Diode, Signal, BAS316.	3198 010 10630
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6206	Zener Diode, 6.8 volt.	3198 020 56880
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21.	3198 010 10070
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21.	3198 010 10070
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21.	3198 010 10070
4121	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4341	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148.	3198 010 10010
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6448	Zener Diode, 6.2 volt	9331 668 30133
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6449	Diode, Signal, BAV99.	3198 010 10620
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6460	Diode, Rect, DG3-7005L	9336 436 10682
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6462	Zener Diode, 9.1 volt.	9331 177 80133
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21.	3198 010 10070
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21.	3198 010 10070
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6469	Diode, Rect, BYV95C.	9335 001 80133
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99.	3198 010 10620
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6476	Zener Diode, 15 volt	3198 010 21590
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6481	Zener Diode, 5.6 volt.	3198 010 25680
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6483	Zener Diode, 33 volt	3198 010 23390
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6485	Diode, Rect, BYV95C.	9335 001 80133
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002. . . .	9322 138 08667
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6523	Diode, Signal, 1N4148.	3198 010 10010
4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6524	Diode, Rect, 1N5062.	3198 010 10120
4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6525	Diode, Rect, 1N5062.	3198 010 10120
4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6526	Zener Diode, 22 volt	3198 020 52290

S = Safety Part Be sure to use exact replacement part.

MS3252S431 (continued)

6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, BAS316.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9522	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9524	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9528	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9530	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9611	Coil, 27u, 10%.	3198 018 22790
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1133.	9352 731 54557	9613	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9614	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9621	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9622	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9623	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9624	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9626	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDTCL143ZT.	9340 547 00215	9627	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9628	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9629	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9631	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9632	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9637	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9638	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9639	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9640	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9641	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDTCL14ET.	9340 310 10215	9642	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9648	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDTCL143ZT.	9340 547 00215	9650	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9651	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9652	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PDTCL143ZT.	9340 547 00215	9654	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9655	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9656	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9657	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9658	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9659	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9121	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9122	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%.	3198 018 22290
9192	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%.	3198 018 22290
9406	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010
9501	Wire Jumper.	3198 036 90010	9846	Wire Jumper.	3198 036 90010
9503	Wire Jumper.	3198 036 90010	9847	Wire Jumper.	3198 036 90010
9506	Wire Jumper.	3198 036 90010	9849	Wire Jumper.	3198 036 90010
9507	Wire Jumper.	3198 036 90010	9850	Wire Jumper.	3198 036 90010

MS3252S431 (continued)

9851	Wire Jumper.	3198	036	90010	9153	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010	9155	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010	9170	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010	CBA	Side Jack Panel Assembly	3141	058	59161
9860	Wire Jumper.	3198	036	90010	Subwoofer Panel Parts				
9861	Wire Jumper.	3198	036	90010	Subwoofer Panel Parts				
9862	Wire Jumper.	3198	036	90010	Top Control Panel Parts				
9864	Wire Jumper.	3198	036	90010	Top Control Panel Parts				
9865	Wire Jumper.	3198	036	90010	Cabinet & Accessory Parts				
9868	Wire Jumper.	3198	036	90010	Cabinet & Accessory Parts				
9873	Wire Jumper.	3198	036	90010	S AC01	AC Cord.	3135	010	03831
9874	Wire Jumper.	3198	036	90010	AC03	Anode Lead Spacer (3 Used)	3135	014	04471
9875	Wire Jumper.	3198	036	90010	AC04	Batteries for Remote Control Transmitter	9299	000	65263
9877	Wire Jumper.	3198	036	90010	AC05	Cabinet Back	3139	124	46461
9891	Wire Jumper.	3198	036	90010	AC08	Chassis Tray	3139	124	31325
9892	Wire Jumper.	3198	036	90010	S AC09	CRT, A80QCF340X34(N)	9301	904	59463
9901	Wire Jumper.	3198	036	90010	AC10	Customer Control Buttons	3139	124	32711
9902	Wire Jumper.	3198	036	90010	S AC12	Degaussing Coil.	2422	549	45334
9903	Wire Jumper.	3198	036	90010	AC15	Holder, Degaussing Coil (4 Used)	3135	013	01661
9904	Wire Jumper.	3198	036	90010	AC17	Owner's Manual	3121	235	21161
9905	Wire Jumper.	3198	036	90010	AC18	Quick Use Guide.	3121	233	44561
9911	Wire Jumper.	3198	036	90010	AC19	Side Jack Panel Bracket.	3139	124	40481
9913	Wire Jumper.	3198	036	90010	AC20	Cabinet Front Assembly	3121	237	53361
9914	Wire Jumper.	3198	036	90010	AC20A	Cabinet Front.	3139	177	70361
9915	Wire Jumper.	3198	036	90010	AC20C	Light Guide.	3139	124	32681
9918	Wire Jumper.	3198	036	90010	AC20D	Nameplate.	3135	015	03561
9991	Wire Jumper.	3198	036	90010	AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
9993	Wire Jumper.	3198	036	90010	REMOTE	Remote Control Transmitter, RC2524/17.	3139	228	87491
9996	Wire Jumper.	3198	036	90010					
9997	Wire Jumper.	3198	036	90010					
9998	Wire Jumper.	3198	036	90010					
CBA	Main Chassis Assembly.	3141	058	59111					

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010

S = Safety Part Be sure to use exact replacement part.

MS3652S427 - Manual no. 7638

Main Chassis Parts

Main Chassis Parts					
	Main Chassis Parts				
0211	2 Pin Connector.	2422 025 16269	2405	Cap, 220u, 20%, 25v, Electrolytic. . .	3198 025 32210
0212	2 Pin Connector.	2422 025 16375	2441	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0219	6 Pin Connector.	2422 025 12482	2443	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
0220	5 Pin Connector.	2422 025 04853	2444	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080
0221	2 Pin Connector.	2422 025 15503	2450	Cap, 47u, 20%, 160v, Electrolytic. . .	2020 021 91139
0222	2 Pin Connector.	2422 025 10646	2451	Cap, 15n, 10%, 50v, Polyester.	3198 014 01530
0223	6 Pin Cinch Jack	2422 026 05184	2452	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
0225	SVHS Jack.	2422 026 04926	2455	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790
0243	6 Pin Connector.	2422 025 04854	2456	Cap, 560n, 5%, 250v, Metalized Polypropylene.	2022 333 00088
0244	5 Pin Connector.	2422 025 04853	2458	Cap, 2u2, 20%, 100v, Electrolytic. . . .	2020 021 91331
0245	6 Pin Connector.	2422 025 04854	2459	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810
0246	5 Pin Connector.	2422 025 12481	2460	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
S 0254	10 Pin CRT Socket.	2422 500 80079	S 2463	Cap, 390p, 10%, 2000v, Ceramic	2020 558 90482
0267	3 Pin Connector.	2412 020 00725	2464	Cap, 2u2, 5%, 160v, Metalized Polypropylene.	2222 479 90042
S 1000	Tuner, V+U, PLL	2422 542 90108	S 2465	Cap, 15n, 5%, 1600v, Polypropylene . .	2020 301 90255
1002	SAW Filter, 45.75MHz	2422 549 44518	2466	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
1200	Filter, Ceramic, 4MHz5	2422 549 40807	2468	Cap, 15n, 10%, 400v, Polyester	2222 347 90219
S 1500	Fuse, 4A, 250V, IEC.	2422 086 10914	2471	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
S 1515	Relay, 5 Amp, 12V.	2422 132 07444	2472	Cap, 150n, 10%, 63v, Metalized Polyester	2222 365 75154
1600	Tact Switch.	2422 128 02742	2473	Cap, 100n, 10%, 63v, Metalized Polyester	2222 365 75104
1601	Tact Switch.	2422 128 02742	2474	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1602	Tact Switch.	2422 128 02742	2475	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
1603	Tact Switch.	2422 128 02742	2476	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
1606	Tact Switch.	2422 128 02742	2480	Cap, 47u, 20%, 25v, Electrolytic. . . .	2020 021 90586
1660	Crystal, 12MHz000	2422 543 01203	2481	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710
1811	3 Pin Connector.	2412 020 00725	2482	Cap, 68n, 10%, 250v, Polyester	2222 347 90234
1861	Ceramic Resonator, 514KHz5, CSB503F58.	2422 540 98344	2485	Cap, 4u7, 20%, 250v, Electrolytic. . . .	2020 021 90856
2004	Cap, 47n, 10%, 50v, Ceramic.	3198 024 44730	2486	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2005	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2487	Cap, 47u, 20%, 50v, Electrolytic. . . .	2020 021 90854
2006	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	2488	Cap, 1000u, 20%, 16v, Electrolytic. . .	2020 021 91049
2007	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2489	Cap, 470u, 20%, 16v, Electrolytic. . . .	2020 021 91577
2008	Cap, 100u, 20%, 25v, Electrolytic. . .	3198 025 31010	2491	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020
2009	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	S 2500	Cap, 470n, 20%, 275v, Metalized Polypropylene.	2022 330 00018
2101	Cap, 470n, +80/-20%, 16v, Ceramic. . .	3198 017 24740	2501	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2102	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2502	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2103	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2503	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 024 90647
2104	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2505	Cap, 2n2, 10%, 1000v, Ceramic.	3198 019 52220
2105	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2507	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2106	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2508	Cap, 470p, 10%, 1000v, Ceramic.	3198 019 64710
2121	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	S 2515	Cap, 1n5, 20%, 50v, Ceramic.	2020 554 90172
2122	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2520	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2123	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	2521	Cap, 22u, 20%, 50v, Electrolytic. . . .	3198 025 52290
2124	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2522	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2125	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	S 2523	Cap, 1n5, 10%, 2000v, Ceramic.	2020 558 90489
2135	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2525	Cap, 470p, 10%, 50v, Ceramic.	3198 017 04710
2136	Cap, 22p, 5%, 50v, Ceramic.	3198 016 32290	2527	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
2141	Cap, 330p, 10%, 50v, Ceramic.	3198 017 33310	2528	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020
2184	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	2540	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2187	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250	2541	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2202	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2560	Cap, 680p, 10%, 1000v, Ceramic. . . .	2020 558 90472
2203	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2561	Cap, 100u, 20%, 160v, Electrolytic. . .	2020 021 91654
2204	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2562	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020
2205	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	2563	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
2208	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	2564	Cap, 2u2, 20%, 25v, Electrolytic. . . .	2020 021 91353
2209	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2567	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790
2210	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	2568	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080
2211	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740	2580	Cap, 47u, 20%, 16v, Electrolytic. . . .	3198 028 24790
2216	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	2581	Cap, 22u, 20%, 50v, Electrolytic. . . .	3198 025 52290
2217	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2590	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222 910 19856
2219	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	2601	Cap, 220n, +80/-20%, 25v, Ceramic. . .	3198 023 22240
2220	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010
2221	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2606	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020
2226	Cap, 100p, 5%, 50v, Ceramic.	3198 016 31010	2607	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2227	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	2608	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2228	Cap, 820p, 5%, 25v, Ceramic.	3198 016 38210	2609	Cap, 33p, 5%, 50v, Ceramic.	3198 016 33390
2229	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090	2611	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2241	Cap, 1n5, 10%, 50v, Ceramic.	3198 017 31520	2612	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2242	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050	2613	Cap, 68p, 5%, 50v, Ceramic.	3198 016 36890
2243	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 32220	2615	Cap, 1n, 10%, 50v, Ceramic.	3198 017 31020
2244	Cap, 100n, 5%, 63v, Metalized Polyester	2222 370 76104	2618	Cap, 1u, +80/-20%, 10v, Ceramic. . . .	3198 017 41050
2245	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198 017 21050
2247	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020	2691	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210
2248	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2802	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2249	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	2803	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240
2250	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280	2810	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2252	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2813	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2253	Cap, 1n, 5%, 25v, Ceramic.	3198 016 31020	2816	Cap, 470n, +80/-20%, 10v, Ceramic. . .	3198 017 44740
2254	Res, Zero ohm, "Chip" Jumper	3198 021 90020	2862	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2330	Cap, 100n, 10%, 250v, Metalized Polyester.	2222 368 90177	2864	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280
2331	Cap, 10n, +80/-20% 1000v, Ceramic. . .	2020 558 90445	2865	Cap, 2u2, 20%, 50v, Electrolytic. . . .	3198 025 52280
2340	Cap, 10u, 20%, 250v, Electrolytic. . . .	2020 012 93495	2866	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2341	Cap, 3n3, 10%, 500v, Ceramic.	3198 019 43320	2867	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2342	Cap, 560p, 5%, 50v, Ceramic.	3198 016 05610	2868	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2343	Cap, 2n2, 10%, 2000v, Ceramic.	2020 558 90559	2869	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2344	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 21040	2870	Cap, 68n, 10%, 50v, Polyester.	3198 014 06830
2345	Cap, 10n, +80/-20%, 1000v, Ceramic . .	2020 558 90445	2871	Cap, 150p, 5%, 50v, Ceramic.	3198 016 31510
2401	Cap, 2u2, 20%, 50v, Electrolytic. . . .	2020 021 90552	2872	Cap, 1n8, 10%, 50v, Ceramic.	2238 586 15626
2402	Cap, 470p, 10%, 500v, Ceramic.	3198 019 44710	2873	Cap, 2u2, +80/-20%, 10v, Ceramic . . .	3198 017 22250
2404	Cap, 47u, 20%, 50v, Electrolytic. . . .	3198 025 54790	2874	Cap, 100u, 20%, 25v, Electrolytic. . . .	3198 025 31010

S = Safety Part Be sure to use exact replacement part.

MS3652S427 (continued)

2875	Cap, 100u, 20%, 25v, Electrolytic . . .	3198 025 31010	3403	Res, 100K, 5%, 1/6W, Carbon Film . . .	3198 011 01040
2876	Cap, 4u7, 20%, 50v, Electrolytic . . .	3198 025 54780	3404	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
2877	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090	3405	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
2878	Cap, 1u, 20%, 50v, Electrolytic. . .	3198 025 51080	3406	Res, 4R7, 5%, 1/6W, Carbon Film. . .	3198 011 04780
2879	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 34720	3408	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
2880	Cap, 22n, 10%, 25v, Ceramic.	3198 017 32230	3410	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
2883	Cap, 470u, 20%, 16v, Electrolytic. . .	3198 025 24710	3411	Res, 4R7, 5%, 1/3W, Metal Film . . .	2306 204 03478
2884	Cap, 2u2, 20%, 50v, Electrolytic . . .	3198 025 52280	3441	Res, 100 ohm, 5%, 1/10W, Metalized Glas	3198 021 51010
2885	Cap, 220n, 10%, 50v, Polyester	3198 014 02240	3442	Res, Zero ohm, "Chip" Jumper	3198 021 90030
2886	Cap, 220n, +80/-20%, 16v, Ceramic. . .	3198 017 42240	3443	Res, 1M, 5%, 1/16W, Metalized Glass. .	3198 021 31050
2892	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3445	Res, 15K, 5%, 1/6W, Carbon Film. . .	3198 011 01530
2893	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 41040	3446	Res, 5K6, 5%, 1/6W, Carbon Film. . .	3198 011 05620
2902	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198 026 21020	3447	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
2903	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	3448	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210
2904	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	3449	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890
2905	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	3450	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
2906	Cap, 27n, 10%, 50v, Ceramic.	2238 580 15642	S 3451	Res, 8R2, 5%, Metal Film	2306 204 03828
2907	Cap, 1n2, 10%, 50v, Ceramic.	2238 586 15624	S 3452	Res, 5K6, 1%, 3/5W, Metal Film	2312 915 15602
2908	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090	3453	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	3454	Res, 2K, 1%, 3/5W, Metal Film.	2312 915 12002
2911	Cap, 10n, 10%, 50v, Ceramic.	3198 017 31030	S 3455	Res, 6R8, 5%, 1 1/3W, Metal Film . . .	3198 012 26880
2950	Cap, 330p, 5%, 50v, Ceramic.	3198 016 33310	3458	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020
3000	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	S 3459	Res, 15K, 5%, 1 1/3W, Metal Film . . .	3198 012 21530
3001	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3460	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	3463	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390
3003	Res, 1K5, 5%, 1/16W, Metalized Glass. .	3198 021 31520	3465	Res, 27K, 1%, 3/5W, Metal Film	2312 915 12703
3004	Res, 8K2, 5%, 1/16W, Metalized Glass .	3198 021 38220	3468	Res, 180 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01810
3005	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3469	Res, 3K3, 5%, 1/6W, Carbon Film. . . .	3198 011 03320
3101	Res, 68 ohm, 5%, 1/6W, Carbon Film . .	3198 011 06890	3470	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3102	Res, 1K, 5%, 1/16W, Metalized Glass. . .	3198 021 31020	3471	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3103	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3472	Res, 3R3, 1%, 3/5W, Metal Film	2312 915 13308
3104	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3473	Res, 5R6, 1%, 3/5W, Metal Film	2312 915 15608
3105	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3474	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3106	Res, 220K, 5%, 1/16W, Metalized Glass. .	3198 021 32240	3475	Res, 2K2, 1%, 3/5W, Metal Film	2312 915 12202
3123	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3477	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3124	Res, 47K, 5%, 1/16W, Metalized Glass. .	3198 021 34730	3478	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510
3125	Res, 150 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01510	3479	Res, 2K7, 5%, 1/10W, Metalized Glass .	3198 021 52720
3126	Res, 47K, 5%, 1/16W, Metalized Glass .	3198 021 34730	3480	Res, 1R5, 5%, 1/4W, Carbon Film. . . .	2122 101 02083
3135	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590	3481	Res, 12K, 1%, 3/5W, Metal Film	2312 915 11203
3136	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3482	Res, 10K, 1%, 3/5W, Metal Film	2312 915 11003
3141	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3484	Res, 3K9, 5%, 1/6W, Carbon Film. . . .	3198 011 03920
3200	Res, 390 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03910	S 3486	Res, 33 ohm, 5%, 2 1/2W, Metal Film. .	3198 012 33390
3201	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3488	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3202	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3490	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220
3203	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3492	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3204	Res, 22K, 5%, 1/6W, Carbon Film. . . .	3198 011 02230	3493	Res, 6R8, 5%, 1/3W, Metal Film	2306 204 03688
3206	Res, 270K, 5%, 1/16W, Metalized Glass. .	2322 702 60274	3494	Res, 4R7, 5%, 1/2W, Metal Film	2306 207 03478
3207	Res, 1K, 5%, 1/6W, Carbon Film	3198 011 01020	3495	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230
3208	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	3496	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3209	Res, 68 ohm, 5%, 1/16W, Metalized Glass	3198 021 36890	3497	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040
3212	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	3498	Res, 12K, 5%, 1/16W, Metalized Glass .	3198 021 31230
3213	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3499	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3217	Res, 330K, 5%, 1/16W, Metalized Glass. .	3198 021 33340	3500	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3218	Res, 82K, 5%, 1/16W, Metalized Glass .	3198 021 38230	3501	Res, 3M3, 5%, 1/2W, Metalized Glass. .	2322 242 13335
3219	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	S 3504	Res, PTC, 3 ohm, 144V.	2122 663 00019
3220	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3506	Res, 1M5, 5%, 1/2W, Metalized Glass. .	2322 242 13155
3221	Res, 560 ohm, 5%, 1/6W, Carbon Film. .	3198 011 05610	3507	Surge Protector.	2422 549 43073
3222	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3508	Res, 220 ohm, 20%, 1/2W, Carbon Film .	3198 013 02210
3226	Res, 560 ohm, 5%, 1/16W, Metalized Glas	3198 021 35610	S 3510	Res, NTC, 4R7, 20%, 3W1.	2122 612 00056
3232	Res, 2K2, 5%, 1/16W, Metalized Glass .	3198 021 32220	3519	Res, 270 ohm, 5%, 1/6W, Carbon Film. .	3198 011 02710
3235	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3520	Res, 1K2, 5%, 1/10W, Metalized Glass .	3198 021 51220
3241	Res, 22K, 5%, 1/16W, Metalized Glass .	3198 021 32230	3521	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
3242	Res, 27K, 5%, 1/16W, Metalized Glass .	3198 021 32730	3522	Res, 330K, 5%, 1/10W, Metalized Glass. .	3198 021 53340
3244	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3523	Res, 100 ohm, 5%, 1/3W, Metal Film . .	2306 204 03101
3245	Res, 39K, 1%, 1/16W, Metalized Glass .	2322 704 63903	3524	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55630
3246	Res, 10K, 5%, 1/16W, Metalized Glass .	3198 021 31030	3525	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3247	Res, 680K, 5%, 1/16W, Metalized Glass. .	3198 021 36840	3526	Res, 0R1, 5%, 3/5W, Metal Film	3198 012 11070
3248	Res, 33K, 5%, 1/16W, Metalized Glass .	3198 021 33330	S 3527	Res, 0R33, 5%, 3/5W, Metal Film. . . .	3198 012 13370
3249	Res, 820 ohm, 5%, 1/6W, Carbon Film. .	3198 011 08210	3528	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3250	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220	3529	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3251	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3530	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3256	Res, 1K, 5%, 1/16W, Metalized Glass. .	3198 021 31020	3531	Res, 4K7, 5%, 1/10W, Metalized Glass .	3198 021 54720
3257	Res, 10M, 5%, 1/16W, Metalized Glass .	3198 021 31060	3532	Res, 2K2, 5%, 1/3W, Metal Film	2306 204 03222
3258	Res, 100K, 5%, 1/16W, Metalized Glass. .	3198 021 31040	3541	Res, 470 ohm, 5%, 1/10W, Metalized Glas	3198 021 54710
3259	Res, 470K, 5%, 1/16W, Metalized Glass. .	3198 021 34740	3542	Res, 1K5, 5%, 1/10W, Metalized Glass .	3198 021 51520
3331	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3543	Res, 82K, 1%, 3/5W, Metal Film	2312 915 18203
3332	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3544	Res, 4K7, 1%, 1/8W, Metalized Glass . .	2322 734 64702
3333	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3545	Res, 270K, 5%, 1/8W, Metalized Glass .	2322 730 61274
3334	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3548	Res, 15K, 5%, 1/10W, Metalized Glass .	3198 021 51530
3335	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010	3552	Res, 10K, 5%, 1/10W, Metalized Glass .	3198 021 51030
3336	Res, 1K, 20%, 1/2W, Carbon Film. . . .	3198 013 01020	3557	Res, 1K, 5%, 1/10W, Metalized Glass. .	3198 021 51020
3340	Res, 10 ohm, 5%, 1/2W, Metal Film. . .	2306 207 03109	3561	Res, 100 ohm, 5%, 1/6W, Carbon Film. .	3198 011 01010
S 3341	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	3562	Res, 12K, 5%, 1/10W, Metalized Glass .	3198 021 51230
S 3341	Res, 2R7 ohm, 5%, 1/3W, MF for A80QCF33 0X34	2306 204 03278	3563	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S 3342	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2306 204 03108	S 3565	Res, 330 ohm, 5%, 1W, Metal Film . . .	3198 012 13310
3343	Res, 1K5, 20%, 1/2W, Carbon Film . . .	3198 013 01520	3566	Res, 2K2, 5%, 1/10W, Metalized Glass .	3198 021 52220
3344	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	3569	Res, 5K6, 5%, 1/10W, Metalized Glass .	3198 021 55620
S 3345	Varactor, 1MA/50V, Max 115V.	2322 593 13507	3580	Res, 47K, 5%, 1/10W, Metalized Glass .	3198 021 54730
3346	Res, 33 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03390	3594	Res, 330 ohm, 5%, 1/10W, Metalized Glas	3198 021 53310
3400	Res, 330 ohm, 5%, 1/6W, Carbon Film. .	3198 011 03310	3595	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240
3401	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330	3596	Res, 220K, 5%, 1/10W, Metalized Glass. .	3198 021 52240
			3601	Res, 8K2, 5%, 1/6W, Carbon Film. . . .	3198 011 08220

S = Safety Part Be sure to use exact replacement part.

MS3652S427 (continued)

3603	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4820	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3604	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4825	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3605	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4827	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3606	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4830	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3607	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	4831	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3608	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710	4861	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3609	Res, 1K, 5%, 1/6W, Carbon Film.	3198 011 01020	4863	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3610	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4865	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3611	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	4866	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3618	Res, 6K8, 5%, 1/6W, Carbon Film.	3198 011 06820	4867	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3622	Res, 470 ohm, 5%, 1/16W, Metalized Glas	3198 021 34710	4869	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3623	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4870	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3624	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4871	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3625	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4873	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3626	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4876	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3627	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	4879	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3628	Res, 10K, 5%, 1/16W, Metalized Glass.	3198 021 31030	4880	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3630	Res, 2K2, 5%, 1/16W, Metalized Glass.	3198 021 32220	4881	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3632	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4883	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3635	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	4885	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3636	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	4892	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3639	Res, Zero ohm, "Chip" Jumper	3198 021 90030	4901	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3640	Res, 8K2, 5%, 1/6W, Carbon Film.	3198 011 08220	4903	Res, Zero ohm, "Chip" Jumper	3198 021 90030
3681	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4906	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3682	Res, 3K3, 5%, 1/10W, Metalized Glass.	3198 021 53320	4924	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3683	Res, 390 ohm, 5%, 1/10W, Metalized Glas	3198 021 53910	4925	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3684	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	4982	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3685	Res, 560 ohm, 5%, 1/10W, Metalized Glas	3198 021 55610	5001	Coil, 27u, 10%	3198 018 22790
3686	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198 021 51520	5002	Coil, 820n, 10%	3198 018 18270
3691	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5201	Coil, 6u8, 5%	3198 018 16880
3693	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5202	Wire Jumper.	3198 036 90010
3694	Res, 4K7, 5%, 1/16W, Metalized Glass.	3198 021 34720	5204	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3801	Res, 220 ohm, 5%, 1/16W, Metalized Glas	3198 021 32210	5205	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3802	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	5206	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3810	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5241	Wire Jumper.	3198 036 90010
3814	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5242	Coil, 10u, 5%	3198 018 11090
3815	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5341	Coil, 22u.	2422 535 97333
3816	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5342	Coil, 22u.	2422 535 97333
3817	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5401	Coil, 1mH, 10%	3198 018 71020
3818	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	S 5445	Transformer, PSL0T	3128 138 21421
3819	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5451	Coil, 33u, 10%	3198 018 73390
3820	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5452	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3821	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5457	Coil, Linear, DC12	3128 138 55881
3822	Res, 75 ohm, 5%, 1/16W, Metalized Glass	3198 021 37590	5461	Transformer, Signal Driver, SC10015-00	2422 531 02465
3861	Res, 100K, 5%, 1/16W, Metalized Glass.	3198 021 31040	5463	Coil, Choke.	3128 138 37021
3862	Res, 15K, 5%, 1/16W, Metalized Glass.	3198 021 31530	5471	Coil, 4u7, 20%	3198 018 74780
3863	Res, 1K2, 5%, 1/16W, Metalized Glass.	3198 021 31220	5472	Coil, 3u3, 10%	3198 018 23380
3864	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5480	Coil, 39u, 10%	2422 535 97336
3865	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 5501	Mains Filter	2422 549 43432
3866	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	S 5520	Transformer, SS39009-04.	2422 531 02459
3867	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	5521	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3891	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5560	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3893	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5561	Coil, 27u, 5%	2422 535 95366
3894	Res, 100 ohm, 5%, 1/16W, Metalized Glas	3198 021 31010	5562	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3896	Res, 330 ohm, 5%, 1/16W, Metalized Glas	3198 021 33310	5564	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3901	Res, 1K, 5%, 1/16W, Metalized Glass.	3198 021 31020	5602	Coil, 5u6, 5%	3198 018 15680
3902	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	5603	Coil, 5u6, 5%	3198 018 15680
3903	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	5604	Coil, 5u6, 5%	3198 018 15680
3904	Res, 10K, 5%, 1/16W, Metalized Glass.	3198 021 31030	5861	Coil, 10u, 5%	3198 018 11090
3905	Res, 3K3, 5%, 1/16W, Metalized Glass.	3198 021 33320	6001	Zener Diode, 33 volt	3198 010 23390
3906	Res, 10K, 5%, 1/16W, Metalized Glass.	3198 021 31030	6201	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 8K2, 5%, 1/16W, Metalized Glass.	3198 021 38220	6202	Diode, Signal, BAS316.	3198 010 10630
4001	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6206	Zener Diode, 6.8 volt.	3198 020 56880
4002	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6331	Diode, Signal, BAV21	3198 010 10070
4101	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6332	Diode, Signal, BAS316.	3198 010 10630
4102	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6333	Diode, Signal, BAV21	3198 010 10070
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6335	Diode, Signal, BAV21	3198 010 10070
4121	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6400	Res, 1K, 1%, 3/5W, Metal Film.	2312 915 11002
4214	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6401	Zener Diode, 47 volt	3198 010 24790
4216	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6445	Zener Diode, 10 volt	3198 020 51090
4388	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6447	Diode, Signal, 1N4148.	3198 010 10010
4401	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6448	Zener Diode, 6.2 volt.	9331 668 30133
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6449	Diode, Signal, BAV99	3198 010 10620
4430	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6460	Diode, Rect, DG3-7005L	9336 436 10682
4431	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6461	Diode, Rect, RGP30J-L7004.	9338 617 60682
4601	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6462	Zener Diode, 9.1 volt.	9331 177 80133
4608	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6465	Diode, Signal, BAV21	3198 010 10070
4609	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6466	Diode, Signal, BAV21	3198 010 10070
4613	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6467	Diode, Signal, BAS316.	3198 010 10630
4614	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6468	Diode, Signal, BAS316.	3198 010 10630
4615	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6469	Diode, Rect, BYV95C.	9335 001 80133
4616	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6470	Diode, Signal, BAV99	3198 010 10620
4617	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6476	Zener Diode, 15 volt	3198 010 21590
4619	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6481	Zener Diode, 5.6 volt.	3198 010 25680
4622	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6482	Zener Diode, 9.1 volt.	9331 177 80133
4623	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6483	Zener Diode, 33 volt	3198 010 23390
4691	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6485	Diode, Rect, BYV95C.	9335 001 80133
4692	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6486	Diode, Rect, EGP20DL-5100.	9322 164 42682
4693	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6487	Diode, Rect, BYV95A.	9335 000 90133
4696	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6488	Diode, Rect, EGP20DL-5100.	9322 164 42682
4812	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6500	Diode, Bridge Rect, GBU6JL-7002.	9322 138 08667
4814	Res, Zero ohm, "Chip" Jumper	3198 021 90030	6520	Diode, Rect, BYV95A.	9335 000 90133

S = Safety Part Be sure to use exact replacement part.

MS3652S427 (continued)

6523	Diode, Signal, 1N4148.	3198 010 10010	9501	Wire Jumper.	3198 036 90010
6524	Diode, Rect, 1N5062.	3198 010 10120	9503	Wire Jumper.	3198 036 90010
6525	Diode, Rect, 1N5062.	3198 010 10120	9506	Wire Jumper.	3198 036 90010
6526	Zener Diode, 22 volt.	3198 020 52290	9507	Wire Jumper.	3198 036 90010
6540	Zener Diode, 6.2 volt.	9331 668 30133	9510	Wire Jumper.	3198 036 90010
6541	Zener Diode, 10 volt.	3198 020 51090	9511	Wire Jumper.	3198 036 90010
6560	Diode, Rect, BYV29X-500.	9340 555 59127	9512	Wire Jumper.	3198 036 90010
6562	Diode, Rect, EGP20DL-5100.	9322 164 42682	9513	Wire Jumper.	3198 036 90010
6563	Diode, Signal, BAS316.	3198 010 10630	9514	Wire Jumper.	3198 036 90010
6565	Diode, Signal, BAV70.	9331 849 10215	9515	Wire Jumper.	3198 036 90010
6566	Diode, Signal, 1N4148.	3198 010 10010	9516	Wire Jumper.	3198 036 90010
6569	Diode, Signal, BAS316.	3198 010 10630	9518	Wire Jumper.	3198 036 90010
6570	Zener Diode, 6.8 volt.	3198 020 56880	9520	Wire Jumper.	3198 036 90010
6580	Diode, Signal, BAS316.	3198 010 10630	9521	Wire Jumper.	3198 036 90010
6681	Diode, Signal, BAT85.	9336 247 60133	9522	Wire Jumper.	3198 036 90010
6691	LED, LTL-10234WHCR.	9322 185 69682	9524	Wire Jumper.	3198 036 90010
6692	IR Receiver.	9322 127 54667	9528	Wire Jumper.	3198 036 90010
6901	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9530	Wire Jumper.	3198 036 90010
6904	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	9611	Coil, 27u, 10%.	3198 018 22790
7101	Transistor, NPN, BC847B(COL).	3198 010 42030	9612	Wire Jumper.	3198 036 90010
7200	IC, TDA9588H/N1/3I/1133.	9352 731 54557	9613	Wire Jumper.	3198 036 90010
7201	Transistor, NPN, BC847B(COL).	3198 010 42030	9614	Wire Jumper.	3198 036 90010
7204	Transistor, PNP, BC857B(COL).	3198 010 42150	9617	Wire Jumper.	3198 036 90010
7205	Transistor, PNP, BC857B(COL).	3198 010 42150	9618	Wire Jumper.	3198 036 90010
7330	IC, TDA6107JF/N3.	9352 713 37112	9619	Wire Jumper.	3198 036 90010
7400	Power FET, IR.	9322 053 35687	9621	Wire Jumper.	3198 036 90010
7441	Transistor, PNP, BC857B(COL).	3198 010 42150	9622	Wire Jumper.	3198 036 90010
7443	Transistor, PNP, BC557B(COL).	3198 020 40110	9623	Wire Jumper.	3198 036 90010
7460	Transistor, NPN, BU4508DX.	9340 550 92127	9624	Wire Jumper.	3198 036 90010
7461	Transistor, NPN, BC337-25(COL).	3198 020 43530	9626	Wire Jumper.	3198 036 90010
7462	Transistor, NPN, PDT143ZT.	9340 547 00215	9627	Wire Jumper.	3198 036 90010
7463	Transistor, PNP, BC327-25(COL).	3198 020 43430	9628	Wire Jumper.	3198 036 90010
7471	IC, TDA8359J/N2.	9352 701 64112	9629	Wire Jumper.	3198 036 90010
7480	Transistor, NPN, BD135.	3198 020 41010	9631	Wire Jumper.	3198 036 90010
7482	Transistor, NPN, BD135.	3198 020 41010	9632	Wire Jumper.	3198 036 90010
S 7515	Optical Coupler, TCET1103(G).	9322 140 14667	9637	Wire Jumper.	3198 036 90010
7520	IC, TEA1507P/N1.	9352 673 56112	9638	Wire Jumper.	3198 036 90010
7521	Power FET, FQPF9N50.	9322 187 16687	9639	Wire Jumper.	3198 036 90010
7522	Transistor, NPN, BC847B(COL).	3198 010 42030	9640	Wire Jumper.	3198 036 90010
7540	Transistor, NPN, BC547B(COL).	3198 020 40030	9641	Wire Jumper.	3198 036 90010
7541	Transistor, NPN, PDT114ET.	9340 310 10215	9642	Wire Jumper.	3198 036 90010
7542	Transistor, PNP, BC857B(COL).	3198 010 42150	9643	Wire Jumper.	3198 036 90010
7560	IC, L78L33ACZ.	9322 134 92676	9648	Wire Jumper.	3198 036 90010
7561	Transistor, NPN, PDT143ZT.	9340 547 00215	9650	Wire Jumper.	3198 036 90010
7580	Transistor, PNP, BC857B(COL).	3198 010 42150	9651	Wire Jumper.	3198 036 90010
7602	IC, M24C08-WBN6.	9322 154 38682	9652	Wire Jumper.	3198 036 90010
7606	Transistor, NPN, PDT143ZT.	9340 547 00215	9654	Wire Jumper.	3198 036 90010
7802	IC, HEF4053BT.	9333 729 60653	9655	Wire Jumper.	3198 036 90010
7861	IC, TDA9853H/V1.	9352 671 19557	9656	Wire Jumper.	3198 036 90010
7891	Transistor, NPN, BC847B(COL).	3198 010 42030	9657	Wire Jumper.	3198 036 90010
7892	Transistor, NPN, BC847B(COL).	3198 010 42030	9658	Wire Jumper.	3198 036 90010
7901	IC, AN7522N PH.	9322 181 41682	9659	Wire Jumper.	3198 036 90010
9001	Wire Jumper.	3198 036 90010	9660	Wire Jumper.	3198 036 90010
9104	Wire Jumper.	3198 036 90010	9663	Wire Jumper.	3198 036 90010
9121	Wire Jumper.	3198 036 90010	9664	Wire Jumper.	3198 036 90010
9122	Wire Jumper.	3198 036 90010	9665	Wire Jumper.	3198 036 90010
9171	Wire Jumper.	3198 036 90010	9666	Wire Jumper.	3198 036 90010
9173	Wire Jumper.	3198 036 90010	9667	Wire Jumper.	3198 036 90010
9175	Wire Jumper.	3198 036 90010	9668	Wire Jumper.	3198 036 90010
9176	Wire Jumper.	3198 036 90010	9669	Wire Jumper.	3198 036 90010
9181	Wire Jumper.	3198 036 90010	9670	Wire Jumper.	3198 036 90010
9182	Wire Jumper.	3198 036 90010	9671	Wire Jumper.	3198 036 90010
9183	Wire Jumper.	3198 036 90010	9672	Coil, 22u, 10%.	3198 018 22290
9192	Wire Jumper.	3198 036 90010	9674	Wire Jumper.	3198 036 90010
9193	Wire Jumper.	3198 036 90010	9675	Wire Jumper.	3198 036 90010
9311	Wire Jumper.	3198 036 90010	9676	Wire Jumper.	3198 036 90010
9312	Wire Jumper.	3198 036 90010	9678	Coil, 22u, 10%.	3198 018 22290
9406	Wire Jumper.	3198 036 90010	9679	Wire Jumper.	3198 036 90010
9407	Wire Jumper.	3198 036 90010	9680	Wire Jumper.	3198 036 90010
9408	Wire Jumper.	3198 036 90010	9681	Wire Jumper.	3198 036 90010
9409	Wire Jumper.	3198 036 90010	9685	Wire Jumper.	3198 036 90010
9410	Wire Jumper.	3198 036 90010	9686	Wire Jumper.	3198 036 90010
9411	Wire Jumper.	3198 036 90010	9687	Wire Jumper.	3198 036 90010
9412	Wire Jumper.	3198 036 90010	9688	Wire Jumper.	3198 036 90010
9413	Wire Jumper.	3198 036 90010	9689	Wire Jumper.	3198 036 90010
9414	Wire Jumper.	3198 036 90010	9690	Wire Jumper.	3198 036 90010
9415	Wire Jumper.	3198 036 90010	9691	Wire Jumper.	3198 036 90010
9416	Wire Jumper.	3198 036 90010	9694	Wire Jumper.	3198 036 90010
9417	Wire Jumper.	3198 036 90010	9695	Wire Jumper.	3198 036 90010
9418	Wire Jumper.	3198 036 90010	9697	Wire Jumper.	3198 036 90010
9419	Wire Jumper.	3198 036 90010	9698	Wire Jumper.	3198 036 90010
9421	Wire Jumper.	3198 036 90010	9699	Wire Jumper.	3198 036 90010
9422	Wire Jumper.	3198 036 90010	9821	Wire Jumper.	3198 036 90010
9423	Wire Jumper.	3198 036 90010	9822	Wire Jumper.	3198 036 90010
9424	Wire Jumper.	3198 036 90010	9825	Wire Jumper.	3198 036 90010
9425	Wire Jumper.	3198 036 90010	9828	Wire Jumper.	3198 036 90010
9426	Wire Jumper.	3198 036 90010	9829	Wire Jumper.	3198 036 90010
9427	Wire Jumper.	3198 036 90010	9831	Wire Jumper.	3198 036 90010
9453	Wire Jumper.	3198 036 90010	9832	Wire Jumper.	3198 036 90010
9460	Wire Jumper.	3198 036 90010	9837	Wire Jumper.	3198 036 90010
9463	Wire Jumper.	3198 036 90010	9838	Wire Jumper.	3198 036 90010
9500	Wire Jumper.	3198 036 90010	9839	Wire Jumper.	3198 036 90010

S = Safety Part. Be sure to use exact replacement part.

MS3652S427 (continued)

9846	Wire Jumper.	3198	036	90010
9847	Wire Jumper.	3198	036	90010
9849	Wire Jumper.	3198	036	90010
9850	Wire Jumper.	3198	036	90010
9851	Wire Jumper.	3198	036	90010
9852	Wire Jumper.	3198	036	90010
9853	Wire Jumper.	3198	036	90010
9856	Wire Jumper.	3198	036	90010
9860	Wire Jumper.	3198	036	90010
9861	Wire Jumper.	3198	036	90010
9862	Wire Jumper.	3198	036	90010
9864	Wire Jumper.	3198	036	90010
9865	Wire Jumper.	3198	036	90010
9868	Wire Jumper.	3198	036	90010
9873	Wire Jumper.	3198	036	90010
9874	Wire Jumper.	3198	036	90010
9875	Wire Jumper.	3198	036	90010
9877	Wire Jumper.	3198	036	90010
9891	Wire Jumper.	3198	036	90010
9892	Wire Jumper.	3198	036	90010
9901	Wire Jumper.	3198	036	90010
9902	Wire Jumper.	3198	036	90010
9903	Wire Jumper.	3198	036	90010
9904	Wire Jumper.	3198	036	90010
9905	Wire Jumper.	3198	036	90010
9911	Wire Jumper.	3198	036	90010
9913	Wire Jumper.	3198	036	90010
9914	Wire Jumper.	3198	036	90010
9915	Wire Jumper.	3198	036	90010
9918	Wire Jumper.	3198	036	90010
9991	Wire Jumper.	3198	036	90010
9993	Wire Jumper.	3198	036	90010
9996	Wire Jumper.	3198	036	90010
9997	Wire Jumper.	3198	036	90010
9998	Wire Jumper.	3198	036	90010
CBA	Main Chassis Assembly.	3141	058	59101

4824	Res, Zero ohm, "Chip" Jumper	3198	021	90030
6161	Zener Diode, 6.8 volt.	3198	010	26880
9151	Wire Jumper.	3198	036	90010
9152	Wire Jumper.	3198	036	90010
9153	Wire Jumper.	3198	036	90010
9155	Wire Jumper.	3198	036	90010
9170	Wire Jumper.	3198	036	90010
CBA	Side Jack Panel Assembly	3141	058	59161

Subwoofer Panel Parts

Subwoofer Panel Parts

Top Control Panel Parts

Top Control Panel Parts

Cabinet & Accessory Parts

Cabinet & Accessory Parts				
S AC01	AC Cord.	3135	010	03831
AC03	Anode Lead Spacer (3 Used)	3135	014	04471
AC04	Batteries for Remote Control Transmitter	9299	000	65263
AC05	Cabinet Back	3139	124	44411
AC08	Chassis Tray	3139	124	31325
S AC09	CRT, A90AKB50X07(V).	9322	186	37682
AC10	Customer Control Buttons	3139	124	32721
S AC12	Degaussing Coil.	2422	549	43972
AC15	Holder, Degaussing Coil (4 Used)	3135	013	01651
AC17	Owner's Manual	3121	235	21161
AC18	Quick Use Guide.	3121	233	44561
AC19	Side Jack Panel Bracket.	3139	124	40481
AC20	Cabinet Front Assembly	3121	237	53151
AC20A	Cabinet Front.	3139	177	57161
AC20C	Light Guide.	3139	124	32691
AC20D	Nameplate.	3135	015	03561
AC20H	Speaker, 16 ohm, 5W (2 Used)	2422	264	00371
REMOTE	Remote Control Transmitter, RC2524/17.	3139	228	87491

Channel One Card Parts

Channel One Card Parts

2D 3 Line Comb Filter Parts

2D 3 Line Comb Filter Parts

DAF Panel Parts

DAF Panel Parts

DVD Eject Panel Parts

DVD Eject Panel Parts

DVD Interface Panel Parts

DVD Interface Panel Parts

Front Interface Panel Parts

Front Interface Panel Parts

ITV Front Jack Panel Parts

ITV Front Jack Panel Parts

Net 1 Panel (part of Scan 4 Card Assembly)

Net 1 Panel (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Scan 4 Card (part of Scan 4 Card Assembly)

Side Jack Panel Parts

Side Jack Panel Parts

0232	Headphone Jack	2422	026	04747
0250	A/V Jack	2422	026	04815
0251	6 Pin Connector.	2422	025	12482
0254	5 Pin Connector.	2422	025	12481
0255	4 Pin Connector.	2422	025	12479
2171	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2172	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2173	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2174	Cap, 330p, 10%, 50v, Ceramic	3198	017	33310
2176	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2177	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
2178	Cap, 470p, 5%, 50v, Ceramic.	3198	016	34710
2179	Cap, 10u, 20%, 50v, Electrolytic	3198	025	51090
3150	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3151	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3152	Res, 47K, 5%, 1/16W, Metalized Glass	3198	021	34730
3153	Res, 150 ohm, 5%, 1/6W, Carbon	3198	011	01510
3156	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
3157	Res, 120 ohm, 5%, 1/16W, Metalized Glas	3198	021	31210
4817	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4819	Res, Zero ohm, "Chip" Jumper	3198	021	90030
4821	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4822	Res, Zero ohm, "Chip" Jumper	3198	021	90020
4823	Res, Zero ohm, "Chip" Jumper	3198	021	90030

S = Safety Part Be sure to use exact replacement part.

TO CORRECT REGION CODE PROBLEMS IN 20DV693R01, 27DV693, AND 30DV693 WITH SD5.12 DVD

USE CUSTOMER'S REMOTE

1) Power the TV from an isolation transformer. By remote turn on TV, and press eject button on the remote. This will switch the TV to DVD operation and show the DVD background display. With the DVD tray open and empty, press DVD Menu on the remote.

2) There will be a system status display. Count the lines up from the bottom. The 4th line from the bottom should read 11100400. If not proceed to step 3. If the line is 1110040 go to step 6.

3) Close the empty tray and turn off the TV by remote. Turn on by remote. After TV operation is started press TV/DVD on remote. After the DVD logo is displayed press PLAY 1 5 9.

4) There are now 8 dashes in the lower left of the screen. Enter 1 1 1 0 0 4 0 0. The numbers will appear as entered. After the last number press PLAY on the remote. WAIT! In about 30 seconds the display will go dark and return. This indicates the information entered is accepted.

5) Confirm the correct setup by repeating steps 1 and 2.

6) Play a Region One disc to confirm correct operation.

TO CORRECT REGION CODE PROBLEMS IN 20DV693R02 WITH SD3.1 DVD

USE CUSTOMER'S REMOTE

1) Power the TV. Turn on TV, and switch operation to DVD. Open and close DVD tray to confirm it is empty. This will switch the TV to DVD operation and show the DVD background display. THERE MAY BE NO COLOR! The next steps will correct.

2) Press SYST MENU on remote to display the DVD system menu. It will appear with the cursor at the top left corner of the menu.

3) Press the remote down arrow 4 times. Press right arrow one time. Press down arrow 5 times.

4) On the last press down a hidden display line will appear. It will appear as:

(C) PHILIPS '00-'01 5580 4.17.11 02100810 P140 5.1.14

In this display the number right after the P is the system. If the number is 140 (example: P140) then the system is set already and no action is needed. Skip to step 7.

If the number after P is not 140 but some other number perform the following system setting.

5) Exit the DVD system menu by pressing SYST MENU on the remote. With no disc in the tray (tray closed) press PLAY159 on the remote. A row of lines will appear. Make the following entry with the remote:

1 4 0 0 0 0 0 0 0 0 0 0 0 PLAY

It may be necessary to repeat this sequence several times to get the following result.

6) In about 3 seconds the DVD background display will become very bright, turn solid blue or black and return to normal blue logo. Wait 10 seconds and repeat steps 2-3-4 to confirm the letter P is followed by the number 140. Power off the TV and unplug.

7) Play a Region One disc to confirm correct operation.