


20W/CHANNEL STEREO BRIDGE AMP

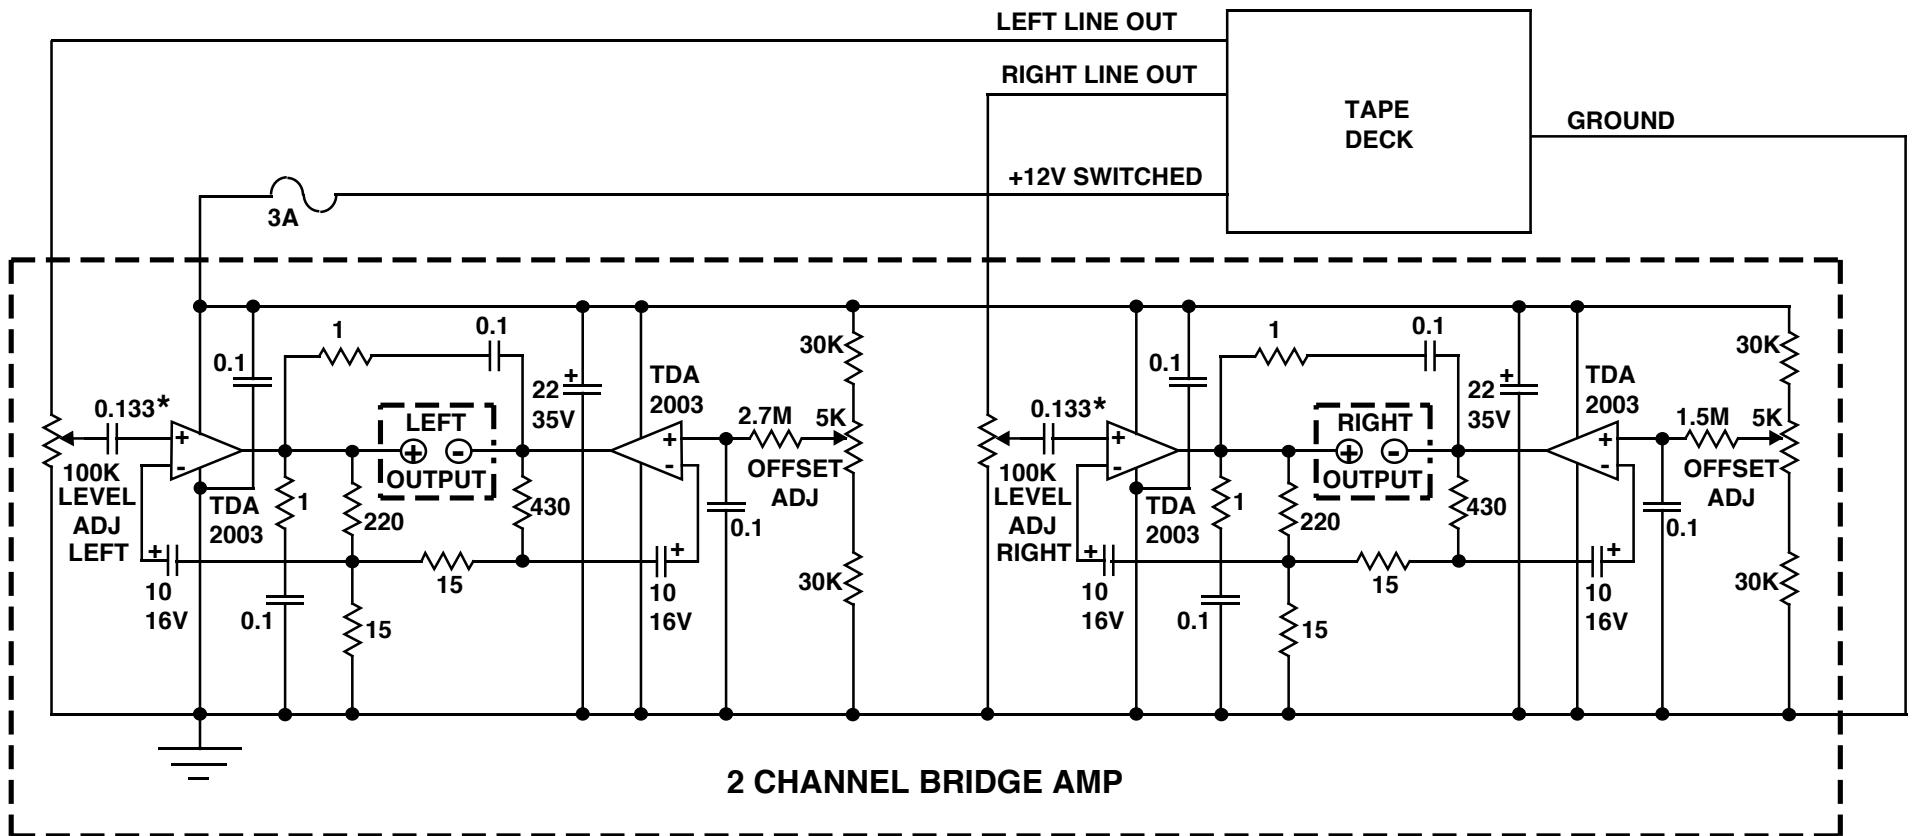

All resistors are in Ohms, capacitors are in μF .

TDA2003 devices are on heatsink.

Speaker outputs are floating (DO NOT GROUND).

OFFSET ADJUST is used to zero DC level across output.

LEVEL ADJUST sets volume (gain) of amp.

Outputs can drive loads down to 1.6 Ohms.

* Capacitor value selected to minimize turn-ON/turn-OFF transients.