

**Thank you for your interest in our schematics.** The schematic is available on the next page.


If you want to download additional parts of a schematic, or additional schematics, these must be requested individually.

To provide you with this information, more than 6000 members work regularly on the content of Radiomuseum.org.

As a member, you can access schematics, large images without watermarks and collector's prices. You will also surf at Radiomuseum.org without advertising. To do so, you may support Radiomuseum.org with a one-time membership fee of 20 € or 30 CHF or 25 US \$. We would be delighted if you joined as a member:


[https://www.radiomuseum.org/dsp\\_anmelden\\_start.cfm](https://www.radiomuseum.org/dsp_anmelden_start.cfm)

#### These books might be of interest of you:




##### **Hello, Everybody! The Dawn of American Radio**

Long before the Internet, another young technology was transforming the way we connect with the world. At the dawn of the twentieth century, radio grew from an obscure hobby into a mass medium with the power to reach millions of people.



##### **The Rise of Radio, from Marconi through the Golden Age**

As the dominant form of electronic mass communication in the United States from the 1930s into the 1950s, radio helped to forge a modern continental nation. It fused myriad subcultures heavily rural, ethnic, and immigrant into a national identity, unifying the nation in the face of the Depression and war.



##### **The Paraset Radio: The Story of a WWII Spy-Radio and How to Build a Working Replica**

This book describes the gripping story behind the Paraset – a unique spy-radio, dropped behind enemy lines in the dark days of WWII. This radio being both light weight and state of the art for the time was concealed in a suitcase, making ideal for use by the spies of SOE.

Click [here](#) for further information.

## PARTS LIST AND DESCRIPTIONS (Continued)

hotrodjohn71@yahoo.com

### RESISTORS

All wattages 1/2 watt, or less, unless otherwise listed.

ITEM No.	RATING		BENDIX PART No.	NOTES	ITEM No.	RATING		BENDIX PART No.	NOTES
	OHMS	WATT				OHMS	WATT		
R5	680K		220604B-684	Note 1	R12	15meg		220604B-156	6" Cupron Wire radiomuseum.org
R6	220K		220604B-224		R13	82Ω		220603B-820	
R7	10meg		220604B-106		R14	28Ω Cold		220629-4	
R8	33K		220604B-333		R15	1Ω		2090438-4	
R9	47K		220604B-473		R16	47Ω		220604B-470	
R10	2.2meg		220604B-225		R17	1.26Ω		2090438-3	
R11	47K		220603B-473						

Note 1. Some versions may use 3.3meg in this application (Part #220604B-335).

### COILS (RF-IF)

ITEM No.	USE	REPLACEMENT DATA					NOTES
		BENDIX PART No.	Meissner PART No.	Merit PART No.	Miller PART No.	Ram PART No.	
L1	Antenna Coil						Wound on 22K Wound on 18K  130 Microhenries
L2	RF Coil	216154-4 *					
L3	IF Trap Coil	2090088-2					
L4	Mixer Coil						
L5	Osc. Coil						
L6	Input IF	2090239-1					
L7	Output IF	2090237-1					
L8	"A" Lead Choke	216188-12					

\* Part of Tuner Assembly M3.

### TRANSFORMER (INTERSTAGE)

ITEM No.	TURNS RATIO	REPLACEMENT DATA							NOTES
		BENDIX PART No.	Halldorson PART No.	Merit PART No.	Ram PART No.	Stancor PART No.	Thordarson PART No.	Triad PART No.	
		PRI.	SEC.						
T1	3 : 1	2090259-1							radiomuseum.org

### TRANSFORMER (AUDIO OUTPUT)

ITEM No.	IMPEDANCE	REPLACEMENT DATA							NOTES
		BENDIX PART No.	Halldorson PART No.	Merit PART No.	Ram PART No.	Stancor PART No.	Thordarson PART No.	Triad PART No.	
		PRI.	SEC.						
T2	22Ω Tap @ 3-4Ω	2090260-1							

### SPEAKER

ITEM No.	TYPE			REPLACEMENT DATA		NOTES
	SIZE	FIELD	V. C. IMP.	BENDIX PART No.	QUAM PART No.	
	SP1	5" X 7"	PM	3-4Ω	655061-2 (2090182-1)	

### COMPONENT COMBINATIONS

ITEM No.	USE	DESCRIPTION	BENDIX PART No.	REPLACEMENT DATA
K1	Audio Couplate and Mixer Grid	390mmf, 10000mmf, 100Ω, 2.2meg, 15meg, 22meg, 33meg	2090147-1	

## PARTS LIST AND DESCRIPTIONS (Continued)

### FUSES

ITEM No.	TYPE	RATING	REPLACEMENT DATA					
			BENDIX PART No.		LITTELFUSE PART No.		BUSS PART No.	
			FUSE	HOLDER	FUSE	HOLDER	FUSE	HOLDER
M1	LAG	5A 32V	AGA-5	221633-6	301005.	155004	AGA5	HAF

### MISCELLANEOUS

ITEM No.	PART NAME	BENDIX PART No.	NOTES
M2	Lamp	1892	#1892
M3	Tuner Ass'y	2090227-1	
	Main Printed Board	2090346-1	Less Tubes and T1
	Small Printed Board	2090347-1	Less X1


### CABINETS & CABINET PARTS

(When Ordering Cabinets & Cabinet Parts, Specify Model, Chassis & Color)

NAME	PART NO.	DESCRIPTION
Bezel	2090184-1	Dial
Knob	2090149-1	Bezel, Volume, On-Off
Knob	2090149-2	Bezel, Tuning
Knob	2090153-1	Control
Knob	2090148-1	Tone
Cover	2090158-1	Top or Bottom
Pointer	2090169-1	
Dial	2090170-1	Calibration
Subdial	2090155-1	Backplate

### WIRING DATA

General-use Unshielded Hook-up Wire ..... Use BELDEN No. 8530 (Solid) Available in Ten Colors  
 ..... Use BELDEN No. 8524 (Stranded) Available in Ten Colors  
 Shielded Hook-up Wire ..... Use BELDEN No. 8885  
 Bonding Strap ..... Use BELDEN No. 8661

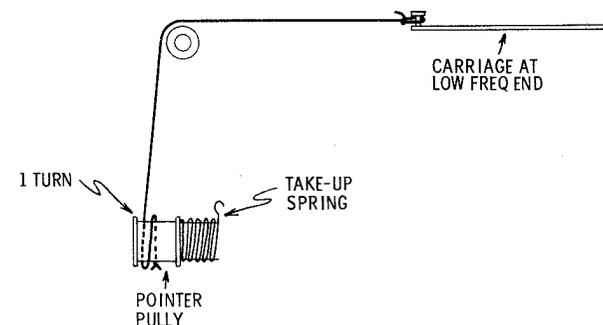

### DIAL CORD STRINGING

FORD MODEL 74BT (FEM-18805-A)

FORD MODEL 74BT (FEM-18805-A)