



Magnetic Latch Solenoid

with Hydraulic Base

S-402-3W

The BERMAD Model S-402-3W-BB is a compact 3-Way Latching Solenoid pilot valve comprised of two main components: a solenoid and a 3-way hydraulic pilot valve. The BERMAD latching solenoid can control valves independently or in combination with other control circuit accessories. Model S-402-D-3W-BB consumes power only when switching positions, using a very short electric impulse. This prolongs life of batteries and enables solar recharging. The hydraulic base features a manual override and consists of a bracket for attaching to the valve or to a solenoid manifold.



Features and Benefits

- Advanced Construction Materials, Unique Plastic Casing
 - ▢ Proven pressure, voltage and weather resistance
 - ▢ Highly durable in corrosive environments
 - ▢ Protection Class- IP68; NEMA Type 6D
- Superb Internal Design and Finish
 - ▢ Reliable operation under dirt loaded water
- Short Electrical Impulse Latch Activation
 - ▢ Extremely low power consumption
 - ▢ Low voltage battery operation
 - ▢ Saves wires and infrastructures
 - ▢ No coil heating
 - ▢ Suites most Battery Operated Controllers on the market
 - ▢ Applicable in solar activated systems
- Hydraulic Base with Installation Bracket
 - ▢ High flow capacity quickens valve response
 - ▢ No dirt sedimentation inside solenoid actuator
 - ▢ Manual override open and close
 - ▢ Simple installation to valve or manifold
- Reliable and Durable Product that Bears the Stamp of BERMAD Quality



Applications

- Systems distanced from control center
- Unavailable power supply locations
- Solenoid controlled on/off valves
- Solenoid controlled pressure and flow control valves
- Multiple valve systems
- Solenoid manifolds in irrigation heads



Specifications

Base Ports: 1/8" NPT

- 1- Vent
- 2- Valve Control Chamber
- 3- Pressure

Valve Anchoring:

By Screws (Self Tapping #8) at the Solenoid base

Leads: 2 leads x 0.32 mm² x 80 cm

Operation Modes (electrical connentions)

+Red & -Black: Solenoid vents

+Black & - Red: Solenoid pressurizes

Operating Pressure Range: 0-10 bar

Base Orifice Diameter: 2.2 mm

Base Flow Factor: Kv = 0.12 m³/h @ 1 bar ΔP; Cv= 0.14 GPM @1 psi ΔP

Materials:

Actuator Casing: Nylon

Seals: NBR

Wetted parts: Stainless Steel 400 and polyamide

Base: Nylon (Optional: Brass)

Electrical Data:

Voltage Range: 9-40 VDC


Coil Resistance: 6Ω

Coil Inductance: 90 mH

Pulse Width: 20-100 mSec

Required Capacitor: 4700μF

Note: To ensure compatibility of solenoid with your system, please contact BERMAD's local representative.

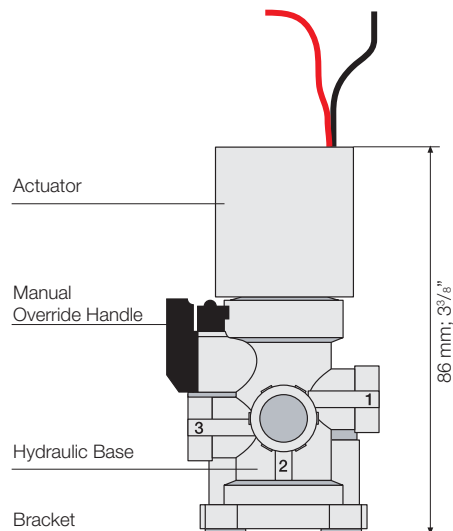

weight: 0.17 kg; 0.37 lbs.

How to Order

Please Specify the requested Solenoid as follow

■ 2-wires 3-Way Magnetic Latch Solenoid with Hydraulic Base, Bermad Model: S-402-2L-3W-9V/DC-BB

To Order installed and tested Solenoid Manifold Please Specify:

■ S-402-2L-3W-9V/DC-BB Solenoid manifold, BERMAD Model: EM-402-_____*

* Specify desired quantity of Solenoids
(2-10 Solenoids can be ordered)



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD.

PCSAE42-3W 05