


For non-standard "symmetric" RTS-CTS handshake see:
<http://en.wikipedia.org/wiki/RS-232>

Place jumper on left side of all 3 sips
if a male RS-232 connector is installed.
Otherwise, for a female RS-232 connector,
place jumpers on the right side.

DTE Function

DCE Function

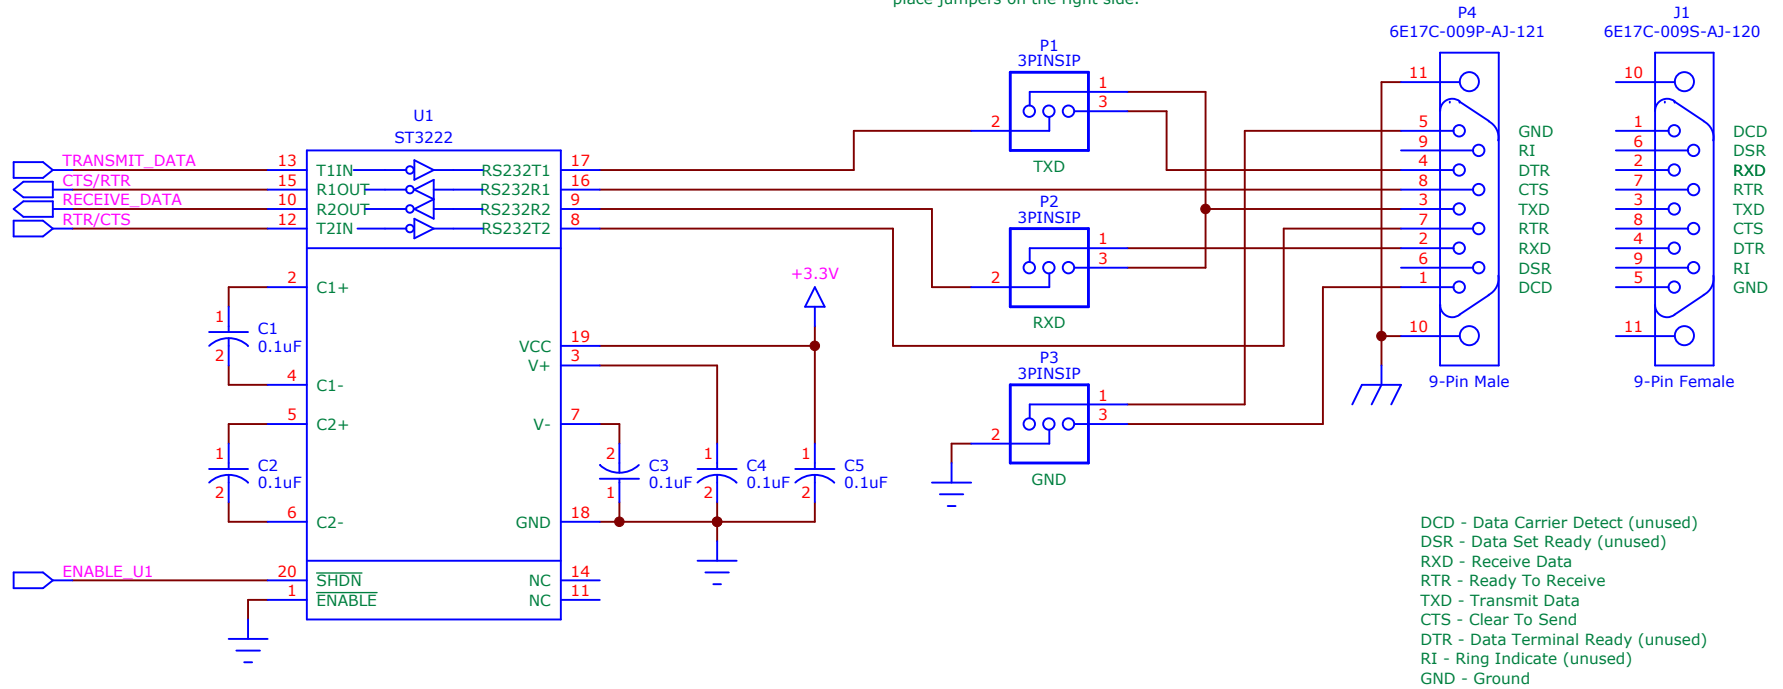

Approvals		Date		Title: Selectable DTE/DCE Function	
Drawn: VG		2014/04/07		Size: A	
Checked:				Part Number:	
Approved:				Rev. A	
				Sheet: 1 of 1	