


## PART SCHEMATIC

LM2917 OUTPUTS AT PIN 5 WHEN PULSED INPUT AT PIN 1 IS ABOVE REFERENCE FREQUENCY SET BY POT. LED INDICATES HIGH FREQUENCY. HOW DO I INCORPORATE A BI-COLOUR LED TO SHOW GREEN WHEN CIRCUIT IS SWITCHED ON & RED WHEN HIGH FREQUENCY IS ACTIVATED?

VIZUE 568

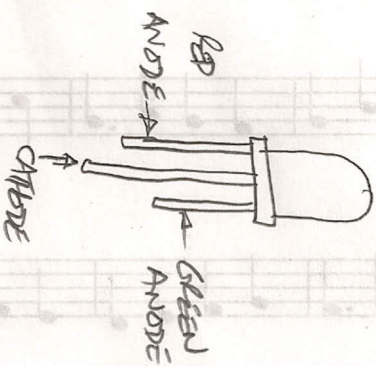

BI-COLOUR LED