


Toroids

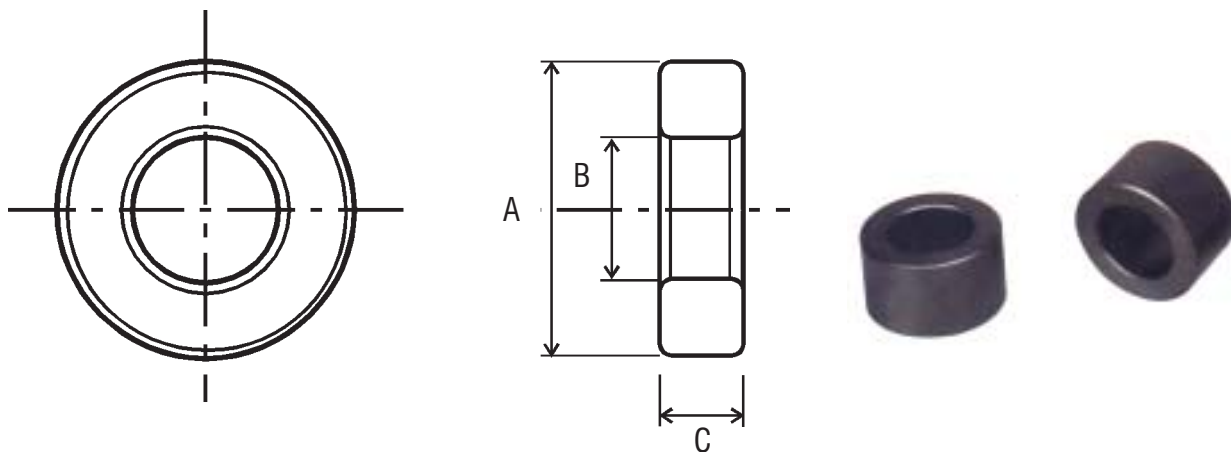

DIMENSIONS										
TYPE	ØA(mm)	ØB(mm)	C (mm)	Le Cm ²	Ae Cm ²	Ve Cm ²	AL (±25%) MSB-5S	AL min MGQ5C	Approx.wt. gms/pc	
T 10.0	10.0 ±0.6	6.0 ±0.2	3.0 ±0.3	2.51	0.06	0.15	900	1200	0.7	
T 10.0	10.0 ±0.6	6.0 ±0.2	4.0 ±0.3	2.51	0.08	0.20	1200	1600	1.0	
T 12.5	12.5 ±0.4	7.5 ±0.4	5.0 ±0.3	3.14	0.13	0.39	2000	1870	1.9	
T 13.3	13.3 ±0.3	8.3 ±0.3	5.2 ^{+0.0} _{-0.6}	3.39	0.13	0.43	1345	1680	2.1	
T 15.2	15.2 ±0.5	7.6 ±0.4	6.7 ±0.3	3.58	0.25	0.91		3300	4.4	
T 16.0	16.0 ±0.4	10.0 ±0.4	6.3 ±0.3	4.08	0.19	0.77	1745	2000	3.7	
T 17.5	17.5 ±0.6	11.5 ±0.4	8.0 ±0.3	4.56	0.24	1.10	1980	2320	5.3	
T 19.0	19.0 ±0.5	11.0 ±0.4	8.0 ±0.3	4.71	0.32	1.51	2500	3400	7.3	
T 21.0	21.0 ±0.5	13.0 ±0.3	12.5 ±0.5	5.34	0.50	2.67	3530	4670	12.9	
T 25.0	25.0 ±0.6	15.0 ±0.5	10.0 ±0.3	6.02	0.49	2.95	3070	3750	15.2	
T 25.0	25.0 ±0.6	15.0 ±0.5	12.0 ±0.4	6.28	0.60	3.77	3600	4800	18.3	
T 27.5	27.5 ±0.6	14.5 ±0.5	6.5 ±0.4	6.60	0.42	2.79	2414	3000	13.5	
T 28.0	28.5 ±0.4	13.5 ±0.4	16.7 ±0.4	6.59	1.25	8.76	7000	9000	40.1	
T 31.5	31.5 ±1.0	19.0 ±0.6	12.5 ±0.3	7.93	0.78	6.19	3825	4687	30.0	
T 32.0	32.0 ±0.7	14.5 ±0.5	7.0 ±0.3	7.30	0.61	4.47	3166	3940	21.7	
T 36.0	36.0 ±1.0	23.0 ±0.6	15.0 ±0.4	9.26	0.97	9.03	3950	5230	43.8	
T 45.0	45.0 ±1.4	28.0 ±0.8	11.0 ±0.4	11.50	0.94	10.81	3080	3850	52	
T 50.0	50.0 ±1.0	30.0 ±0.8	20.0 ±0.3	12.56	2.00	25.12	6000	8000	121.8	
T 58.3	58.3 ±1.0	40.8 ±0.8	17.6 ±0.4	15.56	1.54	23.96	3700		116.2	
T 60.0	63.0 ±1.0	38.0 ±0.8	25.0 ±0.6	15.86	3.13	49.55	7400	9500	240.3	

Note : Epoxy coated Toroids in above types also can be made available.