



## ***Display Specification***

**[WWW.LCDSOLAR.COM](http://WWW.LCDSOLAR.COM)**

Solar Technologies, Inc. – Headquarters  
26180 Enterprise Way  
Building No. 100  
Lake Forest, CA 92630

949.458.1080 Tel.  
949.458.1081 Fax  
[Sales@LCDSolar.com](mailto:Sales@LCDSolar.com)

The Solar Technologies name and logo are the service marks of Solar Technologies, Inc. All other trademarks, service marks, logos, slogans, domain names, trade names and copyrights (collectively "Marks") are the properties of their respective owners. Solar Technologies disclaims any proprietary interest in Marks other than its own. All product specifications are provided for convenience only. The product specifications contained herein are provided "as is" and with respect to the information contained therein Solar Technologies disclaims all representations and warranties of any kind, including warranties of merchantability, fitness for a particular purpose, and accuracy of the content. Please consult the manufacturer for specific product information.

# UNIPAC OPTOELECTRONICS CORPORATION

Spec. No. | 412-212-004

Version : 3


Total pages: 14

Date : 1998/09/16

## UP61V01 COLOR TFT-LCD MODULE SPECIFICATION

MODEL NAME: UP61V01

The content of this technical information  
is subject to change without notice.  
Please contact Unipac or its agent for  
further information.

Approved by	Checked by	Prepared by
		

# UP61V01 Specification Change List

Version	Change Date	Content																																
3	1998-9-01	<p><b>3. Electrical characteristics ( Page 4 )</b></p> <p>b. Current consumption</p> <table border="1"> <thead> <tr> <th colspan="2">Parameter</th> <th>Version 2</th> <th>Version 3</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Supply current</td> <td>Typ.</td> <td>180</td> <td>140</td> </tr> <tr> <td>Remark</td> <td>-</td> <td>Note 1</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Version 2</th> <th>Version 3</th> </tr> </thead> <tbody> <tr> <td>-</td> <td>Note 1 Under 64 grayscale pattern</td> </tr> </tbody> </table> <p>f. Backlight driving conditions (Page 7)</p> <table border="1"> <thead> <tr> <th>Symbol</th> <th></th> <th>Version 2</th> <th>Version 3</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Vs</td> <td>Min.</td> <td>1,250</td> <td>-</td> </tr> <tr> <td>Min.</td> <td>1,250</td> <td>-</td> </tr> <tr> <td>Max.</td> <td>-</td> <td>1,250</td> </tr> <tr> <td>Max.</td> <td>-</td> <td>1,100</td> </tr> </tbody> </table> <p><b>4. Add power ON/OFF sequence (Page 7)</b>            To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown below.</p> <p>Power Supply <math>V_{DD}</math></p> <p>Input Signal</p> <p>Power ON/OFF Sequence</p> <p><b>Appendix :</b>            Update Fig 1 ( Page 12 )</p>	Parameter		Version 2	Version 3	Supply current	Typ.	180	140	Remark	-	Note 1	Version 2	Version 3	-	Note 1 Under 64 grayscale pattern	Symbol		Version 2	Version 3	Vs	Min.	1,250	-	Min.	1,250	-	Max.	-	1,250	Max.	-	1,100
Parameter		Version 2	Version 3																															
Supply current	Typ.	180	140																															
	Remark	-	Note 1																															
Version 2	Version 3																																	
-	Note 1 Under 64 grayscale pattern																																	
Symbol		Version 2	Version 3																															
Vs	Min.	1,250	-																															
	Min.	1,250	-																															
	Max.	-	1,250																															
	Max.	-	1,100																															

**Contents:**

<b>A. Physical specifications</b>	<b>P2</b>
<b>B. Electrical specifications</b>	<b>P3</b>
<b>1. Pin assignment</b>	<b>P3</b>
2. Absolute maximum ratings	<b>P4</b>
3. Electrical characteristics	<b>P4</b>
a. Typical operating conditions	<b>P4</b>
b. Current consumption	<b>P4</b>
c. Display color v.s. input data signals	<b>P5</b>
d. Input signal timing	<b>P6</b>
e. Display position	<b>P7</b>
f. Backlight driving conditions	<b>P7</b>
4. Power ON/OFF Sequence	<b>P7</b>
<b>C. Optical specifications</b>	<b>P8</b>
<b>D. Reliability test items</b>	<b>P10</b>
<b>E. Display quality</b>	<b>P10</b>
<b>F. Packing form</b>	<b>P11</b>
<b>Appendix:</b>	
Fig.1 Outline dimensions of TFT-LCD module	<b>P12</b>
Fig.2 Vertical timing chart	<b>P13</b>
Fig.3 Horizontal timing chart	<b>P14</b>

**A. Physical specifications**

No.	Item	Specification	Remark
1	Display resolution(pixel)	640(H) × 480(V)	
2	Active area(mm)	122.9(H) × 92.2(V)	
3	Screen size(inch)	6.1(Diagonal)	
4	Dot pitch(mm)	0.064(H) × 0.192(V)	
5	Pixel pitch(mm)	0.192(H) × 0.192(V)	
6	Color configuration	R.G.B Vertical stripe	
7	Overall dimensions(mm)	157.8(H) × 108.7(V) × 8(D)	Note 1
8	Weight(g)	180±20	
9	Surface treatment	Anti-Glare coating	

Note 1: Refer to Fig. 1.

## B. Electrical specifications

### 1. Pin assignment

Connector : 25-5087-032-404-861 (ELCO)

User's connector : 14-5087-032-830-861(ELCO)

Pin no.	Symbol	i/o	Description	Remark
1	GND	-	Ground	Note 1
2	CLK	i	Clock signal for sampling each data signal	
3	Hsync	i	Horizontal sync.	
4	Vsync	i	Vertical sync.	
5	GND	-	Ground	Note 1
6	R0	i	Red data(LSB)	
7	R1	i	Red data	
8	R2	i	Red data	
9	R3	i	Red data	
10	R4	i	Red data	
11	R5	i	Red data(MSB)	
12	GND	-	Ground	Note 1
13	G0	i	Green data(LSB)	
14	G1	i	Green data	
15	G2	i	Green data	
16	G3	i	Green data	
17	G4	i	Green data	
18	G5	i	Green data(MSB)	
19	GND	-	Ground	Note 1
20	B0	i	Blue data(LSB)	
21	B1	i	Blue data	
22	B2	i	Blue data	
23	B3	i	Blue data	
24	B4	i	Blue data	
25	B5	i	Blue data(MSB)	
26	GND	-	Ground	Note 1
27	ENAB	i	Signal to settle the horizontal display position	
28	VCC	i	Power supply	
29	VCC	i	Power supply	
30	R/L	i	Horizontal display mode select signal	Note 2
31	U/D	i	Vertical display mode select signal	Note 3
32	TST	-		Note 4

Note 1: GND is connected to the frame of the LCD module.

Note 2: When R/L is "High" or open, the direction of horizontal scanning is normal. When R/L is "Low", the direction of horizontal scanning is reversed.

Note 3: When U/D is "High" or open, the direction of vertical scanning is normal. When U/D is "Low", the direction of vertical scanning is reversed.

Note 4: This pin should be electrically opened.

## 2. Absolute maximum ratings

(GND = 0 V)

Parameter	Symbol	Min.	Max.	Unit	Remark
Supply voltage	$V_{CC}$	-0.3	4.3	V	Note 1
Input voltage	$V_i$	-0.3	$V_{CC}+0.3$	V	Note 1,2
Storage temperature	$T_{stg}$	-25	+60	°C	Note 3
Operating temperature	$T_{opp}$	0	+60	°C	Note 3,4
	$T_{opa}$	0	+50	°C	Note 3,4

Note 1:  $T_a = 25^{\circ}\text{C}$

Note 2: CLK,R0~R5,G0~G5,B0~B5,Hsync,Vsync and ENAB terminals.

Note 3: Maximum wet-bulb temperature  $38^{\circ}\text{C}$  or less, no dew condensation.

Note 4:  $T_{opp}$  : Panel temperature.

$T_{opa}$  : Ambient temperature.

Please pay attention to the temperature rise induced by the inserted backlight.

## 3. Electrical characteristics

### a. Typical operating conditions

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
Supply voltage		$V_{CC}$	3.0	3.3	3.6	V	
Logic input voltage	H level	$V_{IH}$	$V_{CC} \times 0.7$	-	$V_{CC}$	V	
	L level	$V_{IL}$	0	-	$V_{CC} \times 0.3$	V	

### b. Current consumption

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Supply current	$I_{CC}$	$V_{CC} = +3.3\text{V}$	-	140	300	mA	Note 1

Note 1: Under 64 grayscale pattern.

c.Display color v.s. input data signals

Display colors		Data signal (0: Low level , 1: High level)																	
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyna	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	↑																		
	↓																		
	bright	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Green grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	↑																		
	↓																		
	bright	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
Blue grayscale	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	↑																		
	↓																		
	bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
		0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	

Note : Each basic color can be displayed in 64 gray scales using the 6 bit data signals. By combing the 18 bit data signals(R,G,B), the 262,144 colors can be achieved on the display.

## d. Input signal timing

Timing diagrams of input signal are shown in Fig 2 and Fig 3.

## (1).Timing chart

	Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark	
CLK	Frequency	1/Tc	-	25.18	28.3	MHz		
	High time	Tch	5	-	-	ns		
	Low time	Tcl	10	-	-	ns		
Hsync	Period	TH	30.0	31.78	-	$\mu$ s		
			770	800	900	CLK		
	Display period	THd	-	25.4	-	$\mu$ s		
				640			CLK	
	Pulse width	THp	2	96	200	CLK		
	Hsync-CLK timing	THc	10	-	Tc-10	ns		
Vsync	Hsync-Vsync timing	TVh	0	-	TH-THp	CLK		
	Period	TV	16.1	16.7	17.2	ms		
			515	525	560	TH		
	Display period	TVd	-	15.3	-	ms		
					480			TH
Pulse width	TVp	2	-	34	TH			
DATA R0~R5 G0~G5 B0~B5	CLK-DATA timing	Tds	5	-	-	ns		
	DATA-CLK timing	Tdh	10	-	-	ns		
	Rising time falling time	Tdrf	-	-	10	ns		

## (2). Horizontal display position

## (a)ENAB mode:

The horizontal display position is determined by ENAB signal and the input data corresponding to the rising edge of ENAB .

	parameter	symbol	Min.	Typ.	Max.	Unit	Remark
Enable signal	setup time	Tes	5	-	Tc-10	ns	
	pulse width	Tep	-	640	-	CLK	
	Hsync-Enable signal timing	THE	16	-	164	CLK	

## (b)Fix mode:

When ENAB is fixed "Low", the display starts from the data of C48(clock) as shown in Fig 3. Be careful that the module does not work when ENAB is fixed "High".

(3). Vertical display position

parameter	symbol	Min.	Typ.	Max.	Unit	Remark
Vertical display position	TVS	34			H	Fix mode
		4	-	68	H	ENAB mode

e. Display position

D(0,0)	D(1,0)	.....	D(X,0)	.....	D(638,0)	D(639,0)
D(0,1)	D(1,1)	.....	D(X,1)	.....	D(638,1)	D(639,1)
:	:	.....	:	.....	:	:
D(0,Y)	D(1,Y)	.....	D(X,Y)	.....	D(638,Y)	D(639,Y)
:	:	.....	:	.....	:	:
D(0,478)	D(1,478)	.....	D(X,478)	.....	D(638,478)	D(639,478)
D(0,479)	D(1,479)	.....	D(X,479)	.....	D(638,479)	D(639,479)

f. Backlight driving conditions


Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Lamp voltage	$V_L$	-	390	-	Vrms	Note 2
Lamp current	$I_L$	3.2	3.5	3.8	mArms	Note 2
Lamp starting voltage	$V_s$	-	-	1,250	Vrms	Note 1
		-	-	1,100		Note 2
Frequency	$F_L$	-	60	-	KHz	
Lamp life time	$L_L$	10,000	-	-	Hr	Note 2

Note 1: T= 0°C

Note 2: T=25°C

(4). Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown below.

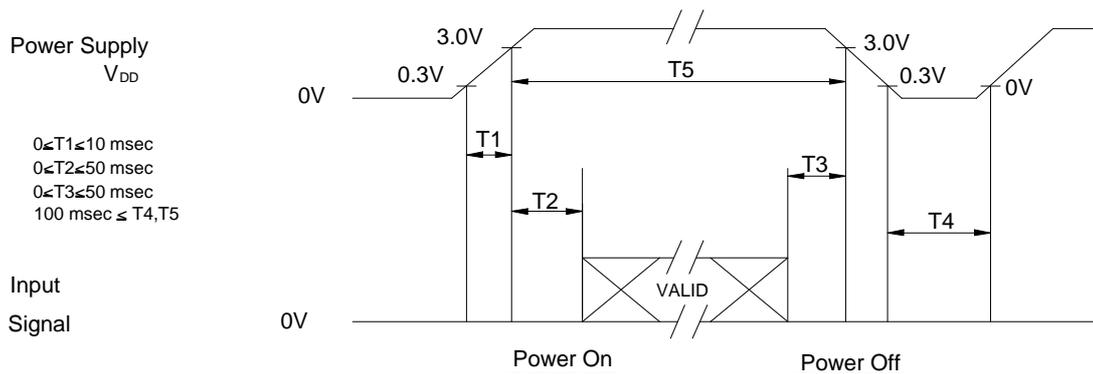

Power ON/OFF Sequence

NOTE : Do not keep the interface signal high-impedance when power is on.

**C. Optical specifications (Note 1, Note 2, Note 3)**

Item	Symbol	Condition	Specification			Unit	Remark
			Min.	Typ.	Max.		
Response time Rising time Falling time	$T_r$ $T_f$	$\theta = 0^\circ$	- -	25 30	50 60	ms	Note 4
Contrast ratio	CR	At optimized viewing angle	100	150	-		Note 5
Viewing angle Top Bottom Left Right		$CR \geq 10$	10 30 45 45	- - - -	- - - -	deg.	Note 8
Brightness	$Y_L$	$\theta = 0^\circ$	50	60	-	nit	Note 6, 7
White chromaticity	x	$\theta = 0^\circ$	0.28	0.33	0.38		
	y		0.31	0.36	0.41		
White uniformity	$\delta_w$		-	-	1.45		Note 9


Note 1: Ambient temperature = 25°C.

Note 2: To be measured in dark room.

Note 3: To be measured with a viewing cone of 1° by Topcon luminance meter BM-7.

Note 4: Definition of response time:

The output signals of photodetector are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

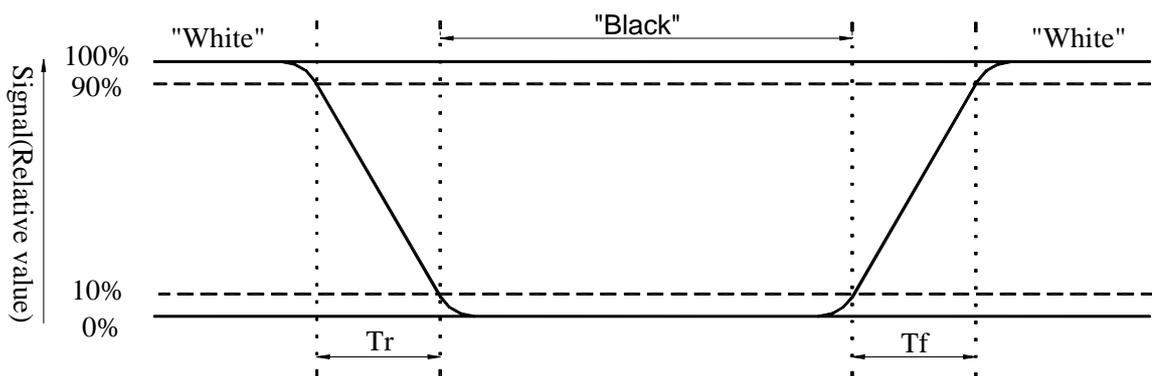

Note 5: Definition of contrast ratio:


Contrast ratio is calculated with the following formula.

$$\text{Contrast Ratio(CR)} = \frac{\text{Photodetector output when LCD is at " White " state}}{\text{Photodetector output when LCD is at " Black " state}}$$

Note 6: Measured on the center area of the panel.


Note 7: Driving conditions for CCFT : Irms=3.5mA.

Note 8: Definition of viewing angle:

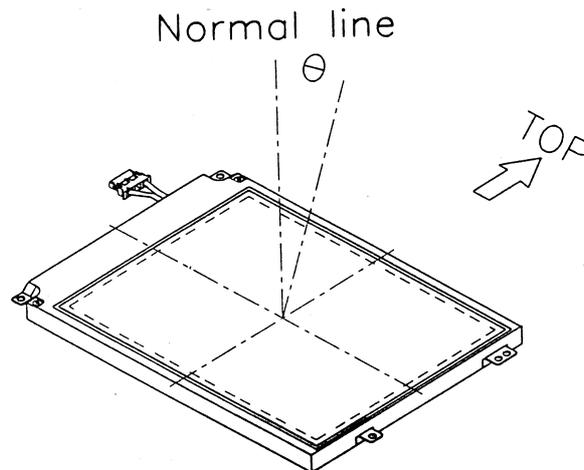

Note 9: Definition of white uniformity:

White uniformity is defined as the following with five measurements (A~E).

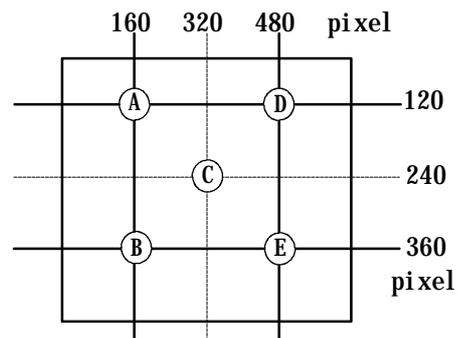


$$\delta_w = \frac{\text{Maximum Luminance of five points (brightness)}}{\text{Minimum Luminance of five points (brightness)}}$$

**D. Reliability test items**

Test tem	Test Condition	Remark
High temperature storage	60°C , 240Hrs	
Low temperature storage	-25°C , 240Hrs	
High temperature & high humidity operation	40°C , 95%RH , 240Hrs (No condensation)	
High temperature operation	50°C , 240Hrs	
Low temperature operation	0°C , 240Hrs	
Temperature cycling (non-operation)	-25°C ~ 60 2hrs,30mins,2hrs,5cycles	
Electrostatic discharge (non-operation)	150PF,150Ω,±10KV,1second, 9 places on the panel,10 times each place	Note 1
Vibration (non-operation)	Frequency range: 10 ~ 55Hz stroke:1.5mm Sweep:10Hz ~ 55Hz ~ 10Hz 1 hour for each direction X, Y, Z (3 Hrs in total)	
Mechanical shock (non-operation)	50G, 11ms , ±X, ±Y ,±Z once for each direction	

Note 1:The discharging points are shown as bellow.

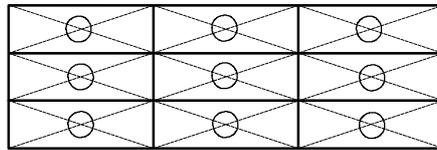**E. Display quality**

The display quality of the color TFT-LCD module should be in compliance with the unipac's "Incoming Inspection Standard For 6.1" TFT-LCD Modules", specification NO:251-160-501.





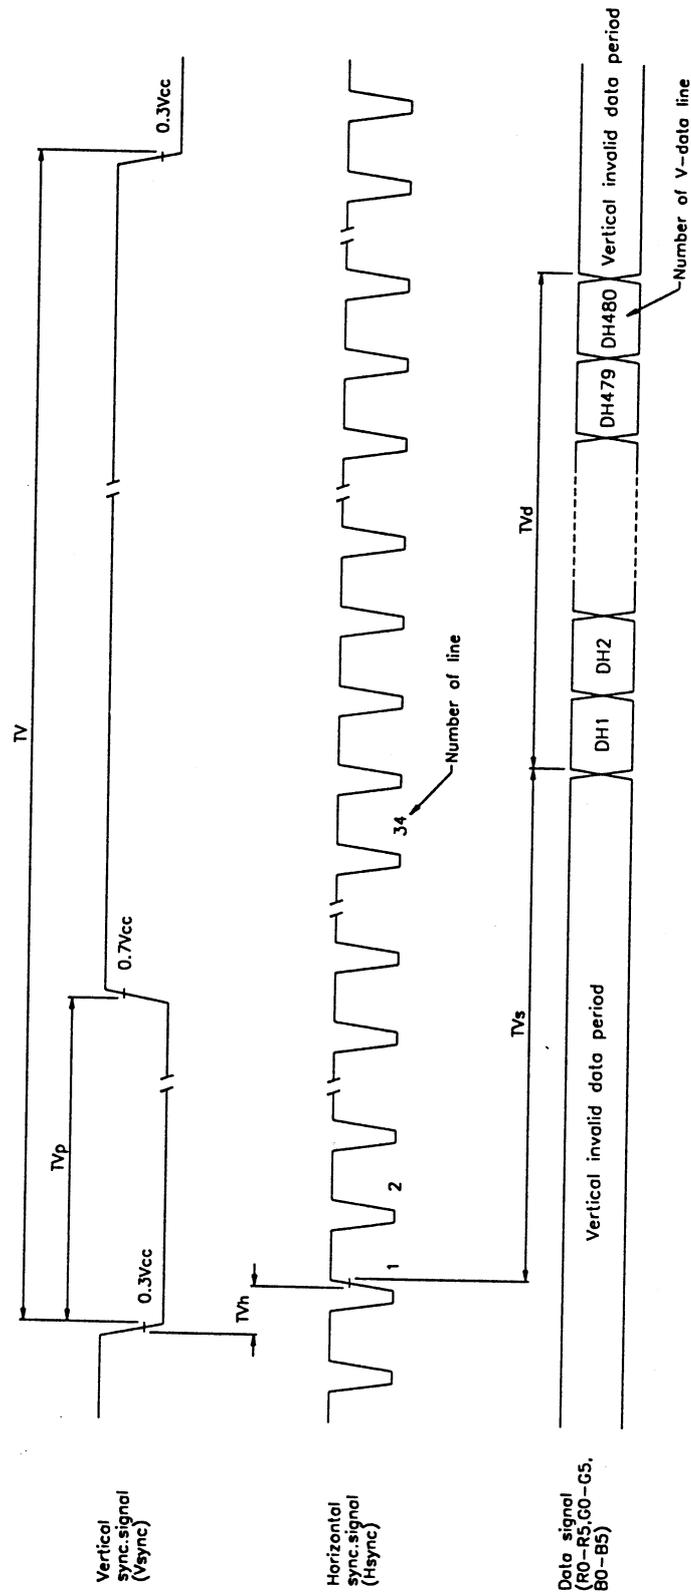


Fig.2 Vertical timing chart

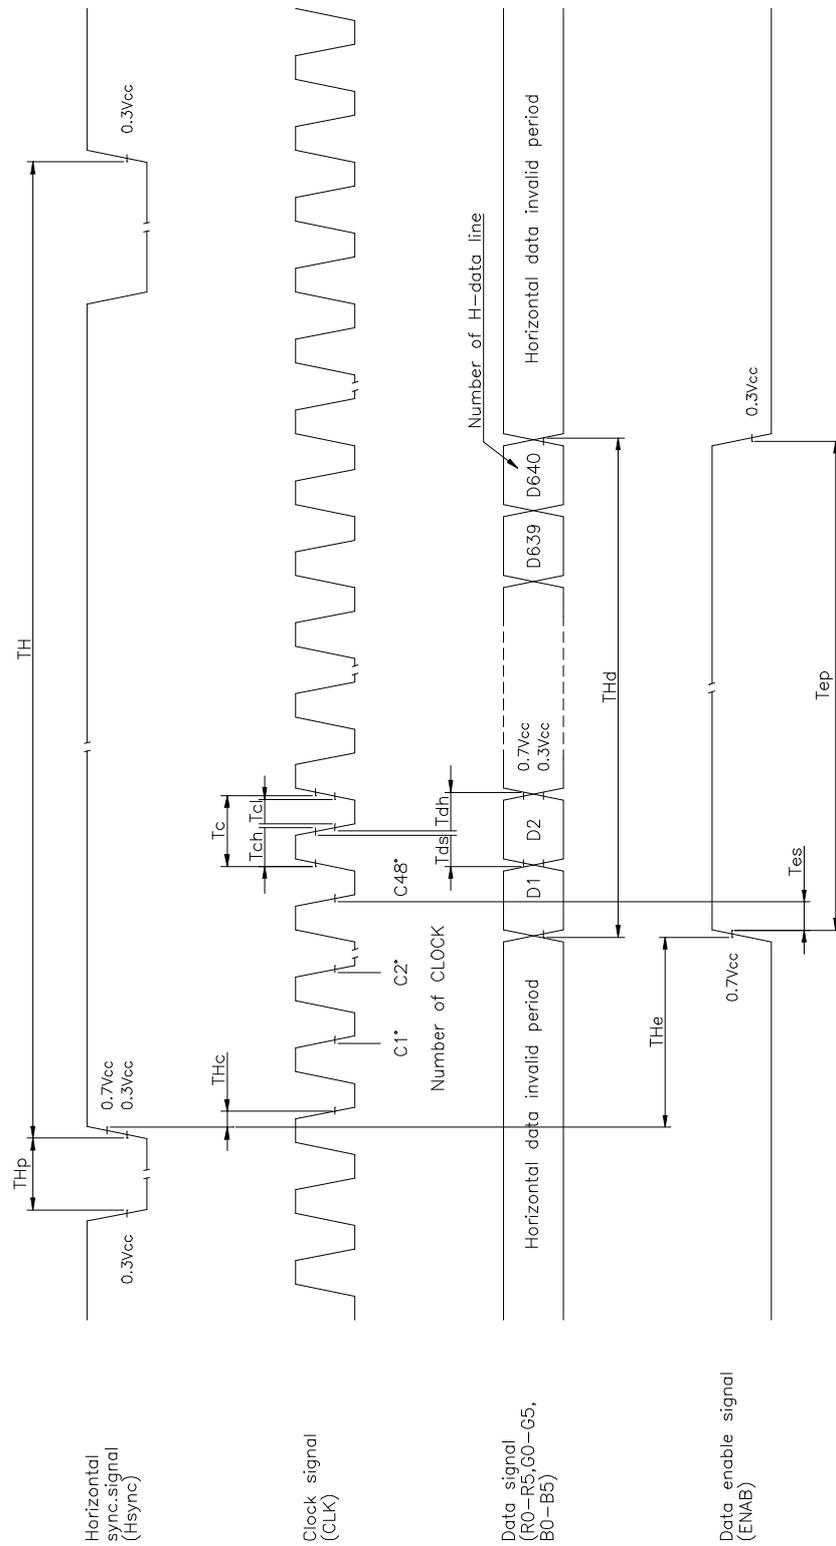


Fig.3 Horizontal timing chart

# UNIPAC OPTOELECTRONICS CORPORATION

## TERMS AND CONDITIONS OF SALE

These Terms and Conditions of Sale apply to all items designed and/or made by Unipac Optoelectronics Corporation ("Unipac"), and Buyer agrees they apply to all such items.

**1 ACCEPTANCE OF TERMS.** BUYER ACCEPTS THESE TERMS (i) BY WRITTEN ACCEPTANCE (BY PURCHASE ORDER OR OTHERWISE), OR (ii) BY FAILURE TO RETURN GOODS SUPPLIED BY UNIPAC WITHIN 5 DAYS OF THEIR DELIVERY.

### 2 DELIVERY

2.1 Delivery will be made Free Carrier (Incoterms 1990), Unipac's warehouse, Science-Based Industrial Park, Taiwan to a carrier designated in writing by Buyer, or if Buyer fails to designate a carrier, to a carrier designated by Unipac.

2.2 Title to the goods and the entire risk will pass to Buyer upon delivery to carrier.

2.3 Shipments are subject to availability. Unipac shall make every reasonable effort to meet the date(s) quoted or acknowledged; and if Unipac makes such effort, UNIPAC WILL NOT BE LIABLE FOR ANY DELAYS.

### 3 TERMS OF PAYMENT

3.1 Unless otherwise stated on Unipac's quotation, all shipments shall be T/T in advance, by Letter of Credit at Sight, or pursuant to agreed prepayment terms. Unipac reserves the right to change credit terms at any time in its sole discretion.

3.2 Buyer guarantees prompt payment of all obligations accrued pursuant to purchase orders issued by Buyer.

### 4 LIMITED WARRANTY

4.1 Unipac warrants that the goods sold will be free from defects in material and workmanship and comply with Unipac's applicable published specifications for a period of sixty (60) days from the date of Unipac's shipment.

4.2 Goods or parts which have been subject to abuse (including without limitation repeated or extended exposure to conditions at or near the limits of applicable absolute ratings) misuse, accident, alteration, neglect, or unauthorized repair or improper application are not covered by any warranty. No warranty is made with respect to custom products or goods produced to Buyer's specifications (unless specifically stated in writing signed by Unipac). Unipac shall not be responsible for defects or claims caused by acts not performed by Unipac; or by combination of goods with other things.

4.3 No warranty is made with respect to goods used in devices intended for use in applications where failure to perform when properly used can reasonably be expected to result in significant injury (including, without limitation, navigation, aviation, weaponry or nuclear equipment, or for surgical implant or to support or sustain life) and Buyer agrees to indemnify, defend, and hold harmless Unipac from all claims, damages and liabilities arising out of any such uses.

4.4 This Article 4 is the only warranty by Unipac with respect to goods and may not be modified or amended except in writing signed by an authorized officer of Unipac.

4.5 Buyer acknowledges and agrees that it is not relying on any applications, diagrams or circuits contained in any literature, and Buyer will test all parts and applications under extended field and laboratory conditions. Notwithstanding any cross-reference or any statements of compatibility, functionality, interchangeability, and the like, the goods may differ from similar goods from other vendors in performance, function or operation, and in areas not contained in the written specifications, or as to ranges and conditions outside such specifications; and Buyer agrees that there are no warranties and that Unipac is not responsible for such things.

4.6 REGARDLESS OF CAUSE OR REASON FOR DAMAGE (WHETHER ACCIDENT, NEGLIGENCE, OR OTHERWISE) UNIPAC SHALL HAVE NO LIABILITY (DIRECT, CONSEQUENTIAL OR OTHER) FOR, IN CONNECTION WITH OR ARISING FROM PROPERTY FURNISHED FOR USE AT OR LEFT AT UNIPAC; and by delivering or entrusting property to Unipac, Buyer expressly confirms this limitation. Notwithstanding this limitation, Unipac will replace, or pay the reasonable retooling costs to replace, masks damaged or destroyed as a result of Unipac's gross negligence or fault.

4.7 EXCEPT AS PROVIDED ABOVE, UNIPAC MAKES NO WARRANTIES OR CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY; AND UNIPAC EXPRESSLY EXCLUDES AND DISCLAIMS ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE OR APPLICATION.

### 5 LIMITATION OF LIABILITY

5.1 Unipac will not be liable for any loss, damage or penalty resulting from causes beyond its reasonable control, including but not limited to delay by others, force majeure, acts of God, material shortage or labor conditions. In any such event, the date(s) for Unipac's performance will be deemed extended for a period equal to any delay resulting.

5.2 THE LIABILITY OF UNIPAC ARISING OUT OF THIS AGREEMENT OR ANY GOODS SOLD WILL BE LIMITED TO REFUND OF THE PURCHASE PRICE OR (WITH UNIPAC'S PRIOR WRITTEN CONSENT) REPAIR OR REPLACEMENT OF PURCHASED GOODS (RETURNED TO UNIPAC FREIGHT PRE-PAID); OR IN THE EVENT OF A FAILURE OR BREACH BY UNIPAC REGARDING DELIVERY, AN AMOUNT EQUAL TO THE TOTAL PURCHASE PRICE OF THE GOODS THAT HAVE NOT BEEN DELIVERED DUE TO SUCH FAILURE.

5.3 Buyer will not return any goods without first obtaining a customer return order number.

5.4 AS A SEPARATE LIMITATION, IN NO EVENT WILL UNIPAC BE LIABLE (i) FOR COSTS OF SUBSTITUTE GOODS, (ii) FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, RELIANCE OR INDIRECT DAMAGES, OR (iii) FOR LOSS OF USE, OPPORTUNITY, MARKET POTENTIAL, GOODWILL AND/OR PROFIT ON ANY THEORY (CONTRACT, TORT, FROM THIRD PARTY CLAIMS OR OTHERWISE). THESE LIMITATIONS SHALL APPLY NOTWITHSTANDING ANY FAILURE OF ESSENTIAL PURPOSE OR OF ANY FAILURE OR INADEQUACY OF ANY REMEDY.

THIS AGREEMENT STATES THE ONLY AND EXCLUSIVE REMEDY FOR ANY AND ALL CLAIMS MADE AGAINST UNIPAC UNDER ANY AGREEMENT AND/OR WITH RESPECT TO PANELS, COMPONENTS, SERVICES AND/OR GOODS.

5.5 No action or proceeding may be commenced by either party against the other (other than to collect money due for goods delivered or services rendered), whether for breach, indemnification, contribution or otherwise, more than one year after delivery of the goods to the carrier; and no claim may be brought unless the non-claiming party has first been given commercially reasonable notice, a full written explanation of all pertinent details (including copies of all materials), and a good faith opportunity to resolve the matter.

5.6 BUYER EXPRESSLY AGREES TO THE LIMITATIONS OF ARTICLES 5, 8 AND 9 AND TO THEIR REASONABLENESS.

5.7 The exclusions and limitations of Articles 5, 8 and 9 will survive the termination of the applicable Agreements, and shall apply notwithstanding any claim of a failure of any one or more remedies to accomplish their purpose, and THE PARTIES EXPRESSLY WAIVE AND RELINQUISH ANY CONTRARY RIGHTS UNDER ANY AGREEMENT, AND/OR LAW, DECISION, CUSTOM OR PRACTICE.

### 6 SUBSTITUTIONS AND MODIFICATIONS

Unipac may at any time make substitutions for product ordered which do not materially and adversely affect overall performance with the then current specifications in the typical and intended use. Unipac reserves the right to halt deliveries and shipments and alter specifications and prices without notice. Buyer shall verify that the literature and information is current before purchasing. Other changes to process and/or specifications by Unipac shall be pursuant to Unipac's standard ECN procedures.

### 7 CANCELLATION

7.1 This Agreement may not be canceled by Buyer except with written consent by Unipac and Buyer's payment of reasonable cancellation charges (including but not be limited to expenses already incurred for labor and material, overhead, commitments made by Unipac, and a reasonable profit).

7.2 In no event will Buyer have rights in partially completed goods.

### 8 INDEMNIFICATION

8.1 Unipac will, at its own expense, assist Buyer with technical support and information in connection with any claim that any parts as shipped by Unipac under this purchase order infringe any valid, enforceable, unexpired R.O.C. patent, copyright, or trademark, provided however, that Buyer (i) gives immediate written notice to Unipac, (ii) permits Unipac to participate and to defend if Unipac requests to do so, and (iii) gives Unipac all needed information, assistance and authority. However, Unipac will not be responsible for infringements resulting from anything not entirely manufactured by Unipac, or from any combination with products, equipment, or materials not furnished by Unipac. Unipac will have no liability with respect to intellectual property matters arising out of products made to Buyer's specifications, code, or designs.

8.2 Except as expressly stated in this Article 8 or in another writing signed by an authorized officer, Unipac makes no representations and/or warranties with respect to intellectual and/or industrial property and/or with respect to claims of infringement.

8.3 Except as to claims Unipac agrees in writing to defend, BUYER WILL INDEMNIFY, DEFEND AND HOLD HARMLESS UNIPAC FROM ALL CLAIMS, COSTS, LOSSES, AND DAMAGES (INCLUDING ATTORNEYS' FEES) AGAINST AND/OR ARISING OUT OF GOODS SOLD AND/OR SHIPPED HEREUNDER.

### 9 NO CONFIDENTIAL INFORMATION

Unipac shall have no obligation to hold any information in confidence except as provided in a separate non-disclosure agreement signed by both parties.

### 10 ENTIRE AGREEMENT

These terms and conditions are the entire agreement between Unipac and Buyer, and no addition, deletion or modification shall be binding on Unipac unless expressly agreed to in a writing signed by an officer of Unipac. Buyer is not relying upon any warranty or representation except for those specifically stated here.

### 11 APPLICABLE LAW

This Agreement and all performance and disputes arising out of or relating to goods involved will be governed by the laws of Taiwan, Republic of China, without reference to conflict of laws principles and excluding the U.N. Convention on Contracts for the International Sale of Goods. Buyer agrees at its sole expense to comply with all applicable laws in connection with the purchase, use or sale of the goods provided hereunder.

### 12 DISPUTE RESOLUTION

12.1 Buyer and Unipac shall cooperate and attempt in good faith to resolve any and all disputes arising out of and/or relating to this Agreement and/or goods furnished pursuant to this Agreement.

12.2 Any disputes relating to and/or arising out of any Agreement and/or goods furnished pursuant to this Agreement that cannot be so resolved will be decided exclusively by binding arbitration. Such arbitration shall take place in Taipei, Taiwan pursuant to the Rules for International Arbitrations under the American Arbitration Association.

12.3 Notwithstanding anything to the contrary, any party may apply to any court of competent jurisdiction for interim injunctive relief with respect to irreparable harm which cannot be avoided and/or compensated by such arbitration proceedings, without breach of this Article 12 and without any abridgment of the powers of the arbitrators.

### 13 ATTORNEYS' FEES

Reasonable attorneys' fees and costs will be awarded to the prevailing party in the event of litigation involving the enforcement or interpretation of this Agreement.

## **Unipac Optoelectronics Corp.**

**No.5, Li-Hsin Road 6 ,  
Science-Based Industrial Park,  
Hsin-Chu City, Taiwan, R.O.C.**

**Fax:886-3-5772545  
Tel :886-3-5632899**