


High Voltage Rectifier Stacks

50mA • 70ns - 3000ns • Axial Leaded

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS											
Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current (in oil) (I _o)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (1) (T _{rr})	Case Length (L)
		55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
	Volts	mA	mA	µA	µA	Volts	mA	Amps	Amps	ns	in.
SPJ100F	10000	50	30	0.50	20	12	10	5	1	70	1.00
SPJ150F	15000	50	30	0.50	20	19	10	5	1	70	1.15
SPJ200F	20000	50	30	0.50	20	24	10	5	1	70	1.15
SPJ250F	25000	50	30	0.50	20	31	10	5	1	70	1.65
SPJ300F	30000	50	30	0.50	20	36	10	5	1	70	1.65
SPJ350F	35000	50	30	0.50	20	43	10	5	1	70	2.10
SPJ400F	40000	50	30	0.50	20	48	10	5	1	70	2.10
SPJ450F	45000	50	30	0.50	20	55	10	5	1	70	2.50
SPJ100S	10000	50	30	0.50	20	10	10	5	1	3000	1.00
SPJ150S	15000	50	30	0.50	20	18	10	5	1	3000	1.15
SPJ200S	20000	50	30	0.50	20	20	10	5	1	3000	1.15
SPJ250S	25000	50	30	0.50	20	28	10	5	1	3000	1.65
SPJ300S	30000	50	30	0.50	20	30	10	5	1	3000	1.65
SPJ350S	35000	50	30	0.50	20	38	10	5	1	3000	2.10
SPJ400S	40000	50	30	0.50	20	40	10	5	1	3000	2.10
SPJ450S	45000	50	30	0.50	20	48	10	5	1	3000	2.50

(1)T_{rr} Testing: I_f=0.5A, I_r=1.0A, I_{rr}=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

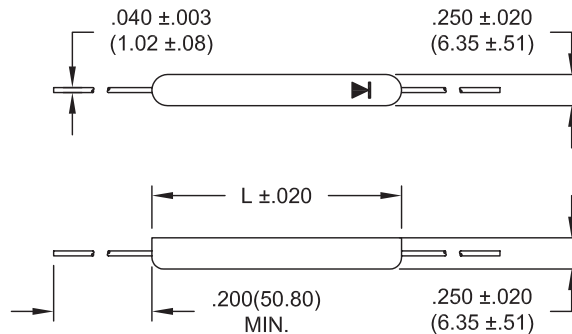

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



Voltage Multipliers Inc.

8711 W. Roosevelt Ave.
Visalia, CA 93291 USA

Tel: 559.651.1402
Fax: 559.651.0740

www.voltagemultipliers.com
www.highvoltagepowersupplies.com